


Testiranje kroz curl:

```
Bruno@DESKTOP-GI1PHS5 MINGW64 ~/Desktop/FIPU/3.godina/Web aplikacije/Vježba 01/wa_vjezbe_01 (main)
$ curl http://localhost:3000
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Express</title>
  </head>
  <body>
    <h1>Hello, Express!</h1>
  </body>
</html>
```


```
Bruno@DESKTOP-GI1PHS5 MINGW64 ~/Desktop/FIPU/3.godina/Web aplikacije/Vježba 01/wa_vjezbe_01 (main)
$ curl http://localhost:3000/about
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>About</title>
  </head>
  <body>
    <h1>Ovo je stranica o nama!</h1>
  </body>
</html>
```

```
Bruno@DESKTOP-GI1PHS5 MINGW64 ~/Desktop/FIPU/3.godina/Web aplikacije/Vježba 01/wa_vjezbe_01 (main)
$ curl http://localhost:3000/users
[{"id":1,"ime":"Bruno","prezime":"Rebic"}, {"id":2,"ime":"Pero","prezime":"Peric"}, {"id":3,"ime":"Jure","prezime":"Juric"}]
```

Testiranje kroz web preglednik:




**Hello, Express!**




**Ovo je stranica o nama!**




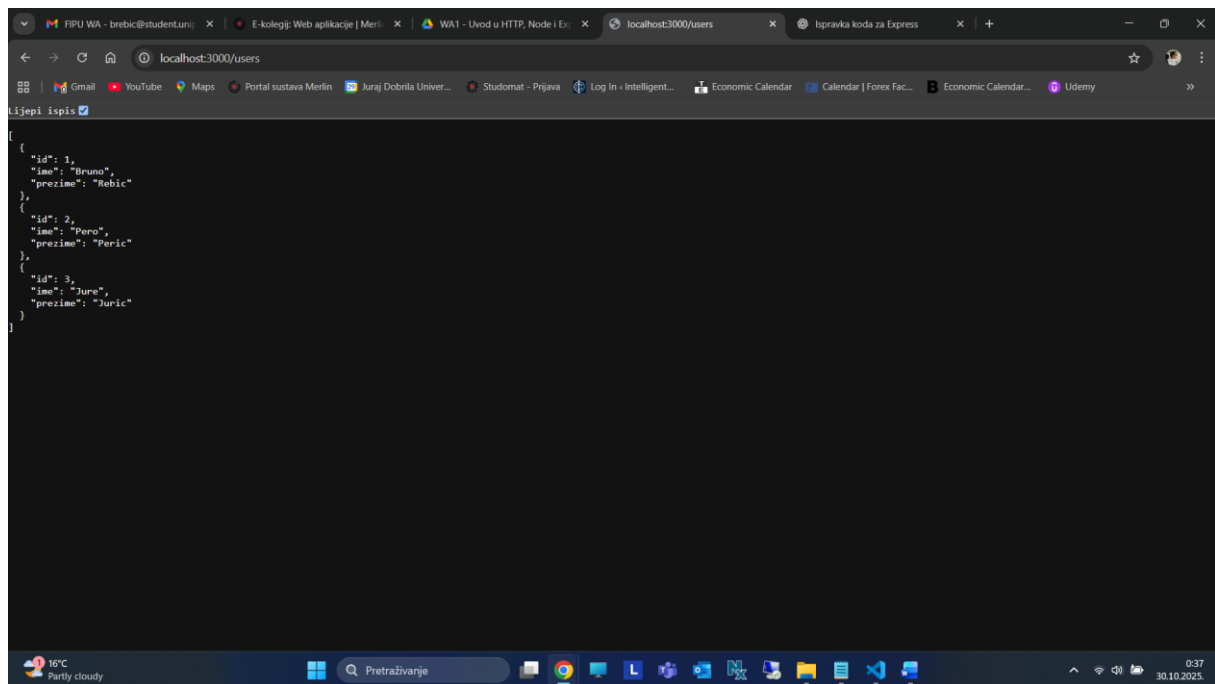


## Testiranje kroz Postman

Definiranje Express okruženja:

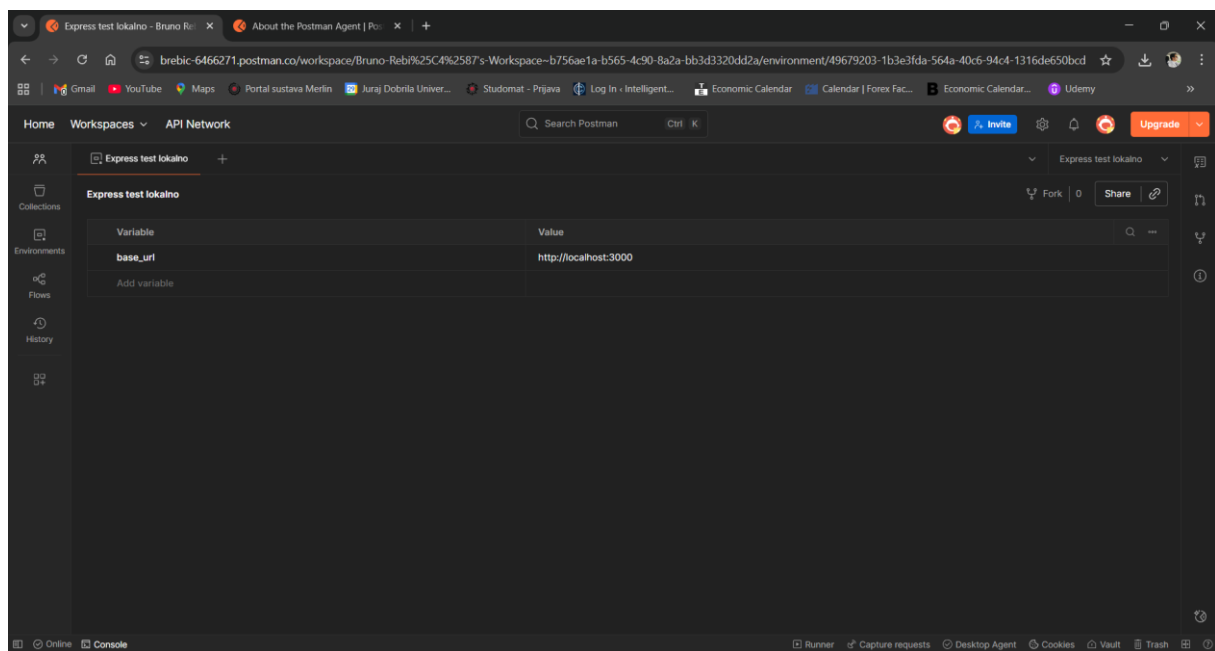

## Zahtjevi:

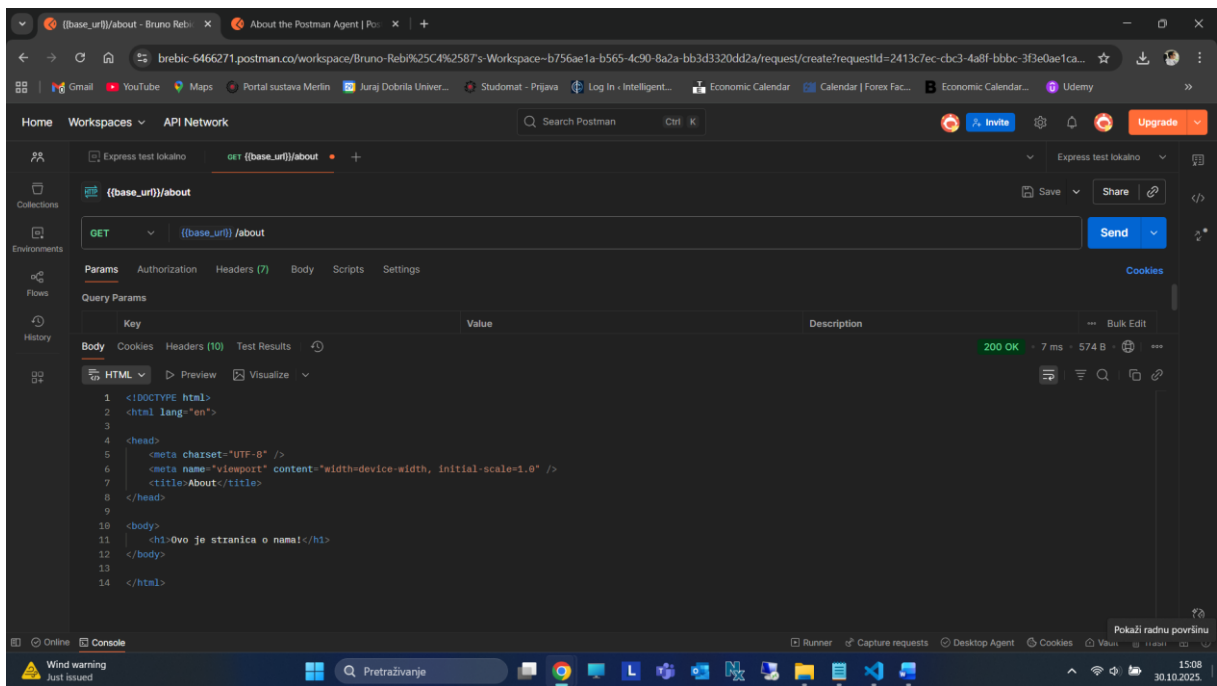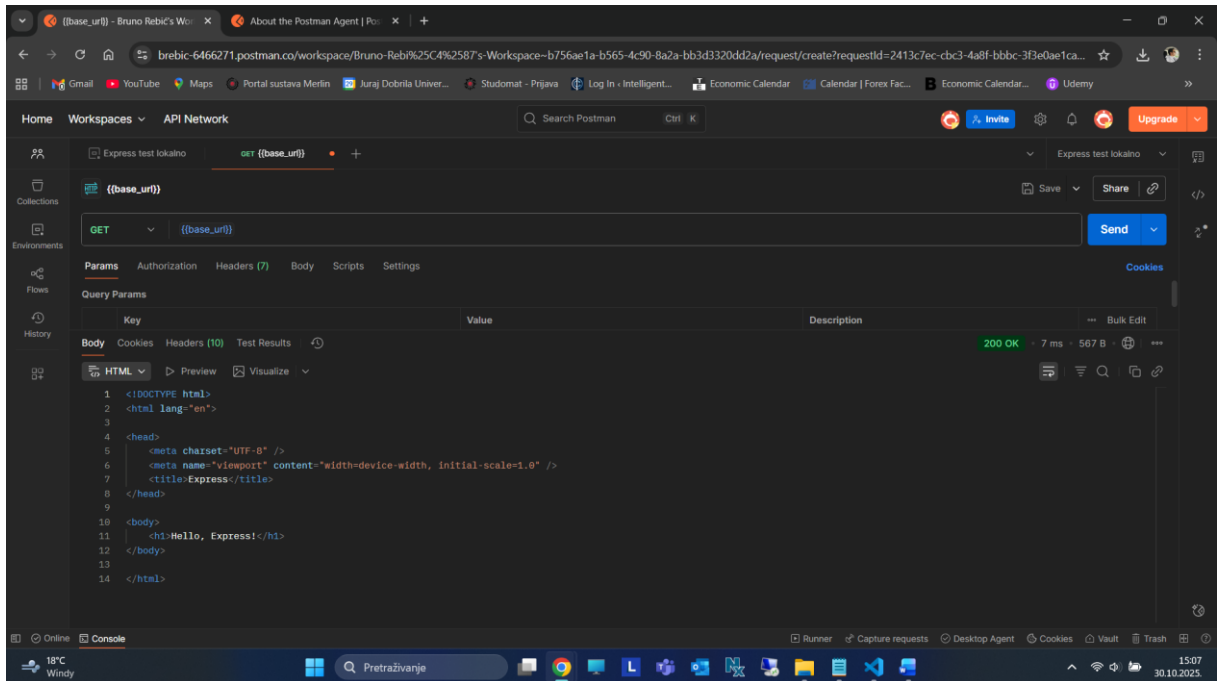

Postman interface showing a REST client request to `get {{base_url}}/users`. The response is a 200 OK status with a JSON body containing three user objects.

**Request:**

- Method: GET
- URL: `get {{base_url}}/users`

**Response:**

- Status: 200 OK
- Time: 5 ms
- Size: 358 B

**JSON Body:**

```
1 {
2   {
3     "id": 1,
4     "ime": "Bruno",
5     "prezime": "Rebic"
6   },
7   {
8     "id": 2,
9     "ime": "Pero",
10    "prezime": "Peric"
11  },
12  {
13    "id": 3,
14    "ime": "Jure",
15    "prezime": "Juric"
16  }
17 }
```

The interface also shows a sidebar with collections, environments, and a console at the bottom.