



Test vježba 3:

Unos narudžbi:

Narudžba 1

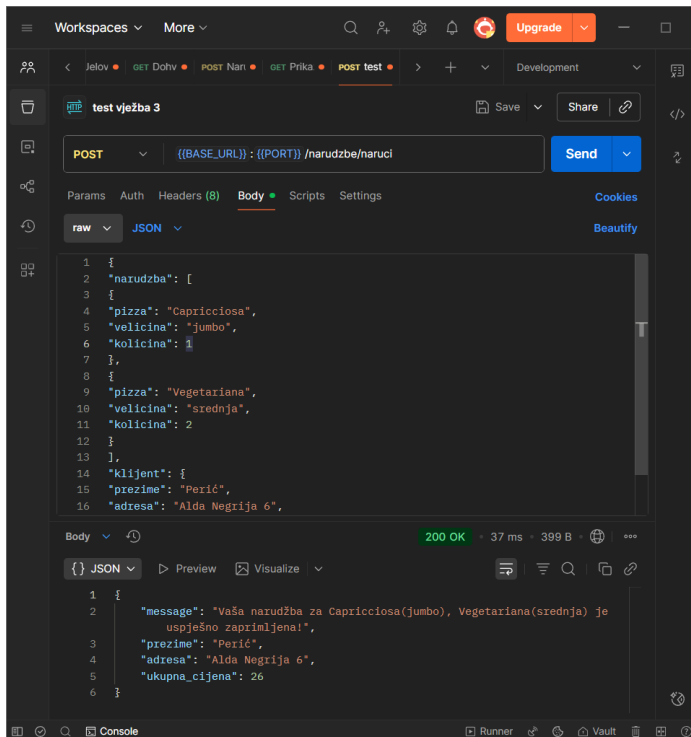

Narudžba 2

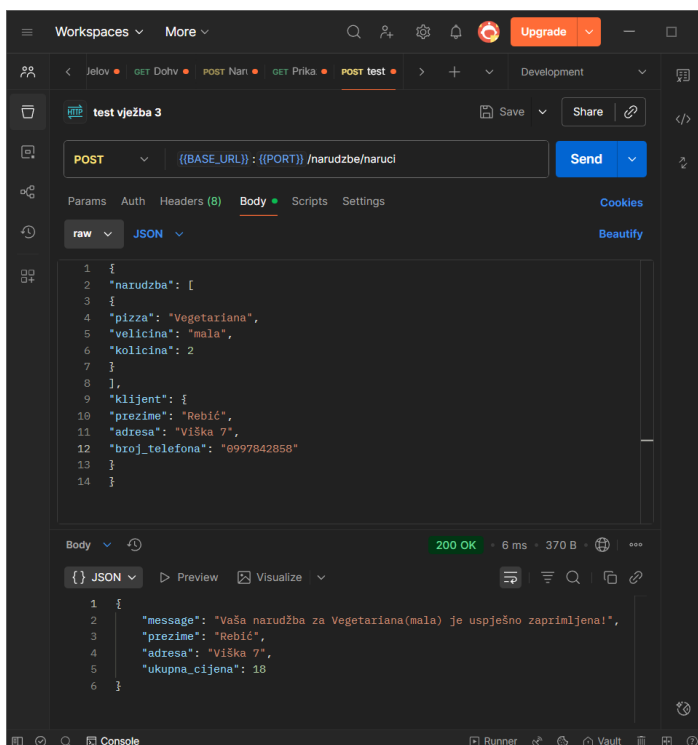

Test vježba 4:

Dohvaćanje svih narudžbi (unesenih u vježbi 3)

The screenshot shows the Postman interface with a GET request to `{{BASE_URL}}:{{PORT}}/narudzbe`. The response is a 200 OK status with a 5 ms response time and 617 B of data. The response body is displayed in a table format, showing a list of orders and a client.

id	narudzba	velicina	kolicina	klijent
0	pizza	velicina	kolicina	prezime
0	Capricciosa	jumbo	1	adresa
1	Vegetariana	srednja	2	broj_telefona
1	pizza	velicina	kolicina	prezime
0	Vegetariana	mala	2	adresa
				broj_telefona

Dohvaćanje narudžbe po id-u

The screenshot shows the Postman interface with a GET request to `{{BASE_URL}}:{{PORT}}/narudzbe/0`. The response is a 200 OK status with a 7 ms response time and 457 B of data. The response body is displayed in JSON format, showing a single order and a client.

```
1 {
2   "id": 0,
3   "narudzba": [
4     {
5       "pizza": "Capricciosa",
6       "velicina": "jumbo",
7       "kolicina": 1
8     },
9     {
10      "pizza": "Vegetariana",
11      "velicina": "srednja",
12      "kolicina": 2
13    }
14  ],
15  "klijent": {
16    "prezime": "Perić",
17    "adresa": "Alda Negrija 6",
18    "broj_telefona": "0912345678"
19  }
20 }
```

Brisanje narudžbe po id-u

