

Building Java Programs Supplement 3G


Graphics

Copyright (c) Pearson 2013.
All rights reserved.


Graphical objects

We will draw graphics in Java using 3 kinds of objects:

- `DrawingPanel`: A window on the screen.
 - Not part of Java; provided by the authors. See class web site.
- `Graphics`: A "pen" to draw shapes and lines on a window.
- `Color`: Colors in which to draw shapes.

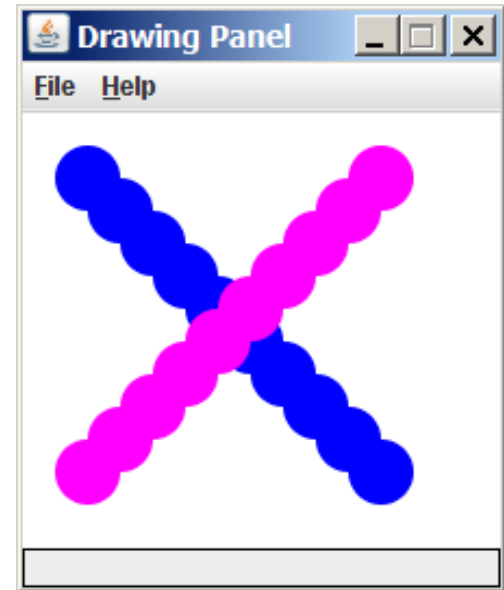

DrawingPanel



"Canvas" objects that represents windows/drawing surfaces


- To create a window:

```
DrawingPanel name = new DrawingPanel(width, height) ;
```

Example:

```
DrawingPanel panel = new DrawingPanel(300, 200) ;
```

- The window has nothing on it.
 - We draw shapes / lines on it with another object of type `Graphics`.

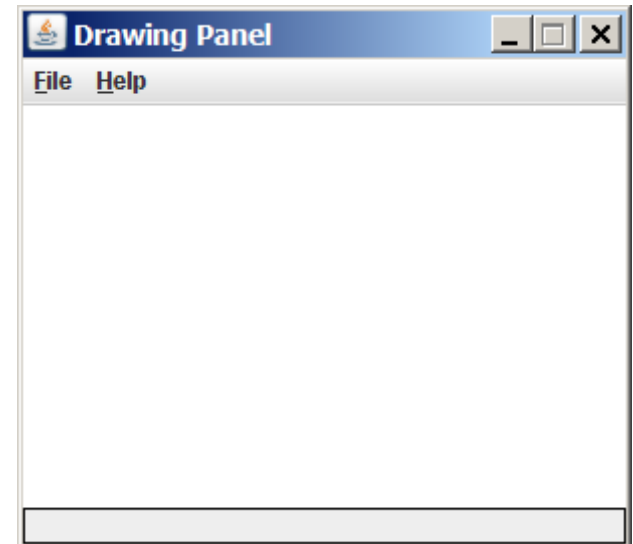

Graphics




"Pen" or "paint brush" objects to draw lines and shapes

- Access it by calling `getGraphics` on your `DrawingPanel`.
`Graphics g = panel.getGraphics();`

- Draw shapes by calling methods on the `Graphics` object.

```
g.fillRect(10, 30, 60, 35);  
g.fillOval(80, 40, 50, 70);
```

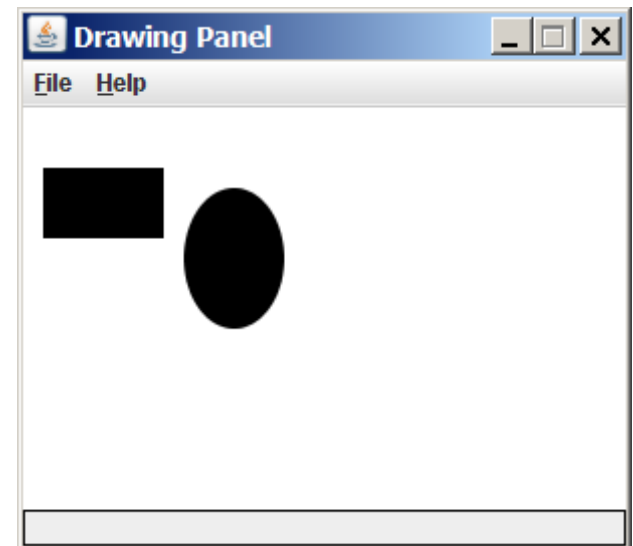

Java class libraries, import

- **Java class libraries:** Classes included with Java's JDK.
 - organized into groups named packages
 - To use a package, put an import declaration in your program:

```
// put this at the very top of your program
import packageName.*;
```


- `Graphics` belongs to a package named `java.awt`

```
import java.awt.*;
```

- To use `Graphics`, you must place the above line at the very top of your program, before the `public class` header.

Coordinate system

- Each (x, y) position is a pixel ("picture element").
- Position $(0, 0)$ is at the window's top-left corner.
 - x increases rightward and the y increases downward.
- The rectangle from $(0, 0)$ to $(200, 100)$ looks like this:

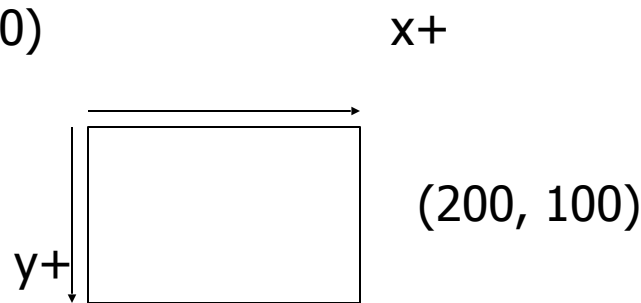

Graphics methods

Method name	Description
<code>g.drawLine(x1, y1, x2, y2) ;</code>	line between points (x1, y1), (x2, y2)
<code>g.drawOval(x, y, width, height) ;</code>	outline largest oval that fits in a box of size width * height with top-left at (x, y)
<code>g.drawRect(x, y, width, height) ;</code>	outline of rectangle of size width * height with top-left at (x, y)
<code>g.drawString(text, x, y) ;</code>	text with bottom-left at (x, y)
<code>g.fillOval(x, y, width, height) ;</code>	fill largest oval that fits in a box of size width * height with top-left at (x, y)
<code>g.fillRect(x, y, width, height) ;</code>	fill rectangle of size width * height with top-left at (x, y)
<code>g.setColor(Color) ;</code>	set <code>Graphics</code> to paint any following shapes in the given color

Color



- Specified as predefined `Color` class constants:

`Color.CONSTANT_NAME`

where **CONSTANT_NAME** is one of:

`BLACK, BLUE, CYAN,
DARK_GRAY, GRAY,
GREEN, LIGHT_GRAY, MAGENTA, ORANGE,
PINK, RED, WHITE, YELLOW`

- Or create one using Red-Green-Blue (RGB) values of 0-255

`Color name = new Color(red, green, blue);`


– Example:

`Color brown = new Color(192, 128, 64);`

Using colors


- Pass a `Color` to Graphics object's `setColor` method
 - Subsequent shapes will be drawn in the new color.

```
g.setColor(Color.BLACK);  
g.fillRect(10, 30, 100, 50);  
g.drawLine(20, 0, 10, 30);  
g.setColor(Color.RED);  
g.fillOval(60, 40, 40, 70);
```

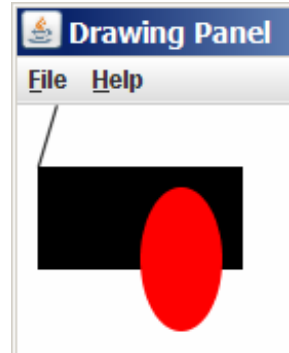

- Pass a color to `DrawingPanel`'s `setBackground` method
 - The overall window background color will change.

```
Color brown = new Color(192, 128, 64);  
panel.setBackground(brown);
```



Outlined shapes


- To draw a colored shape with an outline, first fill it, then draw the same shape in the outline color.

```
import java.awt.*;    // so I can use Graphics

public class OutlineExample {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(150, 70);
        Graphics g = panel.getGraphics();

        // inner red fill
        g.setColor(Color.RED);
        g.fillRect(20, 10, 100, 50);

        // black outline
        g.setColor(Color.BLACK);
        g.drawRect(20, 10, 100, 50);
    }
}
```

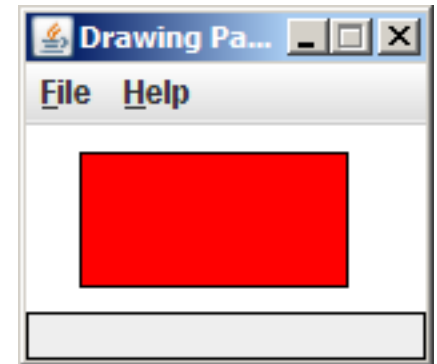


Superimposing shapes



- When ≥ 2 shapes occupy the same pixels, the last drawn "wins."

```
import java.awt.*;
```

```
public class Car {  
    public static void main(String[] args) {  
        DrawingPanel panel = new DrawingPanel(200, 100);  
        panel.setBackground(Color.LIGHT_GRAY);  
        Graphics g = panel.getGraphics();  
  
        g.setColor(Color.BLACK);  
        g.fillRect(10, 30, 100, 50);  
  
        g.setColor(Color.RED);  
        g.fillOval(20, 70, 20, 20);  
        g.fillOval(80, 70, 20, 20);  
  
        g.setColor(Color.CYAN);  
        g.fillRect(80, 40, 30, 20);  
    }  
}
```

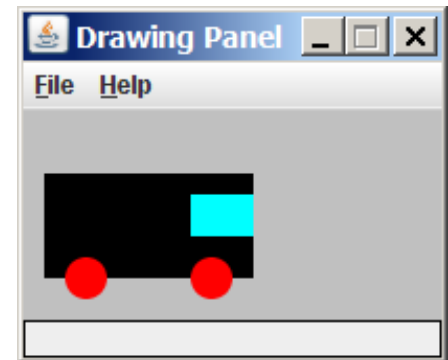

Drawing with loops

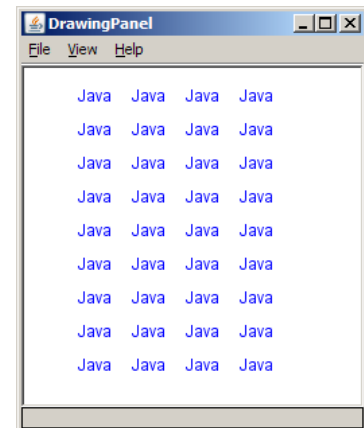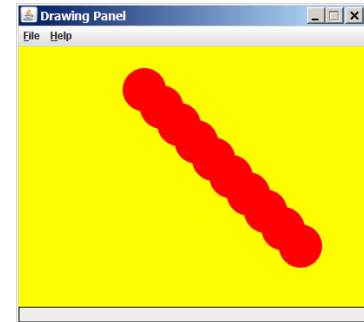


Zero-based loops

- Beginning at 0 and using < can make coordinates easier.


```
DrawingPanel panel = new DrawingPanel(150, 140);
Graphics g = panel.getGraphics();

// horizontal line of 5 20x20 rectangles starting
// at (11, 18); x increases by 20 each time
for (int i = 0; i < 5; i++) {
    g.drawRect(11 + 20 * i, 18, 20, 20);
}
```

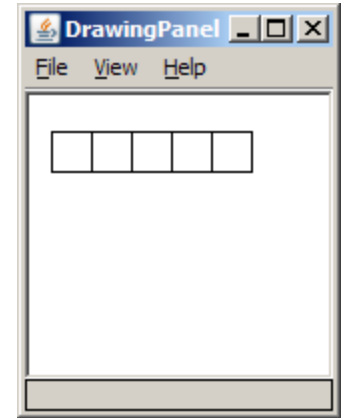


- Exercise: Write a variation of the above program that draws the output at right.
 - The bottom-left rectangle is at (11, 98).

```
for (int i = 0; i < 5; i++) {
    g.drawRect(11 + 20 * i, 98 - 20 * i, 20, 20);
}
```

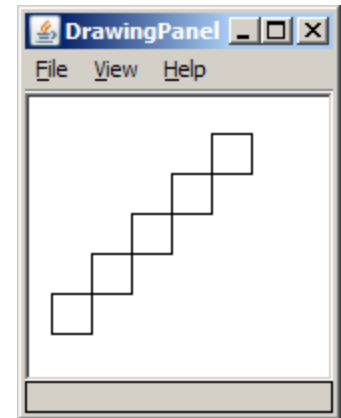

Java book figure

- Write a program that draws the following figure:
 - drawing panel is size 200x150
 - book is at (20, 35), size 100x100
 - cyan background
 - white "BJP" text at position (70, 55)
 - stairs are in color (red=191, green=118, blue=73)
 - each stair is 9px tall
 - 1st stair is 10px wide
 - 2nd stair is 20px wide ...
 - stairs are 10px apart (1 blank pixel between)

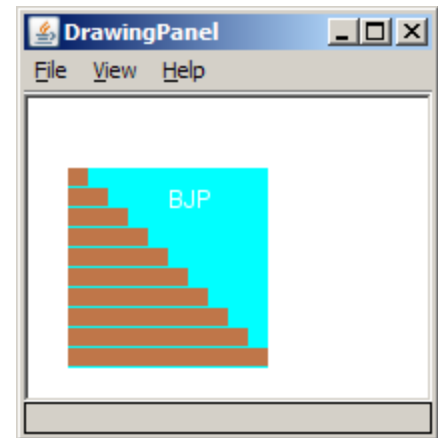

Java book solution

```
// Draws a Building Java Programs textbook with DrawingPanel.
import java.awt.*;

public class Book {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(200, 150);
        panel.setBackground(Color.WHITE);
        Graphics g = panel.getGraphics();


        g.setColor(Color.CYAN);           // cyan background
        g.fillRect(20, 35, 100, 100);

        g.setColor(Color.WHITE);          // white "bjp" text
        g.drawString("BJP", 70, 55);

        g.setColor(new Color(191, 118, 73));
        for (int i = 0; i < 10; i++) {    // orange "bricks"
            g.fillRect(20, 35 + 10 * i, 10 + 10 * i, 9);
        }
    }
}
```

Multiple Java books

- Modify the Java book program so that it can draw books at different positions as shown below.
 - book top/left positions: (20, 35), (150, 70), (300, 10)
 - drawing panel's new size: 450x180

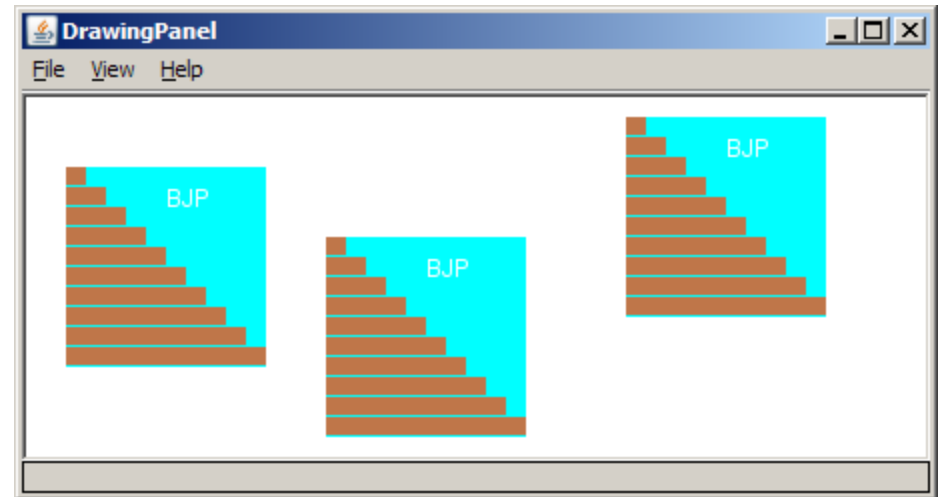

Multiple books solution

- To draw in a method, you must pass `Graphics g` to it.

```
// Draws many BJP textbooks using parameters.
```

```
import java.awt.*;
```

```
public class Book2 {  
    public static void main(String[] args) {  
        DrawingPanel panel = new DrawingPanel(450, 180);  
        panel.setBackground(Color.WHITE);  
        Graphics g = panel.getGraphics();  
  
        // draw three books at different locations  
        drawBook(g, 20, 35);  
        drawBook(g, 150, 70);  
        drawBook(g, 300, 10);  
    }  
}
```

```
...
```

Multiple books, cont'd.

...


```
// Draws a BJP textbook at the given x/y position.
public static void drawBook(Graphics g, int x, int y) {
    g.setColor(Color.CYAN);           // cyan background
    g.fillRect(x, y, 100, 100);

    g.setColor(Color.WHITE);           // white "bjp" text
    g.drawString("BJP", x + 50, y + 20);

    g.setColor(new Color(191, 118, 73));
    for (int i = 0; i < 10; i++) {     // orange "bricks"
        g.fillRect(x, y + 10 * i, 10 * (i + 1), 9);
    }
}
```

Resizable Java books

- Modify the Java book program so that it can draw books at different sizes as shown below.
 - book sizes: 100x100, 60x60, 200x200
 - drawing panel's new size: 520x240

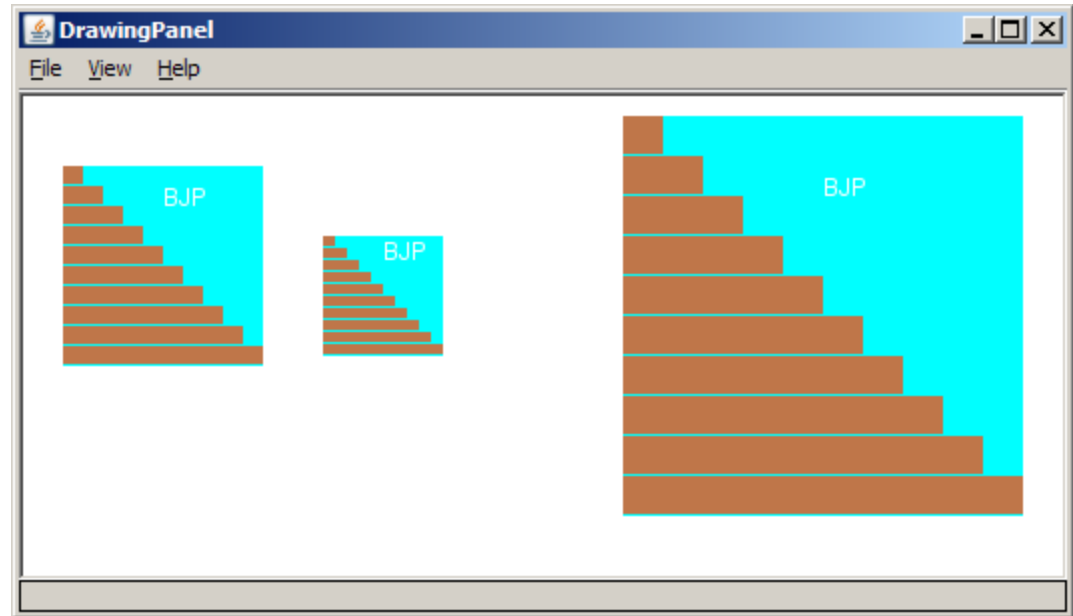

Resizable books solution

```
// Draws many sized BJP textbooks using parameters.
import java.awt.*;

public class Book3 {
    public static void main(String[] args) {
        DrawingPanel panel = new DrawingPanel(520, 240);
        panel.setBackground(Color.WHITE);
        Graphics g = panel.getGraphics();

        // draw three books at different locations/sizes
        drawBook(g, 20, 35, 100);
        drawBook(g, 150, 70, 60);
        drawBook(g, 300, 10, 200);
    }

    ...
}
```

Resizable solution, cont'd.

...

// Draws a book of the given size at the given position.

```
public static void drawBook(Graphics g, int x, int y, int size) {  
    g.setColor(Color.CYAN);           // cyan background  
    g.fillRect(x, y, size, size);  
  
    g.setColor(Color.WHITE);           // white "bjp" text  
    g.drawString("BJP", x + size/2, y + size/5);  
  
    g.setColor(new Color(191, 118, 73));  
    for (int i = 0; i < 10; i++) {     // orange "bricks"  
        g.fillRect(x,                 // x  
                    y + size/10 * i,  // y  
                    size/10 * (i + 1), // width  
                    size/10 - 1);      // height  
    }  
}
```

Polygon

Objects that represent arbitrary shapes

- Add points to a `Polygon` using its `addPoint(x, y)` method.

- Example:

```
DrawingPanel p = new DrawingPanel(100, 100);  
Graphics g = p.getGraphics();  
g.setColor(Color.GREEN);
```

```
Polygon poly = new Polygon();  
poly.addPoint(10, 90);  
poly.addPoint(50, 10);  
poly.addPoint(90, 90);  
g.fillPolygon(poly);
```



DrawingPanel methods

- **panel.clear()** ;
Erases any shapes that are drawn on the drawing panel.
- **panel.setWidth(width)** ;
panel.setHeight(height) ;
panel.setSize(width, height) ;
Changes the drawing panel's size to the given value(s).
- **panel.save(filename)** ;
Saves the image on the panel to the given file (String).
- **panel.sleep(ms)** ;
Pauses the drawing for the given number of milliseconds.

Animation with `sleep`

- `DrawingPanel`'s `sleep` method pauses your program for a given number of milliseconds.

- You can use `sleep` to create simple animations.

```
DrawingPanel panel = new DrawingPanel(250, 200);  
Graphics g = panel.getGraphics();
```

```
g.setColor(Color.BLUE);  
for (int i = 1; i <= 10; i++) {  
    g.fillOval(15 * i, 15 * i, 30, 30);  
    panel.sleep(500);  
}
```

- Try adding `sleep` commands to loops in past exercises in this chapter and watch the panel draw itself piece by piece.