

Implement Client Script & UI Policy (Incident)

Milestone 3: Create onChange Client Script

Description

Create an **onChange Client Script** on the Incident form to dynamically perform an action whenever a specified field value is changed. The script should use the **g_form API** to update related fields or display appropriate messages based on the selected value. This helps automate form behavior, improve data accuracy, and provide users with a more interactive Incident form experience.

Activity 1: Create Client Script

Description

1. **Navigate to Client Scripts:**

Go to System UI → Client Scripts.

2. **Click New** to create a new Client Script.


3. **Fill in the details:**

- **Name:** Auto set urgency for high impact – clearly shows the purpose.
- **Table:** Incident – the script runs only on Incident records.
- **Type:** onChange – executes when a field value changes.
- **Field name:** Impact – triggers the script when Impact is updated.
- **Active:** true – ensures the script runs immediately.

4. **Paste the script** in the script editor section.

```
function onChange(control, oldValue, newValue, isLoading) {  
  if (isLoading || newValue === '') {  
    return;  
  }  
  if (newValue === '1') {  
    g_form.setValue('urgency', '1');  
    g_form.addInfoMessage('Urgency set to High for High impact incident.');  }  
}
```

5. **Click Submit** to save the Client Script.
6. **Verify:** Open an Incident record and change the Impact field to High. The Urgency field should update automatically
7. **Click Submit.**

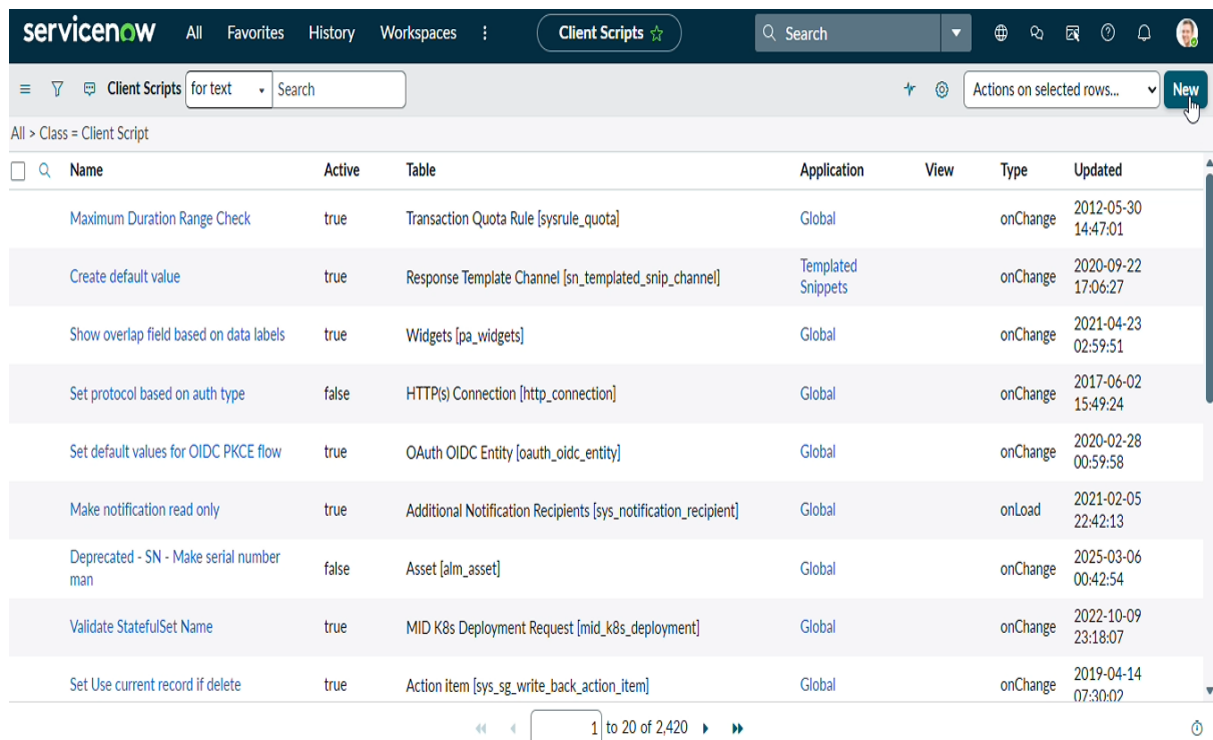

The screenshot shows the ServiceNow 'Client Scripts' page. The top navigation bar includes 'servicenow', 'All', 'Favorites', 'History', 'Workspaces', and a 'Client Scripts' button. A search bar is present. Below the navigation bar, there's a filter section with 'Client Scripts' selected and a search input. A table lists various client scripts with columns: Name, Active, Table, Application, View, Type, and Updated. The table contains 9 rows of data. At the bottom, there's a pagination control showing '1 to 20 of 2,420' items.

Name	Active	Table	Application	View	Type	Updated
Maximum Duration Range Check	true	Transaction Quota Rule [sysrule_quota]	Global		onChange	2012-05-30 14:47:01
Create default value	true	Response Template Channel [sn_templated_snip_channel]	Templated Snippets		onChange	2020-09-22 17:06:27
Show overlap field based on data labels	true	Widgets [pa_widgets]	Global		onChange	2021-04-23 02:59:51
Set protocol based on auth type	false	HTTP(s) Connection [http_connection]	Global		onChange	2017-06-02 15:49:24
Set default values for OIDC PKCE flow	true	OAuth OIDC Entity [oauth_oidc_entity]	Global		onChange	2020-02-28 00:59:58
Make notification read only	true	Additional Notification Recipients [sys_notification_recipient]	Global		onLoad	2021-02-05 22:42:13
Deprecated - SN - Make serial number man	false	Asset [alm_asset]	Global		onChange	2025-03-06 00:42:54
Validate StatefulSet Name	true	MID K8s Deployment Request [mid_k8s_deployment]	Global		onChange	2022-10-09 23:18:07
Set Use current record if delete	true	Action item [sys_sg_write_back_action_item]	Global		onChange	2019-04-14 07:30:02

servicenow

AllFavoritesHistory

Client Script - Auto set urgency for h...

Search

Client Script

Auto set urgency for high impact

UpdateDelete

Additional actions

New client scripts are run in strict mode, with direct DOM access disabled. Access to jQuery, prototype and the window object are likewise disabled. To disable this on a per-script basis, configure this form and add the "Isolate script" field. To disable this feature for all new globally-scoped client-side scripts set the system property "glide.script.block.client.globals" to false.

Name

Auto set urgency for high impact

Table

Incident [incident]

UI Type

Desktop

Type

onChange

Field name

-- None --

Application

Global

Active

☒

Inherited

☐

Global

☒

Description

Messages

Script

1function onChange(control, oldValue, newValue, isLoading) {

2 if (isLoading || newValue == '') {

3 return;

4 }

5

6 if (newValue == '1') {