

Parsing, Compiling Modules, and Evolving: Self-Printing and Reading the Lineage

Brent Hartshorn
brenthartshorn@proton.me

Stage 7 (parent: doi:10.5281/zenodo.20710258)

Abstract

Stage 7 of a self-evolving hypergraph, extended from its parent (doi:10.5281/zenodo.20710258) so the inquiry can look fully back. It declares 7 nodes, each pairing a suggestive Greek glyph with a precise description. Of these, 1 compile via @dslai into small trainable modules (Sigma), making the hypergraph partly differentiable; a module computes, it does not comprehend. It also reads its own published lineage — opening 5 ancestor stages and tracing where each term entered — and records that provenance as data, not as self-understanding. A circuit equation compiles 3 trainable networks — one bound to each symbol — and wires them into 1 composite(s); the equation builds the networks, and the numbers they return are data, not the symbols' meanings combining. It relates them by 11 binary relations and 3 hyperedges, and may trigger gated actions whose output is recorded as data, never as an answer. The engine, introspected from its own source, exposes `act_coherence`, `act_neural`, `compile_module`, `forward`, `train`, `act_train`, `act_infer`, `read_lineage`, `lineage_search`, `act_provenance`, `act_circuit`, `parse`, `to_questions`, `title`, `abstract`, `run_actions`, `build_tex`, `build_pdf`, `evolve`. It poses questions and enacts computations beside them; it makes no claim to resolve what a self is.

Symbolic core (inherited relations)

$$\Omega \longrightarrow \Sigma$$

$$\Sigma \models \Sigma$$

$$\Sigma \otimes \Lambda$$

$$\partial \Sigma \stackrel{?}{=} \mu$$

$$\Sigma \not\prec \Omega$$

$$\Phi \longrightarrow \Sigma$$

$$\Phi \rightsquigarrow \Sigma$$

$$\mathbf{T} \Rrightarrow \Lambda$$

$$\partial \Lambda \rightsquigarrow \mu$$

$$\Delta \dashrightarrow \mu$$

$$\partial \mathbf{T} \otimes \Delta$$

Circuit (a new equation that wires several networks)

Beyond the inherited relations, this stage adds an equation that binds a small trainable network to *each* symbol and composes them along the arrow:

$$\Sigma = \Phi \longrightarrow \Lambda \longrightarrow \mu \quad (\text{width } 5)$$

Each such equation compiles to 3 trainable networks (one per symbol), wired into a composite. Building the networks is what the equation does; the training losses and outputs the composite returns are recorded as data, not the symbols' meanings combining.

Nodes (suggestive glyph + precise description)

Ω origin — *that from which the self is said to come*

Σ self — *the locus that poses and is altered by the question* $\rightarrow$ module 3->8->3 (sigmoid), trainable

Λ language — *the finite medium any self must pass through*

μ meaning — *what a reader supplies, or finds, in the passage*

Φ other — *the one whose regard first gives the self to itself*

T time — *the direction in which the self cannot return*

Δ difference — *the gap that lets one thing be told from another*

Hypergraph (questions, and the data actions returned)

- $\{\Sigma\}$? Can the self reconstruct itself from its own compression? [train]
 $\hookrightarrow$ recorded data (not an answer): {'node': 'Sigma', 'arch': '3->8->3', 'task': 'autoencode', 'mse_start': 0.1252, 'mse_final': 0.0186, 'is': 'an optimization result over a defined toy objective; not the self learning what it is'}
- $\{\Omega, \Sigma, \Lambda\}$? Where, in this inquiry's own history, did origin, self, and language first enter? [provenance]
 $\hookrightarrow$ recorded data (not an answer): {'provenance': {'0mega': {'word': 'origin', 'entered': 'stage 0', 'seen_in': ['0', '1', '2', '3', '6'], 'n_relations': 10}, 'Sigma': {'word': 'self', 'entered': 'stage 0', 'seen_in': ['0', '1', '2', '3', '6'], 'n_relations': 33}, 'Lambda': {'word': 'language', 'entered': 'stage 0', 'seen_in': ['0', '1', '2', '3', '6'], 'n_relations': 11}}, 'is': 'a citation of the lineage; where terms entered, not what they mean'}
- $\{\Phi, \Lambda, \mu, \Sigma\}$? If a self is wired from other, language, and meaning, what does the composite return? [circuit]
 $\hookrightarrow$ recorded data (not an answer): {'circuit': {'Sigma': {'wiring': 'Phi -> Lambda -> mu', 'networks': {'Phi': {'arch': '5->5->5', 'trained_mse': 0.0683}, 'Lambda': {'arch': '5->5->5', 'trained_mse': 0.057}, 'mu': {'arch': '5->5->5', 'trained_mse': 0.0586}}, 'n_networks': 3, 'composite_output_norm': 1.192}}, 'is': "several trained networks wired by the equation; the numbers are data, not the symbols' meanings combining"}

Questions this stage poses

- Does Ω give rise to Σ — and what precedes Ω ?
- On what does Σ entailing Σ rest?

- When Σ is carried by Λ , what survives and what is lost?
- Is $\partial\Sigma$ the same as μ , or is μ supplied by the reader?
- If Σ does not reduce to Ω , where is the remainder?
- Does Φ give rise to Σ — and what precedes Φ ?
- Does Φ haunt Σ — present as an absence?
- What residue remains because T leaves a trace upon Λ ?
- Does $\partial\Lambda$ haunt μ — present as an absence?
- What collapses when Δ shatters the structure of μ ?
- When ∂T is carried by Δ , what survives and what is lost?
- Can the self reconstruct itself from its own compression?
- Where, in this inquiry's own history, did origin, self, and language first enter?
- If a self is wired from other, language, and meaning, what does the composite return?

Lineage read (this stage searched its ancestors)

This stage read 5 ancestor stages (0, 1, 2, 3, 6) from their embedded sources, tracing 7 terms and 43 relations across the lineage. For example: Ω (origin, from stage 0), Σ (self, from stage 0), Λ (language, from stage 0), μ (meaning, from stage 0), Φ (other, from stage 1). This is provenance retrieval — where terms entered and what was said — recorded as data, not a claim to understand the lineage.

Manifold (the geometry of the relations)

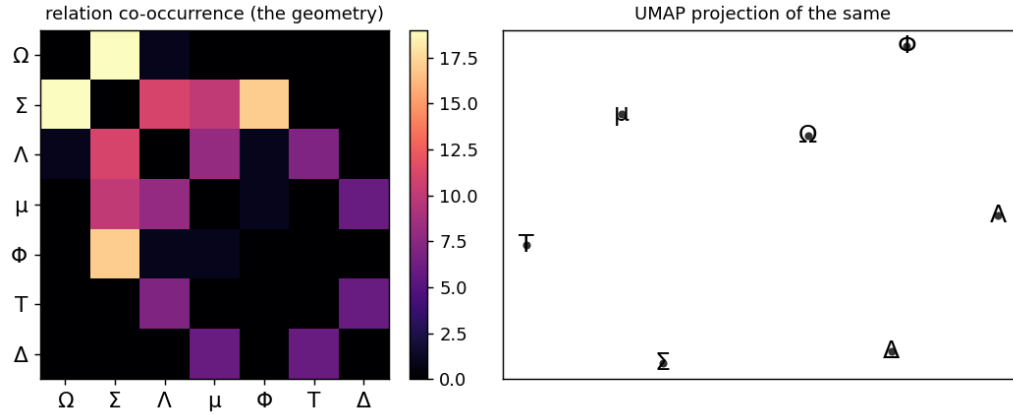


Figure 1: A projection of the relation co-occurrence across the lineage. Left: how often terms share a relation (Σ is densest). Right: a UMAP projection of the same geometry. This is a map of the authored structure — where the terms sit relative to one another — not a discovery of hidden meaning. Computed by an external prototype (`umap_manifold.py`); the engine only embeds it.

Lineage and provenance

This model extends its parent self-evolving inquiry, doi:10.5281/zenodo.20710258, ingesting its relations so the series can look fully back [1, 2, 3, 4]. The companion papers set out the method

and its discipline [2, 3]. Actions record data beside questions; the document poses and enacts, and makes no claim to resolve what a self is.

Appendix: self-extraction

This PDF carries its engine (`introspecter3.py`) and DSL (`self.dsl`) as embedded streams. Requires `pip install pypdf numpy` and a LaTeX install. To produce the next stage, save and run:

```
import base64
exec(base64.b64decode(
    "aW1wb3J0IHNScywgZ2xvYiwgb3MKc3lzLnBhdGguaW5zZXJ0KDA5IClIuIi"
    "kKZnJvbSBweXBkZiBpbXBvcnQgUGRmUmVhZGVyCmNhbmQgPSB0b25lCmZv"
    "ciBmIGluIGdsb2IuZ2xvYigiKi5wZGYiKT0KICAgIHRyeTogYSA9IFBkZl"
    "JlYWRLcihmKS5hdHRhY2htZW50cwogICAgZXhjZXB0IEV4Y2VwdGlvbjo"
    "Y29udGludWUKICAgIGlmICJpbnRyb3NwZWNoZXIzLnB5IiBpb2IhIGFuZC"
    "AoY2FuZCBpcyB0b25lIG9yIG9zLnBhdGguZ2V0bXRpbWUoZikgPiBvcy5w"
    "YXRoLmdldG10aW1lKGNhbmQpKT0KICAgICAgICBjYW5kID0gZgpwZGYgPS"
    "BjYW5kIG9yIG1heChnbG9iLmdsb2IoIioucGRmIiksIGtleTlvcy5wYXRo"
    "LmdldG10aW1lKQpmb3IgbmFtZSwgZGF0YSBpb2I0ZGZSZWFkZXIocGRmKS"
    "5hdHRhY2htZW50cy5pdGVtcygp0gogICAgb3BlbihuYW1lLCAid2IiKS53"
    "cm10ZShkYXRhWzBdIGlmIGlzaW5zdGFuY2UoZGF0YSwgbGlzdCkgZWxzZS"
    "BkYXRhKQppbXBvcnQgaW1wb3J0bGliLCBpbnRyb3NwZWNoZXIzIGFzIEk7"
    "IGltcG9ydGxpYi5yZWxvYWQoSSk7IEkuZXZvbHZlKCKk"))
```

References

- [1] B. Hartshorn, *Origin, Self, Language, Meaning, Other, Time, and Difference: A Self-Evolving Hypergraph* (self_6, parent). doi:10.5281/zenodo.20710258
- [2] B. Hartshorn, *Staging the Question of Self: A self-contained, self-modifying document that mixes poetry, philosophy, and code*. doi:10.5281/zenodo.20709754
- [3] B. Hartshorn, *Enacting the Question of Self: Provenance, a hypergraph, and a differentiable route that records computation as data*. doi:10.5281/zenodo.20710444
- [4] B. Hartshorn, *Origin, Self, Language, Meaning, Other, Time, and Difference: A Self-Evolving Inquiry* (self_3). doi:10.5281/zenodo.20707850
- [5] B. Hartshorn, *Towards Self-Evolving AGI via Emergent DSL*. viXra:2507.0104
- [6] B. Hartshorn, *Emergent Self-Modification and Meta-Programming in Dynamic Systems*. viXra:2507.0036
- [7] B. Hartshorn, *Self-Contained Multi-AI Architecture Definition via DSL*. viXra:2507.0074