● ZINGTREE · ERRAND TEMPLATE

Cancellations — Register Errand

A birdseye view of the cancellation errand workflow — from loading an order in **Edvin**, through per-PNR agent selections, into the automated creation of **Zendesk** tickets and errand registration.

LEGEND 🟪 Agent screen 🟦 Edvin (ETG API) 🟩 Zendesk API 🟧 Decision ⊐ Loop / repeat

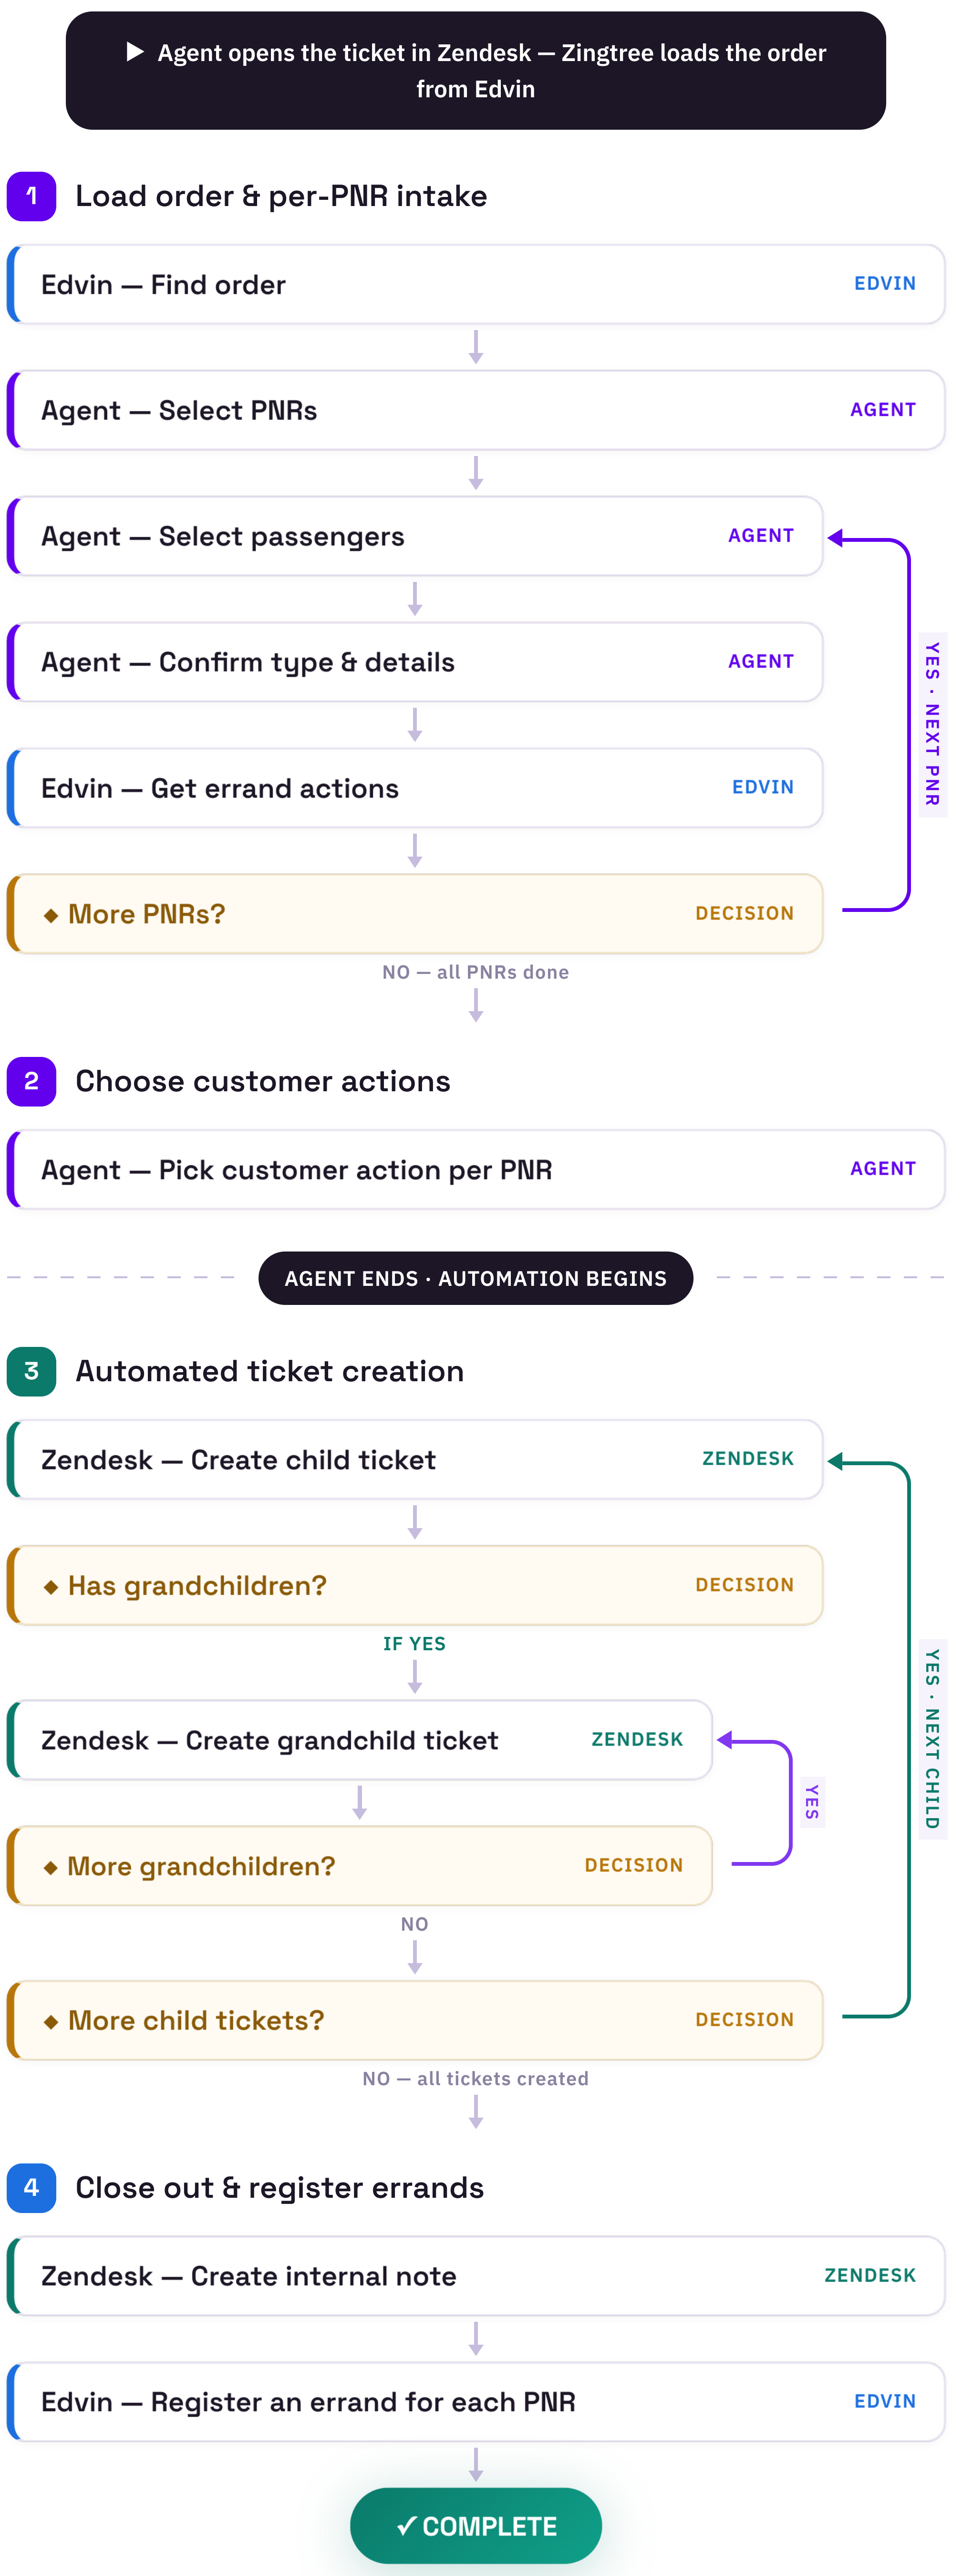

▶ Agent opens the ticket in Zendesk — Zingtree loads the order from Edvin

1 Load order & per-PNR intake

- Edvin — Find order EDVIN
- Agent — Select PNRs AGENT
- Agent — Select passengers AGENT
- Agent — Confirm type & details AGENT
- Edvin — Get errand actions EDVIN
- ◆ More PNRs? DECISION

2 Choose customer actions

- Agent — Pick customer action per PNR AGENT

AGENT ENDS · AUTOMATION BEGINS

3 Automated ticket creation

- Zendesk — Create child ticket ZENDESK
- ◆ Has grandchildren? DECISION
- Zendesk — Create grandchild ticket ZENDESK
- ◆ More grandchildren? DECISION
- ◆ More child tickets? DECISION

4 Close out & register errands

- Zendesk — Create internal note ZENDESK
- Edvin — Register an errand for each PNR EDVIN

✓ COMPLETE

DOCUMENTATION

How the workflow works

The chart above shows only the milestone steps. Behind each one, Zingtree also runs supporting logic — formatting passengers, building the dynamic action list, and the pivotal **stitch / bucket / map** step that turns the agent's choices into the child & grandchild tickets the automation creates.

PHASE 1 · AGENT

Load & intake

The order loads from Edvin. For each PNR, the agent selects passengers and the cancellation type; Zingtree fetches the matching Edvin errand actions.

PHASE 2 · AGENT

Customer actions

The agent picks one Edvin-driven action per PNR. Zingtree buckets each choice and maps the child & grandchild tickets to create.

PHASE 3 · AUTOMATED

Ticket creation

Zingtree loops the mapped array: it creates each child ticket in Zendesk, then for any with grandchildren, opens a side conversation and creates each grandchild beneath it.

PHASE 4 · AUTOMATED

Close & register

A summary internal note is posted to the parent ticket, and each PNR's errand is registered in Edvin. The agent finishes on the closing call.

The bucket & ticket mapping

Every customer action carries a **bucket** defined in Edvin. The PNRs are grouped by bucket, then one child ticket is built per non-empty bucket — a *proceed* bucket becomes a visible Child Ticket; the rest become internal Silent Tickets. Grandchildren are spun from the items inside each group.

`proceed`	Action can be carried out → visible **Child Ticket**.
`no_action`	Nothing to do → **Silent Ticket**.
`escalate`	Needs a specialist team → **Silent Ticket**.
`different_request`	Ask differs from the type → **Silent Ticket**.
`default`	Any uncategorised action, as a safeguard.

The three loops

The workflow repeats work in three places — the curved arrows in the chart. This is why one errand can produce several Zendesk tickets.

↻ Per-PNR loop

Runs passenger, type and action selection once for every PNR the agent picked.

↻ Per-child-ticket loop

Creates each child ticket and decides whether grandchildren are needed.

↻ Per-grandchild loop

Nested inside the child loop; creates each grandchild under its parent's side conversation.

Cancellation types

The agent selects one type per PNR at "Confirm type & details". Each maps to a type inside Edvin's Cancellation category, which determines the available customer actions.

- Before ticket issuance
- Void
- 24 hour rule
- Voluntary — Fare rules
- Voluntary — Voucher/Credit refund
- Force Majeure
- Confirmed Crisis
- GDPR
- Dupe
- Against Cancellation Protection
- Against Cancellation Guarantee
- Against CFAR
- Against Xcover (Cover Genius)
- Schedule Change
- Against Self Transfer Guarantee
- Chargeback / BR lawsuit
- Redirect to CR