



Hands-On Lab

z/OSMF Security Configuration Assistant

Abstract:

The z/OS Management Facility (z/OSMF) provides a web-based graphical interface for system programmers on z/OS. This hand on lab will give an opportunity to learn about the functions and features in z/OSMF first hand. Attendees can use a centralized UI to manage and validate security requirements by product or function.

This session will be useful to systems programmers and security administrator who needs to work with security configuration for scenarios like security validation, security trouble shooting, etc.

Introduction to z/OSMF Security Configuration Assistant task:

When configure a z/OSMF server or enable a z/OSMF service, security setup is usually involved. The administrator might need execute a set of commands or script to figure out what security requirements they lack. This is usually time-consuming and needs much communication efforts.

The Security Configuration Assistant (SCA) task provides a centralized visual framework for examining [the security requirements of z/OSMF and other z/OS components](#). Specifically, SCA task lists the required resources and access requirements by z/OSMF services. You can also import security descriptor file (in human-readable JSON format) of other z/OS components, or import the security descriptor files you created by your own, into z/OSMF. Authorized administrator can validate and fix those security requirements automatically. This could mitigate the repeated communication between z/OS system programmer, who configures z/OSMF or other z/OS components, and z/OS security administrator. SCA task consists of tabbed sections and tabular reports that can be expanded or collapsed, as needed. This framework provides a comprehensive perspective on your z/OS security setup.

Key features of the z/OSMF Security Configuration Assistant (SCA) task

With the SCA task, you can:

- Review security requirements by function.
- Automatically validate security requirements on a flexible scope, regardless of what your security product is.
- Fix security failure by reviewing the commands generated by SCA and submitting commands to your security product

With Import function of SCA task, you can

- Create a JSON file (a.k.a. Security Descriptor file) to organize and describe security requirement based on your need.
- Import Security Descriptor files into SCA and review their security requirements in SCA.
- Specify runtime values to variables in security resource profile.
- Perform security validation against user id or group id for a flexible scope.
- Review & Fix validation failures
- Review validation result in graphic chart
- Filter validation results so that you can quickly narrow down to security requirements with specific type of validation result.

SCA Lab

This lab consists of 10 tasks:

1. Log on to z/OSMF
2. Launch the Security Configuration Assistant task.
3. Check the result of Validation all
4. View the details of each tab
5. Check the statistics of validation
6. Filter out the failed validation
7. Validate another user
8. Validate Configurable security requirements
9. Import external Security Descriptor files
10. Review & fix validation failures
11. SCA RESTful API

It is recommended that you execute these tasks in the order listed above. As you get familiar with the SCA, you will be able to work directly with the task you need to accomplish.

1. Logon to z/OSMF

- Launch browser from your workstation
- Point browser to z/OSMF – enter the following URL
<https://share.centers.ihost.com/zosmf/>
- Login with SHARE userid/pw as provided by the lab instructor
 - Each workstation has been assigned a unique z/OS user id

Note: All screen captures in the handout show the ID SHARA01, your browser will be slightly different to reflect the User ID that you were given.

IBM z/OS Management Facility

LEARN MORE NEED HELP?

Welcome to z/OS

The highly secure, scalable and resilient enterprise operating system for the IBM z Systems mainframe.

z/OS USER ID

SHARA01

z/OS PASSWORD

.....

LOG IN

Shopz
IBM Support

z Systems Redbooks
z/OSMF home Page


WCS Flashes and Techdocs
z/OS home Page

z/OS Knowledge Center

2. Launch the Security Configuration Assistant task.


Step 2a: Open z/OSMF App Center

Click on the icon of App Center on the bottom left of z/OSMF desktop

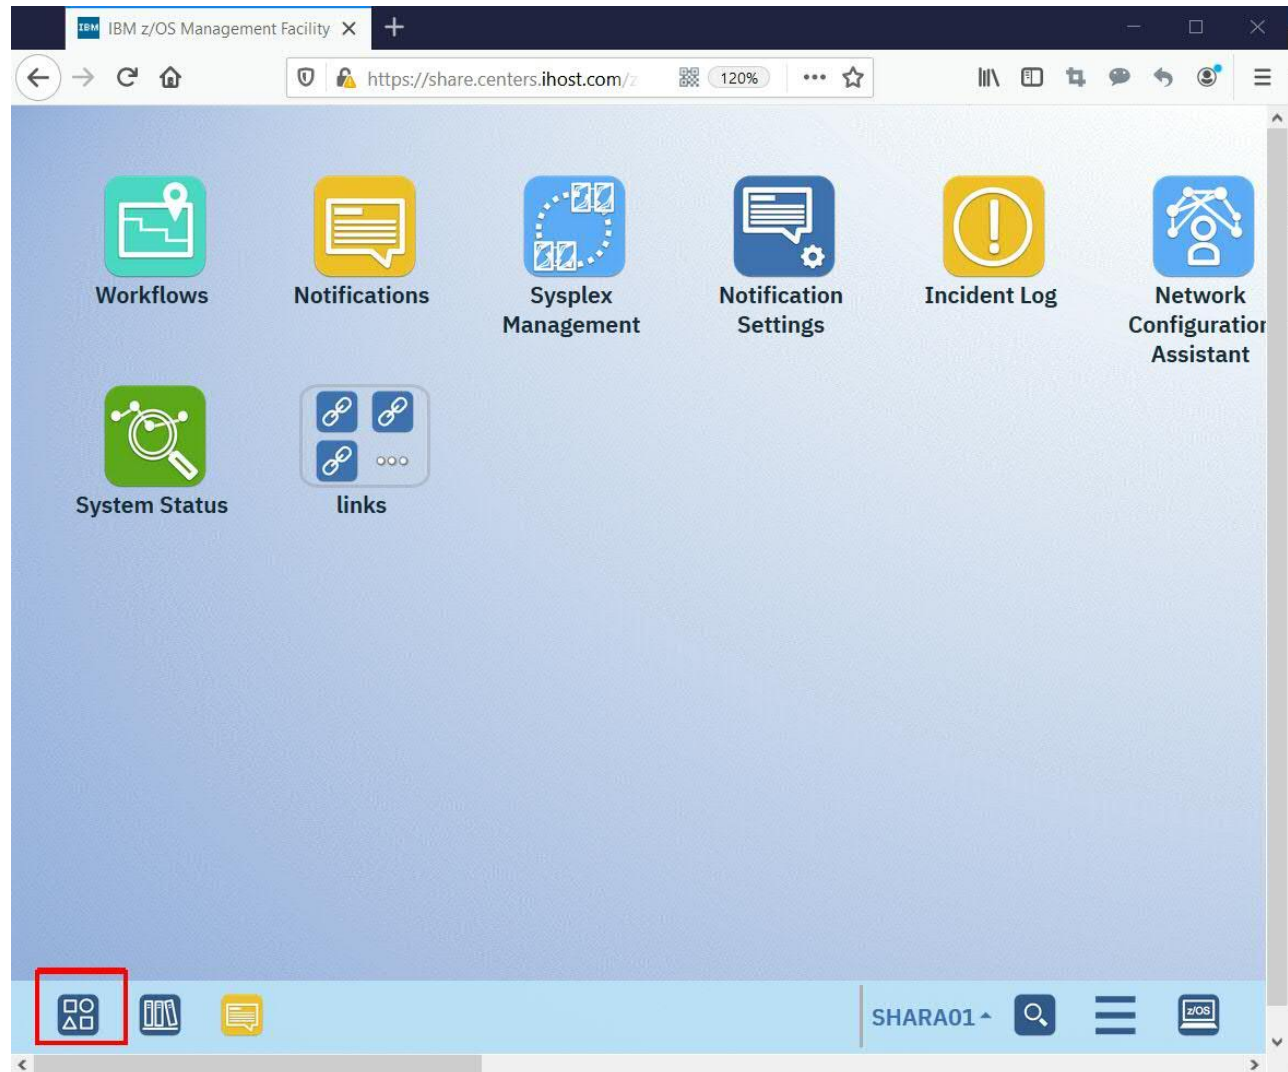

Step 2b: Open Security Configuration Assistant task


Double click on the icon of “Security Configuration Assistant”. You can enter character S to quickly locate the icon of “Security Configuration Assistant”.

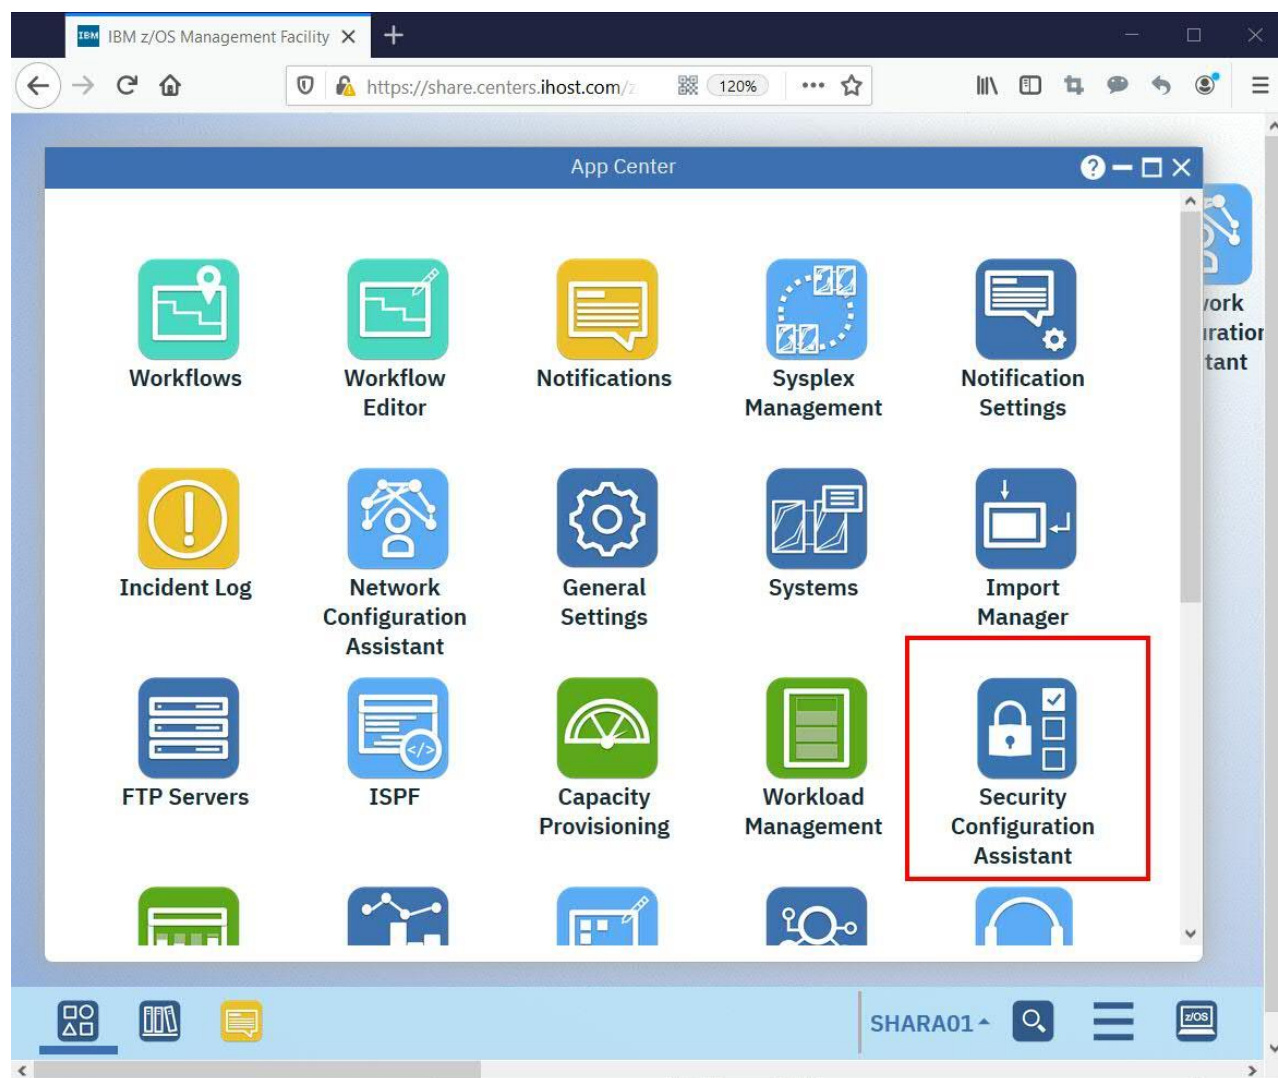

3. Check the result of Validation all.


Step 3a: Validate all security requirements managed by SCA

Click **Validate all**, you may wait for a few seconds for the validation process to be completed.

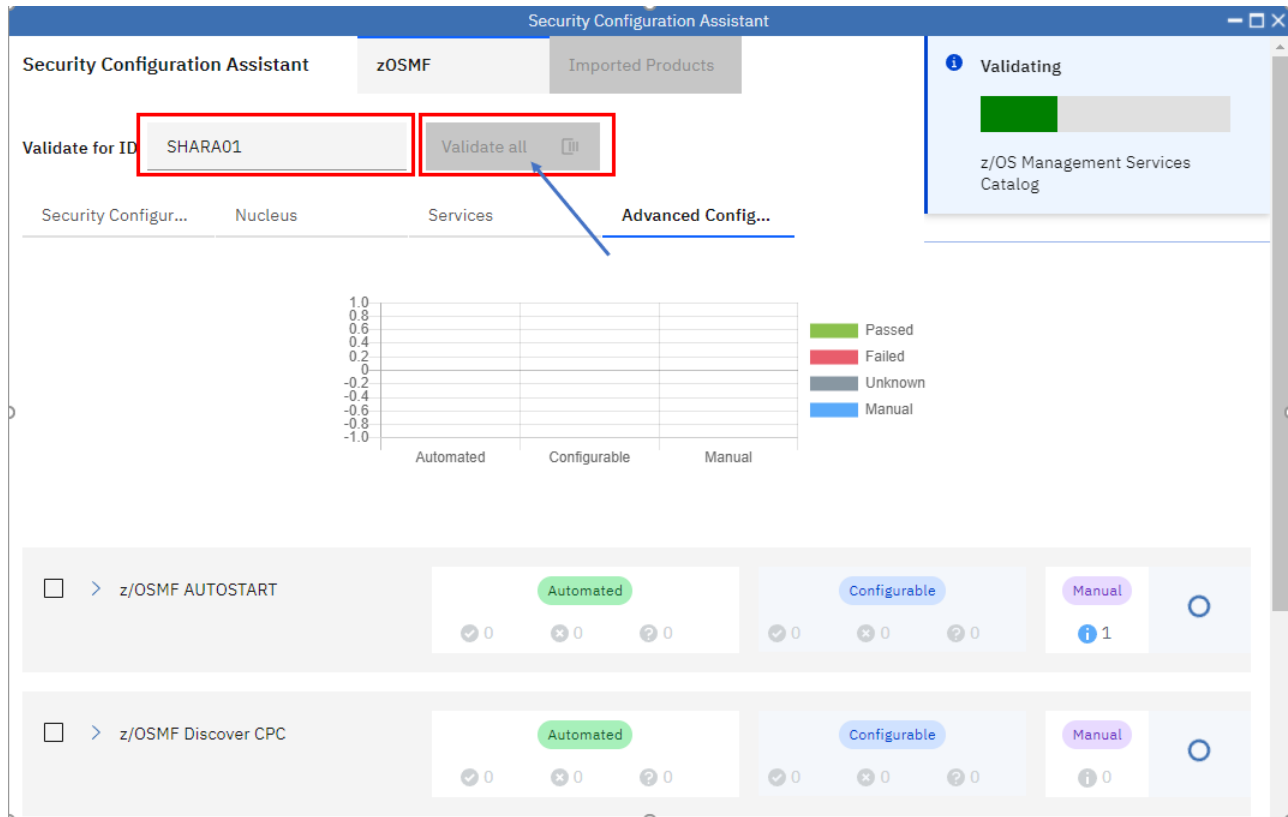


Step 3b: Check the message of SCA Task

When the **Validation all** is completed, messages will be popped up to indicate the validation status. You can also check the messages by clicking on the bell icon on the top right.

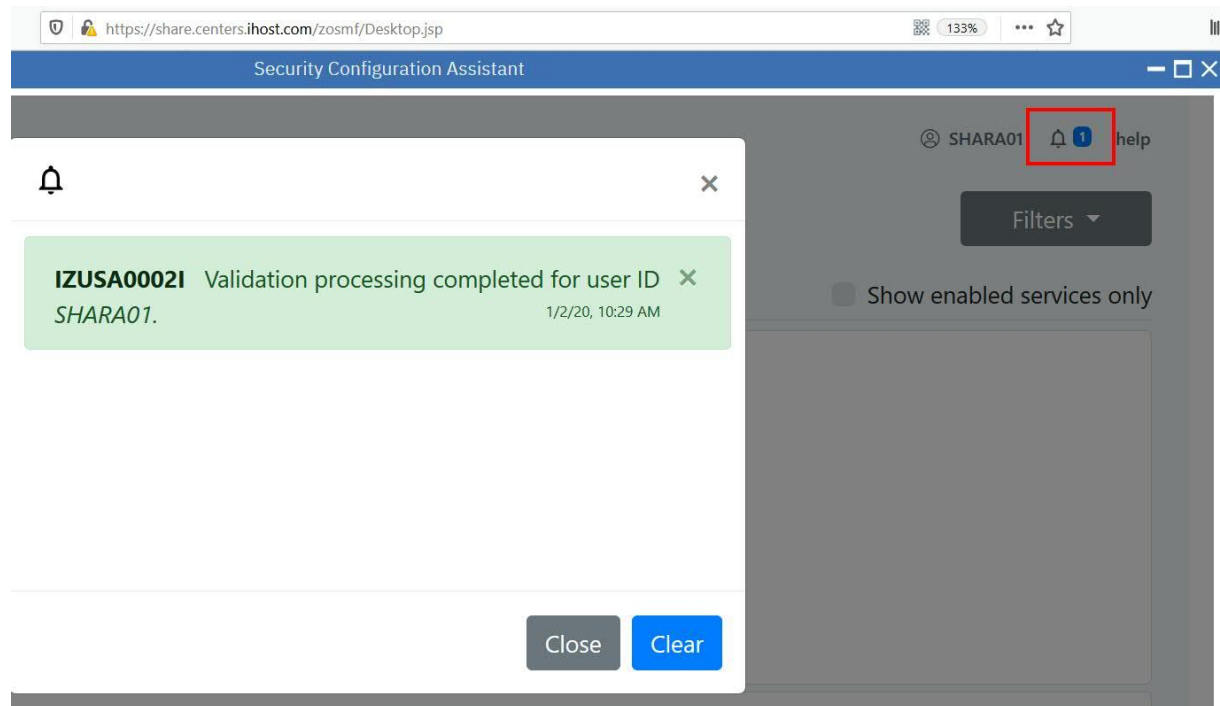

Step 3c: Check different tabs of SCA task

You can see there are 4 tabs for security requirements of z/OSMF itself in SCA task. Each tab contains security requirements and result for different group of z/OSMF functions.

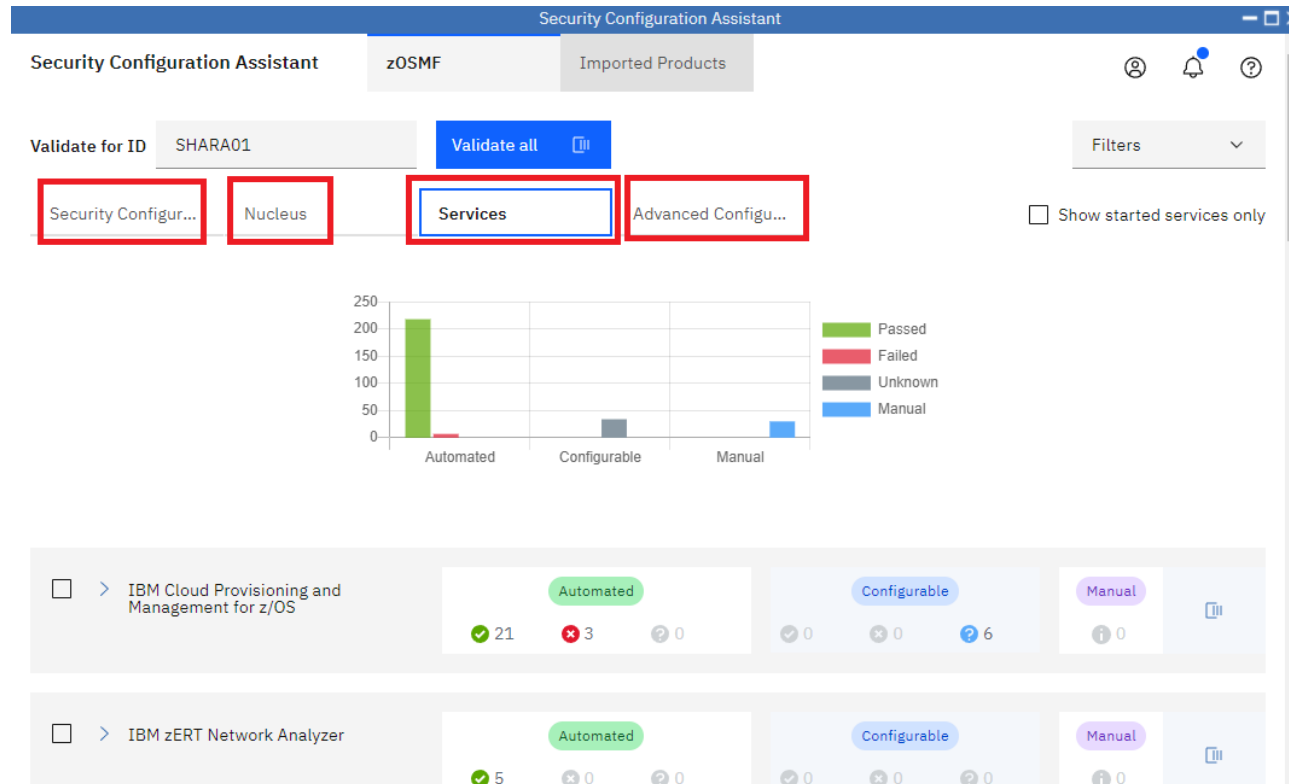

4. View the details of each tab

Now let's check out details in each tab.

Step 4a: Check the tab of Security Configuration Assistant

Extend the category of “z/OSMF Security Configuration Assistant”. The list in this tab includes all security requirements that are required to run the SCA task itself. If those security requirements are not satisfied, the later validations done by SCA task automatically may show the ‘Unknown’ status. Each line in the table indicates one specific security requirement which include:

- SAF resource name and explains why the authorization is needed.
- SAF resource class, Who needs access, access level
- User ID of the currently validated user.
- Validation result, which indicate if the authorities has been granted
- Action. If the corresponding security setup is changed later, you can rerun the validation for specific item to verify if the change was successful. To do so, click the refresh icon in this **Action** column. The Security Configuration Assistant task runs validation again to determine whether the user has the required level of access to the selected resource name

Resources for z/OSMF Security Configuration Assistant	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
BBG.SECCLASS.SERVER	Allow the user to verify resources in the SERV...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.APPL	Allow the user to verify resources in the APPL ...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.FACILITY	Allow the user to verify resources in the FACIL...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.EJBROLE	Allow the user to verify resources in the EJBRO...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.SERVAUTH	Allow the user to verify resources in the SERV...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.STARTED	Allow the user to verify resources in the STAR...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.ZMFCLOUD	Allow the user to verify resources in the ZMFC...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.ACCTNUM	Allow the user to verify resources in the ACCT...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.TSOPROC	Allow the user to verify resources in the TSOP...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]
BBG.SECCLASS.TSOAUTH	Allow the user to verify resources in the TSOA...	SERVER	IZUSVR	READ	IZUSVR	Passed	[Refresh]

Step 4b: Check the tab of Nucleus

Extend the category of “z/OSMF Nucleus” and scroll down a little bit. The items in this tab includes all security requirement required for z/OSMF nucleus.

The screenshot shows the Security Configuration Assistant interface. The top navigation bar includes "Security Configuration Assistant", "zOSMF", and "Imported Products". Below this, there's a "Validate for ID" section with "SHARA01" and a "Validate all" button. A "Filters" dropdown is on the right. The main content area has tabs for "Security Configur...", "Nucleus" (highlighted with a red box), "Services", and "Advanced Configu...". Under the "Nucleus" tab, there's a summary section with "Automated" (19 items), "Configurable" (0 items), and "Manual" (6 items). Below this is a table listing resources for z/OSMF Liberty Server.

Resources for z/OSMF Liberty Server	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
BBG.ANGEL.IZUANG1	Allow the z/OSMF server to access the angel p...	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.AUTHMOD.BBGZSAFM	Enable z/OSMF server to use the z/OS Authori...	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.AUTHMOD.BBGZSAFM.SAFCRED	To enable the SAF authorized user registry ser...	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.AUTHMOD.BBGZSAFM.ZOSWLM	To enable the WLM services(ZOSWLM).	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.AUTHMOD.BBGZSAFM.TXRRS	To enable the RRS transaction services(TXRRS).	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.AUTHMOD.BBGZSAFM.ZOSDUMP	To enable the SVCDUMP services(ZOSDUMP).	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.SECPF.IZUDFLT	Allow the z/OSMF server to make authenticati...	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.SECCLASS.ZMFAPLA	Allow the z/OSMF server to authorize checks f...	SERVER	IZUSVR	READ	IZUSVR	Passed	[i]
BBG.SYNC.IZUDFLT	Allow the z/OSMF server to authorize checks f...	FACILITY	IZUSVR	CONTROL	IZUSVR	Passed	[i]
BPX.WLMSEVER	Allows the z/OSMF server to use WLM functio...	FACILITY	IZUSVR	READ	IZUSVR	Passed	[i]

Step 4c: Check the tab of Services

This tab includes security requirements for all z/OSMF services. They are grouped by service. You can extend each category to see the details of each z/OSMF service.

Administrator can leverage this tab to check if the security requirements of a specific z/OSMF service are satisfied or not.

The screenshot shows the Security Configuration Assistant (SCA) interface. The top navigation bar includes 'Security Configuration Assistant', 'zOSMF', and 'Imported Products'. Below this, there's a 'Validate for ID' section with 'SHARA01' and a 'Validate all' button. The 'Services' tab is selected and highlighted with a red box. The main content area displays a list of services with their status (Automated, Configurable, Manual) and counts of checks. The services listed are:

Service	Automated	Configurable	Manual
IBM Cloud Provisioning and Management for z/OS	21 (pass), 3 (fail), 0 (info)	0 (pass), 0 (fail), 6 (info)	0 (info)
IBM zERT Network Analyzer	5 (pass), 0 (fail), 0 (info)	0 (pass), 0 (fail), 0 (info)	0 (info)
Network Configuration Assistant	7 (pass), 1 (fail), 0 (info)	1 (pass), 0 (fail), 2 (info)	4 (info)
Storage Management	1 (pass), 0 (fail), 0 (info)	0 (pass), 0 (fail), 0 (info)	1 (info)
System Variables Services	20 (pass), 0 (fail), 0 (info)	0 (pass), 0 (fail), 5 (info)	2 (info)
TSO/E Address Space Services	4 (pass), 0 (fail), 0 (info)	0 (pass), 0 (fail), 2 (info)	0 (info)

Step 4d: Check the tab of Advanced Configuration

The items in this tab include security requirements for z/OSMF advanced configurations.

The screenshot displays the 'Security Configuration Assistant' web interface. The browser address bar shows 'https://share.centers.ihost.com/zosmf/'. The interface has a top navigation bar with 'Security Configuration Assistant', 'zOSMF', and 'Imported Products' tabs. Below this, there's a 'Validate for ID' section with 'SHARA01' and a 'Validate all' button. A 'Filters' dropdown is on the right. The main content area has tabs for 'Security Configur...', 'Nucleus', 'Services', and 'Advanced Config...'. The 'Advanced Config...' tab is selected and highlighted with a red box. It lists five security requirements for z/OSMF:

Requirement	Automated	Configurable	Manual
z/OSMF AUTOSTART	1 (green check)	0	1 (blue question mark)
z/OSMF Discover CPC	4 (green check), 1 (red X)	0	2 (blue question mark)
z/OSMF Server setup for AT-TLS security	0	1 (green check)	0
z/OSMF Server setup for shared key ring and certificate	1 (green check), 2 (red X)	0	0
z/OSMF requirement to ICSF	21 (green check)	0	0

5. Check the statistics of validation

Now let's continuously focus on "Advanced Configuration" tab and check out the statistics of validation result.

Step 5a: Count the number of "Passed" and "Failed"

Extend "z/OSMF Discover CPC" category and count the number of "Passed" and "Failed".

The screenshot shows the Security Configuration Assistant interface. The 'Advanced Config...' tab is selected. Under the 'Automated' section, there are 4 green checkmarks and 1 red X. A table lists the resources and their validation status. The 'Failed' result is highlighted by a red box.

Resources for z/OS data set and file REST Interface	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
CEA.CEATSO.TSOREQUEST	Allows CEA to invoke a TSO session. ⓘ	SERVAUTH	IZUUSER IZUADMIN IZUSVR	READ	SHARA01	Passed	ⓘ
IZUACCT	Allows access to the Account Number resource... ⓘ	ACCTNUM	IZUUSER IZUADMIN	READ	SHARA01	Passed	ⓘ
IZUFPROC	Allows access to the TSO Procedure resource ... ⓘ	TSOPROC	IZUUSER IZUADMIN	READ	SHARA01	Passed	ⓘ
IZUDFLT.IzuManagementFacilityRestFiles.i zuUsers	Allows access to z/OS data set and file REST l... ⓘ	EJBROLE	<User of the Service>	READ	SHARA01	Passed	ⓘ
Resources for Discover CPC service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
HWI.APPLNAME.HWISERV	Allows the administrator groups access to the ... ⓘ	FACILITY	IZUADMIN	READ	SHARA01	Failed	ⓘ

Step 5b: Review the summarized numbers for a category

There is a summary area for each category in the same row of the category name. It shows the summarized numbers of validation result for the specific category. It should be consistent with the number you counted in step 5a.

The Manual Checks indicates how many security requirements can not be automatically validated and require user's manual check. You can click on the sub tab of "Manual" to see the details


The screenshot shows the Security Configuration Assistant interface. The top navigation bar includes "Security Configuration Assistant", "zOSMF", and "Imported Products". The main content area is titled "Validate for ID SHARA01" and includes a "Validate all" button. Below this, there are tabs for "Security Configur...", "Nucleus", "Services", and "Advanced Config...". The "Advanced Config..." tab is selected, showing a summary for "z/OSMF Discover CPC". A red box highlights the summary area, which displays "Automated" with 4 green checkmarks and 1 red cross, and "Configurable" with 0 green checkmarks and 0 red crosses. Below the summary, there are two tables. The first table, "Resources for z/OS data set and file REST interface", lists four resources: CEA.CEATSO.TSOREQUEST, IZUACCT, IZUFPROC, and IZUDFLT.IzuManagementFacilityRestFiles.i zuUsers. All four resources have a "Passed" validation result. The second table, "Resources for Discover CPC service", lists one resource: HWI.APPLNAME.HWISERV, which has a "Failed" validation result.

Resources for z/OS data set and file REST interface	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
CEA.CEATSO.TSOREQUEST	Allows CEA to invoke a TSO session.	SERVAUTH	IZUUSER IZUADMIN IZUSVR	READ	SHARA01	Passed	
IZUACCT	Allows access to the Account Number resource...	ACCTNUM	IZUUSER IZUADMIN	READ	SHARA01	Passed	
IZUFPROC	Allows access to the TSO Procedure resource ...	TSOPROC	IZUUSER IZUADMIN	READ	SHARA01	Passed	
IZUDFLT.IzuManagementFacilityRestFiles.i zuUsers	Allows access to z/OS data set and file REST i...	EJBROLE	<User of the Service>	READ	SHARA01	Passed	

Resources for Discover CPC service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
HWI.APPLNAME.HWISERV	Allows the administrator groups access to the ...	FACILITY	IZUADMIN	READ	SHARA01	Failed	

Step 5c: Check the overall summary via chart


On the top of each tab, there is a chart summarizes the validation result for the specific tab.

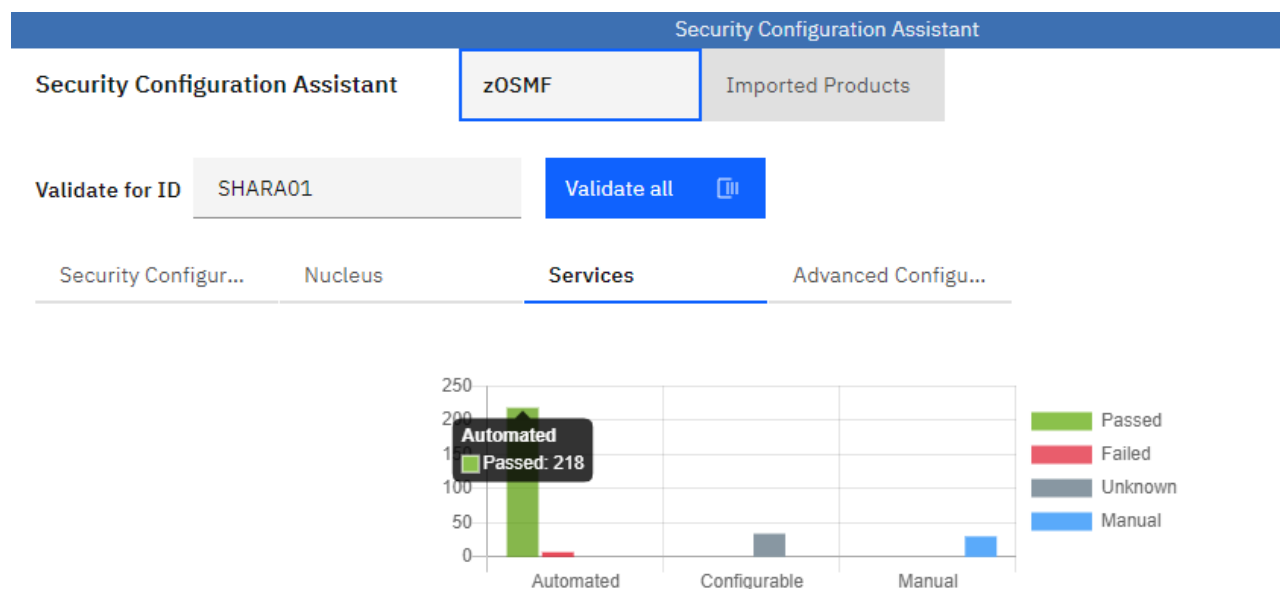


6. Filter out the failed validation

Sometimes, you may only care about the validation failures, the Filter function can help you with that.

Click on the button 'Filters' on the top right corner.

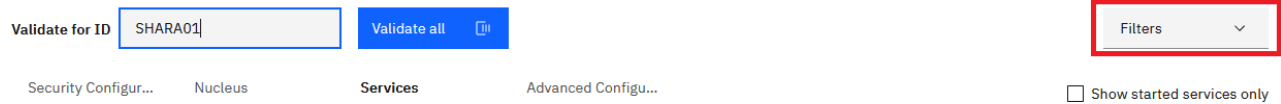

Then select 'Failed' option

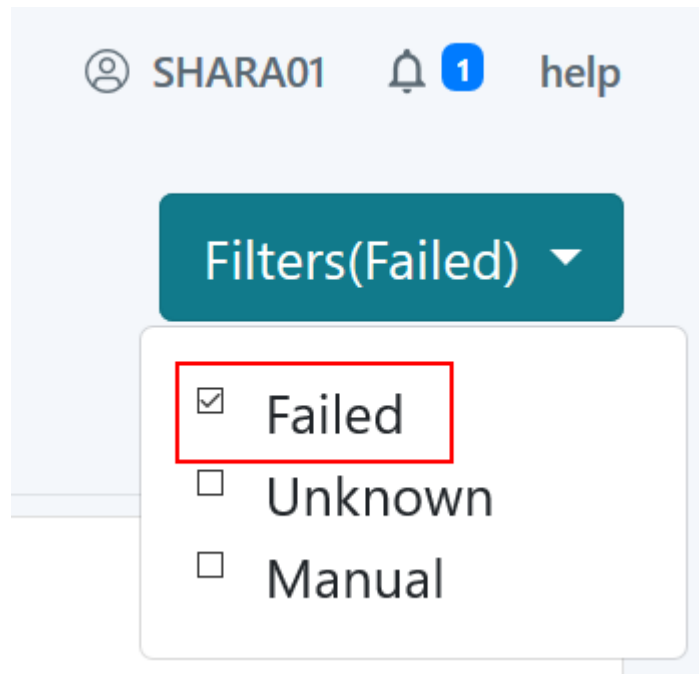

Then extend some categories and only validation failures are displayed so that you can quickly find out what security requirements have not been satisfied.


Unselect the 'Failed' check box in the Filter drop down menu so that we can continue with next step.

7. Validate another user


As an authorized administrator, you can validate z/OSMF security requirements for specified user id or group id.

Step 7a: Specify a different user to be validated

Specify the user id in the input box on the top

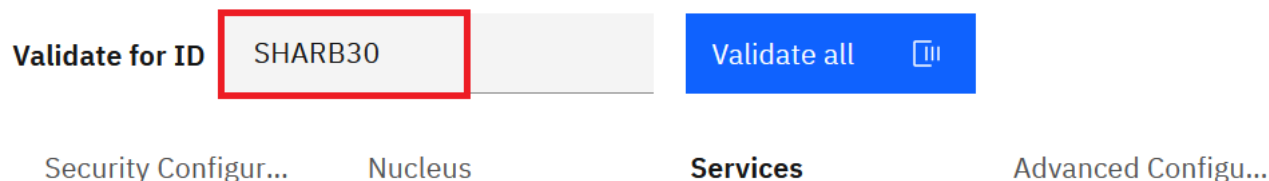

Then click on the “Services” tab to list all the services and plugins. Here we will use the tab of Services for hands-on,

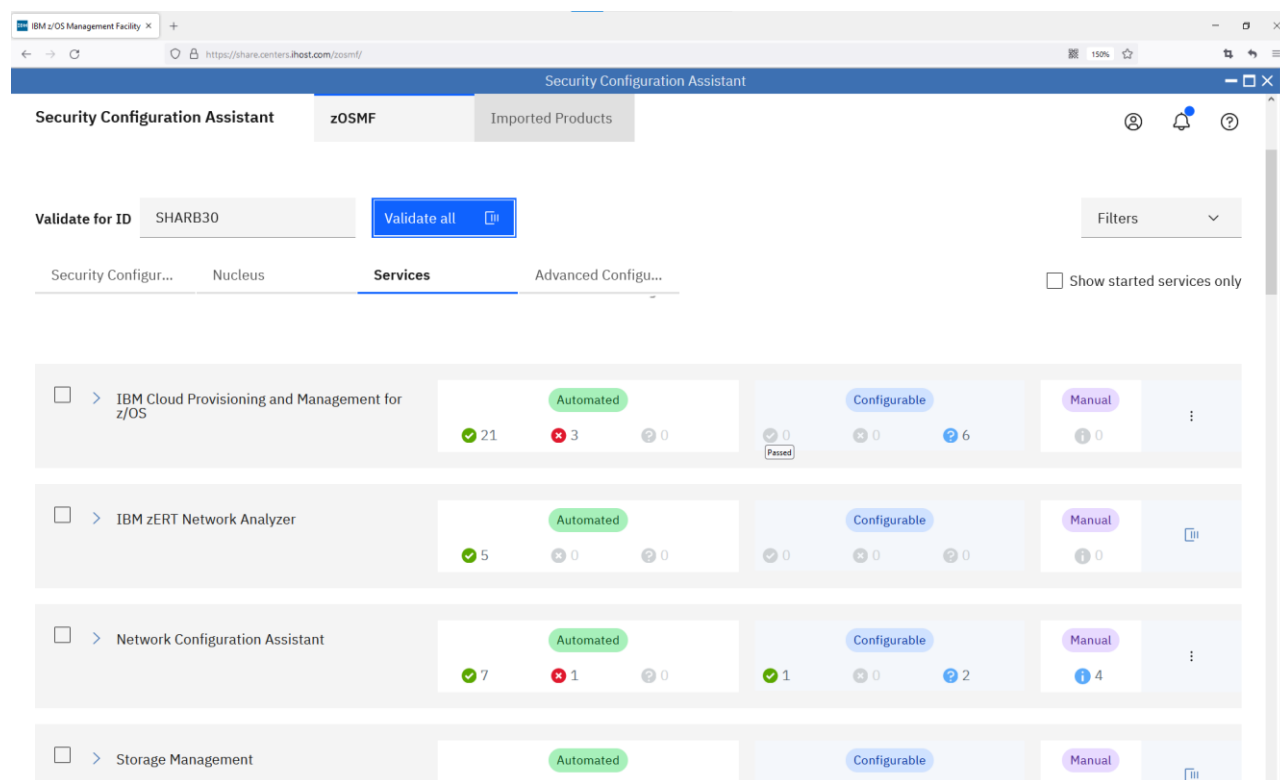

Step 7b: Validate a specific security requirement for the specified user

Extend z/OSMF Sysplex Management category, click on the **Validate** icon in the first row. The validation will be started to check if “SHARB30” has the “READ” access to z/OSMF Sysplex Management service which is protected by SAF profile IZUDFLT.ZOSMF.SYSplex.

Validate for ID SHARB30 Validate all Filters

Security Configur... Nucleus **Services** Advanced Configu... ☐ Show started services only

☐ z/OSMF Sysplex Management Automated Configurable Manual

33 1 0 0 0 7 1

Resources for z/OSMF Sysplex Management service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
IZUDFLT.ZOSMF.SYSplex	Allows the user to view sysplex resour...	① ZMFAPLA	IZUUSER IZUADMIN	READ	SHARB30	Passed	Validate
IZUDFLT.ZOSMF.SYSplex.MODIFY	Allows the user to modify sysplex reso...	① ZMFAPLA	IZUADMIN	READ	SHARB30	Passed	Validate

When the validation is completed, a message will be popped up to display the result of validation. The user id “SHARB30” is also displayed in the column of “Validated User ID”. Another column right after it shows the status of “Passed” which means the validation is successful.

Security Configuration Assistant zOSMF Imported Products

Validate for ID SHARB30 Validate all

Security Configur... Nucleus **Services** Advanced Configu... ☐ Show started services only

☐ z/OSMF Sysplex Management Automated Configurable Manual

33 1 0 0 0 7 1

IZUSA00141
Validation information is updated for ID SHARB30 for resource IZUDFLT.ZOSMF.SYSplex.

Resources for z/OSMF Sysplex Management service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
IZUDFLT.ZOSMF.SYSplex	Allows the user to view sysplex resour...	① ZMFAPLA	IZUUSER IZUADMIN	READ	SHARB30	Passed	Validate
IZUDFLT.ZOSMF.SYSplex.MODIFY	Allows the user to modify sysplex reso...	① ZMFAPLA	IZUADMIN	READ	SHARB30	Passed	Validate

Step 7c: Run validation for a specific z/OSMF service

Click on the **Validate** icon on the same row with the category title “z/OSMF Sysplex Management”. This triggers validation for all the security requirements required by the service “z/OSMF Sysplex Management”.

Validate for ID **SHARB30** Validate all

Security Configur... Nucleus **Services** Advanced Configu... Show started services only

☐ z/OSMF Sysplex Management Automated Configurable Manual

33 1 0 0 0 7

Automated Configurable Manual

Resources for z/OSMF Sysplex Management service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
IZUDFLT.ZOSMF.SYSplex	Allows the user to view sysplex resour...	① ZMFAPLA	IZUUSER IZUADMIN	READ	SHARA01	Passed	
IZUDFLT.ZOSMF.SYSplex.MODIFY	Allows the user to modify sysplex reso...	① ZMFAPLA	IZUADMIN	READ	SHARA01	Passed	
IZUDFLT.ZOSMF.SYSplex.LOG	Allows the user to clean up the sysple...	① ZMFAPLA	<User of the Service>	READ	SHARA01	Passed	
CEA.XCF.CF	Allows the user to access CEA for the ...	① SERVAUTH	IZUUSER IZUADMIN	READ	SHARA01	Passed	
CEA.XCF.CDS	Allows the user to access CEA for the ...	① SERVAUTH	IZUUSER IZUADMIN	READ	SHARA01	Passed	

Validate Review & Fix

When the validation is completed, a message pops up and displays the result of validation. This operation is usually used to verify if a user can access a specific z/OSMF service. Depends on the different user you specified on the top, the validation result may vary.

Security Configuration Assistant **z/OSMF** Imported Products

Validate for ID **SHARB30** Validate all

Security Configur... Nucleus **Services** Advanced Configu... Show started services only

☐ z/OSMF Sysplex Management Automated Configurable Manual

33 1 0 0 0 7 1

Automated Configurable Manual

Resources for z/OSMF Sysplex Management service	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
IZUDFLT.ZOSMF.SYSplex	Allows the user to view sysplex resour...	① ZMFAPLA	IZUUSER IZUADMIN	READ	SHARB30	Passed	
IZUDFLT.ZOSMF.SYSplex.MODIFY	Allows the user to modify sysplex reso...	① ZMFAPLA	IZUADMIN	READ	SHARB30	Passed	
IZUDFLT.ZOSMF.SYSplex.LOG	Allows the user to clean up the sysple...	① ZMFAPLA	<User of the Service>	READ	SHARB30	Passed	
CEA.XCF.CF	Allows the user to access CEA for the ...	① SERVAUTH	IZUUSER	READ	SHARB30	Passed	

IZUSA00151
Validation information is updated for the z/OSMF service z/OSMF Sysplex Management.

8. Validate Configurable security requirements

Each component may have the **Configurable** items, in this tab, security resource name contains variables.

Extend “Network Configuration Assistant”, then click on “Configurable” tab. Click the + icon in **Action** column to add variable value for configurable requirements.




Validate for ID: SHARA01 Validate all Filters

Security Configur... Nucleus **Services** Advanced Configu... ☐ Show started services only


☐ Network Configuration Assistant

Automated **Configurable** Manual

Automated: 7 (green), 1 (red), 0 (grey) | Configurable: 0 (green), 0 (red), 3 (blue) | Manual: 4 (blue)

Resources for Networking support for IBM Cloud Provisioning and Management for z/OS	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
MVS.ROUTE.CMD.<system_name>	Allows the Network Confi...	OPERCMDS	IZUSVR	READ			
EZB.NETSTAT.<system_name>.<tcp_procedure_name>.CONFIG	Allows the Network Confi...	SERVAUTH	IZUSVR	READ			
EZB.NETSTAT.<system_name>.<tcp_procedure_name>.VIPADCFG	Allows the Network Confi...	SERVAUTH	IZUSVR	READ			

Input value **S2** for the variable name <system_name>, and click **OK**.

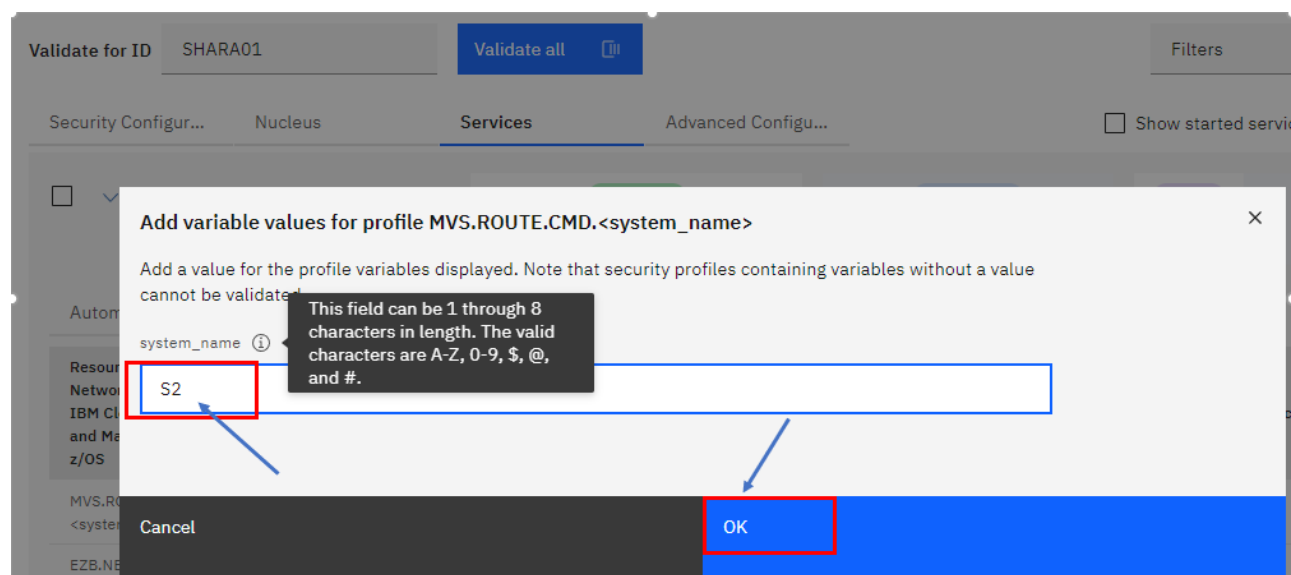


The added resource will be validated automatically.

9. Import external security descriptor file

SCA can support other external products. Once you have a security descriptor file, upload it to <z/OSMF data directory>/configuration/security directory. Then SCA will be able to discover it and allows administrator to import it to SCA.

To import a Security Descriptor file, click **Imported Products** tab, and then click **Import** button. All Security Descriptor files under <z/OSMF data directory>/configuration/security directory will be listed. For this lab, we won't do the real "Load" action, please just click on the "Cancel" button to cancel the Import action. In fact, once the Security Descriptor file is imported into SCA, the functions you explored above for z/OSMF security requirements also work for security requirements described in the Security Descriptor file.

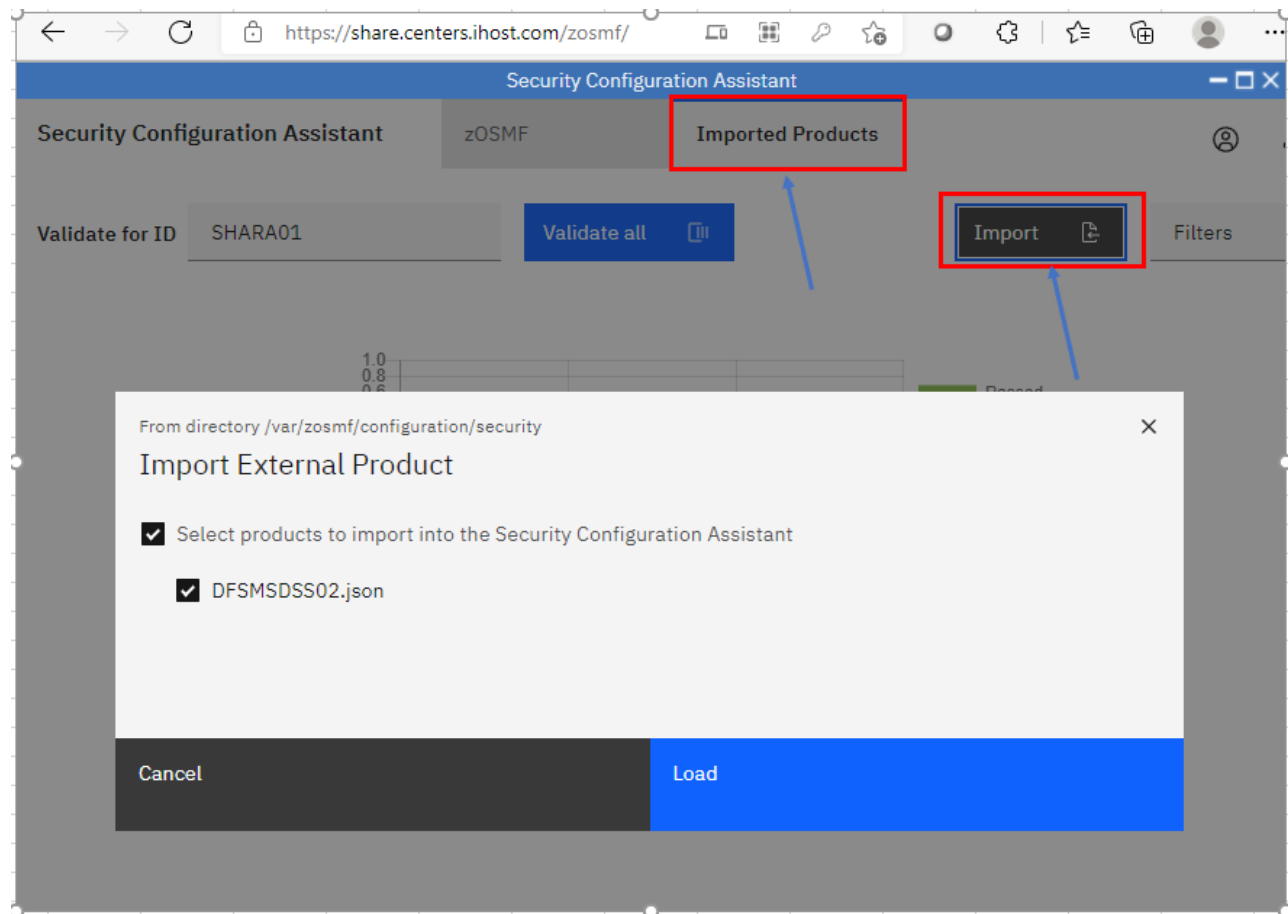

10. Review & Fix security failures

Step 10a. Validate security requirements

Ensure you are on the tab of “Imported Products” and extend tab of “DFSMS Data Set Services (DFSMSdss3)”.

Click the action button on the right, then select “**Validate**” action.


The screenshot shows the Security Configuration Assistant interface. The 'Imported Products' tab is selected. Under 'DFSMS Data Set Services (DFSMSdss3)', the 'Automated' tab is active. A dropdown menu is open on the right, showing the 'Validate' action highlighted. Below the menu, three tables are visible, each showing security requirements for different resources. The 'Validation Result' column for all entries is 'Unknown'.

Resources for BYPASSACS with COPY	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
STGADMIN.ADR.COPY.BYPASSACS	DFSMSdss storage administrator BYPASSACS with COPY co...	FACILITY	<User of the Command>	READ		Unknown	[II]

Resources for BYPASSACS with RESTORE	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
STGADMIN.ADR.RESTORE.BYPASSACS	DFSMSdss storage administrator BYPASSACS with RESTORE...	FACILITY	<User of the Command>	READ		Unknown	[II]


Resources for CGCREATED	Description	Class	Who needs the access	Required Access	Validated ID	Validation Result	Action
STGADMIN.ADR.CGCREATE	DFSMSdss storage administrator CGCREATED command pro...	FACILITY	<User of the Command>	READ		Unknown	[II]

After the validation completes, you will find some security requirements are not satisfied which are indicated as “Failed” in the column of “Validation Result”. Now we are about to fix all the failed security requirements for “DFSMS Data Set Services”. Click the action button again. This time, select “Review & Fix” menu item.

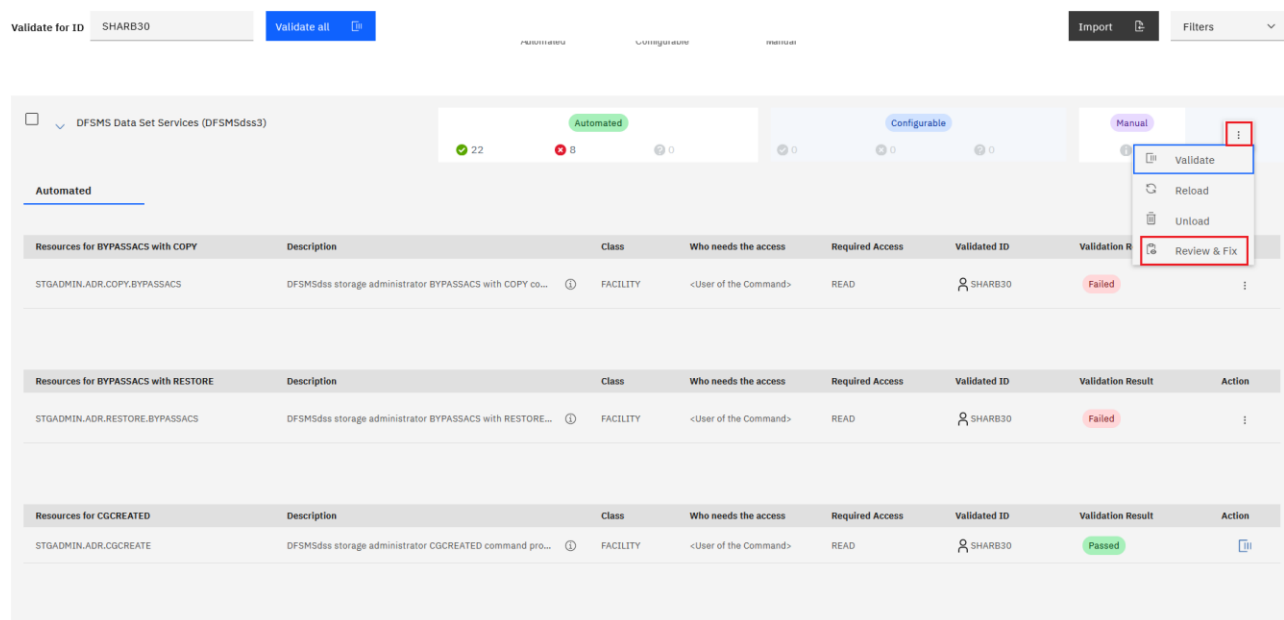

A dialog will be popped up. You can now review the commands generated for the validation failures. For each failed item, the generated commands include:

- Define the security profile
- Grant permission to the user or group that you have just validated for

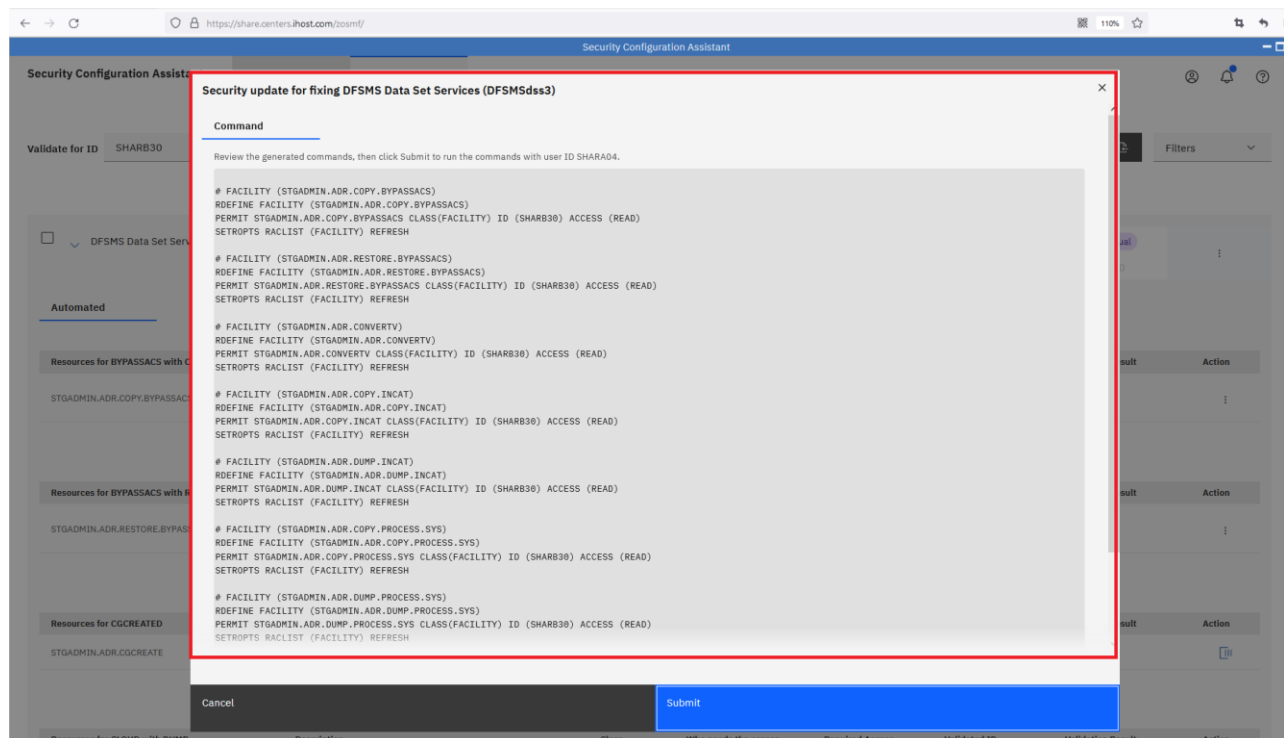

You can now review the generated commands. If you are satisfied with the commands, you can click on the “**Submit**” button to submit those commands to z/OS. You can imagine that “Submit” these commands require special authority, therefore, we will just click on “Cancel” button to not make any change.

11. SCA RESTful API

This step does not require your actions. It's only for your reference.

With APAR PH41248 and PH39327, SCA now exposes its capability of automatic security validation and provisioning via REST API. Since REST API is easy to be consumed by many programming languages either locally or remotely, it's now easy to consume SCA capability without having to open SCA UI.

Here is a example for using SCA REST API to do validation. The security requirements to be validated is directly included in the REST API request body:

Request:

```
Post
'https://share.centers.ihost.com/zosmf/config/security/v1/validate?userid=ibm
user'

{
  "resourceItems": [
    {
      "resourceProfile": "IZUDFLT.ZOSMF.CONFIGURATION.SECURITY_ASSISTANT",
      "resourceClass": "ZMFAPLA",
      "access": "READ"
    }
  ]
}
```

Response:

```
{
  "resourceItems": [
    {
      "resourceProfile": "IZUDFLT.ZOSMF.CONFIGURATION.SECURITY_ASSISTANT",
      "resourceClass": "ZMFAPLA",
      "access": "READ",
      "action": "validate",
      "validatedId": "ibmuser",
      "status": "Passed"
    }
  ]
}
```

```
}
```

Here is another example in which security requirements to be validated are specified in a standalone Security Descriptor file:

Request:

```
Post
'https://share.centers.ihost.com/zosmf/config/security/v1/validate/descriptor?userid=ibmuser'
{
  "path": "/usr/lpp/zosmf/configuration/izu5655S28SM01.json"
}
```

Response:

```
{
  "serviceId": "5655S28SM01",
  "serviceName": "z/OSMF Security Configuration Assistant",
  "version": "1.0",
  "vendor": "IBM",
  "resourceItems": [
    {
      "itemId": "5655S28SM01I00001000",
      "itemType": "PROGRAMMABLE",
      "itemCategory": "z/OSMF Security Configuration Assistant",
      "itemDescription": "Allow the user to verify resources in the SERVER class.",
      "resourceProfile": "BBG.SECCLASS.SERVER",
      "resourceClass": "SERVER",
      "whoNeedsAccess": "<IZU_STARTED_TASK_USERID_NAME>",
      "access": "READ",
      "action": "validate",
      "validatedId": "ibmuser",
      "status": "Passed"
    }
  ]
}
```

Here is an example about using SCA REST API to provision security configuration. The security requirements are specified directly in the REST API request body:

Request:

```
Post
'https://share.centers.ihost.com/zosmf/config/security/v1/provision?userid=ibmuser'
```

```
{
  "resourceItems": [
    {
      "resourceProfile": "IZUDFLT.ZOSMF.CONFIGURATION.SECURITY_ASSISTANT",
      "resourceClass": "ZMFAPLA",
      "access": "READ"
    }
  ]
}'
```

Response:

```
{
  "resourceItems": [
    {
      "resourceProfile": "IZUDFLT.ZOSMF.CONFIGURATION.SECURITY_ASSISTANT",
      "resourceClass": "ZMFAPLA",
      "access": "READ",
      "actionObjectId": "ibmuser",
      "status": "passed",
      "action": "provision",
      "validatedId": "ibmuser"
    }
  ]
}
```

The security requirements can also be saved in a standalone file:

Request:

```
Post
'https://share.centers.ihost.com/zosmf/config/security/v1/provision/descriptor?userid=ibmuser'
{
  "path": "/usr/lpp/zosmf/configuration/izu5655S28SM01.json"
}
```

Response:

```
{
  "serviceId": "5655S28SM01",
  "serviceName": "z/OSMF Security Configuration Assistant",
}
```

```
"version": "1.0",
"vendor": "IBM",
"resourceItems": [
  {
    "resourceProfile": "BBG.SECCLASS.SERVER",
    "resourceClass": "SERVER",
    "access": "READ",
    "actionObjectId": "ibmuser",
    "status": "passed",
    "itemId": "5655S28SM01I00001000",
    "itemType": "PROGRAMMABLE",
    "itemCategory": "z/OSMF Security Configuration Assistant",
    "itemDescription": "Allow the user to verify resources in the SERVER class.",
    "whoNeedsAccess": "<IZU_STARTED_TASK_USERID_NAME>",
    "action": "validate",
    "validatedId": "ibmuser"
  }
]
```

End of exercise