

Gift wrapping algorithm

In computational geometry, the **gift wrapping algorithm** is an algorithm for computing the convex hull of a given set of points.

Contents

Planar case


Algorithm

Pseudocode

Complexity

See also

References

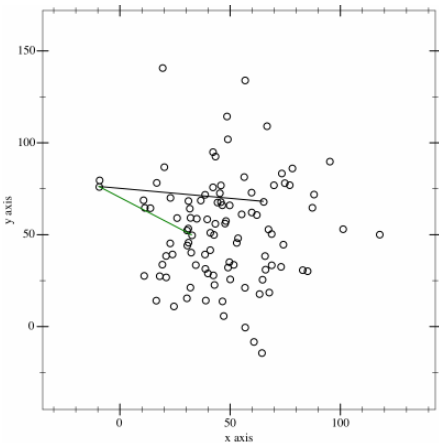

Animation of the gift wrapping algorithm. The red lines are already placed lines, the Black line is the current best guess for the new line, and the green line is the next guess

Planar case

In the two-dimensional case the algorithm is also known as **Jarvis march**, after R. A. Jarvis, who published it in 1973; it has $O(nh)$ time complexity, where n is the number of points and h is the number of points on the convex hull. Its real-life performance compared with other convex hull algorithms is favorable when n is small or h is expected to be very small with respect to n . In general cases, the algorithm is outperformed by many others (See Convex hull algorithms).

Algorithm

For the sake of simplicity, the description below assumes that the points are in general position, i.e., no three points are collinear. The algorithm may be easily modified to deal with collinearity, including the choice whether it should report only extreme points (vertices of the convex hull) or all points that lie on the convex hull. Also, the complete implementation must deal with degenerate cases when the convex hull has only 1 or 2 vertices, as well as with the issues of limited arithmetic precision, both of computer computations and input data.


The gift wrapping algorithm begins with $i=0$ and a point p_0 known to be on the convex hull, e.g., the leftmost point, and selects the point p_{i+1} such that all points are to the right of the line $p_i p_{i+1}$. This point may be found in $O(n)$ time by comparing polar angles of all points with respect to point p_i taken for the center of polar coordinates. Letting $i=i+1$, and repeating with until one reaches $p_h=p_0$ again yields the convex hull in h steps. In two dimensions, the gift wrapping algorithm is similar to the process of winding a string (or wrapping paper) around the set of points.

The approach can be extended to higher dimensions.

Pseudocode

```

algorithm jarvis(S) is
    // S is the set of points
    // P will be the set of points which form the convex
    hull. Final set size is i.
    pointOnHull = leftmost point in S // which is guaranteed
    to be part of the CH(S)
    i := 0
    repeat
        P[i] := pointOnHull
        endpoint := S[0]      // initial endpoint for a
        candidate edge on the hull
        for j from 0 to |S| do
            // endpoint == pointOnHull is a rare case and
            can happen only when j == 1 and a better endpoint has not
            yet been set for the loop
            if (endpoint == pointOnHull) or (S[j] is on left
            of line from P[i] to endpoint) then
                endpoint := S[j]    // found greater left
            turn, update endpoint
            i := i + 1
            pointOnHull = endpoint
        until endpoint = P[0]      // wrapped around to first
        hull point
  
```

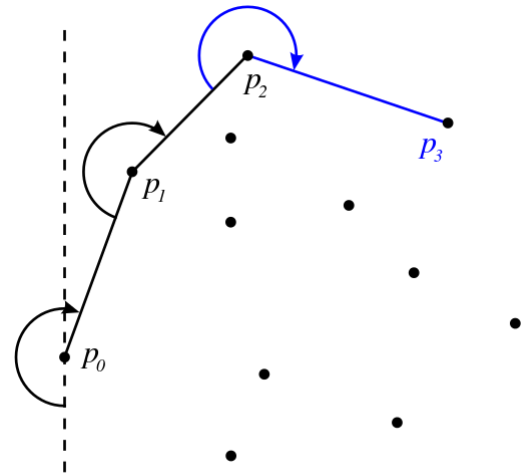

Jarvis's march computing the convex hull.

Complexity

The inner loop checks every point in the set S , and the outer loop repeats for each point on the hull. Hence the total run time is $O(nh)$. The run time depends on the size of the output, so Jarvis's march is an output-sensitive algorithm.

However, because the running time depends linearly on the number of hull vertices, it is only faster than $O(n \log n)$ algorithms such as Graham scan when the number h of hull vertices is smaller than $\log n$. Chan's algorithm, another convex hull algorithm, combines the logarithmic dependence of Graham scan with the output sensitivity of the gift wrapping algorithm, achieving an asymptotic running time $O(n \log h)$ that improves on both Graham scan and gift wrapping.

See also

- Convex hull algorithms

References

- Cormen, Thomas H.; Leiserson, Charles E.; Rivest, Ronald L.; Stein, Clifford (2001) [1990]. "33.3: Finding the convex hull". *Introduction to Algorithms* (2nd ed.). MIT Press and McGraw-Hill. pp. 955–956. ISBN 0-262-03293-7.
- Jarvis, R. A. (1973). "On the identification of the convex hull of a finite set of points in the plane". *Information Processing Letters*. 2: 18–21. doi:10.1016/0020-0190(73)90020-3 (https://doi.org/10.1016%2F0020-0190%2873%2990020-3).

Retrieved from "https://en.wikipedia.org/w/index.php?title=Gift_wrapping_algorithm&oldid=1008251630"

This page was last edited on 22 February 2021, at 10:29 (UTC).

Text is available under the Creative Commons Attribution-ShareAlike License 3.0; additional terms may apply. By using this site, you agree to the Terms of Use and Privacy Policy. Wikipedia® is a registered trademark of the Wikimedia Foundation, Inc., a non-profit organization.