



Merative Social Program Management 8.1

Development Environment Installation Guide

Note

Before using this information and the product it supports, read the information in [Notices on page 47](#)

Edition

This edition applies to Merative™ Social Program Management 8.0.0, 8.0.1, 8.0.2, 8.0.3, and 8.1.

© Merative US L.P. 2012, 2023

Merative and the Merative Logo are trademarks of Merative US L.P. in the United States and other countries.

Contents

Note.....	iii
Edition.....	v
1 Installing a development environment.....	9
1.1 Installing prerequisites.....	11
Installing and configuring Apache Ant.....	11
Installing and configuring Java™ SE and Java™ EE.....	11
1.2 Installing IBM® Installation Manager.....	12
1.3 Installing an application server.....	13
Installing and configuring IBM® WebSphere® Application Server.....	13
Installing and configuring Oracle WebLogic Server.....	14
1.4 Installing a database.....	15
H2 database.....	15
IBM® Db2® database.....	15
Oracle database.....	18
1.5 Installing Merative™ Social Program Management.....	20
Installing fixes and maintenance updates.....	24
Installing the Editor Applications asset to remove browser Flash dependencies.....	25
Uninstalling Merative™ Social Program Management.....	26
1.6 Social Program Management postinstallation configuration.....	27
Setting the Social Program Management environment variables.....	27
Configuring the H2 database.....	28
Configuring the IBM® Db2® database.....	30
Configuring the Oracle Database.....	32
Testing the configuration.....	33
Running build commands for the server and client applications.....	33
Starting the XML server.....	34
Customizing cryptography for production environment protection.....	34
Configuring <code>curam.referer.domains</code> for Cross-Site Request Forgery (CSRF) protection.....	35
1.7 Installing and configuring Eclipse and Apache Tomcat.....	35
Configuring Tomcat.....	36
Configuring the Java™ SE for Eclipse.....	37
Configuring the Eclipse class path variables and the Eclipse Tomcat Plugin.....	38
Importing and configuring the Social Program Management projects in Eclipse.....	39
Starting the Tomcat server and the Social Program Management servers.....	40
Using Eclipse to validate the tabbed configuration artifacts.....	41
Supported Eclipse text file encoding.....	41

1.8 Installing and configuring Rational® Software Architect Designer.....	42
Installing the Merative™ Social Program Management plug-ins.....	42
Setting up your Rational® Software Architect Designer workspace.....	43
1.9 Getting started with the development environment.....	44
Starting the server, Tomcat, and the RMILoginClient.....	44
Logging on to Social Program Management.....	45
Deploying Social Program Management.....	45
1.10 Upgrading Merative™ Social Program Management.....	46
Notices.....	47
Privacy policy.....	48
Trademarks.....	48

1 Installing a development environment

You can install a light or a full Merative™ Social Program Management development environment to develop Social Program Management applications. Development is supported only on Microsoft™ Windows™, and you can build on both Microsoft™ Windows™ and Linux®.

- **Light Java™ development environment**

A light development environment consists of Social Program Management, an Eclipse and Tomcat IDE, the lightweight H2 database, and the IBM® Rational® Software Architect Designer UML modeling tool.

- **Full Java™ development environment**

A full development environment replaces H2 with a supported enterprise database and adds a supported enterprise application server for full development and testing.

- **Java™ build environment**

A build environment consists of Social Program Management, and a supported database and application server.

- **Supplemental front-end development**

- **8.0.1.0**

If you want to extend UIM with JavaScript™ and the IBM® Carbon Design System, install the open source Social Program Management UI Addon Development Environment.

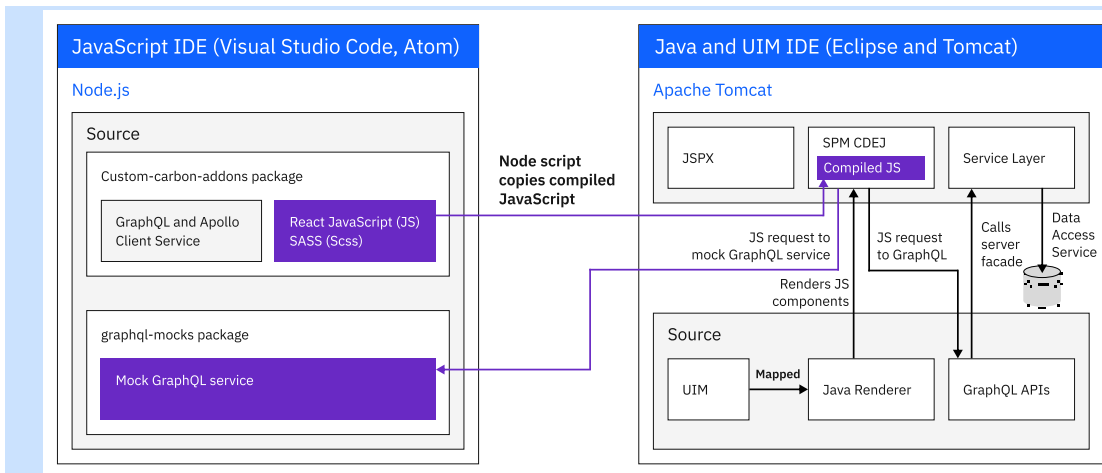


Figure 1: React and Java™ development environments for UI components

For more information, see <https://merative.github.io/spm-ui-addon-devenv>.

- If you want to work with the Merative™ SPM Universal Access Responsive Web Application, install the Merative™ SPM Universal Access Responsive Web Application asset.

Figure 2: React and Java™ lightweight application development environments for Universal Access

For more information about installing a React JavaScript™ development environment for Universal Access development, see the *Merative™ SPM Universal Access Responsive Web Application Guide*.

1.1 Installing prerequisites

You must install some prerequisites before you install the Merative™ Social Program Management software.

For the exact versions of prerequisites and supported software, see the *Merative™ Social Program Management prerequisites and supported software* technote related link.

Related information

[Merative Social Program Management prerequisites and supported software](#)

Installing and configuring Apache Ant

Apache Ant is a Java™ library and command-line tool for building Java™ applications.

Procedure

1. Download the Ant compressed file from the Apache website. For more information, see [Installing Apache Ant](#).
2. Extract the file to a directory of your choice on your computer. By default the file extracts to the `apache-ant-version` directory. The installation is now complete.
3. Create an ANT_HOME system environment variable with the value set to the Apache Ant installation directory.
 - a) Windows
Add `%ANT_HOME%\bin` to the PATH environment variable.
 - b) Linux
Add `$ANT_HOME/bin` to the PATH environment variable.
4. Create an ANT_OPTS system environment variable with the value:

```
ANT_OPTS=-Xmx1400m -Dcmp.maxmemory=1400m
```

Installing and configuring Java™ SE and Java™ EE

You can install a stand-alone Java™ SE and Java™ EE, or use the ones that are included with the supported application servers. The application server becomes a prerequisite if you use the included Java™ SE and Java™ EE.



About this task

Follow the Oracle documentation to install the Oracle Java™ SE and Java™ EE. No further installation steps are needed if you use the versions that are included with an application server.

Regardless of which Java™ SE and Java™ EE you use, you must complete the following configuration steps.

You might need multiple versions of Java™ SE and Java™ EE installed on a single computer. If so, you can choose the scope for these Microsoft™ Windows™ environment variables. For example, system wide, or through a script file or symbolic links.

Procedure

1. Create a JAVA_HOME environment variable that points to the installed Java™ SE.
 -  Place %JAVA_HOME%\bin at the beginning of the PATH environment variable.
 -  Place \$JAVA_HOME/bin at the beginning of the PATH environment variable.
2. Create a J2EE_JAR environment variable that points to the installed Java™ EE JAR file:

Refer to the application server documentation to find details of the Java™ EE JAR file that is provided with that application server type and version.

1.2 Installing IBM® Installation Manager

IBM® Installation Manager is used to install many IBM products. Install IBM® Installation Manager if you want to install IBM® WebSphere® Application Server or IBM® Db2®.

Procedure

1. Download the IBM® Installation Manager from www-01.ibm.com/support/docview.wss?uid=swg27025142. The different versions of IBM® Installation Manager are available if you scroll down the page.
2. Select the **Download document** hyperlink for the version of IBM® Installation Manager that you want to install.
3. On the Installation Manager (version) page, scroll down to the 'Change History' section and select the appropriate Fix Central (FC) link for Microsoft™ Windows™.
4. On the 'Select Fixes' page, select the version of IBM® Installation Manager appropriate for the version of Microsoft™ Windows™.
5. Click **Continue** to navigate to the download page.
6. Download the IBM® Installation Manager compressed file for your version of Microsoft™ Windows™.
7. Extract the downloaded file to a temporary location.
For example, *C : \Temp*
8. After the IBM® Installation Manager software is downloaded and extracted, navigate to the *Install.exe* file.
For example, *C : \Temp\IM\install.exe*.
9. Right-click on *Install.exe* and select the **Run as administrator** option.
10. On the package selection, select the checkbox for the most recent version of the IBM® Installation Manager.
11. Click **Next**.
12. Review the International Program License Agreement and select the radio button to accept the terms and continue with the installation.
13. Click **Next**.
14. Select a location for the IBM Installation Manager.

For example, `C:\IBM\Installation Manager\eclipse`.

Typically, IBM® Installation Manager, IBM® WebSphere® Application Server, and IBM® Db2® are installed in the same folder, `C:\IBM`. Do not install these programs into `C:\Program Files`, or any other location with a space in the name as it can cause problems later.

15. Click **Install**.

16. Click **Finish**.

1.3 Installing an application server

You can install an application server to give you a complete set of development tools or for a build environment. The application server is a prerequisite if you want to use the Java™ SE and Java™ EE that are bundled with IBM® WebSphere® Application Server or Oracle WebLogic Server.

Note: You must not install an application server on an environment where the hostname contains an underscore.

Installing and configuring IBM® WebSphere® Application Server

Install WebSphere® Application Server or IBM® WebSphere® Application Server Network Deployment from the installation media and set the required Microsoft Windows environment variable.

Before you begin

IBM® Installation Manager is used to install IBM® WebSphere® Application Server, see [1.2 Installing IBM® Installation Manager on page 12](#).

If you want to install WebSphere® Application Server as a service, you must first create a user account with administrator privileges to use as the credentials for the service.

Important:

- **Windows** Do not install WebSphere® Application Server in a directory that contains spaces in the name, such as the default *Program Files* directory, as it can cause problems later.
- Do not install the WebSphere® Application Server sample applications. The sample application Apache Derby data source results in a class path conflict with the application web client use of Derby.

Setting the WebSphere® Application Server environment variable

Set the `WAS_HOME` environment variable to the server directory of the WebSphere® Application Server installation.

Windows For example, `C:\IBM\WebSphere\AppServer`

Linux For example, `/opt/IBM/WebSphere/AppServer`

Installing and configuring Oracle WebLogic Server

Complete the following steps to install and configure Oracle WebLogic Server.

Procedure

1. Run the Oracle installer. When prompted in the installation wizard, choose the following options:
 - For the installation type, choose **WebLogic Server**.
 - Deselect the **Automatically Launch the Configuration Wizard** checkbox.
2. Set the `WLS_HOME` environment variable to the `server` directory of the WebLogic Server installation.

Windows For example, `server_directory\wlserver_version\server`

Linux For example, `/opt/wlsversion/wlserver/server`.

3. Configure the WebLogic Server application transaction timeout settings, see [Configuring the Oracle WebLogic Server application transaction timeout settings on page 14](#).

Configuring the Oracle WebLogic Server application transaction timeout settings

Set the minimum application transaction timeout settings for Oracle WebLogic Server to 120 seconds.

About this task

Warning: These settings are for testing or development and are not advised for production systems where they represent minimum values. Tuning must be done to find the correct settings for your environment. The minimum value is recommended for the following components:

- Merative™ SPM Child Welfare
- Merative™ SPM Income Support
- Merative™ SPM Income Support for Medical Assistance
- Merative™ SPM Workers Compensation
- Merative™ SPM Youth Services

Procedure

1. Log on to the localhost console from `https://localhost:7002/console`.
2. Select the domain name under the **Domain Structure** section.
3. Select the **Configuration** tab.
4. Select the **JTA** tab.
5. Set **Timeout Seconds** to be 120 seconds.

What to do next

To test these components on Oracle WebLogic Server during development cycles, you can use the same steps to increase the JTA timeout settings.

1.4 Installing a database

The H2 database is supported as a development database. IBM® Db2® and Oracle Database are supported as database servers.

Note: No particular character set is required for the installation and setup of the DBMS. Configure a character set that is appropriate for the character range that is needed in the application.

H2 database

H2 is an SQL database engine that is written in Java™ that implements the JDBC API. A browser-based console application is included. The H2 database is preinstalled with the Merative™ Social Program Management software.

After you install the Social Program Management platform software, the self-contained database is in the `%CURAMSDEJ%\drivers\h2.jar` file.

If you plan to use the H2 database, select the IBM® Db2® option during installation. Enter values for Db2® as you proceed through the wizard. After you complete the installation, you must edit the database properties in the `%CURAM_DIR%\EJBServer\project\properties\Bootstrap.properties` file for the H2 database instead. `%CURAM_DIR%` is the Social Program Management installation directory, by default `C:\Merative\Curam\Development`.

These limitations apply to the support of the H2 database:

- For development use only.
- Not supported at run time.
- EAR files cannot be built for the H2 database.
- You cannot run the **configure** target while the H2 database is in use. This target automatically configures the application server.

Related information

[H2 Database Engine User Guide](#)

To see the H2 database user guide, click this link.

IBM® Db2® database

IBM® Db2® is supported as a database server.

Note: It is possible to use Merative™ Social Program Management against a remote database with the Db2® Universal Type 4 Driver. The driver is supplied with the Server Development Environment for Java™ (SDEJ).

Db2® database encoding options

If you plan to install IBM® Db2®, read this important background information about issues with Db2® database encoding and related sizing information. During a Db2® installation, you must

identify your requirement for SBCS or MBCS data. Depending on your choice, you might have to complete some extra post-configuration steps before you build the Merative™ Social Program Management database.

What is the issue?

For a multi-byte character set (MBCS) or encoding, Db2® processes columns by their byte size, not their character length. Therefore, for multi-byte characters, a CHAR, VARCHAR, or CLOB column might store fewer characters than the column length specification indicates, depending on the actual character length.

Consider the following example:

- A CHAR or VARCHAR column that is modeled with a length of 16.
- The 16-character string, "Marge says hello" that does not have accented character, requires 16 bytes for storage in a single-byte character set (SBCS).
- A similar 16-character string, but with accented characters, "Márge says héllö", requires 18 bytes for storage in UTF-8, a multi-byte character set (MBCS).

For the single-byte data, the string fits and processing is successful. For the multi-byte data, the string does not fit, resulting in overflow errors at run time. The Social Program Management web client usually captures and reports field size errors in a user-friendly manner. In this case, the user receives an "un-handled server exception" error, which is an underlying SQL Code -302 error. This is because the client does not capture this size mismatch as it checks the number of characters, and not the byte length.

How Social Program Management addresses the issue

Social Program Management provides modeling and build-time capabilities to resize its database columns to address this issue. These capabilities are described further in the *Modeling Reference Guide* and *Server Developer's Guide*.

As Social Program Management provides support for multiple languages, support for MBCS data is enabled by default with the maximum expansion set. These expansion settings are appropriate to ensure that new users, testing environments, and so on, do not encounter any errors because of their language, encoding, and database sizing. Also, users can find they require MBCS data when they import or paste data from other applications into their Social Program Management system. However, these defaults might not be appropriate for all environments. The following section describes some considerations for changing these expansion settings.

What you must consider

It is important to carefully consider your data encoding requirements regarding Db2® and Social Program Management to avoid unexpected behavior with how the database stores characters.

The preceding example represents a boundary case in that the data length matches the maximum column width. In many cases it is unlikely that, even with MBCS characters, an overflow situation will occur. Most data does not reach the maximum defined size. However, you must be prepared for the possibility of these error situations.

Use the database character set encoding appropriate to your application and environment. If possible, consider using an SBCS and encoding that supports your requirements. For example, CP1252 supports most Western European characters. However, CP1252 (or other SBCS

encodings) might not support characters from different or "broader" character sets or encodings (for example, UTF-8) that users might copy and paste into their browser.

When installing your Db2® database, you must only identify your requirement for SBCS or MBCS data and be prepared to take appropriate action before you build your Social Program Management database:

- If you require characters that use multiple bytes, then you must consider whether the default Social Program Management settings are appropriate. The necessary database space is dependent on various factors such as the following factors.
 - The specific character sizes. In Db2® and Db2® for z/OS, MBCS data can range from 1 to 4 bytes.
 - The frequency of MBCS characters, which can depend on the application, language, locale, column usage within the application, and so on.
 - The information density of the language and locale. For example, while some languages can require more bytes per character, each character can represent more information than, for instance, an alphabetic character and might fit into a field without any size adjustment.

If an SBCS is adequate, plan to disable database expansion. For more information about MBCS data sizing considerations, see the *Server Developer's Guide*.

Installing IBM® Db2®

Ensure that your account has administrative privileges and then follow the Db2® installer instructions to complete a default installation. You do not need to manually create a Db2® database. The platform software provides Ant scripts that you can run as a postinstallation step to create a basic test database.

Note the following options that are presented during a default installation:

- The *name* and *password* of the administrator account. Use an account and password that meets the standards and requirements of your site and Db2®.

Windows If it is an existing user, that user must be a member of the Administrator group.

Linux The specified user must be a Linux® user on your system.

- Certain editions of the Db2® installer support federated databases. If the installer presents an option that is defaulted to **This machine will be the instance-owning database partition server**, then change this option to **This machine will be a single-partition database server**.
- You must choose MBCS or SBCS, depending on your requirements. If you are unsure of what database encoding option to select, see [Db2® database encoding options on page 15](#).

For more information, see [Installing Db2®](#).

Configuring for circular transaction logging

When you use a database with circular transaction logging enabled, certain transactions can exceed the available log file space and fail. To avoid this issue, either use archive logging or set the available log size and quantity appropriately until it meets the needs of the transaction.

About this task

A common point for this failure is when the `prepare.application.data` Ant target is running, as this target publishes all the CER rule sets on the system. This Ant target is typically run after a clean database build. If the log is too small, it can result in an `SQLCODE -964` error.

You can use the following example to help you to increase the Db2® log file size and quantity. The exact amount of log file storage that is required varies from system to system. For more information about increasing the number and size of the log files available, see the specific documentation for your database.

Procedure

1. Open a command prompt and enter `db2cmd`.
2. Enter the following command:

```
db2 connect to db_name user db_user_name using db_password
```

Where `db_name`, `db_user_name`, `db_password` are the credentials of the database.

3. Enter the following commands:

```
db2 update db cfg for db_name using logfilsiz log_file_size
```

```
db2 update db cfg for db_name using logprimary primary_log_files
```

```
db2 update db cfg for db_name using logsecond secondary_log_files
```

Where the temporary values are as follows:

- The log file size. Set `log_file_size` to 1024.
 - The number of primary log files. Set `primary_log_files` to 50.
 - The number of secondary log files. Set `secondary_log_files` to 100.
4. Restart the database by entering the following commands:

```
db2stop
db2start
```

Oracle database

Oracle database is supported as a database server.

Note: You can use a remote database by using the Oracle Type 4 Driver that is supplied with the SDEJ.

Oracle database encoding options

If you plan to install Oracle, it is important to consider the character set for the data that you plan to store in your database when you configure the database for use with Merative™ Social Program Management.

For Oracle, there are two parameters to consider: `NLS_CHARACTERSET` and `NLS_LENGTH_SEMANTICS`.

- The `NLS_CHARACTERSET` parameter details the allowable character set of any data that is loaded to the database, generally AL32UTF8 is recommended by Oracle.
- The `NLS_LENGTH_SEMANTICS` determines how Oracle interprets length specifiers on CHAR and VARCHAR columns. To handle supplementary characters, for example, ß in German, where the storage of the character would be 2 bytes and might overrun the length of

a defined column, set the NLS_LENGTH_SEMANTICS parameter to CHAR. This setting directs the database to size columns with a character length rather than byte length.

Oracle extended data types

Starting with Oracle Database 12c, the maximum value of the VARCHAR2 data type can be extended from 4000 to 32767 bytes by changing the MAX_STRING_SIZE initialization parameter from its default value of STANDARD to EXTENDED. However, take care when enabling Oracle extended data types as there are some important caveats that apply. For more information about setting and using extended data types, see the Oracle documentation.

Important: The process of switching to use Oracle extended data types is a one-way operation. After you switch to extended data types, you can't switch back without some form of database recovery. You must ensure that extensive regression testing is performed before switching in production environments.

Postinstallation configuration for the Oracle database

Complete the following postinstallation tasks on the Oracle Database.

Creating an Oracle role for application servers

The application needs certain privileges to use the Oracle XA interface. Later, when you configure the application, the username under which the server connects to Oracle is specified. The appropriate privileges must be assigned to this username for the server to work successfully.

About this task

To bundle together the various privileges that are needed, you can create an Oracle role. Privileges can be granted to this role. Later this role can be granted to your users, granting all the privileges that are associated with that role.

The following commands create a role that is called CURAM_SERVER and give it the necessary privileges. A CURAM_USER user is then assigned that role and given the password PASSWORD. You run these commands inside an Oracle SQL*Plus window.

Procedure

1. To run the commands from SQL*Plus, type the following command at a command line:

```
sqlplus ?/? as SYSDBA
```

2. Enter the following commands:

```
CREATE ROLE "CURAM_SERVER";
GRANT RESOURCE TO "CURAM_SERVER";
```

```
Windows @%ORACLE_HOME%\RDBMS\ADMIN\xaview.sql
```

```
Linux
@${ORACLE_HOME}/rdbms/admin/xaview.sql
```

```
GRANT SELECT ON V$XATRANS$ TO PUBLIC;
GRANT SELECT ON PENDING_TRANS$ TO PUBLIC;
GRANT SELECT ON DBA_2PC_PENDING TO PUBLIC;
GRANT SELECT ON DBA_PENDING_TRANSACTIONS TO PUBLIC;
GRANT EXECUTE ON DBMS_SYSTEM TO CURAM_SERVER;
CREATE USER CURAM_USER IDENTIFIED BY
PASSWORD DEFAULT TABLESPACE "USERS" TEMPORARY TABLESPACE "TEMP";
GRANT "CONNECT", "CURAM_SERVER", UNLIMITED TABLESPACE TO <CURAM_USER>;
```

Where CURAM_USER and PASSWORD are the database user credentials.

Configuring for circular transaction logging

When you use a database with circular transaction logging enabled, certain transactions can exceed the available log file space and fail. To avoid this issue, either use archive logging or set the available log size and quantity appropriately until it meets the needs of the transaction.

A common point for this failure is when the *prepare.application.data* Ant target is running, as this target publishes all the CER rule sets on the system. This Ant target is typically run after a clean database build.

For information about increasing the number and size of the log files available, see the specific documentation for your database. The exact amount of log file storage that is required varies from system to system.

Configuring redo log space

Certain Social Program Management transactions that have significant insert activity are affected by the available redo log space. To avoid this issue, allocate the appropriate redo log space for your system.

A common point for this failure is when the *prepare.application.data* Ant target is running, as this target publishes all the CER rule sets on the system. This Ant target is typically run after a clean database build.

For information about allocating the appropriate size for the redo logs, see the Oracle documentation. The exact amount of activity and the required redo log space varies from system to system.

1.5 Installing Merative™ Social Program Management

For Long Term Support (LTS) releases, or Continuous Delivery (CD) releases with full development installers, run the Social Program Management platform installer to install the base platform on which all the other modules are installed. Then, install each of the Social Program Management application modules that you are licensed for. For Continuous Delivery (CD) releases with delta installers, run the installer on the appropriate full version.

Before you begin

Social Program Management software and maintenance releases are available to download from [Merative™ Support](#).

LTS releases contain the Social Program Management Platform and all of the Social Program Management application modules. LTS releases are delivered with full development installers.

CD releases are delivered either with full development installers, denoted by the second digit being incremented such as 8.1.0, or delta installers, such as 8.0.3, which must be installed on the appropriate full release.

Ensure that you have the required installers and all of the required information before you start the installation:

- Review the Social Program Management release notes.
- Review the Social Program Management Security Bulletins. Security Bulletins are now available from Merative Support. You must be a technical contact to access Security Bulletins, open a support case if you need access. Select **SPM Software Download** and enter your technical contact credentials to access Security Bulletins under Knowledge articles.

Note: The Structured Decision Making (SDM) Add-on module is not translated and must not be installed with Merative™ SPM Child Welfare on a non-English language installation.

Merative™ SPM Income Support has a dependency on Merative™ SPM Outcome Management. If you plan to install Merative™ SPM Income Support, you must install Merative™ SPM Outcome Management.

Merative™ SPM Income Support for Medical Assistance does not have a dependency on Merative™ SPM Outcome Management.

Note: If you are installing a modification release, install it in a new installation location and not in a previous installation location.

About this task

Social Program Management software and maintenance fix releases are available from the [Merative Software Downloads](#) site. You must request access to download software.

For a full installation, you must download the Social Program Management platform installer, plus individual installers for each component you plan to install. Typically, you install application modules, and optional associated add-ons.

Before you start, you must have the following information:

- A list of the components of the application for which you are licensed.
- The organization name and address.
- The database server name, port number, database name, database username, and database password.

If your project is stored in a source-controlled environment, you might take the following approach to the installation, depending on your requirements:

- Install Merative™ Social Program Management and any optional components.
- Place the installed code base under source control.

- To support future installations, the files in the */Installer* folder must also be maintained under source control.
- Use your source-control procedures to distribute the environment to other developers.

During the installation, all installation process and the installation history are saved to the following log files:

- */Installer/CuramInstaller.log*
- */Installer/Installhistory.txt*

Procedure

1. Go to [Merative™ Support](#), locate the appropriate downloads for your version, and download the software.
2. Extract the files to a temporary directory and change to that directory.
3. To run the installer wizard, enter the command `java -jar <installername.jar>`. If the installer name includes spaces, put the name in quotation marks. For example, `java -jar "Merative Curam SPM Installer Development.jar"`.

By default, the platform installer also installs the following platform application modules:

- Merative™ SPM Verification Engine
- Merative™ SPM Evidence Broker
- Merative™ SPM Life Event Management

You must have a valid license to use the platform application modules.

4. On the welcome page, click **Next**.
5. Do not alter the default installation path. Accept the default installation path by clicking **Next > OK** to create the directory. If the target installation directory exists, you are prompted to overwrite the existing files.
6. Select a language. If left blank, the language defaults to English - US.
7. If you are licensed for Universal Access, select the checkbox for any extra languages needed.
8. Click **Next** to accept the license type.
9. The components that you are licensed for are displayed. Confirm the components that you require are selected and click **Next**.
10. Enter the **Organization Name** and **Organization Address**, and click **Next**.
11. Select the **Cúram Database Platform** that you plan to use with the application. For example, **DB2/UDB**.
If you intend to use the H2 database, select **DB2/UDB** during the installation. Enter values for Db2® so you can proceed through the wizard. After you complete the installation, you must edit the database properties in the `%CURAM_DIR%\EJBServer\project\properties\Bootstrap.properties` file for the H2 database instead. `%CURAM_DIR%` is the Social Program Management installation directory, which by default is `C:\Merative\Curam\Development`.
12. In the **Database Account Logon** and **Database Account Password** fields, enter the values as defined during the database installation and click **Next**.

13. In the **Database Server Name** field, enter the fully qualified hostname of the computer on which you installed the database. Enter a value for the **Database Server Port** field, such as 50000 for Db2®. Enter the database name in the **Curam Database Name** and click **Next**. The installation files are extracted. This step can take several minutes.
 14. When the extraction completes, click **Next**.
The installation files are configured based on the inputs that are provided in the previous steps.
 15. Click **Next > Done** to complete the platform installation. Review the release notes and complete any relevant postinstallation steps.
 16. Run the installers for each of the application modules for which you have a valid license:
 - Merative™ SPM Universal Access
 - Merative™ SPM Outcome Management
 - Merative™ SPM Provider Management
 - Merative™ SPM Social Enterprise Collaboration
 - Merative™ SPM Business Intelligence and Analytics
 - Merative™ SPM Appeals
 - Merative™ SPM Workers Compensation - Do not install any further modules with this module.
 - Either Merative™ SPM Income Support or Merative™ SPM Income Support for Medical Assistance (but not both). You can then install these modules in this sequence:
 1. Merative™ SPM Income Support Screening
 2. Merative™ SPM Business Intelligence and Analytics Reports for Income Support
 - Merative™ SPM Child Welfare. You can then install:
 1. Merative™ SPM Business Intelligence and Analytics Reports for Child Welfare
 2. Merative™ SPM Child Welfare Structured Decision Making (SDM) Add-on
 3. Merative™ SPM Outcome Management Structured Decision Making (SDM) Add-on
- Note:** Merative™ SPM Outcome Management Structured Decision Making Add-on is installed on Merative™ SPM Child Welfare only for a modular Child Welfare licensing strategy and where only the Merative™ SPM Child Welfare Case Management module of Child Welfare is installed. Structured Decision Making Add-on includes only the SDM assessments that relate to an Outcome Management plan within an ongoing Child Welfare case.
- Merative™ SPM Youth Services
 - Any additional assets such as demonstrations
17. Verify your installation by checking the installation history to determine what was installed. A text file for each installer and the *InstallHistory.txt* file that lists all of the installers that ran are found in the installation folder.
For example, *C:\Merative\Curam\Development\Installer*.
 18. Review the release notes for each of the application modules and complete any postinstallation steps that are relevant to your configuration.
 19. If you plan to develop reports for Merative™ SPM Business Intelligence and Analytics, complete any additional installation steps to install your reporting development environment, see the *Business Intelligence and Analytics Guide*.

20. If you plan to use Citizen Engagement, you must also install the Merative™ SPM Universal Access Responsive Web Application development environment. For more information, see the *Merative™ SPM Universal Access Responsive Web Application Guide*.

Related information

[Merative Social Program Management prerequisites and supported software](#)

Installing fixes and maintenance updates

After you install a Merative™ Social Program Management Long Time Support (LTS) or Continuous Delivery (CD) release, install the most recent maintenance updates.

About this task

Social Program Management software and maintenance releases are available from [Merative™ Support](#). You must request access to download software.

- Maintenance on an LTS release is delivered in Fix packs that include critical and significant defects and security updates, and increment the fourth digit of the release number. For example, 8.0.1.1. They do not contain new features or enhancements. Updates to an LTS release do not force an upgrade impact unless it is unavoidable for reasons of security or stability. Fix Packs are delivered in a delta installer.
- Maintenance on a CD release is delivered in the next CD release. Critical defects and security patches are also delivered separately on the two most recent CD releases.

CD releases deliver maintenance updates, plus new optional features and functions. They are cumulative and contain all the fixes and functions in the previous CD releases. CD releases are delivered either with full development installers, denoted by the second digit being incremented such as 8.1.0, or delta installers, such as 8.0.3, which must be installed on the appropriate full release. New features and functions in CD releases either have no impact, or are disabled by default.

- You can choose to benefit only from the maintenance updates, without incurring any impact from the new features and functions.
- You can choose to enable new features and functions on a case-by-case basis, and handle the associated impacts, if any.
- Occasionally, obsolete JAR files can remain in your development environment after you install a maintenance update. For example, if you upgrade from a Fix Pack to a later Fix Pack by using the delta installers, JAR files that were removed in the later Fix Pack might remain in your environment. To avoid future issues with these files, we recommend that you manually remove them.

For more information about updated or removed JAR files, read the release notes for your version and see the *Product Overview*.

Procedure

1. Read the Merative™ Social Program Management release notes for the update. Take note of any preinstallation steps, requirements, restrictions, installation steps, and postinstallation steps that might apply.
2. Go to [Merative™ Support](#), locate the appropriate download for your version, and download the software.

3. Extract the contents of the .zip file. The installer is in the *INSTALLER* directory.
4. Ensure that files in your Social Program Management installation are writable.
5. Run the installer.
6. When prompted to move obsolete files, select **Yes**.
Moving the files can take some time, during which no progress indicator is displayed.
7. Click **Finish** to complete the installation.
8. Complete any postinstallation steps.
9. After installing the release, run the appropriate build targets for your installation.
10. Manually remove obsolete JAR files, if needed.

Related information

[Merative Social Program Management prerequisites and supported software](#)

Installing the Editor Applications asset to remove browser Flash dependencies

As browsers no longer support Adobe™ Flash, you must replace the editors that depend on Adobe™ Flash in the browser with stand-alone versions that run on Adobe™ Air. To replace the editors, you must download and run the Editor Applications asset installer.

Before you begin

The server updates in the Editor Applications asset extend some of the core *JAR* files in Social Program Management. To ensure that you have the appropriate server updates, you must reinstall the Editor Applications asset if you upgrade Social Program Management through any of the following upgrades:

- Long Term Support release fix packs
- Continuous Delivery releases

About this task

The Editor Applications asset enables stand-alone versions of editors that previously required Adobe™ Flash support in the browser for Social Program Management. A client installation registers the editors so you can start them by using a URL. In addition, the Social Program Management development environment is updated to automatically start the new stand-alone editors by default. The following editors are updated:

- Cúram Express Rules (CER) Editor
- Data Mapping Editor
- Data Store Editor
- Intelligent Evidence Gathering (IEG) Editor
- Decision Matrix Editor
- Dynamic Evidence Editor

Procedure

1. The Editor Applications asset is available to download from [Merative™ Support](#). Download the asset and extract the contents, which are described in this table.

Table 1: The Editor Applications asset contents

File	Description
<i>EditorApplications.jar</i>	The installer for the development environment updates.
<i>EditorApplicationsClient.msi</i>	The installer for the editors.
<i>Readme.txt</i>	A brief description of the asset and how to install it.

2. Install the development environment updates.
 - a) If Java is configured, double-click *EditorApplications.jar*. If Java is not configured, change to the INSTALL folder and run **java -jar EditorApplications.jar**.
 - b) To use the new editors, you must deploy the newly built version to your development server.
3. You must run a separate client installation, the *.msi* file, on any client on which the editors are to run. The installation is not available from a running server so the installation must be distributed. To install the editors, complete the following steps on each client computer:
 - a) Copy *EditorApplicationsClient.msi* to the computer.
 - b) Double-click *EditorApplicationsClient.msi*.
 - c) Select the default location for the installation.
4. Validate that the editors are installed correctly.
 - a) Access the newly deployed development server.
 - b) Open any editor, for example the Data Mapping Editor. The editor's start tab displays as blank or with a spinner. A dialog box is displayed to request that you want to start the editor.
 - c) Indicate that you want to start the editor. The editor starts as a separate, full-screen application. In your browser, the editor's start tab shows that the editor started correctly.

Results

You can now use the new editors during development. For more information about accessibility for the editors, see the *Product Overview*.

Some known limitations apply to the standalone Cúram Express Rules Editor. For more information, see the *Troubleshooting Guide*.

Uninstalling Merative™ Social Program Management

An uninstallation file is created in the *<install>\Uninstaller\uninstaller.jar* directory during a Merative™ Social Program Management installation. You can use this file to uninstall the application.

About this task

JAR files might be recognized as executable by being associated with a suitable launcher, such as *javaw*. If this is the case for your operating system, start the Social Program Management Uninstaller with the standard method that is supported by your operating system. For example, double-clicking the Social Program Management Uninstaller file.

Note: The uninstaller does not reset any system variables that are set by a previous installation.

Procedure

1. Navigate to the `<install>\Uninstaller\` directory.
2. Double-click the `uninstaller.jar` file to uninstall Social Program Management.

1.6 Social Program Management postinstallation configuration

Complete any required postinstallation configuration tasks after you install the Merative™ Social Program Management software.

Setting the Social Program Management environment variables

Before you proceed, you must run a script to set some required Social Program Management environment variables.

Procedure

1. Change to the `%CURAM_DIR%` directory.
`%CURAM_DIR%` is the Social Program Management installation directory, which by default is `C:\Merative\Curam\Development` or `opt/merative/Curam/Development`.
2. Run the following command:

Windows

```
SetEnvironment.bat
```

Linux

```
SetEnvironment.sh
```

Windows

Configuring the H2 database

Complete the following postinstallation steps for the H2 database. To use the H2 database, you must update the *Bootstrap.properties* file with the correct credentials to connect to the H2 database. Ensure that you encrypt the password.

About this task

For example, here is typical H2 database content from a *Bootstrap.properties* file.

```
curam.db.type=h2
curam.db.name=curamdb
curam.db.username=curam
curam.db.password=qqnscP4c4+s=
# H2 directory.
# Default is home directory
# (i.e. C:/Documents and Settings/<username>). (Optional)
curam.db.h2.directory=C:/H2
# Mode remote|embedded
curam.db.h2.mode=embedded
# For remote mode also specify:
curam.db.serverport=9092
curam.db.servername=localhost
# Lock Time Out in ms. Default is 1000, i.e. 1 second. (Optional)
curam.db.h2.locktimeout=20000
# Property to disable MVCC. Default: true. (Optional)
curam.db.h2.mvcc=true
```

After you update the *Bootstrap.properties* file and rebuild the server and database, you can develop in the same way as you would with Oracle or Db2®.

For more information about the *Bootstrap.properties* file, see the *Server Developer's Guide*.

Procedure

1. Edit the *Bootstrap.properties* file.
2. Ensure that each of the database properties has the correct values for the H2 database.

Encrypting passwords

You must encrypt passwords before you put them in the *Bootstrap.properties* file.

Procedure

1. Open a command prompt and change to the `%CURAM_DIR%\EJBServer` directory.
`%CURAM_DIR%` is the Merative™ Social Program Management installation directory, which by default is `C:\Merative\Curam\Development`.
2. Issue the following command:

```
build encrypt -Dpassword=password
```

where *password* is the password you want to encrypt.

3. Copy the encrypted string in the output to the correct location in the *Bootstrap.properties* file.
 For example, the `curam.db.password` parameter.

Setting the H2 mode

Set your preferred mode for developing applications.

About this task

The following H2 modes are supported for application development:

- **Embedded mode**

In embedded mode, an application opens the database from within the same JVM by using JDBC. This mode is the fastest and easiest connection mode. The disadvantage is that a database can be open in only one virtual machine (and class loader) at any time.

- **Remote mode**

In remote mode, sometimes called client/server mode, an application opens the database remotely by using the JDBC or the ODBC API. Many applications can connect to the same database at the same time. The remote mode is slower than the embedded mode because all data is transferred over TCP/IP.

Procedure

1. Edit the `%CURAM_DIR%\EJBServer\project\properties\Bootstrap.properties` file.

`%CURAM_DIR%` is the Merative™ Social Program Management installation directory, which by default is `C:\Merative\Curam\Development`.

2. Specify the mode in the `curam.db.h2.mode` property.
For example:

```
# Mode remote|embedded
curam.db.h2.mode=embedded
```

Setting Multi-Version Concurrency Control (MVCC)

You can enable or disable Multi-Version Concurrency Control (MVCC). MVCC is enabled by default.

About this task

The MVCC feature allows higher concurrency than using exclusive table level or row level locks. When using MVCC in this database, delete, insert, and update operations only issue a shared lock on the table. An exclusive lock is still used when adding or removing columns, when dropping the table, and when using `SELECT . . . FOR UPDATE`. Connections only see committed data, and their own changes.

That means, if connection A updates a row but has not committed the change, connection B sees the old value. Only when the change from connection A is committed, the new value is visible to other connections (read committed). If multiple connections concurrently try to update the same row, the database waits until it can apply the change, but at most until the lock timeout expires.

Procedure

1. Edit the `%CURAM_DIR%\EJBServer\project\properties\Bootstrap.properties` file.

`%CURAM_DIR%` is the Cúram installation directory, which by default is `C:\Merative\Curam\Development`.

2. Specify true or false in the `curam.db.h2.mvcc` property.

For example:

```
# Property to disable MVCC. Default: true. (Optional)
curam.db.h2.mvcc=false
```

Starting the H2 Web Console

Start the H2 Web Console by running the `org.h2.tools.Server` class in `h2.jar` as follows:

```
java -cp %CuramSDEJ%\drivers\h2-1.3.176.jar org.h2.tools.Server -tcp -web
```

You can access the H2 Web Console at the following URL:

```
http://localhost:8082/
```

The JDBC connection URL that you specify in the login screen is based on the `curam.db.name`, `curam.db.username`, and `curam.db.h2.directory` values in `Bootstrap.properties`. These values define the database name, SCHEMA name, and the database location in the file system. So, if your database name is `curamdb`, your user name is `curam` and `curam.db.h2.directory` defaults to your home directory, then your JDBC string would look like this example:

```
jdbc:h2:tcp://localhost/~ /curamdb;schema=curam;FILE_LOCK=SOCKET
```

For example, if the `curam.db.h2.directory` is `C:/H2`, then your JDBC string would look like this example:

```
jdbc:h2:tcp://localhost/file:C:/H2/curamdb;schema=curam;FILE_LOCK=SOCKET
```

Specify the values for **User Name** and **Password** as in your `Bootstrap.properties` file and then click the **Connect button** (or **Test Connect button**). When connected, a SQL text control is available.

Configuring the IBM® Db2® database

After you install Merative™ Social Program Management, complete the following postinstallation configuration steps on IBM® Db2®

Providing a Db2® License File

An empty `db2jcc_license_cu.jar` file exists to allow for Eclipse class path dependencies in the `CuramSDEJ` project. The file is in the Windows `%CURAMSDEJ%\drivers` or Linux `%CURAMSDEJ%/drivers` directory, where `%CURAMSDEJ%` is the root `CuramSDEJ` location directory.

You must overwrite this empty JAR file with a real license to access IBM® Db2®.

You can find the IBM® Db2® license file in the following directory:

- Windows `<Db2_directory>\java\db2jcc_license_cu.jar`
- Linux `<Db2_directory>/java/db2jcc_license_cu.jar`

where `Db2_directory` is the Db2® installation path, for example:

- **Windows** `C:\IBM\SQLLIB.`
- **Linux** `/opt/ibm/db2`

Creating and configuring a Db2® database with scripts on Microsoft™ Windows™

Windows

Use the provided Ant scripts to create and configure a basic test database. The Ant scripts use the database properties from your *Bootstrap.properties* file.

To create a database, issue the following commands:

```
ant -f %CURAMSDEJ%\util\db2_createdb.xml
ant -f %CURAMSDEJ%\util\db2_postconfig.xml -Ddb2.dir=db2_directory
ant -f %CURAMSDEJ%\util\db2_createdb.xml restart.db2
```

Note: The *db2_createdb.xml restart.db2* script restarts your Db2® system.

```
ant -f %CURAMSDEJ%\util\db2_optimizedbrecreation.xml
```

where *db2_directory* is the Db2® installation path. By default, *c:\IBM\SQLLIB*.

If you have any problems with creating the database, you can run the following script to drop the database and try again:

```
ant -f %CURAMSDEJ%\util\db2_createdb.xml dropdb
```

Linux®

Linux

To create a database, issue the following commands:

```
ant -f $CURAMSDEJ/util/db2_createdb.xml
ant -f $CURAMSDEJ/util/db2_postconfig.xml -Ddb2.dir=db2_directory
ant -f $CURAMSDEJ/util/db2_createdb.xml restart.db2
```

Note: The *db2_createdb.xml restart.db2* script restarts your Db2® system.

```
ant -f $CURAMSDEJ/util/db2_optimizedbrecreation.xml
```

where *db2_directory* is the Db2® installation path. By default, */opt/ibm/db2*.

If you have any problems with creating the database, you can run the following script to drop the database and try again:

```
ant -f $CURAMSDEJ/util/db2_createdb.xml dropdb
```

Replacing the packaged Db2® drivers

Usually the most recent JDBC drivers available at the time of release are packaged with Merative™ Social Program Management. However, if you want to replace the drivers that are included in **Windows** `%CURAMSDEJ%\drivers` or **Linux** `$CURAMSDEJ/drivers`, copy the

following files from Windows `<Db2_directory>\java` or Linux `$CURAMSDEJ/drivers` and replace the existing files.

Where `<Db2_directory>` is the Db2® installation path. For example, Windows `C:\IBM\SQLLIB` or Linux `/IBM/SQLLIB`.

- `db2jcc.jar`
- `db2jcc_license_cu.jar`
- `sqlj.zip`

Using Db2® pureScale®

To use Db2® pureScale® with Social Program Management, you must complete the following steps to set the necessary data source property or properties for using Db2® from the command line. For example, with batch processing. See the IBM® Db2® and IBM® WebSphere® Application Server documentation for their specific pureScale settings.

You must generate a `.bindings` file based on your `Bootstrap.properties` file database settings, which specify the Db2® pureScale connect member. To do this:

1. In your `Bootstrap.properties` file set property `curam.db.enable.bindings.generation=true` and specify a valid location value for property `curam.environment.bindings.location`. For example, Windows `curam.environment.bindings.location=C:/Temp` or Windows `curam.environment.bindings.location=/Curam`.
2. Run the Ant **configtest** target, to generate the `.bindings` file in the specified location.
3. In your `Bootstrap.properties` file, remove `curam.db.enable.bindings.generation=true` or set it to `false` and set `curam.db.disable.bindings.generation=true`.
4. Set the Content value for the relevant pureScale® data source properties in the `.bindings` file. This is easier if you sort it first. For example, set `enableSysplexWLB` to 'true'. Save the changes.

From this point onwards, the Social Program Management Db2® data source uses these properties when used from the command line. Changes to the database properties in `Bootstrap.properties` must be reflected in `.bindings` or by rerunning the procedure above. However, Ant scripts using the `<sql>` task do not use these pureScale® settings. These Ant scripts, for example the **database** target, are typically not run frequently and don't have a processing profile that requires pureScale settings. However, you can modify scripts as needed to specify these properties by using the Ant `<connectionProperty>` nested element.

Configuring the Oracle Database

After you install Merative™ Social Program Management, complete the following postinstallation configuration steps on Oracle Database

Replacing the packaged Oracle JDBC drivers

Typically, the most recent JDBC drivers that are available at the time of release are packaged with Merative™ Social Program Management. However, you can replace the included JDBC drivers if needed.

Complete the following steps to replace the included JDBC drivers in the `<CURAMSDEJ>/drivers` directory.

1. Copy and rename the `ojdbc<version>.jar` driver from an installation of your Oracle Database version to `ojdbc<version>.jar` in the `<CURAMSDEJ>/drivers` directory.
2. Replace the `runtime<version>.jar` and `translator.jar` drivers in the `drivers` directory with the drivers from your Oracle Database client installation.

Testing the configuration

Merative™ Social Program Management includes a configuration test tool, which helps to confirm that the installation and third-party tools are set up correctly. You can run this tool to detect problems with your installation.

Before you begin

If you are using the H2 database, ensure that you complete these steps before you start this task.

- Build the server and the database.
- If you are using H2 in remote mode, ensure that the H2 Web Console is started.

Procedure

1. Open a command prompt.
2. Go to the `%Curam%/EJBServer` directory and issue the following command to check the application server configuration and the database connectivity:

```
build configtest
```

3. Ensure that the build is successful before proceeding.

Running build commands for the server and client applications

Before you can log on to an Merative™ Social Program Management application or to the Universal Access home page, you must run a number of build commands.

About this task

Important:

Ensure that you are in the correct directory before you run each of these commands.

Procedure

1. Open a command line.
2. Go to the `%Curam%/EJBServer` directory and issue the following commands:

`%CURAM_DIR%` is the Cúram installation directory, which by default is Windows `C:\Merative\Curam\Development` or Linux `/opt/merative/curam/development`.

```
build clean server
build database
build prepare.application.data
build createClasspaths
```

3. Go to the `%Curam%/webclient` directory and issue the following command:

```
build clean client
build external-client -Dapp=CitizenPortal
```

4. Ensure that the builds are successful before proceeding.

Starting the XML server

Before you start the Social Program Management application, you must start the XML server in your ADE.

Procedure

1. Change to the `%CURAM_DIR%\CuramSDEJ\xmlserver` directory.

`%CURAM_DIR%` is the Social Program Management installation directory, which by default is Windows `C:\Merative\Curam\Development` or Linux `/opt/merative/curam/development`.

2. Run the following build target to start the XML server:

```
ant -f xmlserver.xml
```

Customizing cryptography for production environment protection

Social Program Management provides a default cryptography configuration for development and testing environments only. To strengthen your production environment security, we strongly recommend that you customize the cryptography configuration by creating a new keystore and secret key, and regularly rotating the secret key.

In a production environment, relying on the default cryptography configuration can expose your system to significant risks and vulnerabilities. A system administrator must customize these settings to safeguard against potential data breaches, unauthorized access, and other security threats. For more information about how to customize the cryptography configuration, see the *Security Guide*.

Configuring `curam.referer.domains` for Cross-Site Request Forgery (CSRF) protection

The Merative™ Social Program Management user interface (UI) infrastructure uses the HTTP referrer header check to further protect Social Program Management against Cross-Site Request Forgery (CSRF).

Only requests from trusted domains are permitted. You configure trusted domains on the server as a comma-separated list by using the dynamic system property `curam.referer.domains`. As the default property is set to `localhost`, only an administrator who is logged on to the server host computer can access the application. All other users are blocked.

Configuring `curam.referer.domains` after installation

The following list outlines the two ways that you can configure `curam.referer.domains` after installation:

1. An administrator on the server host computer can access the Social Program Management system administration application. An administrator can set the dynamic system property `curam.referer.domains` directly to the required host domains to which the administrator wants to grant access.

For more information about Cross-Site Request Forgery (CSRF) protection for Merative™ Social Program Management web pages, see the *Security Guide*.

2. Developers and administrators can provide a custom component that overrides the default `Application.prx` and that sets the property `curam.referer.domains` to the required domains.

For more information about how to merge an `application.prx` file, see the *Server Developer's Guide*.

1.7 Installing and configuring Eclipse and Apache Tomcat

You need the following software for an Eclipse and Apache Tomcat IDE. You can download the software from the web, as described in the *Merative™ Social Program Management Supported Prerequisites* technote, and follow the product installation instructions and these post-installation steps.

- **Eclipse IDE**
An IDE that you can use to develop an application. If you are unsure about which Eclipse package to download, you can download and install the Eclipse IDE for Java EE Developers.
- **Apache Tomcat**
A servlet container that you can use to run the client web application.
- **Eclipse Tomcat Plugin**
An open source Eclipse plug-in that integrates with a Tomcat installation to start Tomcat from within Eclipse.

Install the plug-in by extracting the plug-in archive file to the Eclipse *dropins* folder. The default `eclipse/dropins` folder is assumed.

- **Java SE and Java EE**
You can use the Java SE and Java EE that were installed as prerequisites for the Merative™ Social Program Management software for the Eclipse IDE.

Related information

[Merative Social Program Management prerequisites and supported software](#)

Configuring Tomcat

After installation, you must update the default Tomcat configuration files with the appropriate settings.

About this task

- **UTF-8**

By default, Tomcat assumes that requests are encoded with ISO-8859-1 instead of UTF-8. This default setting can break string handling if request parameters contained UTF-8 extended characters. For correct string handling, you must add the `useBodyEncodingForURI="true"` parameter to the `<Connector>` element of the `server.xml` configuration file.

- **POST Data limit**

By default Tomcat limits POST data to 2 MB. This limit can cause an issue when you use rule sets, which can post data greater than this limit. To disable the POST limit in Tomcat, you can add the `maxPostSize="-1"` attribute to the `<Connector>` element of the `server.xml` configuration file.

- **Non-ASCII characters in Java source files**

Tomcat converts JSPs into servlets that are contained in UTF-8 encoded Java sources files by default (for multi-byte character support). These files are generated into the `work` folder of the project. The Sysdeo plug-in marks the `work` folder as an Eclipse source folder. If you use the Eclipse build command, the Java compiler expects system encoding sources files by default. If any source file in the `work` folder contains non-ASCII characters, such as `ú`, an `Invalid Character` compiler error is generated and you cannot access the page in a web browser.

The `keepgenerated` attribute prevents Tomcat from saving the source files in the `work` folder and avoids this problem. You can prevent this occurring by updating the Tomcat `web.xml` configuration file with a new `init-param` element.

The Eclipse compiler cannot be changed to compile UTF-8 source files because of a second source folder that is called `JavaSource` that contains files that are not in UTF-8 encoding. Changing this setting does not affect the use of the application in any way. The `keepgenerated` parameter can be set to `true` if you want to view and debug through source files that are generated by Tomcat, but the error and browser access problem then occurs.

Procedure

1. Edit the `tomcat_install_dir\conf\server.xml` configuration file and update the `<Connector>` element as follows.

Where `tomcat_install_dir\conf\server.xml` is the directory where you installed Tomcat.

- a) Change the default port number to `port="9080"`.
- b) Add the `useBodyEncodingForURI="true"` attribute.
- c) If you intend to use rule sets, add the `maxPostSize="-1"` attribute.

For example:

```
<Connector port="9080" maxThreads="150" minSpareThreads="25"
maxSpareThreads="75" enableLookups="false" redirectPort="8443"
acceptCount="100" connectionTimeout="20000" disableUploadTimeout="true"
useBodyEncodingForURI="true" maxPostSize="-1" />
```

2. Edit the `tomcat_install_dir\conf\context.xml` configuration file. Update the `<Context>` element to include a `reloadable="true"` attribute.

For example:

```
<Context reloadable="true">
```

3. Edit the `tomcat_install_dir\conf\web.xml` configuration file. Update the `org.apache.jasper.servlet.JspServlet` servlet with a new `init-param` element with the value `false`.

For example:

```
<init-param>
<param-name>keepgenerated</param-name>
<param-value>>false</param-value>
</init-param>
```

Configuring the Java™ SE for Eclipse

You must ensure that Eclipse always starts with the correct Java™ SE and set the default VM arguments. Multiple Java™ SE installations can be present on your computer from other products that are based on Java™.

Before you begin

Ensure that Eclipse starts with the correct Java™ SE by using one of the following methods:

- Put the correct Java™ SE first on the Microsoft™ Windows™ system path.
- Use the `-vm` command-line argument with the `eclipse.exe` command. For more information about Eclipse commands, see the Eclipse documentation.

Procedure

1. Start Eclipse by double-clicking the `eclipse.exe` executable file.
2. After you start Eclipse, select **Window > Preferences > Java > Installed JREs**. On the **Installed JREs** page, ensure that the checkbox for the correct Java™ SE is selected as the default.
3. Add default VM arguments by selecting the Java™ SE and clicking **Edit**.
4. In the **Default VM Arguments** field, enter `-Xmx4096M -Xms512m`.
5. Click **OK**.

Configuring the Eclipse class path variables and the Eclipse Tomcat Plugin

In Eclipse, you must set the class path variables and configure the Eclipse Tomcat Plugin.

Procedure

Set the class path variables:

1. In Eclipse, go to **Window > Preferences > Java > Build Path > class path Variables**.
2. Click **New**, enter the following information, and click **OK**.
 - **Name** J2EE_JAR
 - **Path**
 - The path to the JAR file of your Java™ EE implementation. For example, for WebSphere® Application Server, enter: C:\IBM\WebSphere\AppServer\lib\j2ee.jar
 - For example, for Oracle WebLogic Server, enter: C:\Oracle\Weblogic\wlserver\server\lib\weblogic.jar
3. Click **New**, enter the following information, and click **OK**.
 - **Name** JAVAMAIL_HOME
 - **Path** The folder that contains *mail.jar* and *activation.jar* files for your Java™ EE implementation.

Note:

If your version of Java™ EE does not contain these files, you can download JavaMail API and Java™ Activation Framework (JAF) from the Oracle website and copy the files to any folder, for example C:\Tools\JAVA_MAIL. Then, configure JAVAMAIL_HOME to point to that folder.

4. Click **OK** to save the preferences.

Configure the Eclipse Tomcat Plugin:

The plugin adds a toolbar and more menu options to Eclipse to configure and use Tomcat.

5. In Eclipse, go to **Window > Preferences > Tomcat**.

If you don't see Tomcat in the high-level preferences tree, you might have the wrong Tomcat plugin, it might not be installed properly, or you might need a clean Eclipse start.
6. Select the appropriate Tomcat version, such as version 7.x.
7. Set Tomcat home to where you extracted the downloaded archive.
For example, C:\Tools\Tomcat\apache-tomcat-<version>.
8. Select JVM Settings and in the **Append to JVM Parameters** field, enter -Xmx1024m.

Importing and configuring the Social Program Management projects in Eclipse

Import the Merative™ Social Program Management projects into Eclipse. The projects are automatically built when you import them. After the projects are imported, you can configure them for use.

Procedure

Import the projects:

1. In Eclipse, click **File > Import**.
2. Expand **General**, select **Existing Projects into Workspace**, and click **Next**.
3. Set the **Select root directory field** field to, for example `C:\Merative\Curam\Development`.

Eclipse automatically searches for and identifies projects.

4. Ensure that **Copy projects into workspace** is NOT selected.
5. Click **Finish**.

Eclipse immediately starts building the workspace. The following error is displayed:

```
Project 'CuramBITransforms' is missing required Java project:
'CuramBITools' CuramBITransforms Build path Build Path Problem
```

6. Manually import the CuramBITransforms project. In Eclipse, click **File > Import**.
7. Expand **General**, select **Existing Projects into Workspace**, and click **Next**.
8. Set the **Select root directory field** field to `C:\Merative\Curam\Development\Reporting\components\BIBuildTools`.

Eclipse automatically searches for and identifies projects.

9. Ensure that **Copy projects into workspace** is NOT selected.
10. Click **Finish**.

Configure the Curam project:

11. In Eclipse Package Explorer, right-click the **Curam** project, select **Properties > Tomcat** and confirm the following settings.
 - **Is a Tomcat Project:** Selected
 - **Context Name:** /Curam
 - **Can update server.xml file:** Selected
 - **Mark this context as reloadable:** Selected
 - **Redirect context logger to Eclipse console:** Selected
 - **Subdirectory to set as application root:** /WebContent
 - **Subdirectory to set as application work:** /work

12. Click **OK**.

13. Update the Tomcat server.xml file with an entry for the Curam application by right-clicking the **CitizenPortal** project and selecting **Properties > Tomcat Project > Update context definition**.

Configure the CitizenPortal project:

14. In Eclipse Package Explorer, right-click the **CitizenPortal** project and select **Properties > Tomcat** and confirm the following settings.
 - **Is a Tomcat Project:** Selected

- **Context Name:** /CitizenPortal
- **Can update server.xml file:** Selected
- **Mark this context as reloadable:** Selected
- **Redirect context logger to Eclipse console:** Selected
- **Subdirectory to set as application root:** /WebContent
- **Subdirectory to set as application work:** /work

15. Click **OK**.

16. Update the Tomcat server.xml file with an entry for the CitizenPortal application by right-clicking the **CitizenPortal** project and selecting **Properties > Tomcat Project > Update context definition**.

Configure the CuramBIRTViewer Project:

17. In Eclipse Package Explorer, right-click the **CuramBIRTViewer** project and select **Properties > Tomcat** and confirm the following settings.

- **Is a Tomcat Project:** Selected
- **Context Name:** /CuramBIRTViewer
- **Can update server.xml file:** Selected
- **Mark this context as reloadable:** Selected
- **Redirect context logger to Eclipse console:** Selected
- **Subdirectory to set as application root:** /WebContent
- **Subdirectory to set as application work:** /work

18. Update the Tomcat server.xml file with an entry for the CuramBIRTViewer application by right-clicking the **CuramBIRTViewer** project and selecting **Properties > Tomcat Project > Update context definition**.

19. Click **OK**.

20. In your Curam Development command window, enter:

```
cd %CURAM_DIR%\BIContent
```

Where %CURAM_DIR% is the Curam installation directory, which by default is *C:\Merative\Curam\Development*.

21. Enter:

```
build client.birt
```

If you are developing new Business Intelligence and Analytics content, see the BIRT developer's information for more details on how to set up a development environment.

Starting the Tomcat server and the Social Program Management servers

Start the Tomcat and Social Program Management servers by following the instructions in the related links.

About this task

After the servers are started, applications are available at these URL:

- The Social Program Management client application is available at the following URL:
http://localhost:8080/Curam/AppController.do

- The CitizenPortal application is available at the following URL: `http://localhost:8080/CitizenPortal/application.do`
- The Social Program Management Business Intelligence and Analytics Viewer application is available at the following URL: `http://localhost:8080/CuramBIRTViewer`

Related tasks

[Starting the server, Tomcat, and the RMILoginClient on page 44](#)

Start the server, Tomcat, and the RMILoginClient so that you can log in and test the installation.

Using Eclipse to validate the tabbed configuration artifacts

You can set up Eclipse to validate the tabbed configuration files with the correct schema.

Open the Eclipse **Preferences** dialog by selecting **Window > Preferences** and complete the following steps:

- Select **XML > XML Catalog**.
 - Click **Add** to add an entry.
 - For the **Location**, point at the schema file (for example, `tab.xsd`) in the `%CURAMSDEJ%\lib` directory.
 - Leave the rest as defaults and click **OK**.
 - Repeat for each of the schema files for the tabbed configuration artifacts. For the full list of schema files associated with configuration files, see the *Web Client Reference Manual*.
 - Click **OK** to exit the **XML Catalog** window.
- Select **General > Editors > File Associations**.
 - Click **Add...** to add an entry: `*.tab`.
 - Select the new `*.tab` entry and click **Add** to add the XML Editor as the **Associated Editor**.
 - Repeat for all the tabbed configuration artifact file extensions. For the full list of extensions for configuration files, see the *Web Client Reference Manual*.
- Select **General > Content Types**.
 - Expand **Text** and select **XML**.
 - Click **Add** to enter a file association for XML content and click **OK**. Do this step for each of the file extensions.
- Click **OK** to save the preference changes.

Supported Eclipse text file encoding

In Eclipse, you can set the default text file encoding at the project level. Changing the text file encoding from the default is unsupported for Merative™ Social Program Management projects within Eclipse.

This restriction does not affect your ability to save files in various encodings on a file-by-file basis.

1.8 Installing and configuring Rational® Software Architect Designer

IBM® Rational® Software Architect Designer is an Eclipse-based UML modeling tool that is required to do server development. The exact installation steps for installing IBM® Rational® Software Architect Designer can vary depending on the edition and version of your software.

Before you begin

IBM® Installation Manager is used to install Rational® Software Architect Designer. For more information about installing IBM® Installation Manager, see [1.2 Installing IBM® Installation Manager on page 12](#).

Procedure

1. Start the IBM® Installation Manager by clicking **Start > All Programs > IBM® Installation Manager > IBM® Installation Manager**.
2. From the **File** menu, select **Preferences**.
3. From the **Repositories** window, select **Add Repository**.
4. From the **Add Repository** window, select **Browse** to add an entry that points to your Rational® Software Architect Designer installation file and click **OK**.
5. From the **Repositories** window, ensure that this entry is the only selected repository and click **OK**.
6. From the **IBM Installation Manager** window, select **Install**.
7. From the **Install Packages** window, select appropriate version check box and click **Next**.
8. From the **Prerequisite** window, read the information that is displayed and click **Next**.
9. From the **Licenses** window, read the information, select **I accept the terms in the license agreements**, and click **Next**.
10. From the **Location** window, select **Browse** to select the installation directory or use the default value. For **Architecture Selection**, update the default values if required. Click **Next**.
11. From the **Features** window, select the translations to install and click **Next**.
12. From the **Features to install** window, select the **Rational Rose model import** check box to install the IBM® Rational Rose® profile that is required by migrated models in Eclipse. Click **Next**.
13. From the **Summary** window, click **Install**.

Installing the Merative™ Social Program Management plug-ins

You must install the Merative™ Social Program Management plug-ins to enable modeling support.

Procedure

1. From the Rational® Software Architect Designer installation directory, for example, the `C:\Program Files\IBM\SDP` directory, create a `dropins` directory.

2. From the *dropins* directory, create a new file called *rsa_plugin.link* that contains the path to the plug-ins for Rational® Software Architect Designer. Ensure that you use forward slashes.
For example,

```
path=C:/Curam/CuramSDEJ/rsa
```

3. Edit the Microsoft Windows shortcut that starts Rational® Software Architect Designer to pass the -clean option so that the plug-ins are picked up.
For example:

```
...\eclipse.exe -clean -product com.ibm.rational....
```

4. Start or restart Rational® Software Architect Designer.

Setting up your Rational® Software Architect Designer workspace

Complete the following steps to set up your Eclipse workspace in Rational® Software Architect Designer.

Procedure

1. Start Rational® Software Architect Designer by clicking **Start > All Programs > IBM Software Delivery Platform > IBM® Rational® Software Architect Designer version > IBM® Rational® Software Architect Designer**.
2. From the **Workspace Launcher**, select **Browse** to navigate to the location where you want your Rational® Software Architect Designer workspace to be stored and click **OK**.
3. From the **Overview** window, hover over the top right icon to display Workbench. Select the **Workbench** icon.
4. Select **File > Import**.
5. From the **Import** window, expand the **General** folder and select **Existing Project into Workspace** and click **Next**.
6. From the **Import Projects** window, select **Browse** and select `%CURAM_DIR%\EJBServer` for the **Select root directory** and click **Finish**.
`%CURAM_DIR%` is the Merative™ Social Program Management installation directory, which by default is `C:\Merative\Curam\Development`.
7. Repeat steps 4-6 to import the `%CURAMSDEJ%` root directory. You are now ready to start using Rational® Software Architect Designer.

1.9 Getting started with the development environment

The installation is now complete. Start the server, Tomcat, and the RMILoginClient client so you can log in to the application.

Starting the server, Tomcat, and the RMILoginClient

Start the server, Tomcat, and the RMILoginClient so that you can log in and test the installation.

About this task

The server is started as a Java process that starts three threads:

- **tnameserv**
The Java Transient Name Server to facilitate a JNDI lookup service for finding resources such as Java classes. The Java tnameserv.exe is not stopped when you exit Eclipse. You can check for tnameserv.exe in Windows Task Manager.
- **RMI Server**
The RMILoginClient server application process, which provides login functionality.
- **JMSLite**
JMS Message Engine, which provides JMS-like functionality.

For more information about JMSLite, see the *Workflow Reference Guide*.

Procedure

1. Check that the database is running.
2. In Package Explorer, expand **EJBServer > components > core > lib**, right-click on **core.jar**, and select **Run As > Java Application**.
3. In the **Select Java Application** window, select **StartServer** and click **OK**.

When a console window is displayed in Eclipse, check for messages like these:

```
tnameserv.exe started:
  Initial Naming Context:

IOR:00bdbdbd0000002b49444c3a6f6d672e6f72672f436f734e616d696e672f4e616d696e67436f6e74657874457874
3000bd000000010000000000000072000102bd0000000d392e3136312e39392e31333600bd04c5000000164c4d424900
b3c2f20c00100000000400000000bdbd00000003000000010000001800bdbdbd00010001000000010001002000010100
0049424d0a0000000800bd0011180000000000026000000020002
TransientNameServer: setting port for initial object references to: 1221
Ready.

JMSLite started:
### ...
### Custom RIDPSecondaryRequestMockService loaded ###
```

4. To start Tomcat, on the Eclipse menu, click the Start Tomcat button on the Eclipse Tomcat Plugin toolbar.
Confirm a clean start in the Tomcat console window in Eclipse by waiting for a few moments until you see a message like this:

```
INFO: Server startup in 61316 ms
```

5. In Package Explorer, expand the **EJBServer > components > core > lib**, right-click on **core.jar**, select **RMILoginClient** and select **Run as application**
6. In the **Select Java Application** window, select **RMILoginClient** and click **OK**.
7. In the **RMILoginClient** window, enter your credentials.

Logging on to Social Program Management

You can access the Merative™ Social Program Management application or the Citizen Portal application from any supported browser. From here, you can access features that are based on your role. For example, you can log on to administer the system.

Procedure

1. Enter one of the following URLs:

```
https://server_name:port/Curam/AppController.do
```

```
https://server_name:port/CitizenPortal/application.do
```

where:

- *server_name* is the name of the server where you installed the application.
- *port* is the port for the application. Default port numbers are as follows:
 - Apache Tomcat: 9080
 - IBM® WebSphere® Application Server: 9044
 - Oracle WebLogic Server: 7002

2. Log on with the appropriate role.

Option	Description
sysadmin	The System Administrator user has access to technical administration features.
admin	The Administrator user has access to administration features.
caseworker	The caseworker role has access to caseworker features.
supervisor	The supervisor role has access to supervisor features.

Deploying Social Program Management

To test your applications with an enterprise application server, you can deploy the application and web services application to one of the supported application server and database combinations.

- IBM® WebSphere® Application Server and IBM® Db2®.
- IBM® WebSphere® Application Server and Oracle Database.
- Oracle WebLogic Server and Oracle Database.

For more information about deployment, see:

-
-
-

1.10 Upgrading Merative™ Social Program Management

Use the Cúram Upgrade Helper Pack and the UI Upgrade Helper tool to help you to upgrade your custom Merative™ Social Program Management application.

- **Cúram Upgrade Helper Pack**

The Cúram Upgrade Helper Pack contains tools and an upgrade guide, which describes the recommended process for upgrading Merative™ Social Program Management applications and details any significant migrations that might require upgrade effort. The tools are available to assist with certain process steps. The Cúram Upgrade Helper Pack is available from the [Merative Software Downloads](#) site. You must be a technical contact to access this site, see [Social Program Management support](#) for details. Download the appropriate version for your upgrade.

- **UI Upgrade Helper**

You can use the Merative™ Social Program Management UI Upgrade Helper tool to help you to upgrade your Social Program Management UI from version 7 to version 8. For more information about the UI Upgrade Helper, see <https://merative.github.io/spm-ui-upgrade-helper>.

Notices

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the Merative website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of Merative

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of Merative.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

Merative reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by Merative, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

MERATIVE MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

Merative or its licensors may have patents or pending patent applications covering subject matter described in this document. The furnishing of this documentation does not grant you any license to these patents.

Information concerning non-Merative products was obtained from the suppliers of those products, their published announcements or other publicly available sources. Merative has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-Merative products. Questions on the capabilities of non-Merative products should be addressed to the suppliers of those products.

Any references in this information to non-Merative websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this Merative product and use of those websites is at your own risk.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

The licensed program described in this document and all licensed material available for it are provided by Merative under terms of the Merative Client Agreement.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to Merative, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. Merative, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. Merative shall not be liable for any damages arising out of your use of the sample programs.

Privacy policy

The Merative privacy policy is available at <https://www.merative.com/privacy>.

Trademarks

Merative™ and the Merative™ logo are trademarks of Merative US L.P. in the United States and other countries.

IBM®, the IBM® logo, and ibm.com® are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide.

Adobe™, the Adobe™ logo, PostScript™, and the PostScript™ logo are either registered trademarks or trademarks of Adobe™ Systems Incorporated in the United States, and/or other countries.

Oracle and Java are registered trademarks of Oracle and/or its affiliates.

The registered trademark Linux® is used pursuant to a sublicense from the Linux Foundation, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis.

Microsoft™, Windows™, and the Windows™ logo are trademarks of Microsoft™ Corporation in the United States, other countries, or both.

UNIX™ is a registered trademark of The Open Group in the United States and other countries.

Other company, product, and service names may be trademarks or service marks of others.