




程式設計-深碗(網頁)



HTML是一種標記型文檔，用來標記一個文本內容意義的文檔。最外層的HTML標籤標記整個文檔的內容屬於HTML。裡面的head就是文檔的屬性，如文檔類型，文檔大小，文檔名等；body就是文檔主要內容。而後來HTML被用作網頁開發，因此head就成了描述網站屬性的標記，而body就成了網站內容的標記。

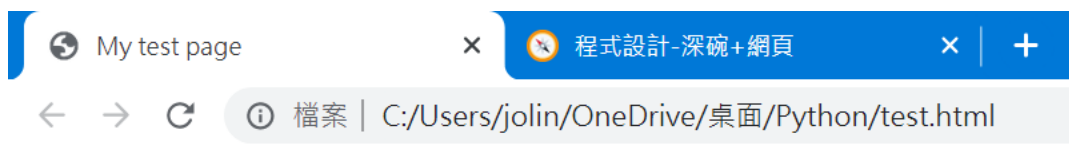

班級	學號	姓名
資管一甲	410411XX	XXX

```
<!DOCTYPE html>
<html>

<head>
  <meta charset="utf-8">
  <title>My test page</title>
  <style>

    </style>
</head>


<body>
  <table style="border:3px #cccccc solid;" cellpadding="10" border='1'>
    <tr>
      <th>班級</th>
      <th>學號</th>
      <th>姓名</th>
    </tr>
    <tr>
      <td>一甲</td>
      <td>410411XX</td>
      <td>XXX</td>
    </tr>
  </table>
</body>

</html>
```

https://www.webtech.tw/info.php?tid=HTML_head_標籤

- `<!DOCTYPE html>` — 文件類型（doctype）文件類型是用來連結一些應遵守的規則，有點像自動校正的功能。然而，現在大家其實不太管文件類型，它就是個必須放在程式碼中的東西，現階段大家只需要知道這點就夠了。
- `<html></html>` — `<html>` 元素，又被視為根元素（root element），包含了所有顯示在這個頁面上的內容。
- `<head></head>` — `<head>` 元素，裡面放的是你想涵括的重要資訊，但**不會顯示於網頁瀏覽眼前的**。例如，顯示於搜尋結果的關鍵字、頁面說明、CSS、字元實體集...等。
- `<body></body>` — `<body>` 元素，包含了**所有會顯示於網頁瀏覽眼前的內容**。無論是文字、圖片、影面、互動遊戲...等。
- `<meta charset="utf-8">` — 這個元素指定了你的文件**使用utf-8字元編碼**，建議大家都要使用這個元素，它會幫助你免去許多文字無法正確呈現的煩惱。
- `<title></title>` — 呈現於網頁瀏覽眼前的網頁標題。

3/10

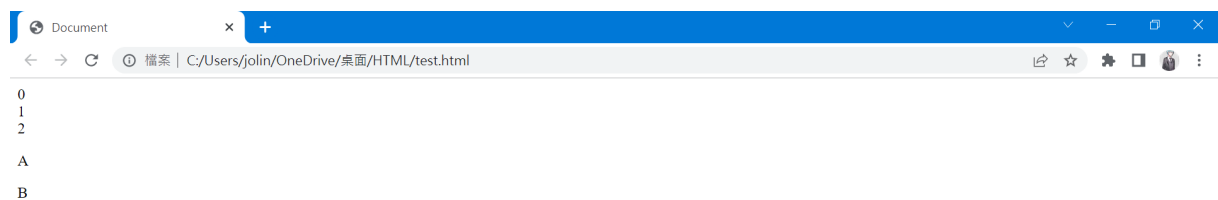

民宿預約網	
姓名	XXX
連絡電話	1234567890
入住日期	2022/03/10 <input type="text"/>
退房日期	下午 05:19 <input type="text"/>
確認預約	<input type="button" value="確認"/>

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <script>
    function check() {
      if (document.form1.phone.value == "") {
        alert("連絡電話, 不可空白!");
        return false;
      }
      return true;
    }
  </script>
</head>

<body>
  0<br>1
  <br>2
```

```


<p>A</p>
<p>B</p>
<form name="form1" action="" onsubmit="return check();">
  <table style="margin-top:50px;" border="5" align="center">
    <tr>
      <td colspan="2" align="center">民宿預約網</td>
    </tr>
    <tr>
      <td>姓名</td>
      <td><input type="text" name="name"></td>
    </tr>
    <tr>
      <td>連絡電話</td>
      <td><input type="text" name="phone"></td>
    </tr>
    <tr>
      <td>入住日期</td>
      <td><input type="date" name="checkIn"></td>
    </tr>
    <tr>
      <td>退房日期</td>
      <td><input type="time" name="checkOut"></td>
    </tr>
    <tr>
      <td><input type="submit" value="確認預約"></td>
      <td></td>
    </tr>
  </table>
</form>
</body>

</html>
</html>

```

- `<form name="form1" action="" onsubmit="return check();">` — 藉由抓取submit回傳的功能，按下按鈕後執行回傳 (type="submit")的動作，並且呼叫寫好的名為"check"的功能。

3/17



Hello, world!

This is a simple hero unit, a simple jumbotron-style component for calling extra attention to featured content or information.

It uses utility classes for typography and spacing to space content out within the larger container.

[Learn more](#)

```

<!doctype html>
<html lang="en">

<head>
  <title>Title</title>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

  <!-- Bootstrap CSS v5.0.2 -->
  <!-- link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" integrity="sha384-EVSTQN3/azpr"
  <style>
    .jumbotron3 {
      padding: 8rem 8rem;
      margin-bottom: 2rem;
      background-color: #47be5b3a;
      border-radius: .5rem;
    }
  </style>
</head>

<body>
  <div class="container" style="margin-top:100px;">
    <div class="jumbotron3" style="box-shadow: 5px 10px #030303af">
      <h1 class="display-4">Hello, world!</h1>
      <p class="lead">This is a simple hero unit, a simple jumbotron-style component for calling extra attention to featured content
      <hr class="my-4">
      <p>It uses utility classes for typography and spacing to space content out within the larger container.</p>
      <a class="btn btn-primary btn-lg" href="#" role="button">Learn more</a>
    </div>
  </div>


  <!-- Bootstrap JavaScript Libraries -->
  <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" integrity="sha384-IQsoLX15PILFhosVNubq5LC7Qb9DXg
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js" integrity="sha384-cVKIPhGWiC2Al4u+LWgxfKTRICfu0JT XR
</body>

</html>

```

- bootstrap的應用，詳細內容可以到官網去查詢

3/24 Navbar



```

<!doctype html>
<html lang="en">

<head>
  <title>Title</title>
  <!-- Required meta tags -->
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

  <!-- Bootstrap CSS v5.0.2 -->
  <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" integrity="sha384-EVSTQN3/azprG1A
</head>

```

```

<body>

  <!-- Bootstrap JavaScript Libraries -->
  <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" integrity="sha384-IQsoLXl5PILFhosVNubq5LC7Qb9DXg"
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js" integrity="sha384-cVKIPhGWiC2Al4u+LWgxfKTRICfu0JTxR
  <nav class="navbar navbar-expand-lg navbar-light bg-light">
    <div class="container-fluid">
      <a class="navbar-brand" href="#">Navbar</a>
      <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">首頁</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="#">Link</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expan
          Dropdown
        </a>
        <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
          <li><a class="dropdown-item" href="#">Action</a></li>
          <li><a class="dropdown-item" href="#">Another action</a></li>
          <li>
            <hr class="dropdown-divider">
          </li>
          <li><a class="dropdown-item" href="#">Something else here</a></li>
        </ul>
      </li>

    </ul>
    <form class="d-flex">

      <button data-bs-toggle="modal" data-bs-target="#exampleModal" class="btn btn-outline-success" type="button">登入</button>
    </form>
  </div>
</div>
</nav>

  <!-- Modal -->
  <div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog">
      <div class="modal-content">
        <div class="modal-header">
          <h5 class="modal-title mx-auto" id="exampleModalLabel">會員帳號登入</h5>


        </div>
        <div class="modal-body">
          <form>
            <div class="mb-3">
              <label for="exampleInputEmail1" class="form-label">帳號</label>
              <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
            </div>
            <div class="mb-3">
              <label for="exampleInputPassword1" class="form-label">密碼</label>
              <input type="password" class="form-control" id="exampleInputPassword1">
            </div>
            <div class="mb-3 form-check">
              <input type="checkbox" class="form-check-input" id="exampleCheck1">
              <label class="form-check-label" for="exampleCheck1">記住我</label>
            </div>

            <div class="text-center">
              <button type="submit" class="btn btn-primary">登入</button>
              <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">關閉</button>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
</body>

</html>


```

- 如何觸發按鈕，並呼叫另一個浮動視窗

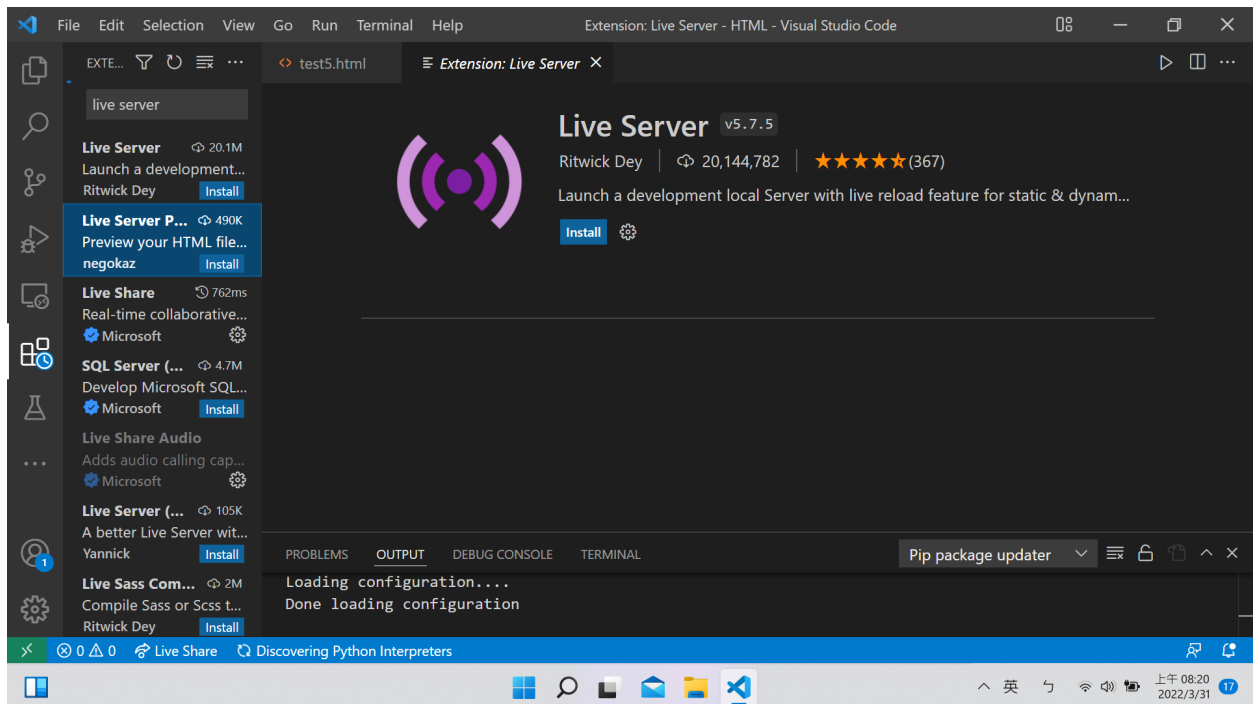

3/31 Carousel

<https://stackoverflow.com/questions/30538967/how-to-center-image-in-carousel>

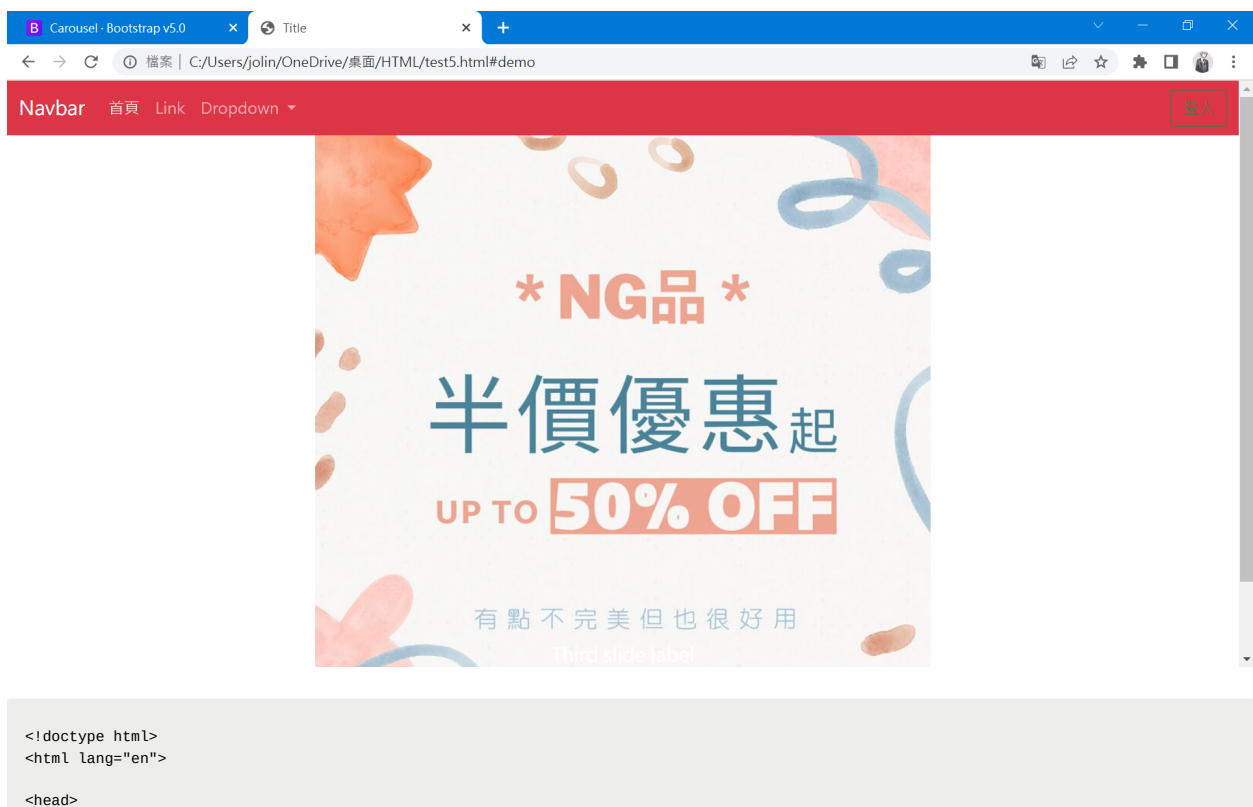

```

<title>Title</title>
<!-- Required meta tags -->
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

<!-- Bootstrap CSS v5.0.2 -->
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" integrity="sha384-EVSTQN3/azprG1A
<style>
.carousel-item img {
    margin: auto;
}
</style>
</head>

<body>

<!-- Bootstrap JavaScript Libraries -->
<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" integrity="sha384-IQsoLX15PILFosVNubq5LC7Qb9DXg
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js" integrity="sha384-cVKIPhGWiC2Al4u+LWgxfKTRICfu0JTxR
<nav class="navbar navbar-expand-lg navbar-dark bg-danger ">
    <div class="container-fluid ">
        <a class="navbar-brand" href="#" ">Navbar</a>
        <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-contro
        <span class="navbar-toggler-icon "></span>
        </button>
        <div class="collapse navbar-collapse" id="navbarSupportedContent ">
            <ul class="navbar-nav me-auto mb-2 mb-lg-0 ">
                <li class="nav-item ">
                    <a class="nav-link active" aria-current="page" href="#" ">首頁</a>
                </li>
                <li class="nav-item ">
                    <a class="nav-link" href="#" ">Link</a>
                </li>
                <li class="nav-item dropdown ">
                    <a class="nav-link dropdown-toggle" href="#" " id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-
                    Dropdown
                    </a>
                    <ul class="dropdown-menu" aria-labelledby="navbarDropdown ">
                        <li><a class="dropdown-item" href="#" ">Action</a></li>
                        <li><a class="dropdown-item" href="#" ">Another action</a></li>
                        <li>
                            <hr class="dropdown-divider ">
                        </li>
                        <li><a class="dropdown-item" href="#" ">Something else here</a></li>
                    </ul>
                </li>
            </ul>
            <form class="d-flex ">

                <button data-bs-toggle="modal" data-bs-target="#exampleModal" class="btn btn-outline-success" type="button">登入</bu
            </form>
        </div>
    </div>
</nav>

<div id="carouselExampleCaptions" class="carousel slide" data-bs-ride="carousel">
    <div class="carousel-indicators">
        <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="0" class="active" aria-current="true" aria-la
        <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="1" aria-label="Slide 2"></button>
        <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="2" aria-label="Slide 3"></button>
    </div>
    <div class="carousel-inner">
        <div class="carousel-item active">
            
            <div class="carousel-caption d-none d-md-block">
                <h5>First slide label</h5>
                <p>Some representative placeholder content for the first slide.</p>
            </div>
        </div>
        <div class="carousel-item">
            
            <div class="carousel-caption d-none d-md-block">
                <h5>Second slide label</h5>
                <p>Some representative placeholder content for the second slide.</p>
            </div>
        </div>
        <div class="carousel-item">
            
            <div class="carousel-caption d-none d-md-block">
                <h5>Third slide label</h5>
            </div>
        </div>
    </div>

```

```

        <p>Some representative placeholder content for the third slide.</p>
    </div>
</div>
</div>
<button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide="prev">
    <span class="carousel-control-prev-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Previous</span>
</button>
<button class="carousel-control-next" type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide="next">
    <span class="carousel-control-next-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Next</span>
</button>
</div>
<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <h5 class="modal-title mx-auto" id="exampleModalLabel">會員帳號登入</h5>
            </div>
            <div class="modal-body">
                <form>
                    <div class="mb-3">
                        <label for="exampleInputEmail1" class="form-label">帳號</label>
                        <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
                    </div>
                    <div class="mb-3">
                        <label for="exampleInputPassword1" class="form-label">密碼</label>
                        <input type="password" class="form-control" id="exampleInputPassword1">
                    </div>
                    <div class="mb-3 form-check">
                        <input type="checkbox" class="form-check-input" id="exampleCheck1">
                        <label class="form-check-label" for="exampleCheck1">記住我</label>
                    </div>
                    <div class="text-center">
                        <button type="submit" class="btn btn-primary">登入</button>
                        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">關閉</button>
                    </div>
                </form>
            </div>
        </div>
    </div>
</div>
</div>
</body>
</html>

```

4/7-14 Bootstrap youtube Embeds responsive (官網連結)

首頁

```

<!doctype html>
<html lang="en">

<head>
    <title>Title</title>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

    <!-- Bootstrap CSS v5.0.2 -->
    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" integrity="sha384-EVSTQN3/azprG1A"
    <style>
        .carousel-item img {
            margin: auto;
        }
    </style>

</head>

<body>

```



```

<!-- Bootstrap JavaScript Libraries -->
<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" integrity="sha384-IQsoLXl5PILFhosVNubq5LC7Qb9DXg"
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js" integrity="sha384-cVKIPhGWiC2Al4u+LWgxfKTRIcfu0JTxR
<nav class="navbar navbar-expand-md navbar-dark bg-dark fixed-top">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">NavBar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="
      <span class="navbar-toggler-icon"></span>
    </button>

    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="index.html">Home</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="product.html">商品介紹</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expan
            Dropdown
          </a>
          <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li>
              <hr class="dropdown-divider">
            </li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
      </ul>
      <form class="d-flex">
        <button class="btn btn-outline-success" type="button" data-bs-toggle="modal" data-bs-target="#exampleModal">LogIn</butt
      </form>
    </div>
  </div>
</nav>

<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true" style="margin:auto;">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title mx=-auto" id="exampleModalLabel">帳號登入</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <form>
        <div class="mb-3">
          <label for="exampleInputEmail1" class="form-label">帳號</label>
          <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
          <div id="emailHelp" class="form-text">We'll "never" share your email with anyone else.</div>
        </div>
        <div class="mb-3">
          <label for="exampleInputPassword1" class="form-label">密碼</label>
          <input type="password" class="form-control" id="exampleInputPassword1">
        </div>
        <div class="mb-3 form-check">
          <input type="checkbox" class="form-check-input" id="exampleCheck1">
          <label class="form-check-label" for="exampleCheck1">記憶</label>
        </div>
        <div class="text-center">
          <button type="submit" class="btn btn-primary">認證</button>
          <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        </div>
      </form>
      <div class="modal-footer">
      </div>
    </div>
  </div>
</div>

<div id="carouselExampleCaptions" class="carousel slide" data-bs-ride="carousel">
  <div class="carousel-indicators">
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="0" class="active" aria-current="true" aria-la
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="1" aria-label="Slide 2"></button>
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="2" aria-label="Slide 3"></button>
  </div>

```

```

<div class="carousel-inner">
  <div class="carousel-item active">
    
    <div class="carousel-caption d-none d-md-block">
      <h5>First slide label</h5>
      <p>Some representative placeholder content for the first slide.</p>
    </div>
  </div>
  <div class="carousel-item">
    
    <div class="carousel-caption d-none d-md-block">
      <h5>Second slide label</h5>
      <p>Some representative placeholder content for the second slide.</p>
    </div>
  </div>
  <div class="carousel-item">
    
    <div class="carousel-caption d-none d-md-block">
      <h5>Third slide label</h5>
      <p>Some representative placeholder content for the third slide.</p>
    </div>
  </div>
</div>
<button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide="prev">
  <span class="carousel-control-prev-icon" aria-hidden="true"></span>
  <span class="visually-hidden">Previous</span>
</button>
<button class="carousel-control-next" type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide="next">
  <span class="carousel-control-next-icon" aria-hidden="true"></span>
  <span class="visually-hidden">Next</span>
</button>
</div>
<div class="container">
  <div class="row">
    <h1 class="text-center my-5">最新上傳影片</h1>
    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <!-- 總長度12 每種不同框架長度為6/12·4/12...等-->
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="embed-responsive embed-responsive-16by9">
        <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
      </div>
    </div>
  </div>
</div>

<div class="row">
  <h1 class="text-center my-5">最熱門上傳影片</h1>
  <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
    <div class="embed-responsive embed-responsive-16by9">
      <iframe class="embed-responsive-item" src="https://www.youtube.com/embed/Ti_VHbuyTAs" allowfullscreen></iframe>
    </div>
  </div>
</div>

```

分頁1

程式設計-深碗(網頁)

```

        <li class="nav-item">
          <a class="nav-link" href="product.html">商品介紹</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expanded="true">
            Dropdown
          </a>
          <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li>
              <hr class="dropdown-divider">
            </li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
      </ul>
    </div>
    <form class="d-flex">
      <button class="btn btn-outline-success" type="button" data-bs-toggle="modal" data-bs-target="#exampleModal">LogIn</button>
    </form>
  </div>
</div>
</nav>

<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true" style="margin:auto;">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title mx=-auto" id="exampleModalLabel">帳號登入</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <form>
        <div class="mb-3">
          <label for="exampleInputEmail1" class="form-label">帳號</label>
          <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
          <div id="emailHelp" class="form-text">We'll "never" share your email with anyone else.</div>
        </div>
        <div class="mb-3">
          <label for="exampleInputPassword1" class="form-label">密碼</label>
          <input type="password" class="form-control" id="exampleInputPassword1">
        </div>
        <div class="mb-3 form-check">
          <input type="checkbox" class="form-check-input" id="exampleCheck1">
          <label class="form-check-label" for="exampleCheck1">記憶</label>
        </div>
        <div class="text-center">
          <button type="submit" class="btn btn-primary">認證</button>
          <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        </div>
      </form>
      <div class="modal-footer">
      </div>
    </div>
  </div>
</div>

<div class="container">
  <div class="row">
    <h1 class="text-center my-5">最新上傳影片</h1>
    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="card" style="width: 18rem;">
        
        <div class="card-body">
          <h5 class="card-title">商品標題</h5>
          <p class="card-text">商品規格與特色介紹</p>
          <a href="#" class="btn btn-primary">GOGO!</a>
        </div>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="card" style="width: 18rem;">
        
        <div class="card-body">
          <h5 class="card-title">商品標題</h5>
          <p class="card-text">商品規格與特色介紹</p>
          <a href="#" class="btn btn-primary">GOGO!</a>
        </div>
      </div>
    </div>
  </div>


```


```

        </div>
      </div>
    </div>

    <div class="col-sm-12 col-md-6 col-lg-4 mb-5">
      <div class="card" style="width: 18rem;">
        
        <div class="card-body">
          <h5 class="card-title">商品標題</h5>
          <p class="card-text">商品規格與特色介紹</p>
          <a href="#" class="btn btn-primary">GO GO!</a>
        </div>
      </div>
    </div>
  </div>
</div>
<div class="footer">
  <p class="bg-danger text-white text-center p-1 fixed-bottom">版權宣告，翻印必究</p>
</div>
</html>

```

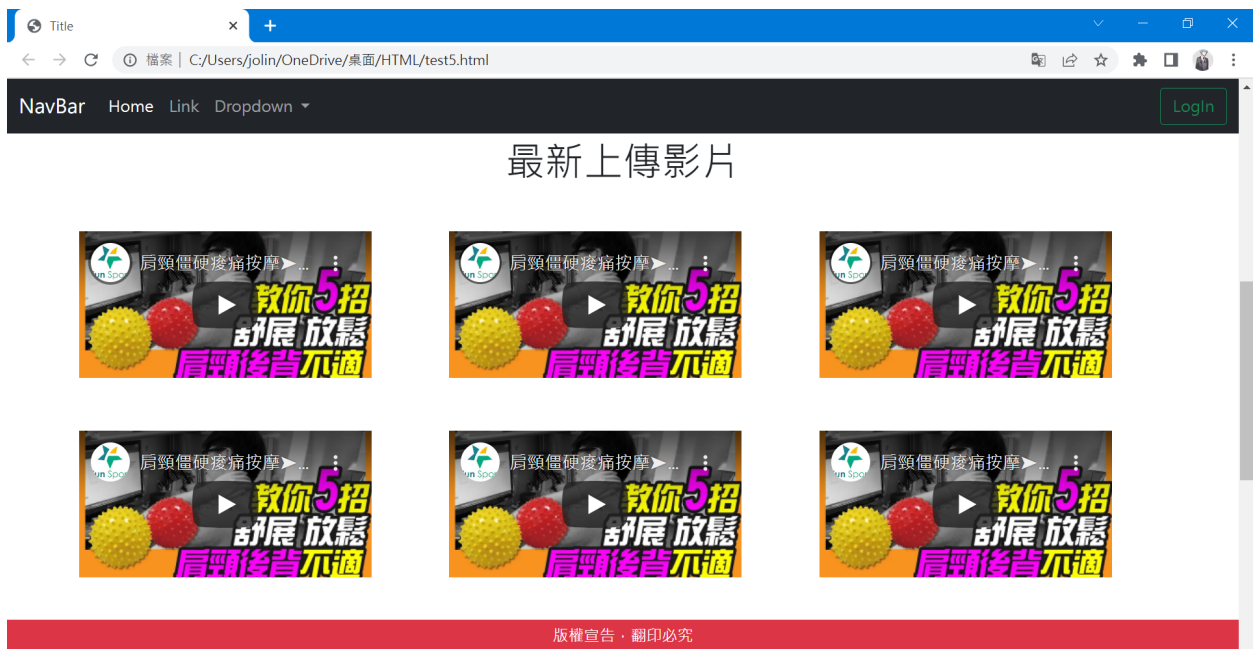


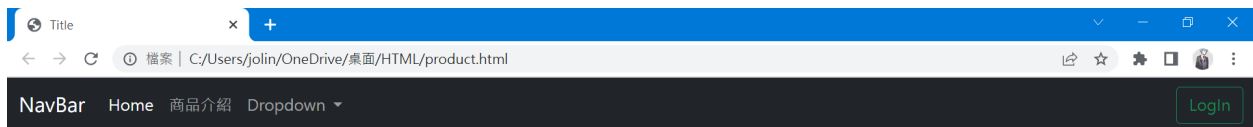

最新上傳影片



版權宣告・翻印必究

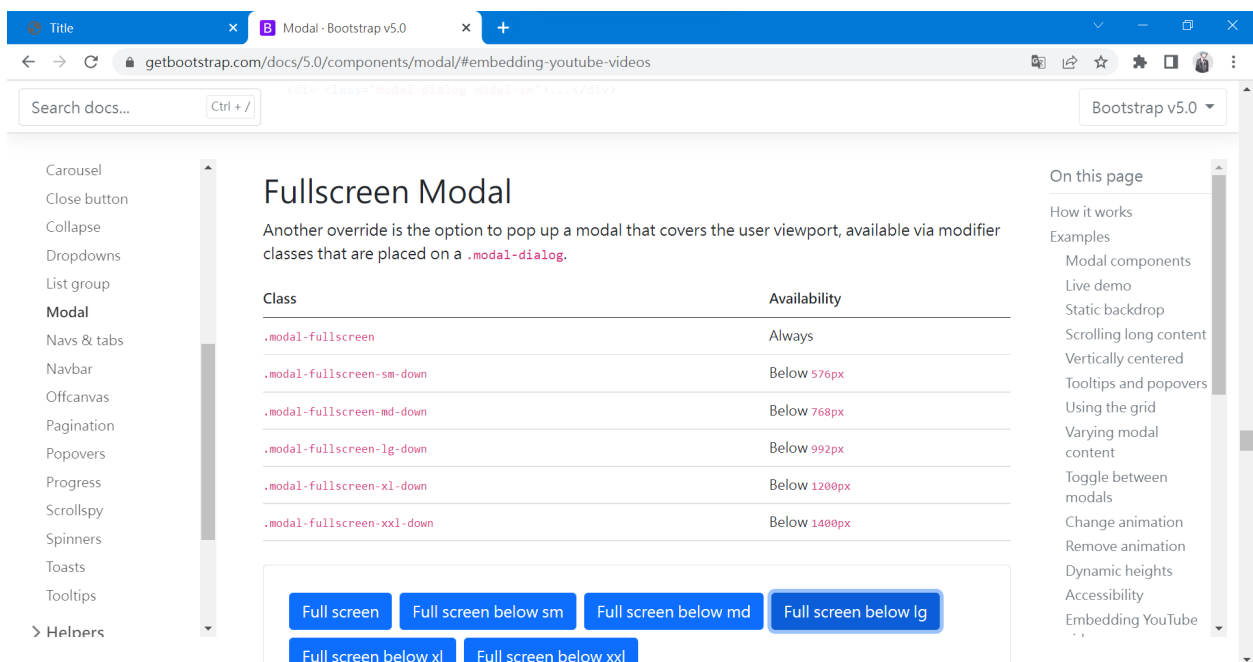

lg是螢幕目前最大的規格，即便沒有定義也會有。<https://getbootstrap.com/docs/5.0/components/modal/#embedding-youtube-videos>

Github教學

github.com/briante25

Search or jump to... Pull requests Issues Marketplace Explore

Overview Repositories 2 Projects Packages Stars

Popular repositories

green-judge a012 Public

linebot test_for_linebot Public

5 contributions in the last year

Contribution settings

Apr May Jun Jul Aug Sep Oct Nov Dec Jan Feb Mar Apr

Mon

Wed

Fri

Learn how we count contributions

Less More

Contribution activity

2022

github.com/briante25

Search or jump to... Pull requests Issues Marketplace Explore

Overview Repositories 2 Projects Packages Stars

Popular repositories

green-judge a012 Public

linebot test_for_linebot Public

5 contributions in the last year

Contribution settings

Apr May Jun Jul Aug Sep Oct Nov Dec Jan Feb Mar Apr

Mon

Wed

Fri

Learn how we count contributions

Less More

Contribution activity

2022

New repository

- Import repository
- New gist
- New organization
- New project

https://github.com/new

Create a New Repository

github.com/new

Search or jump to... Pull requests Issues Marketplace Explore

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Owner ^{*} **briante25** / Repository name ^{*} **tesetbs5** ✓

Great repository names are **tesetbs5** is available. ble. Need inspiration? How about **psychic-fiesta**?

Description (optional)

☒ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:
Skip this step if you're importing an existing repository.

briante25/tesetbs5

github.com/briante25/tesetbs5


Search or jump to... Pull requests Issues Marketplace Explore

briante25 / tesetbs5 Public

Pin Unwatch 1 Fork 0 Star 0

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Quick setup — if you've done this kind of thing before


 Set up in Desktop or **HTTPS** **SSH** `https://github.com/briante25/tesetbs5.git`



Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# tesetbs5" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/briante25/tesetbs5.git
git push -u origin main
```

<https://github.com/briante25/tesetbs5/upload>

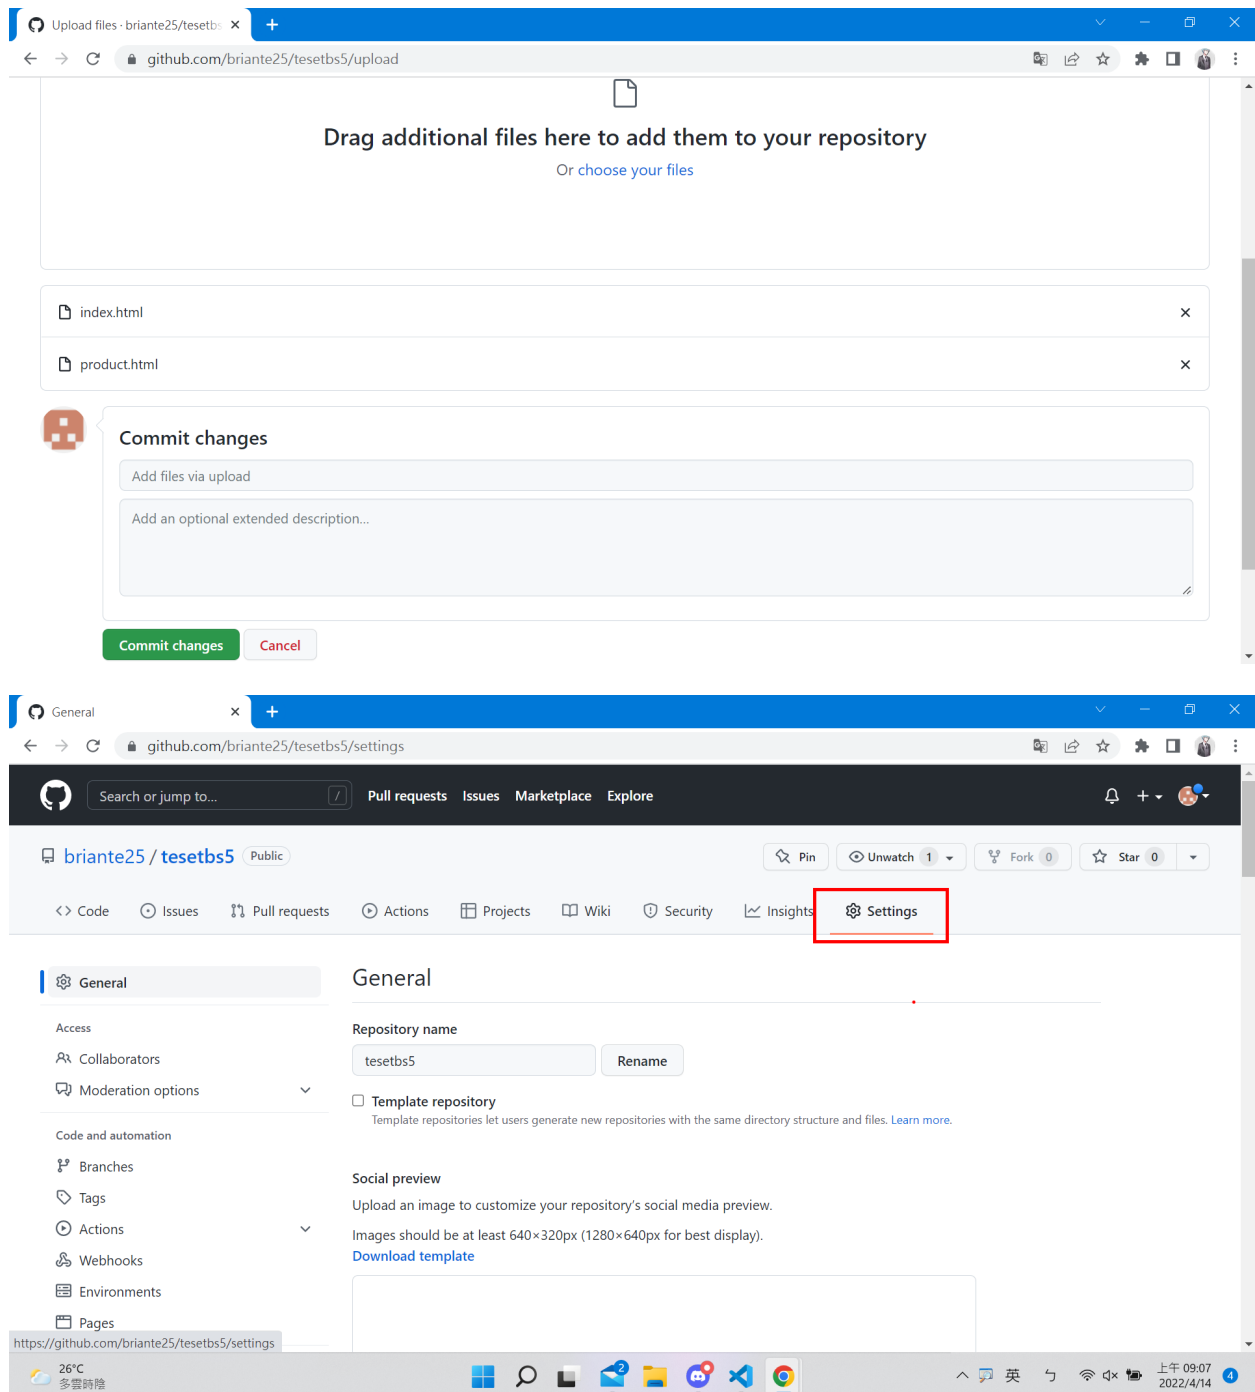

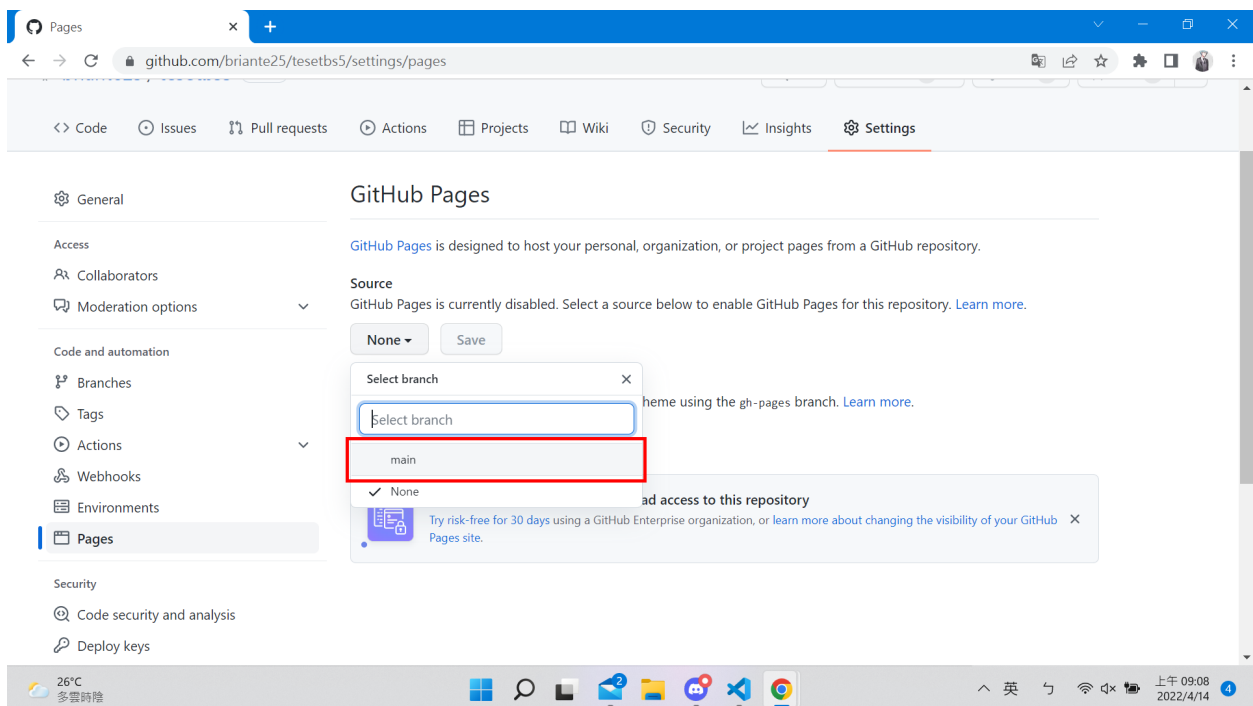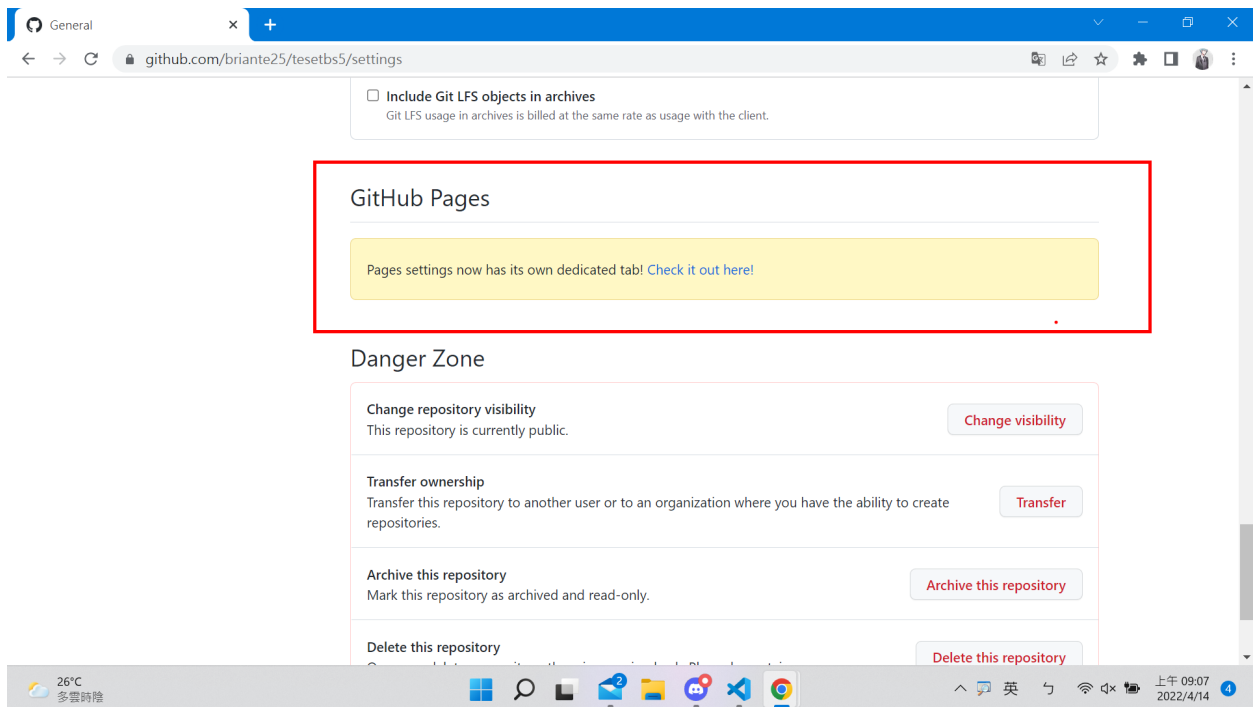

接著save檔案，等待網站跑完就好了。