$goes_to_dfe_bin.sh$

for crontab_load_method in { ascii_station,

binary_station,

shef_station,
pseudo_binary_station }

do

goes_to_dfe_bin_crontab_load_method.sh


\$crontab_load_method

done

$goes_to_dfe_bin_crontab_load_method.sh$

crontab_load_method=\$1

select station
from enp_station
where crontab_load_method = '\$crontab_load_method'
and goes_id is not null




 $/ opt/lrgs/data/station_\$\{crontab_load_method\}.dat$

for station in STATION do

goes_to_dfe_bin_station.sh


\$station
\$crontab_load_method

done

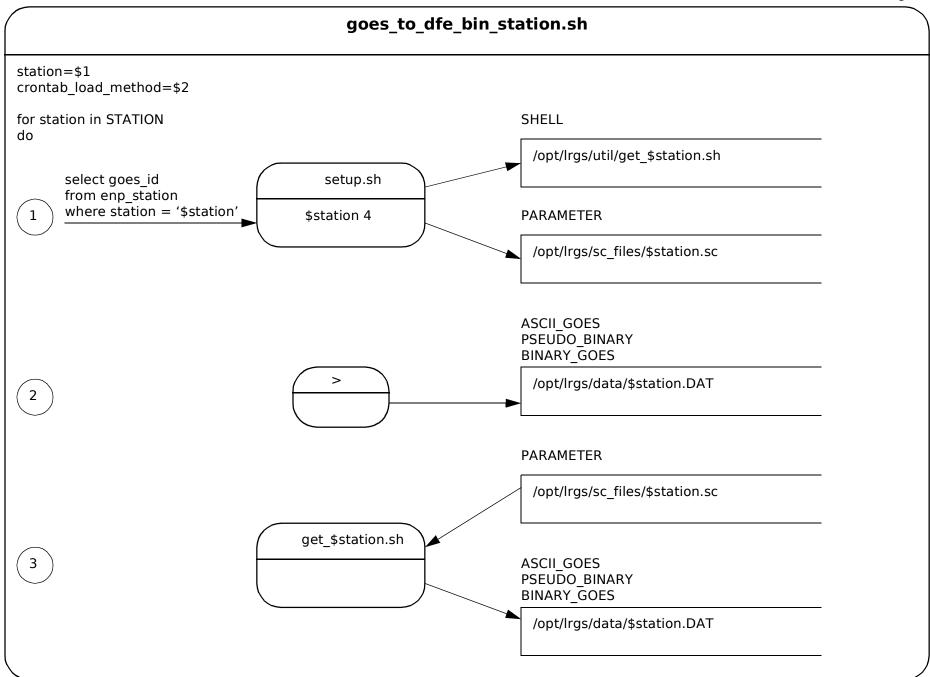


goes_to_dfe_bin_station.sh

if crontab_load_method = 'ascii_station' then

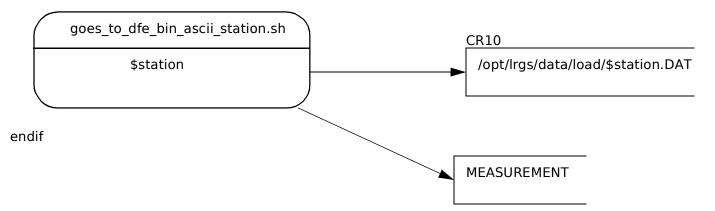


if crontab_load_method = 'binary_station' then

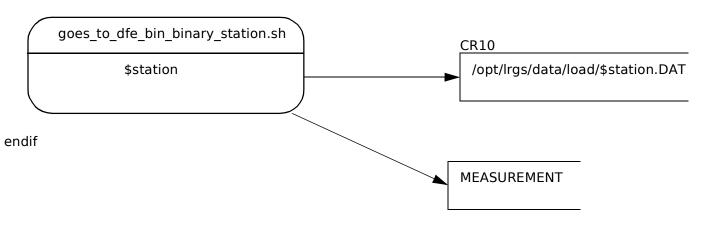

goes_to_dfe_bin_station.sh

if crontab_load_method = 'shef_station' then

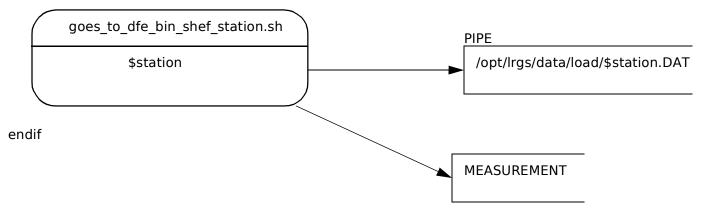

if crontab_load_method = 'pseudo_binary'
then

