


## SHEF\_DATATYPE\_CODE

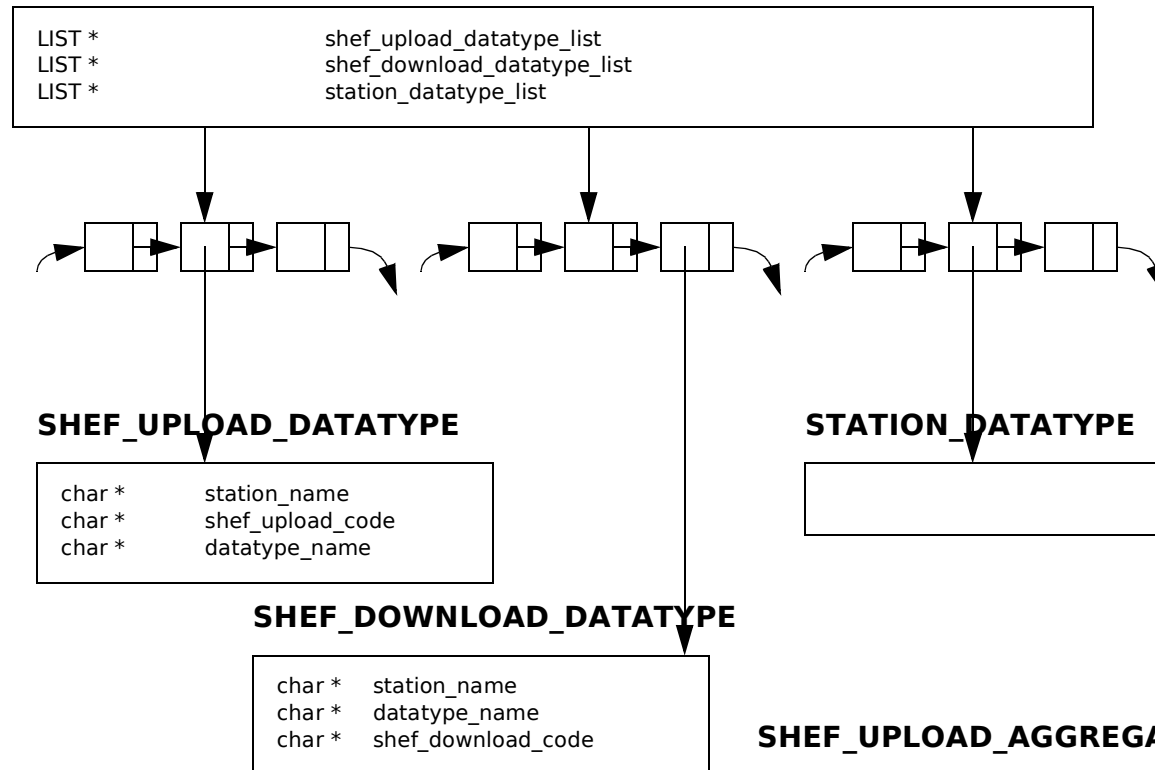

## SHEF\_UPLOADAggregateMEASUREMENT

```
char * station
char * datatype
char * measurement_date
char * measurement_time
double measurement_value
```

If the last two characters in the shef code are 'MM':

- 1) Trim off the MM
- 2) Generate key=datatype^measurement\_date^measurement\_hour
- 3) If key in hash table: if ( measurement\_value < prior.measurement\_value ) then  
datatype = \${datatype}\_min
- 4) If key in hash table: if ( measurement\_value > prior.measurement\_value ) then  
datatype = \${datatype}\_max
- 5) Set key to hash table