




SPPAS

the automatic annotation and analysis of speech

by Brigitte Bigi



Any help is welcome to improve this documentation!
Contact: brigitte.bigi@gmail.com
© 2011-2017 - Brigitte Bigi

Contents

| | | |
|----------|------------------------------------|----------|
| 1 | Introduction | 1 |
| 1.1 | What is SPPAS? | 1 |
| 1.1.1 | Overview | 1 |
| 1.1.2 | Copyright and Licenses | 2 |
| 1.1.3 | User engagement: how to cite SPPAS | 2 |
| 1.1.4 | Need help | 2 |
| 1.1.5 | Supports | 3 |
| 1.1.6 | Author and contributors | 4 |
| 1.2 | Getting and installing | 4 |
| 1.2.1 | Websites | 4 |
| 1.2.2 | External programs | 4 |
| 1.2.3 | Download and install SPPAS | 5 |
| 1.2.4 | The SPPAS package | 5 |
| 1.2.5 | Update | 6 |
| 1.3 | Capabilities | 6 |
| 1.3.1 | What SPPAS can do? | 6 |
| 1.3.2 | How to use SPPAS? | 7 |
| 1.4 | Main and important recommendations | 7 |
| 1.4.1 | About files | 7 |
| 1.4.2 | About automatic annotations | 8 |
| 1.4.3 | About linguistic resources | 8 |
| 1.5 | Interoperability and compatibility | 8 |
| 1.6 | About this documentation | 10 |

| | | |
|----------|---|-----------|
| 2 | Interface | 11 |
| 2.1 | Introduction | 11 |
| 2.2 | GUI Main frame | 11 |
| 2.2.1 | Launch SPPAS | 11 |
| 2.2.2 | The tips | 12 |
| 2.2.3 | The menu | 12 |
| 2.2.4 | The file explorer | 13 |
| 2.2.5 | Settings | 15 |
| 2.2.6 | About | 16 |
| 2.2.7 | Help | 16 |
| 2.2.8 | Plugins | 16 |
| 2.3 | CLI | 18 |
| 3 | Automatic Annotations | 21 |
| 3.1 | Introduction | 21 |
| 3.1.1 | About this chapter | 21 |
| 3.1.2 | Annotations methodology | 21 |
| 3.1.3 | File formats and tier names | 23 |
| 3.1.4 | Recorded speech | 23 |
| 3.1.5 | Automatic Annotations with GUI | 23 |
| 3.1.6 | Automatic Annotations with CLI | 24 |
| 3.1.7 | The procedure outcome report | 26 |
| 3.2 | New language support | 30 |
| 3.3 | Orthographic Transcription | 30 |
| 3.4 | Inter-Pausal Units (IPUs) segmentation | 31 |
| 3.4.1 | Overview | 31 |
| 3.4.2 | Silence/Speech segmentation | 31 |
| 3.4.3 | Silence/Speech segmentation time-aligned with a transcription | 35 |
| 3.4.4 | Split into multiple files | 35 |
| 3.4.5 | Perform IPUs Segmentation with the GUI | 35 |
| 3.4.6 | Perform IPUs Segmentation with the CLI | 36 |
| 3.5 | Text normalization | 37 |
| 3.5.1 | Overview | 37 |
| 3.5.2 | Adapt Text normalization | 37 |
| 3.5.3 | Support of a new language | 38 |

| | | |
|----------|---|-----------|
| 3.5.4 | Perform Text Normalization with the GUI | 38 |
| 3.5.5 | Perform Text Normalization with the CLI | 38 |
| 3.6 | Phonetization | 40 |
| 3.6.1 | Overview | 40 |
| 3.6.2 | Adapt Phonetization | 40 |
| 3.6.3 | Support of a new language | 41 |
| 3.6.4 | Perform Phonetization with the GUI | 41 |
| 3.6.5 | Perform Phonetization with the CLI | 41 |
| 3.7 | Alignment | 42 |
| 3.7.1 | Overview | 42 |
| 3.7.2 | Adapt Alignment | 43 |
| 3.7.3 | Support of a new language | 43 |
| 3.7.4 | Perform Alignment with the GUI | 43 |
| 3.7.5 | Perform Alignment with the CLI | 44 |
| 3.8 | Syllabification | 45 |
| 3.8.1 | Overview | 45 |
| 3.8.2 | Adapt Syllabification | 45 |
| 3.8.3 | Support of a new language | 46 |
| 3.8.4 | Perform Syllabification with the GUI | 46 |
| 3.8.5 | Perform Syllabification with the CLI | 47 |
| 3.9 | Repetitions | 47 |
| 3.9.1 | Overview | 47 |
| 3.9.2 | Adapt Repetitions and support of a new language | 47 |
| 3.9.3 | Perform Repetitions with the GUI | 48 |
| 3.9.4 | Perform Repetitions with the CLI | 48 |
| 3.10 | Momel and INTSINT | 48 |
| 3.10.1 | Momel (modelling melody) | 48 |
| 3.10.2 | Encoding of F0 target points using the “INTSINT” system | 49 |
| 3.10.3 | Perform Momel and INTSINT with the GUI | 51 |
| 3.10.4 | Perform Momel and INTSINT with the CLI | 51 |
| 4 | Resources for Automatic Annotations | 53 |
| 4.1 | Overview | 53 |
| 4.2 | French | 53 |
| 4.2.1 | List of phonemes | 53 |

| | | |
|--------|--|----|
| 4.2.2 | Pronunciation dictionary | 55 |
| 4.2.3 | Acoustic Model | 56 |
| 4.2.4 | Syllabification configuration file | 56 |
| 4.3 | Italian | 56 |
| 4.3.1 | List of phonemes | 56 |
| 4.3.2 | Pronunciation dictionary | 58 |
| 4.3.3 | Acoustic Model | 58 |
| 4.3.4 | Syllabification configuration file | 58 |
| 4.4 | Spanish | 58 |
| 4.4.1 | List of phonemes | 58 |
| 4.4.2 | Pronunciation Dictionary | 60 |
| 4.4.3 | Acoustic Model | 60 |
| 4.5 | Catalan | 60 |
| 4.5.1 | List of phonemes | 60 |
| 4.5.2 | Pronunciation dictionary | 62 |
| 4.5.3 | Acoustic Model | 62 |
| 4.6 | English | 63 |
| 4.6.1 | List of phonemes | 63 |
| 4.6.2 | Pronunciation dictionary | 64 |
| 4.6.3 | Acoustic Model | 65 |
| 4.7 | Polish | 65 |
| 4.7.1 | List of phonemes | 65 |
| 4.7.2 | Pronunciation Dictionary | 67 |
| 4.7.3 | Acoustic Model | 67 |
| 4.8 | Portuguese | 67 |
| 4.8.1 | Pronunciation Dictionary | 69 |
| 4.8.2 | Acoustic Model | 69 |
| 4.9 | Mandarin Chinese | 69 |
| 4.9.1 | List of phonemes | 69 |
| 4.9.2 | Pronunciation dictionary | 71 |
| 4.9.3 | Acoustic model | 71 |
| 4.10 | Southern Min (or Min Nan) | 72 |
| 4.10.1 | List of phonemes | 72 |
| 4.10.2 | Pronunciation Dictionary | 74 |
| 4.10.3 | Acoustic Model | 74 |

| | | |
|----------|---|-----------|
| 4.11 | Cantonese | 74 |
| 4.11.1 | List of phonemes | 74 |
| 4.11.2 | Acoustic Model | 75 |
| 4.12 | Japanese | 75 |
| 4.13 | Korean | 76 |
| 4.13.1 | List of phonemes | 76 |
| 4.13.2 | Pronunciation dictionary | 77 |
| 4.13.3 | Acoustic Model | 78 |
| 4.14 | Naija | 78 |
| 5 | Analyses | 79 |
| 5.1 | Introduction | 79 |
| 5.2 | DataRoamer | 81 |
| 5.3 | AudioRoamer | 82 |
| 5.3.1 | Properties of the audio file | 82 |
| 5.3.2 | Playing audio files | 83 |
| 5.3.3 | Want more? | 84 |
| 5.4 | IPUsciber | 85 |
| 5.5 | Visualizer | 87 |
| 5.6 | DataFilter | 88 |
| 5.6.1 | Filtering annotations of a tier: SingleFilter | 88 |
| 5.6.2 | Filtering on time-relations between two tiers | 91 |
| 5.7 | Statistics | 93 |
| 5.7.1 | Descriptive statistics | 93 |
| 5.7.2 | TGA - Time Group Analyzer | 94 |
| 5.7.3 | User agreement | 95 |
| 6 | Scripting with Python and SPPAS | 97 |
| 6.1 | Introduction | 97 |
| 6.2 | A gentle introduction to programming | 97 |
| 6.2.1 | Introduction | 98 |
| 6.2.2 | Variables: Assignment and Typing | 98 |
| 6.2.3 | Basic Operators | 99 |
| 6.2.4 | Data types | 99 |
| 6.2.5 | Conditions | 100 |
| 6.2.6 | Loops | 101 |

| | | |
|----------|---|------------|
| 6.2.7 | Dictionaries | 102 |
| 6.3 | Scripting with Python | 102 |
| 6.3.1 | Comments and documentation | 103 |
| 6.3.2 | Getting started with scripting in Python | 103 |
| 6.3.3 | Functions | 104 |
| 6.3.4 | Reading/Writing files | 106 |
| 6.3.5 | Python tutorials | 108 |
| 6.3.6 | Exercises to practice | 108 |
| 6.4 | The API of SPPAS to manage data | 108 |
| 6.4.1 | Overview | 108 |
| 6.4.2 | Why developing a new API? | 109 |
| 6.4.3 | The API class diagram | 109 |
| 6.5 | Creating scripts with annotationdata API | 111 |
| 6.5.1 | Preparing the data | 111 |
| 6.5.2 | Read/Write annotated files | 112 |
| 6.5.3 | Manipulating a Transcription object | 113 |
| 6.5.4 | Manipulating a Tier object | 113 |
| 6.5.5 | Main information on Annotation/Location/Label objects | 114 |
| 6.5.6 | Exercises | 114 |
| 6.5.7 | Search in annotations: Filters | 115 |
| 6.5.8 | Exercises | 117 |
| 6.6 | More with SPPAS API | 117 |
| 7 | References | 119 |
| 7.1 | References about SPPAS | 119 |
| 7.1.1 | How to cite SPPAS? | 119 |
| 7.1.2 | SPPAS software description | 119 |
| 7.1.3 | About Text Normalization | 120 |
| 7.1.4 | About Phonetization | 120 |
| 7.1.5 | About Forced-Alignment | 120 |
| 7.1.6 | About Syllabification | 120 |
| 7.1.7 | About Repetitions | 121 |
| 7.1.8 | About analyses tools | 121 |
| 7.1.9 | About the API | 121 |
| 7.1.10 | Related references | 121 |

| | | |
|----------|--|------------|
| 7.2 | SPPAS in research projects | 123 |
| 7.2.1 | MULTIPHONIA | 123 |
| 7.2.2 | Amennpro | 123 |
| 7.2.3 | Evalita 2011: Italian phonetization and alignment | 124 |
| 7.2.4 | Cofee: Conversational Feedback | 124 |
| 7.2.5 | Variamu: Variations in Action: a MUltilingual approach | 124 |
| 8 | SPPAS Release notes | 127 |
| 8.1 | The early versions | 127 |
| 8.1.1 | Version 1.0 (2011, 9th March) | 127 |
| 8.1.2 | Version 1.1 (2011, 7th June) | 127 |
| 8.1.3 | Version 1.2 (2011, 23th July) | 127 |
| 8.1.4 | Version 1.3 (2011, 12th December) | 127 |
| 8.2 | The birth of SPPAS | 128 |
| 8.2.1 | SPPAS 1.4.0 (2012, 14th June) | 128 |
| 8.2.2 | SPPAS 1.4.1 (2012, 13th July) | 129 |
| 8.2.3 | SPPAS 1.4.2 (2012, 2nd August) | 130 |
| 8.2.4 | SPPAS 1.4.3 (2012, 10th October) | 130 |
| 8.2.5 | SPPAS 1.4.4 (2012, 6th December) | 131 |
| 8.2.6 | SPPAS 1.4.5 (2013, 15th January) | 131 |
| 8.2.7 | SPPAS 1.4.6 (2013, 12th February) | 132 |
| 8.2.8 | SPPAS 1.4.7 (2013, 25th March) | 132 |
| 8.2.9 | SPPAS 1.4.8 (2013, 30th May) | 132 |
| 8.2.10 | SPPAS 1.4.9 (2013, 3rd July) | 133 |
| 8.2.11 | SPPAS 1.5.0 (2013, 2nd August) | 133 |
| 8.2.12 | SPPAS 1.5.1 (2013, 29th August) | 134 |
| 8.2.13 | SPPAS 1.5.2 (2013, 27th September) | 134 |
| 8.2.14 | SPPAS 1.5.3 (2013, 25th October) | 134 |
| 8.2.15 | SPPAS 1.5.4 (2013, 3rd December) | 135 |
| 8.2.16 | SPPAS 1.5.5 (2013, 23th December) | 135 |
| 8.2.17 | SPPAS 1.5.6 (2014, 28th January) | 135 |
| 8.2.18 | SPPAS 1.5.7 (2014, 18th February) | 136 |
| 8.2.19 | SPPAS 1.5.8 (2014, 18th March) | 136 |
| 8.2.20 | SPPAS 1.5.9 (2014, 15th April) | 136 |
| 8.2.21 | SPPAS 1.6.0 (2014, 22th May) | 137 |

| | | |
|----------|------------------------------------|------------|
| 8.2.22 | SPPAS 1.6.1 (2014, 26th September) | 137 |
| 8.2.23 | SPPAS 1.6.2 (2014, 21th October) | 137 |
| 8.2.24 | SPPAS 1.6.3 (2014, 2nd November) | 138 |
| 8.3 | The childhood of SPPAS | 138 |
| 8.3.1 | SPPAS 1.6.4 (2014, 5th December) | 138 |
| 8.3.2 | SPPAS 1.6.5 (2014, 17th December) | 139 |
| 8.3.3 | SPPAS 1.6.6 (2015, 19th January) | 139 |
| 8.3.4 | SPPAS-1.6.7 (2015, 16th February) | 140 |
| 8.3.5 | SPPAS-1.6.8 (2015, 9th April) | 141 |
| 8.4 | The development phase | 141 |
| 8.4.1 | SPPAS-1.6.9 (2015, 14th May) | 141 |
| 8.4.2 | SPPAS-1.7.0 (2015, 3th July) | 142 |
| 8.4.3 | SPPAS-1.7.1 (2015, 5th August) | 143 |
| 8.4.4 | SPPAS-1.7.2 (2015, 3th September) | 143 |
| 8.4.5 | SPPAS-1.7.3 (2015, 9th October) | 144 |
| 8.4.6 | SPPAS-1.7.4 (2015, 6th November) | 144 |
| 8.4.7 | SPPAS-1.7.5 (2015, 11th December) | 144 |
| 8.4.8 | SPPAS-1.7.6 (2016, 28th January) | 145 |
| 8.4.9 | SPPAS-1.7.7 (2016, 30th March) | 145 |
| 8.4.10 | SPPAS-1.7.8 (2016, 5th May) | 146 |
| 8.4.11 | SPPAS-1.7.9 (2016, 3th June) | 146 |
| 8.5 | The stabilization phase | 147 |
| 8.5.1 | SPPAS-1.8.0 (2016, 30th August) | 147 |
| 8.5.2 | SPPAS-1.8.1 (2016, 28th November) | 147 |
| 8.5.3 | SPPAS-1.8.2 (2017, 18th January) | 147 |
| 8.5.4 | SPPAS-1.8.3 (2017, 10th March) | 148 |
| 8.5.5 | SPPAS 1.8.4 (2017, 10th April) | 148 |
| 8.5.6 | SPPAS 1.8.5 (2017, 20th April) | 148 |
| 8.5.7 | SPPAS 1.8.6 (2017, 19th June) | 148 |
| 8.5.8 | SPPAS 1.9 (2017, 16th August) | 149 |
| 9 | Appendix | 151 |
| 9.1 | List of error messages | 151 |

Introduction

What is SPPAS?

Overview

SPPAS - the automatic annotation and analyses of speech is a scientific computer software package written and maintained by Brigitte Bigi of the [Laboratoire Parole et Langage](#), in Aix-en-Provence, France.

SPPAS is daily developed with the aim to provide a robust and reliable software. Available for free, with open source code, there is simply no other package for linguists to simple use in both the automatic annotations of speech and the analyses of any kind of annotated data. You can imagine the annotations or analyses you need, SPPAS does the rest!

As the primary functionality, SPPAS proposes a set of automatic or semi-automatic annotations of recordings. In this context, corpus annotation is “defined as the practice of adding interpretative, linguistic information to an electronic corpus of spoken and/or written language data. ‘Annotation’ can also refer to the end-product of this process” (Leech, 1997). The annotation of recordings is then concerned by many Linguistics fields as Phonetics, Prosody, Gestures or Discourse... Corpora are annotated with detailed information at various linguistic levels thanks to annotation software. As large multimodal corpora become prevalent, new annotation and analysis requirements are emerging. The annotations must be time-synchronized: annotations need to be time-aligned in order to be useful for purposes such as qualitative or quantitative analyses. Temporal information makes it possible to describe behaviors from different subjects that happen at the same time, and time-analysis of multi-level annotations can reveal linguistic structures. Annotating recordings is very labor-intensive and cost-ineffective since it has to be performed manually by experienced researchers with many hours of work. SPPAS can automatize annotations and allows users to save time. In order to use efficiently this automatic annotation software, a rigorous methodology to collect data and to prepare them is expected. This implies a rigorous framework to ensure compatibilities between annotations and time-saving. The expected result is time-aligned data, for all annotated levels.

Automatic annotations can be used either with a Command-line User Interface or a Graphical User Interface. So, there's no specific difficulty by using this software. Advanced users can also access directly the Application Programming Interface. The program was implemented using the programming language Python 2.7. The only potential brake on the usage of automatic annotations of SPPAS is the need to integrate it in a rigorous methodology for the corpus construction, annotations and analyses.

Linguistics annotation, especially when dealing with multiple domains, makes use of different tools within a given project. In recent years, many annotation software and/or tools have become available for annotation of audio-video data. For a researcher looking for an annotation software, it is difficult to select the most appropriate. Due to the diversity of linguistic phenomena, annotation tools lead to a variety of models, theories and formalisms. This diversity results in heterogeneous description formats, each tool developing its own framework. The choice of the annotation software is part of the annotation framework and must be done carefully and of course before the creation of the corpus. SPPAS annotation files are in a specific XML format with extension `xra`; and annotations can be imported from and exported to a variety of other formats, including Praat (TextGrid, PitchTier, IntensityTier), Elan (eaf), Transcriber (trs), Annotation Pro (antx), Phonedit (mrk), Sclite (ctm, stm), HTK (lab, mlf), subtitles formats (srt, sub), CSV files...

“[...] when multiple annotations are integrated into a single data set, inter-relationships between the annotations can be explored both qualitatively (by using database queries that combine levels) and quantitatively (by running statistical analyses or machine learning algorithms)” (Chiarcos 2008). As a consequence, some special features are offered in SPPAS for managing corpora of annotated files - of any file format. Among others, it includes a tool to filter multi-levels annotations (Bigi and Saubesty, 2015). Other included tools are dedicated to the analysis of time-aligned data; as for example to estimate descriptive statistics, a version of the Time Group Analyzer (Gibbon 2013), etc.

Data analysis of SPPAS are mainly proposed in the Graphical User Interface. However, advanced users can also access directly the Application Programming Interface, for example to estimate statistics or to manipulate annotated data.

Copyright and Licenses

(c) 2011-2017 Brigitte Bigi, Laboratoire Parole et Langage, Aix-en-Provence, France

SPPAS software is distributed under the terms of the **GNU GENERAL PUBLIC LICENSE**.

SPPAS resources are distributed:

- under the terms of the [GNU GENERAL PUBLIC LICENSE](#), or
- on the terms of the “Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License”.

A copy of both licenses is available in the package. See the “Resources” chapter for details about the license of each proposed resource.

User engagement: how to cite SPPAS

By using SPPAS, **you agree to cite the reference in your publications**.

See the “References” chapter of this documentation to get the list or the home page <http://www.lpl-aix.fr/~bigi/> to get printable versions of the references.

Need help

1. Many problems can be solved by updating the version of SPPAS.

2. When looking for more detail about some subject, one can search this documentation. This documentation is available in-line - see the SPPAS website, it is also included in the package in PDF format, and it can also be explored with the Graphical User Interface by clicking on the `Help` button.
3. There is a F.A.Q. in the SPPAS web site. Topics can range from elementary “how do I” queries to advanced issues in scriptwriting. There’s (or there will be) something there for everybody.
4. If none of the above helps, you may contact the author by using the Graphical User Interface: click the `Feedback` button. Another option is that you may send e-mail to the author. In both cases, it is very important to indicate clearly:
 1. your operating system and its version,
 2. the version of SPPAS (supposed to be the last one), and
 3. for automatic annotations, send the log file, `~/temp/vn -akie: n e`

2017

The introduction of Naija language is supported by the French National Research Agency (ANR) [NaijaSynCor](#).

Author and contributors

Since January 2011, **Brigitte Bigi** (brigitte.bigi@gmail.com) is the main author of SPPAS. She is a researcher at CNRS - [Centre National de la Recherche Scientifique](#). Know more about the author: <http://www.lpl-aix.fr/~bigi>

Here is the list of other contributors in programming:

- April 2012-June 2012: Alexandre Ranson;
- April 2012-July 2012: Cazembé Henry;
- April 2012-June 2013: Bastien Herbaut;
- March 2013-March 2014: Tatsuya Watanabe;
- April 2015-June 2015: Nicolas Chazeau;
- April 2015-June 2015: Jibril Saffi.

Getting and installing

Websites

Since January 2016, the main website of SPPAS is located at the following URL:

<http://www.sppas.org>

The source code with recent stable releases is hosted on github. From this website, anyone can download the current version and the development version. After signed-in, anyone can send comments and/or declare an issue:

<https://github.com/brigittebigi/sppas>

External programs

On the main website, it is possible to find information about the software requirements. In fact, other programs are required for SPPAS to operate. Of course, they must be installed before using SPPAS, and *only once*. This operation takes 5 up to 10 minutes depending on the operating system.

The following software are required:

1. Python 2.7.x
2. wxPython >= 3.0
3. julius >= 4.1

It is very (very very) important to take care about the version of Python. An installation guide is available on the website, depending on the operating system. **Please, closely follow the instructions.** Notice that administrator rights are required to perform the installations. In case of difficulty arising from the installation of such software, we invite you to consult the web first. It probably will provide the right solution. If, however, the problems were to persist, contact the author by e-mail.

Download and install SPPAS

The main website contains the [Download](#) page to download recent versions. There is a unique version of SPPAS which does not depend on the operating system. The only obvious difference depending on the system is how it looks on the computer screen.



Figure 1.1: Operating systems

SPPAS is ready to run, so it does not need elaborate installation, except for the other software required for SPPAS to work properly. All you need to do is to copy the SPPAS package from the website to somewhere on your computer. Choose *a location with preferably only US-ASCII characters in the name of the path*.

The SPPAS package is compressed and zipped, so you will need to *decompress and unpack* it once you've got it.

The SPPAS package

Unlike many other software tool, SPPAS is not what is called a “black box”. Instead, everything is done so that users can check / change operation. It is particularly suitable for automatic annotations: it allows any user to adapt automatic annotations to its own needs. The package of SPPAS is then a directory with content as files and folders.

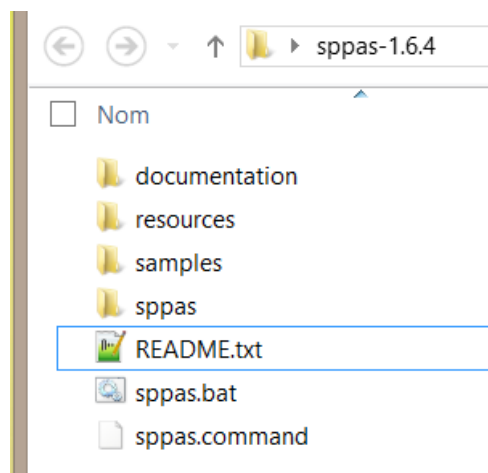


Figure 1.2: SPPAS Package content

The SPPAS package contains:

- the `README.txt` file, which aims to be read by users
- the files `sppas.bat` and `sppas.command` to execute the Graphical User Interface
- the `resources` directory contains data that are used by automatic annotations (lexicons, dictionaries, ...)
- the `samples` directory contains folders of data of various languages, they are sets of annotations freely distributed to test features of SPPAS
- the `sppas` directory contains the program itself
- the `documentation` directory contains:
 - the copyright
 - the printable documentation
 - the printable version of the main reference published in “the Phonetician” journal
 - the folder `scripting_solutions` is a set of python scripts corresponding to the exercises proposed in the chapter “Scripting with Python and SPPAS”

Update

SPPAS is constantly being improved and new packages are published frequently (about 10 versions a year). It is important to update regularly in order to get the latest functions and corrections.

Updating SPPAS is very easy and fast:

1. Download the last updated package from the SPPAS main web site;
2. Unpack the downloaded package;
3. Optionally, put the old one into the Trash.

Capabilities

What SPPAS can do?

Here is the list of features available to annotate automatically speech data and to analyze annotated files:

1. Automatic and semi-automatic annotations
 - *Momel*: modelling melody
 - *INTSINT*: Intonation
 - *IPUs segmentation*: speech/silence segmentation
 - *Text normalization*: tokenization, remove punctuation, etc
 - *Phonetization*: grapheme to phoneme conversion
 - *Alignment*: phonetic segmentation
 - *Syllabification*: group phonemes into syllables
 - *Repetitions*: detect self-repetitions, and other-repetitions
2. Analysis

- *IPUscriber*: Manual orthographic transcription, after IPUs segmentation
- *AudioRoamer*: Play, show information and manage speech audio files
- *Statistics*: Estimates/Save statistics on annotated files
- *DataRoamer*: Manipulate annotated files
- *DataFilter*: Extract data from annotated files (i.e. querying data)
- *Visualizer*: Display sound and annotated files

3. Plugins

- *SAMPA to IPA*: convert SAMPA into IPA phonemes encoding
- *SAMPA to Praat-IPA*: convert SAMPA into Praat phonemes encoding
- *Classify phones*: create tiers with the phonemes classification (articulatory information)
- *Marsatag*: apply MarsaTag French POS-tagger on time-aligned files
- *sox*: call the Swiss Army Knife of sound processing utilities from SPPAS

How to use SPPAS?

There are three main ways to use SPPAS:

1. The Graphical User Interface (GUI) is as user-friendly as possible:
 - double-click on the `sppas.bat` file, under Windows;
 - double-click on the `sppas.command` file, under MacOS or Linux.
2. The Command-line User Interface (CLI), with a set of programs, each one essentially independent of the others, that can be run on its own at the level of the shell.
3. Scripting with Python and SPPAS provides the more powerful way.

Main and important recommendations

About files

There is a list of important things to keep in mind while using SPPAS. They are summarized as follows and detailed in the chapters of this documentation:

1. Speech audio files:
 - only `wav` and `au` files
 - only mono (= one channel)
 - frame rates: 16000hz
 - bit rate: 16 bits
 - good recording quality is expected. It is obviously required to never convert from a compressed file, as mp3 for example.
2. Annotated data files:
 - *UTF-8* encoding only

- it is recommended to use only US-ASCII characters in file names (including the path)

Other frame rates and bit rates are accepted: the audio file is converted in 16 bits/16000Hz in a copy of the file then SPPAS is using this latter.

About automatic annotations

The quality of the results for most of the automatic annotations is highly influenced by **the quality of the data the annotation takes in input**. This is a politically correct way to say: *Garbage in, garbage out!*

Annotations are based on the use of linguistic resources. Resources for several languages are gently shared and freely available in the SPPAS package. The quality of the automatic annotations is largely influenced by **the quality of the linguistic resources**. The users can contribute to improve them.

About linguistic resources

Users are of crucial importance for resource development. They can contribute to improve them, and the author releases the improvements to the public, so that the whole community benefits. Resources are distributed under the terms of public licenses, so that SPPAS users are “free”:

- free to study the source code and the resources of the software they use,
- free to share the software and resources with other people,
- free to modify the software and resources, and
- free to publish their modified versions of the software and resources.

Interoperability and compatibility

In the scope of the compatibility between SPPAS data and annotated data from other software tools or programs, SPPAS is able to open/save and convert files. The conversion of a file to another file is the process of changing the form of the presentation of the data, and not the data itself. Every time, when data file is to be used, they must be converted to a readable format for the next application. A data conversion is normally an automated process to some extent. SPPAS provide the possibility to automatically import and export the work done on some various file formats from a wide range of other software tools. For the users, the visible change will be only a different file extension but for software it is the difference between understanding of the contents of the file and the inability to read it.

The conversion of file formats is then a difficult task and it can imply that some data are left. Representing annotated data in SPPAS is of crucial importance for its automatic annotations, its analysis of annotations and for the software to be able to automatically annotate and analyze any kind of data files. SPPAS then includes an original and generic enough annotation representation framework. This framework for annotations is very rich and contain several information like alternative labels or alternative localizations of annotations, a tier hierarchy, controlled vocabularies, etc. A native format named XRA was then developed to fit in such data representation. The physical level of representation of XRA obviously makes use of XML, XML-related standards and stand-off annotation. Due to an intuitive naming convention, XRA documents are human readable as far as possible within the limits of XML.

SPPAS makes use of its internal data representation to convert files. A conversion then consists of two steps: First, the incoming file is loaded and mapped to the SPPAS data framework; and second, such data is saved

to the expected format. These two steps are applied whatever the organization structure of annotations in the original or in the destination file format. This process allows SPPAS to import from and export to a variety of file formats. This is illustrated by the next Figure which includes the list of file formats and the corresponding software that are supported. Arrows are representing the following actions:

- import from, represented by a continued line with an arrow from the file format to the SPPAS framework;
- partially import from, represented by a dash line with an arrow from the file format to the SPPAS framework;
- export to, represented by an arrow from the SPPAS framework to the file format.

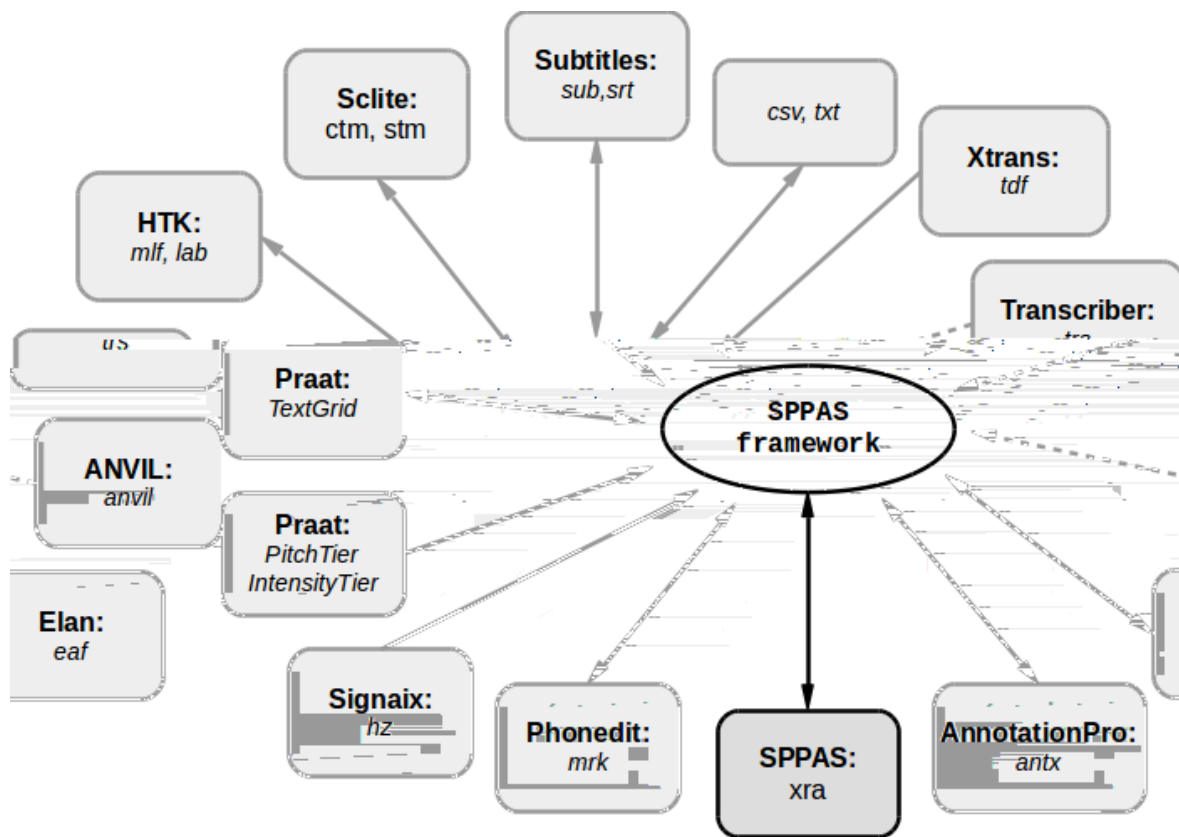


Figure 1.3: SPPAS conversion method and formats

To summarize, SPPAS supports the following software with their file extensions:

- Praat: TextGrid, PitchTier, IntensityTier
- Elan: eaf
- Annotation Pro: antx
- Phonedit: mrk
- Sclite: ctm, stm
- HTK: lab, mlf
- Subtitles: srt, sub
- Signaix: hz
- Spreadsheets, R,...: csv
- Audacity, notepads: txt

And the followings can be imported:

- ANVIL: anvil
- Transcriber: trs
- Xtrans: tdf

The support of external formats is regularly extended to new formats by the author on-demand from the users and distributed to the community in the SPPAS regular updates.

About this documentation

This documentation will assume that you are using a relatively recent version of SPPAS. There's no reason not to download the latest version whenever released: it's easy and fast!

Any and all constructive comments are welcome.

Interface

Introduction

The current chapter describes how to use SPPAS with the Graphical User Interface (GUI) and with the Command-line User Interface (CLI). Each feature implemented in SPPAS corresponds to a program that can be invoked by the GUI or the CLI.

GUI Main frame

Launch SPPAS

Under Windows, once the SPPAS package is opened in the File Explorer, double-click on the `sppas.bat` file. In recent versions of Windows (e.g. 10), the first time you try to run SPPAS you may get a window with title “Windows protected your PC” and the following message: “Windows SmartScreen prevented an unrecognized app from starting. Running this app might put your PC at risk. More info”. Click `More info` message and then `Run anyway` button. The file will now run SPPAS, and you will now no longer get a Windows protected your PC prompt when you run this specific file next time. This warning message comes from the fact that SPPAS is a free software and we did not paid to Microsoft commercial fees which would remove the “Unknown Publisher” warnings.

Under MacOS, once the SPPAS package is opened in the Finder, double-click on the `sppas.command` file. In recent versions of MacOS X (e.g. from 10.11 El Capitan), the first time you try to run SPPAS you may get a message: “sppas.command can’t be opened because it is from an unidentified developer.”. This warning message comes from the fact that SPPAS is a free software and we did not paid to Apple commercial fees. The solution is to run SPPAS with a right click (alt-click) on `sppas.command` file. This time you will get a message: “sppas.command is from an unidentified developer. Are you sure you want to open it?” Then click on `Open`. It will also now work each time you run it.

Under Linux, once the SPPAS package is opened in the Finder/File Explorer, double-click on the `sppas.command` file.

The program will first check the version of wxpython and eventually ask to update. It will then check if the julius program can be accessed.

The main windows will open automatically. It is made of a menu (left), a title (top), the tips (middle), the list of files (left-middle), and the action buttons (right).

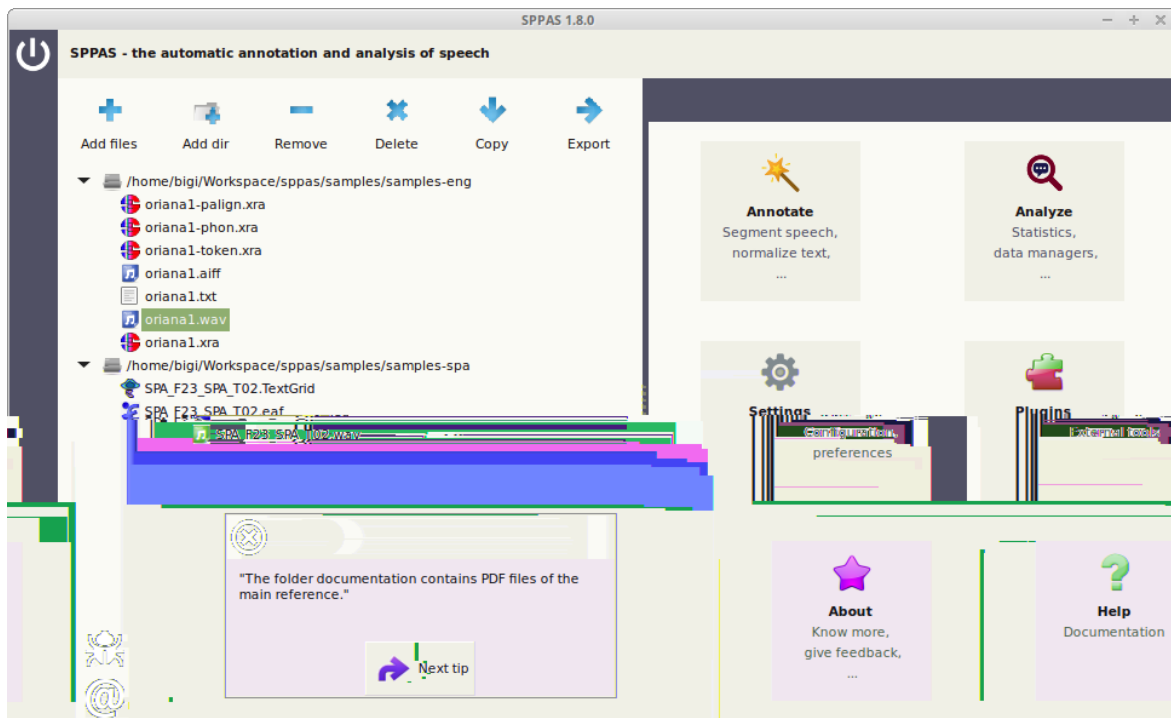


Figure 2.1: Main Frame of version 1.9.0

The tips

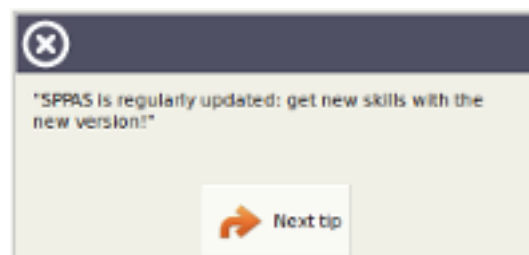


Figure 2.2: The tips included in the main frame

The frame includes message tips that are picked up randomly and printed to help users. Click on the button **Next Tip** to read another message, or click on the top-left button to close the tips frame. The **Settings** allows to show/hide tips at start-up. Anyone can suggest new tips to help other users. They have to be sent to the author by e-mail so that they will be included in the next version.

The menu

The menu is located at the left-side of the window. At top, a button allows to exit the program, and at bottom you can declare an issue or contact the author.

The **Exit** button closes all SPPAS frames properly.

To declare an issue, click on the bug button of the menu, then your default web browser will be opened at the appropriate URL. Take a quick look at the list of already declared issues and if any, click on the green button “New Issue”.

To contact the author, replace the text “Describe what you did here...” by your own comment, question or suggestion and choose how to send the e-mail: with your own default mailer, with gmail opened in your web browser, or by another e-mail client. Then, close the frame by clicking on the “Close” button.

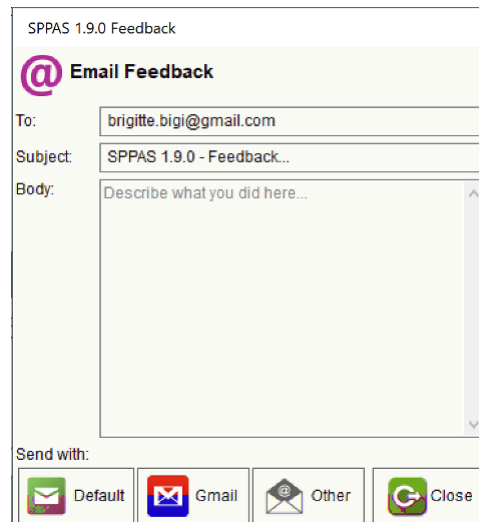


Figure 2.3: The Feedback Frame

The file explorer

The list contains directories and files the user added. However, only files that SPPAS can deal with, e.g. depending on the file extension, can be appended to the list. Files with an unknown extension are rejected.

Remark: The files are added in the list, but they are not opened.

Select file(s)

To select a single file, all files of a directory or several files:

- a single click on a file name highlights and selects the chosen file. If other files or directories were previously selected, they are deselected.
- a single click on a directory name highlights the chosen directory and selects all files. If other files or directories were previously selected, they are deselected.
- to select several files or directories, the `ctrl` key (Linux/Windows) or `cmd` key (Apple) must be pressed while clicking each file or directory.
- to select several files or directories, the `shift` key can be pressed while clicking two files or directories.

Add file(s)

A single-click on the `Add files` button opens a window that allows to select the files to get. By default, only files with “.wav” extensions are proposed. When audio file(s) is/are selected, all files with the same name are automatically added into the file explorer.

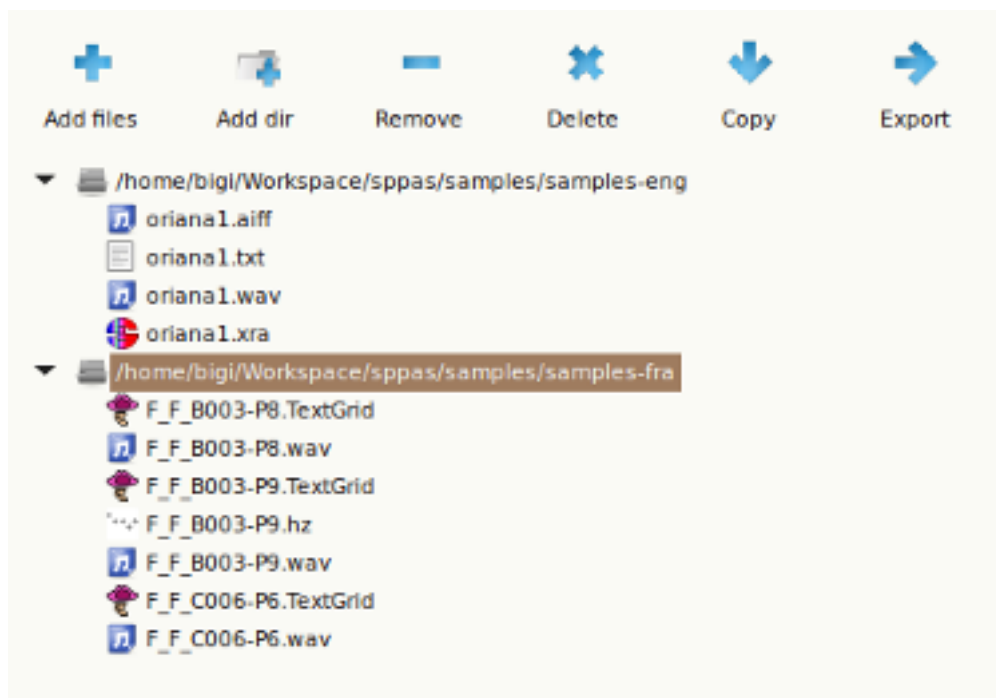


Figure 2.4: File explorer

The wildcard of this window can be changed to some other specific file extensions and then other files can be selected.

Delete file(s)

A single-click on the `Delete` button deletes *definitively* the selected files/directories of your computer, and remove them of the list. Notice that there is no way to get them back!

A dialogue window will open, and you have to confirm or cancel the definitive file(s) deletion.

Copy file(s)

A single-click on the `Copy` button allows to copy the selected file(s), change their name and/or change the location. It is also possible to change the file format by assigning the appropriate file extension.

Export file(s)

Export annotated files in an other format (csv, txt, ...):

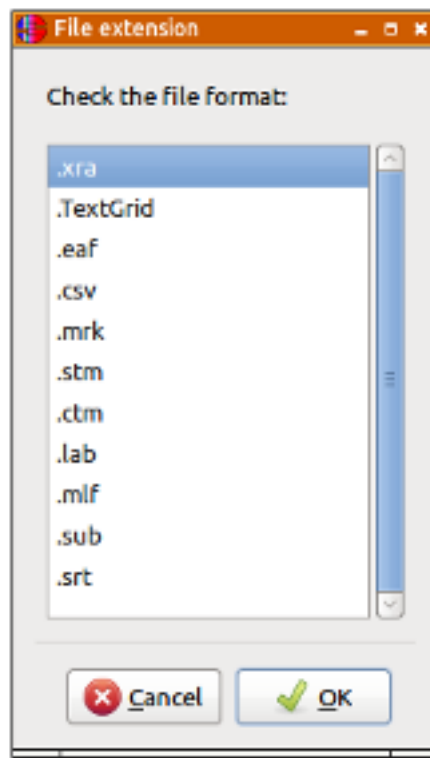


Figure 2.6: Export: Check the expected format in the list

After the export, a new window opens to report whether the file(s) were exported successfully or not. Actually, an export fails if: - the given file is not in UTF-8 encoding; - the given file contains several tiers and the output format supports only one; - the given file contains corrupted annotations.

Settings

To change user preferences, click on the `Settings` icon, then choose your preferred options in the tabs:

- General: fix background color, font color and font of the GUI, and enable/disable tips at start-up.

- Theme: fix how the icons of the GUI will look like.
- Annotations: fix automatic annotations parameters.

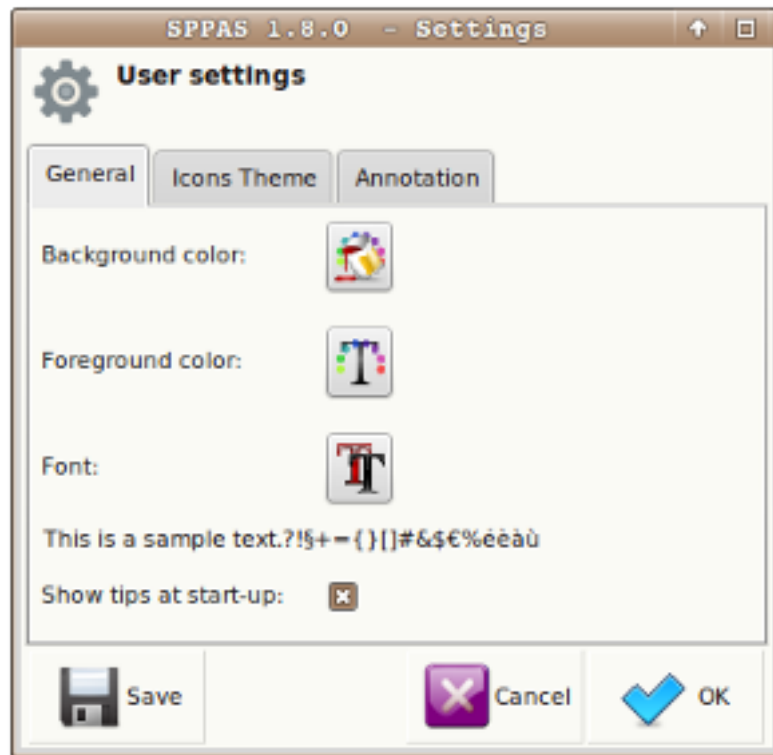


Figure 2.7: Settings is used to manage user preferences

These preferences can be saved in a file to be used each time SPPAS is executed. Finally, to close the settings window, click on:

- “Cancel” button to ignore changes;
- “Close” to apply changes then close the window.

About

The **About** action button allows to display the main information about SPPAS: author, license, a link to the web site, etc.

Help

The **Help** action button opens the documentation and allows to browse in the chapters and sections.

Plugins

Installing plugins is a very useful solution to extend the features of SPPAS. Several plugins are available for download in the main site of SPPAS. The plugins of SPPAS are installed in a folder with name “plugins” in the main directory of SPPAS.

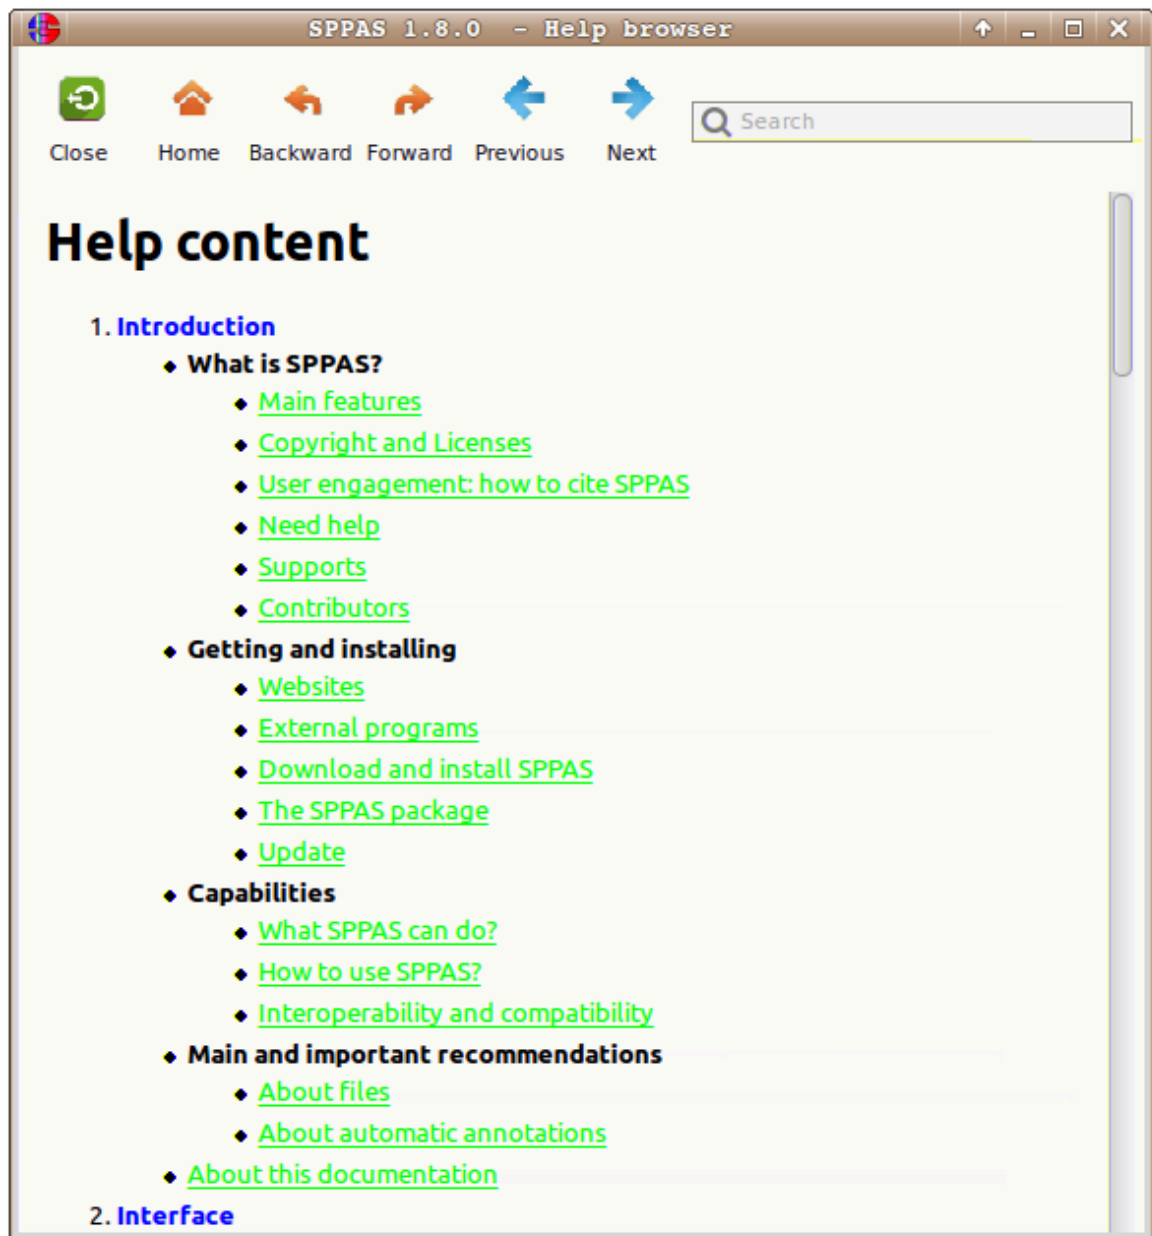


Figure 2.8: The Help browser window

The plugin system of SPPAS was fully changed at version 1.8.2; and plugins were all updated at version 1.9.0. Old plugins and new ones are not compatibles.

Installing a plugin

To install a plugin, simply follow this workflow:

1. Download the plugin package - e.g. a zip file.
2. Execute SPPAS.
3. Click on the 'Plugin' icon then click on the 'Install' button of the toolbar.
4. Browse to indicate the plugin package.
5. See the new plugin icon in the plugins list.

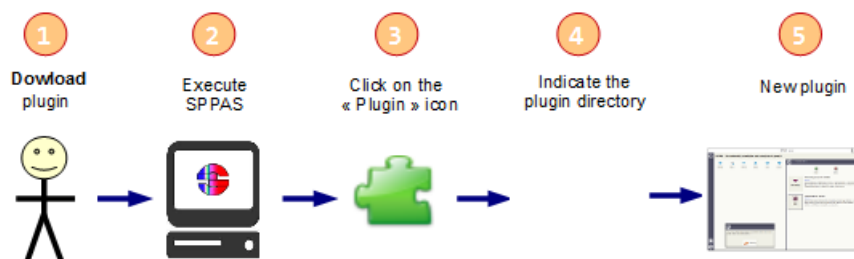


Figure 2.9: Installing a new Plugin

Deleting a plugin

To delete a plugin, click on the “Delete” button of the toolbar. Choose the plugin in the given list then click on the “OK” button. Notice that the plugin is definitively deleted of the disk.

Using a plugin

To execute a plug-in, select file(s) in the File explorer, click on the icon of the plug-in and follow instructions of the plugged program.

CLI

A command-line interface (CLI), also known as command-line user interface, is a means of interacting with a computer program where the user issues commands to the program in the form of successive lines of text (command lines). Command-line interfaces provide a more concise and powerful means to control the program than the GUI.

Operating system command line interfaces are called a command-line interpreter, command processor or shell. It displays a prompt, accept a “command line” typed by the user terminated by the Enter key, then execute the specified command and provide textual display of results or error messages. When a shell is active a program is typically invoked by typing its name followed by command-line arguments (if any).

Such programs are located in the `bin` folder of the `sppas` directory included in the SPPAS package. All these programs are written with the programming language Python 2.7.

It is usual for a program to be able to display a brief summary of its parameters. Each program included in SPPAS provides its usage by using the option `--help`, as for example:

```
prompt> annotation.py --help
```

There are 2 types of programs in the `sppas/bin` folder:

1. programs to execute an automatic annotation. These programs only requires Python 2.7 to be installed, and `julius` or `hvite` for the alignment program. They do not use a GUI so that installing wxPython is not required.
2. programs to execute an analysis tool. They take as argument the files to work on and they open the corresponding window. The GUI is launch.

In addition, the program `plugin.py` allows to install, execute and remove a plugin of SPPAS.

Automatic Annotations

Introduction

About this chapter

This chapter is not a description on how each automatic annotation is implemented and how it's working: references are available for that in chapter 7.

Instead, this chapter describes how each automatic annotation can be used in SPPAS, i.e. what is the goal of the annotation, what are the requirements, what kind of resources are used, what is the expected result and how to perform it within SPPAS.

Each automatic annotation process is illustrated as a workflow schema, where:

- blue boxes represent the name of the automatic annotation;
- red boxes represent tiers, with their name in white;
- green boxes indicate the resource;
- yellow boxes indicate the annotated file either given as input or produced as result.

Annotations methodology

The kind of process to implement in the perspective of obtaining rich and broad-coverage multimodal/multi-levels annotations of a corpus is illustrated in next Figure. It describes each step of the annotation workflow. This Figure must be read from top to bottom and from left to right, starting by the recordings and ending to the analysis of annotated files. Yellow boxes represent manual annotations, blue boxes represent automatic ones.

After the recording, the first annotation to perform is IPUs segmentation. Indeed, at a first stage, the audio signal must be automatically segmented into Inter-Pausal Units (IPUs) which are blocks of speech bounded by silent pauses of more than X ms, and time-aligned on the speech signal. **An orthographic transcription has to be performed manually inside the IPUs.** Then text normalization automatic annotation will normalize the orthographic transcription. The phonetization process will convert the normalized text in a set of pronunciations using X-SAMPA standard. Alignment will perform segmentation at phonemes and tokens levels, etc.

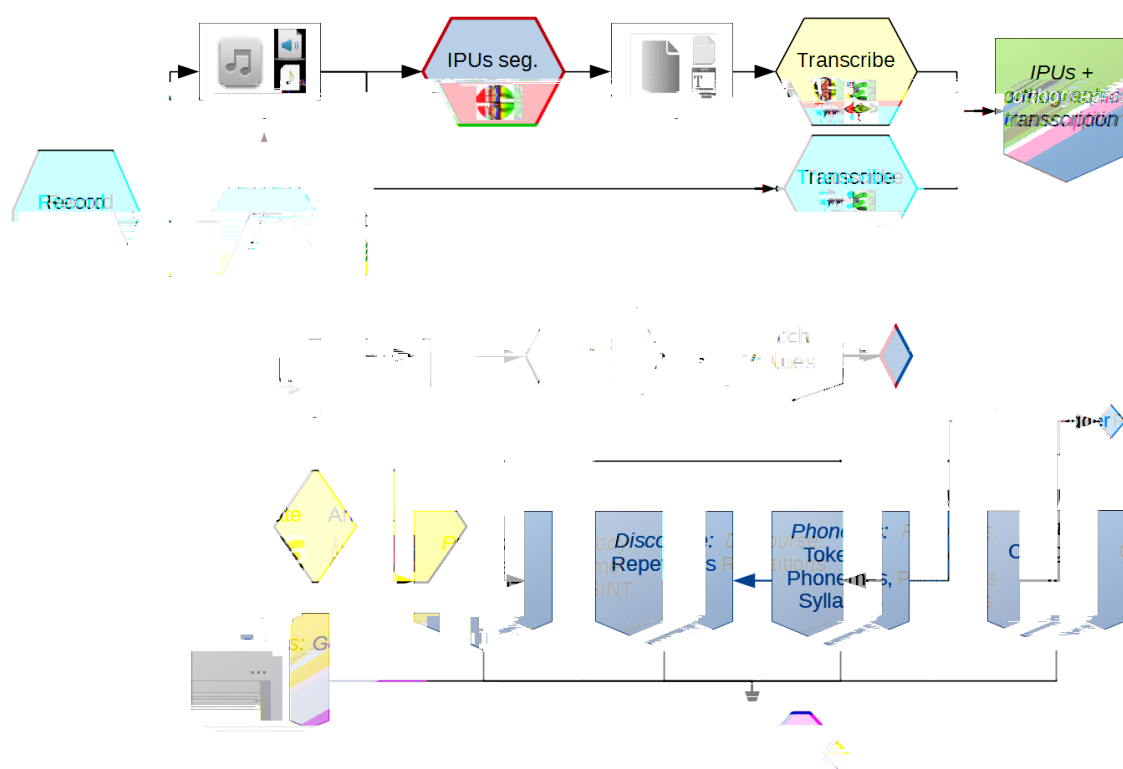


Figure 3.1: Annotation methodology

At the end of each automatic annotation process, SPPAS produces a *Procedure Outcome Report* that contains important information about the annotations. This window opens in the scope to be read by users (!) and can be saved with the annotated corpus. It mentions all parameters and eventually warnings and errors that occurred during the annotation process.

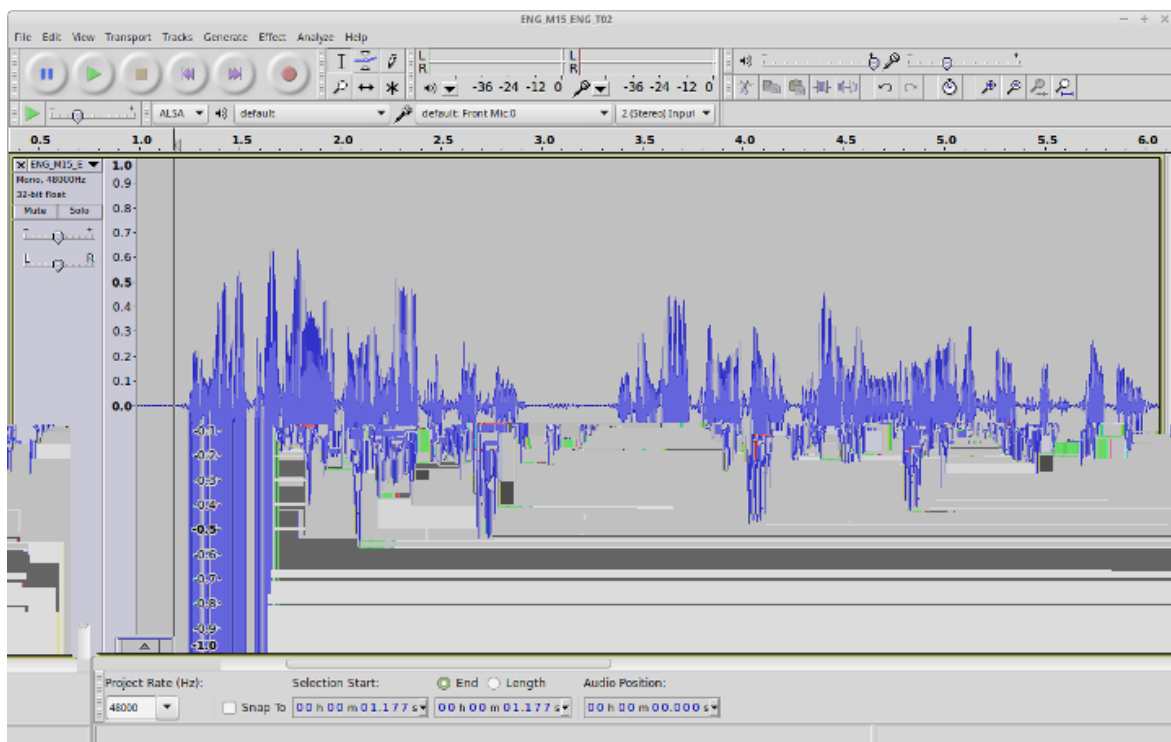


Figure 3.2: Example of expected recorded speech

3. Select the language for all annotations in one; or for each annotation independently by clicking on the “chains” button first then selecting each language.
4. Click on the *Perform annotations* button, and wait. Be patient! Particularly for Text Normalization or Phonetization: loading resources (lexicons or dictionaries) can be very long. Sometimes, the progress bar does not really show the progress... it depends on the operating system and the power of the computer. So, just wait!
5. It is important to read the Procedure Outcome report to check that everything happened normally during the automatic annotations.

Automatic Annotations with CLI

To perform automatic annotations with SPPAS Command-line User Interface, there is a main program `annotation.py`. Each annotation has also its own program with more options than the previous one.

This main program performs automatic annotations on a given file or on all files of a directory. It strictly corresponds to the button *Perform annotations* of the GUI. All annotations are pre-configured: no specific option can be specified. The options of annotations are fixed files with extension `.ini` in `sppas/etc` folder.

```
usage: annotation.py -w file|folder [options]
```

optional arguments:

```
-h, --help          show this help message and exit
-w file|folder      Input wav file name, or folder
```

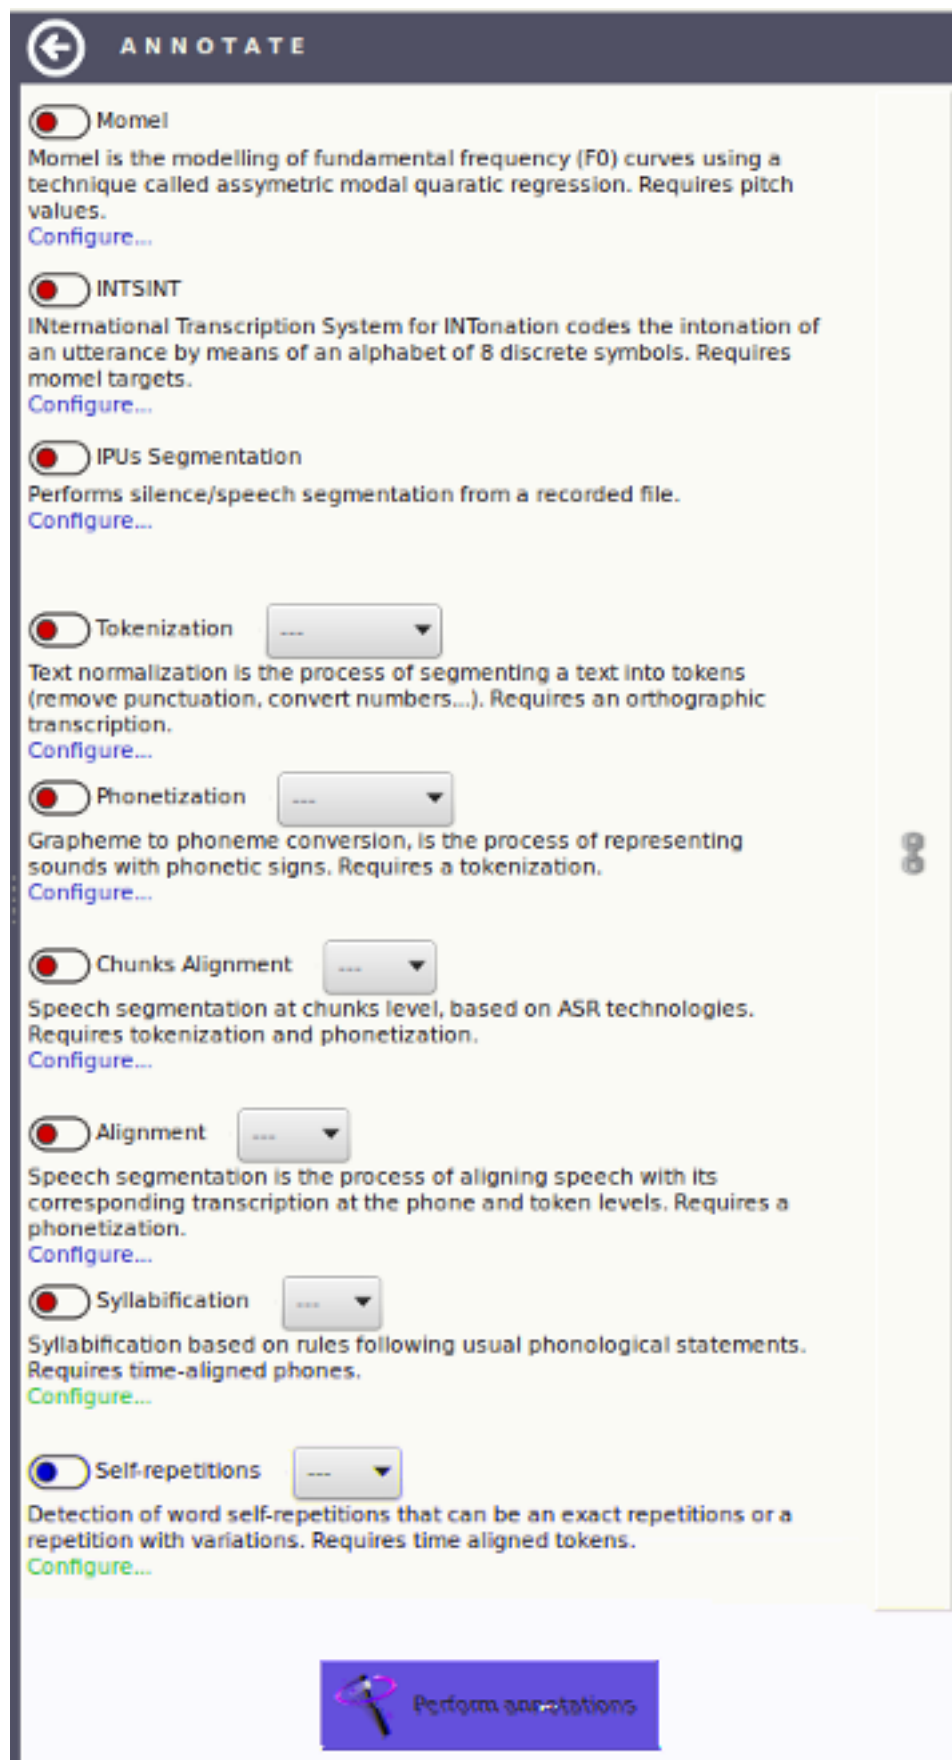


Figure 3.3: The annotate panel

```

-l lang          Input language, using iso639-3 code
-e extension     Output extension. One of: xra, textgrid, eaf, csv, ...
--momel         Activate Momel and INTSINT
--ipu           Activate IPUs Segmentation
--tok           Activate Text Normalization
--phon          Activate Phonetization
--align         Activate Alignment
--syll          Activate Syllabification
--rep           Activate Repetitions
--all           Activate ALL automatic annotations
--merge         Create a merged TextGrid file, if more than two automatic
                annotations (this is the default).
--nomerge       Do not create a merged TextGrid file.

```


Examples of use:

```

./sppas/bin/annotation.py -w ./samples/samples-eng
                        -l eng
                        --ipu --tok --phon --align

```

A progress bar is displayed for each annotation. At the end of the process, a message indicates the name of the procedure outcome report file, which is `./samples/samples-eng.log` in our example. This file can be opened with any text editor (as Notepad++, vim, TextEdit, ...).

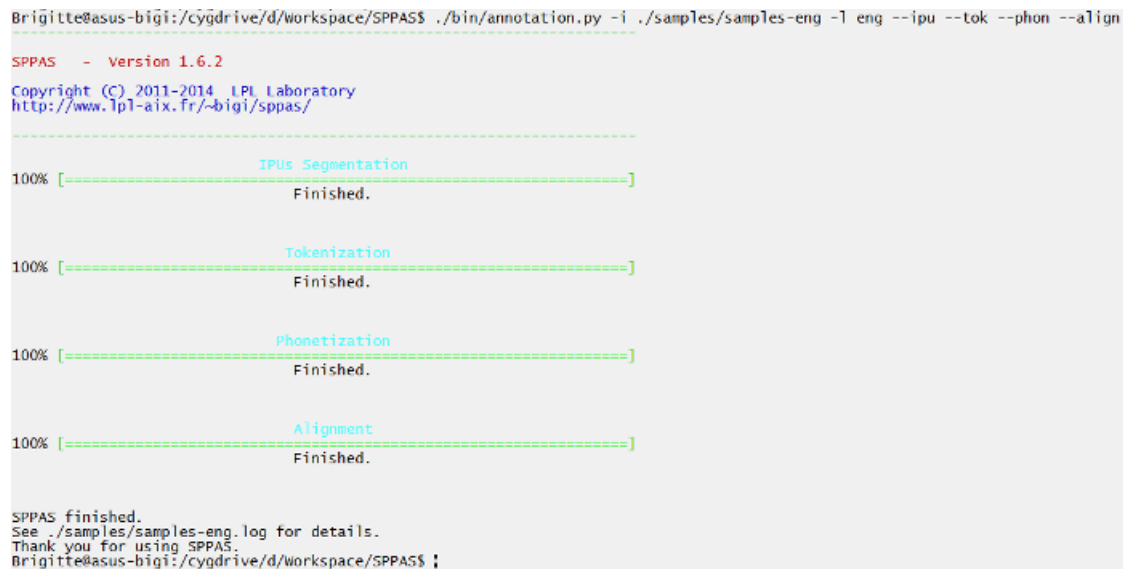

```

Brigitte@asus-bigi:/cygdrive/d/workspace/SPPAS$ ./bin/annotation.py -i ./samples/samples-eng -l eng --ipu --tok --phon --align

SPPAS - Version 1.6.2
Copyright (C) 2011-2014 LPL Laboratory
http://www.lpl-aix.fr/~bigi/sppas/

100% [=====] IPUs Segmentation
                        Finished.

100% [=====] Tokenization
                        Finished.

100% [=====] Phonetization
                        Finished.

100% [=====] Alignment
                        Finished.

SPPAS finished.
See ./samples/samples-eng.log for details.
Thank you for using SPPAS.
Brigitte@asus-bigi:/cygdrive/d/workspace/SPPAS$ ;

```

Figure 3.4: CLI: annotation.py output example

The procedure outcome report

It is very important to read conscientiously this report: it mentions exactly what happened during the automatic annotation process. This text can be saved: it is recommended to be kept it with the related data because it contains information that are interesting to know for anyone using the annotations.

The text first indicates the version of SPPAS that was used. This information is very important. Annotations in SPPAS and their related resources are regularly improved and then, the result of the automatic process can change from one version to the other one.

Example:

```
SPPAS version 1.9.0
Copyright (C) 2011-2017 Brigitte Bigi
Site web: http://www.sppas.org/
Contact: Brigitte Bigi (brigitte.bigi@gmail.com)
```

Secondly, the text mentions information related to the given input:

1. the selected language of each annotation, only if the annotation is language-dependent). For some language-dependent annotations, SPPAS can still perform the annotation even if the resources for a given language are not available: in that case, select “und”, which is the iso639-3 code for “undetermined”.
2. the list of files to be annotated.
3. the list of annotations and if each annotation was activated or disabled. In that case, activated means that the checkbox of the AAP was checked by the user and that the resources are available for the given language. On the contrary, disabled means that either the checkbox of the AAP was not checked or the required resources are not available.
4. the file format of the resulting files.

Example:

```
Date: 2017-07-05 12:15:40.637000
Langages sélectionnés:
- Momel:
- INTSINT:
- IPUs Segmentation:
- Text Normalization: eng
- Phonetization: eng
- Alignment: eng
- Syllabification: und
- Self-repetitions: eng
```

```
-----
Fichiers sélectionnés:
- oriana1.wav
```

```
-----
Annotations sélectionnées:
- Momel: désactivé
- INTSINT: désactivé
- IPUs Segmentation: sélectionné
- Text Normalization: sélectionné
- Phonetization: sélectionné
- Alignment: sélectionné
- Syllabification: désactivé
- Self-repetitions: désactivé
```

```
-----
Extension de fichiers: .xra
```

Thirdly, each automatic annotation is described in details, for each annotated file. At a first stage, the list of options and their value is summarized. Example:

```
... Text Normalization du fichier oriana1.wav
...   ... Options:
...   ...   - faked: True
...   ...   - std: False
...   ...   - custom: False
```

Then, a diagnosis of the given file is printed. This latter can be: 1. “Valid”: the file is relevant 2. “Admit”: the file is not as expected but SPPAS will convert it in a copy and work on it. 3. “Invalid”: SPPAS can’t work with that file. The annotation of this file is disabled. In case 2 and 3, a message indicates the origin of the problem.

Example of “Valid” diagnosis:

```
...   ... Diagnostic:
...   ...   - oriana1.xra: Valide.
```

Example of “Admit” diagnosis:

```
...   ... Diagnostic:
...   ...   - M_3.wav: Admis. La taux d’échantillonnage d’un fichier audio est
de préférence 16000 Hz. Ce fichier est échantillonné à 44100 Hz, SPPAS créera une
copie et travaillera sur celle-ci.
...   ...   - M_3-phon.xra: Valide.
...   ...   - M_3-token.xra: Valide.
```

Then, if any, the annotation procedure prints message. Four levels of information must draw your attention:

1. “[OK]” means that everything happened normally. The annotation was performed successfully.
2. “[IGNORE]” means that SPPAS ignored the file and didn’t do anything.
3. “[WARNING]” means that something happened abnormally, but SPPAS found a solution, and the annotation was still performed successfully.
4. “[ERROR]” means that something happened abnormally and SPPAS failed to found a solution. The annotation was either not performed, or performed with a bad result.

Example of “Warning” message:

```
...   ... Export AP_track_0711.TextGrid
...   ... into AP_track_0711.xra
...   ... [ IGNORE ] because a previous segmentation is existing.
```

Example of “Warning” message:

```
...   ... [ WARNING ] chort- est absent du dictionnaire et a été phonétisé
automatiquement S-o-R-t
```

At the end of the report, the “Result statistics” section mentions the number of files that was annotated for each step, or -1 if the annotation was disabled.

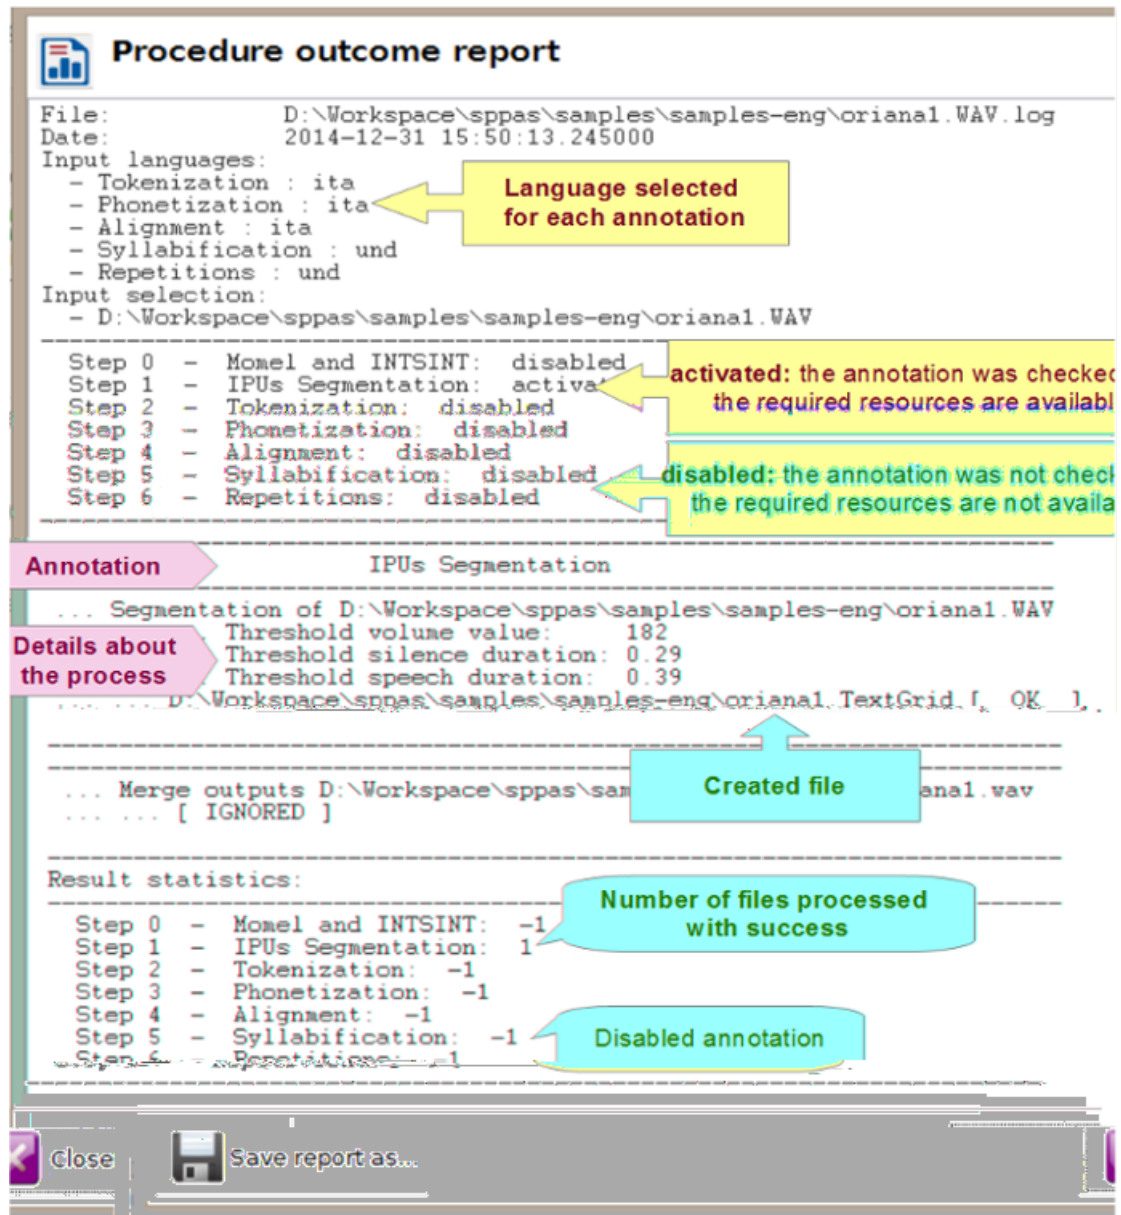


Figure 3.5: Procedure outcome report

New language support

Some of the annotations are requiring linguistic resources in order to work efficiently on a given language: text normalization requires a lexicon, phonetization requires a pronunciation dictionary, etc. Each section of this chapter which is describing an annotation is also including *the way to create the related resource*. The next chapter contains details about the existing resources - list of phonemes, authors, licenses, etc.

While starting SPPAS, the Graphical User Interface dynamically creates the list of available languages of each annotation by exploring the related folder. This means that:

- appended resources are automatically taken into account (ie. there's no need to modify the program itself);
- SPPAS needs to be re-started if new resources are appended while it was already being running.

Orthographic Transcription

An orthographic transcription is often the minimum requirement for a speech corpus so it is at the top of the annotation procedure, and it is the entry point for most of the automatic annotations. *Transcription conventions* are then designed to provide rules for writing speech corpora. These conventions establish which are the phenomena to transcribe and also how to mention them in the orthography.

In speech, many phonetic variations occur. Some of these phonologically known variants are predictable and can be included in the pronunciation dictionary but many others are still unpredictable like invented words, regional words or words borrowed from another language. These specifics have a direct consequence on the automatic phonetization procedure (Bigi 2012). As a consequence, from the beginning of its development it was considered to be essential for SPPAS to deal with an **Enriched Orthographic Transcription**.

The transcription convention is summarized below. Notice that all the symbols must be surrounded by whitespace. The file `TOE-SPPAS.pdf` available in the `documentation` folder gives details of the convention, including examples of what is recommended.

Convention overview:

- truncated words, noted as a '-' at the end of the token string (an ex- example);
- noises, noted by a '*' (not available for: English, Japanese and Cantonese);
- laughs, noted by a '@' (not available for: English, Japanese and Cantonese);
- short pauses, noted by a '+';
- elisions, mentioned in parenthesis;
- specific pronunciations, noted with brackets [example,eczap];
- comments are noted inside braces or brackets without using comma {this} or [this and this];
- liaisons, noted between '=' (an =n= example);
- morphological variants with <like,lie ok>;
- proper name annotation, like \$ John S. Doe \$.

SPPAS also allows to include in the transcription the regular punctuations, and numbers (not available for some languages). Numbers will be automatically converted to their written form during Text Normalization process.

From this Enriched Orthographic construction, several derived transcriptions can be generated automatically, including the followings:

1. the standard transcription is the list of orthographic tokens
2. a specific transcription from which the phonetic tokens are obtained to be used by the grapheme-phoneme converter that is named faked transcription.

As for example with the transcribed sentence: *This [is,iz] + hum... an enrich(ed) transcription {loud} number 1!*. The derived transcriptions are:

- standard: *this is + hum an enriched transcription number one*
- faked: *this iz + hum an enrich transcription number one*

The convention then allows to include a large scale of phenomena, for which most of them are optional. As a minimum, the orthographic **transcription must include**:

- filled pauses;
- short pauses;
- repeats;
- noises and laugh items (not available for: English, Japanese and Cantonese).

Finally, it has to be noticed that this convention is not software-dependent. The orthographic transcription can be performed with IPUscrber tool of SPPAS, Praat, Annotation Pro, Audacity, ...

Inter-Pausal Units (IPUs) segmentation

Overview

After recording, the first annotation to perform is IPUs segmentation. At the early first stage, the Inter-Pausal Units (IPUs) must be automatically detected in the audio signal. IPUs are blocks of speech bounded by silent pauses of more than X ms. An annotated file with the bounds of IPUs is then created. This segmentation should be verified manually: the better recording quality, thus the better IPUs segmentation.

The “IPUs segmentation” automatic annotation can perform 3 actions:

1. find silences/ipus of a recorded file.
2. find silences/ipus of a recorded file when the utterances are given in a `txt` file.
3. split/save a recorded file into multiple files, depending on segments indicated in a time-aligned file.

Notice that all time values are indicated in seconds.

Silence/Speech segmentation

The IPUs Segmentation annotation performs a silence detection from a recorded file. This segmentation provides an annotated file with one tier named “IPU”. The silence intervals are labelled with the “#” symbol, as ipus intervals are labelled with “ipu_” followed by the IPU number.

The following parameters must be properly fixed:

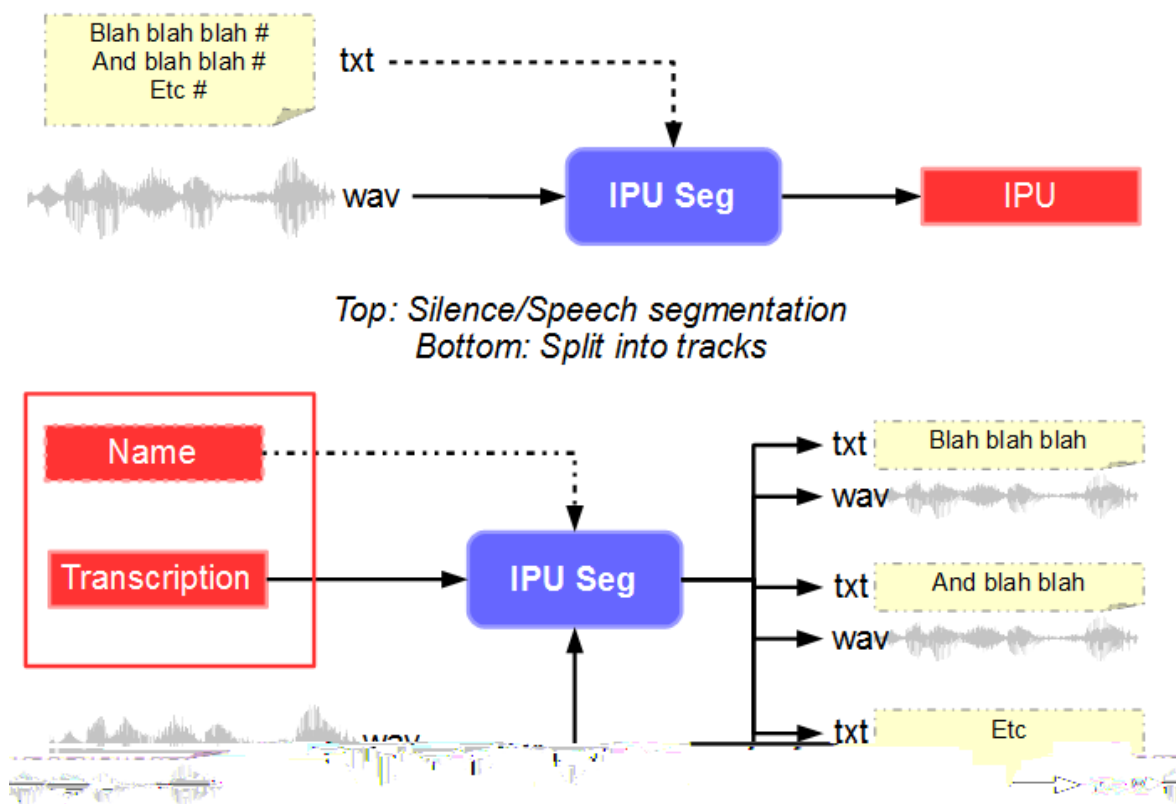


Figure 3.6: IPU Segmentation workflow

- Minimum volume value (in seconds): If this value is set to zero, the minimum volume is automatically adjusted for each sound file. Try with it first, then if the automatic value is not correct, set it manually. The Procedure Outcome Report indicates the value the system choose. The AudioRoamer component can also be of great help: it indicates min, max and mean volume values of the sound.
- Minimum silence duration (in seconds): By default, this is fixed to 0.2 sec. This duration mostly depends on the language. It is commonly fixed to at least 0.2 sec for French and at least 0.25 seconds for English language.
- Minimum speech duration (in seconds): By default, this value is fixed to 0.3 sec. A relevant value depends on the speech style: for isolated sentences, probably 0.5 sec should be better, but it should be about 0.1 sec for spontaneous speech.
- IPU's boundary shift (in seconds) for start or end: a duration which is systematically added to ipus boundaries, to enlarge the ipus interval, and as a consequence, the neighboring silences are reduced.

The following options are also available to configure the annotation: * Add the IPU index in each interval of the Transcription tier * Split the audio file into tracks (only if silence/ipus segmentation is already available) * Save tracks as annotation files (only if silence/ipus segmentation is already available)

The procedure outcome report indicates the values (volume, minimum durations) that was used by the system for each sound file given as input. It also mentions the name of the result file.

```
... IPU's Segmentation of file oriana1.wav
...   ... [ INFO ] A transcription was found, perform Silence/Speech segmentation
time-aligned with a transcription oriana1.txt
...   ... Options:
...   ...   - save_as_trs: False
...   ...   - dirtracks: False
...   ...   - addipuidx: True
...   ... Diagnostic:
...   ...   - oriana1.wav: Valide.
...   ...   Threshold volume value:      122
...   ...   Threshold silence duration: 0.3
...   ...   Threshold speech duration: 0.5
...   ... [ OK ] oriana1.xra
```

The annotated file can be checked manually (preferably in SPPAS Visualizer tool or in Praat). If such values was not correct, then, delete the annotated file that was previously created, change the default values and re-annotate.

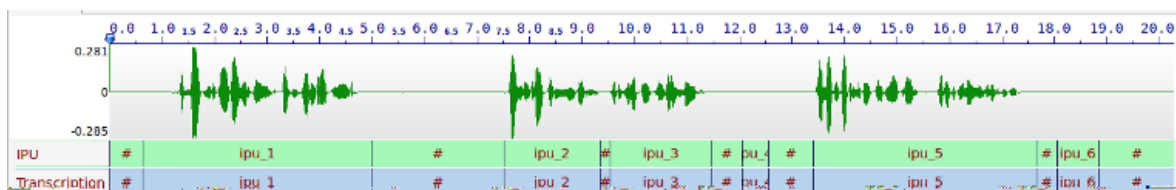


Figure 3.7: Result of IPU's Segmentation: silence detection

Notice that the speech segments can be transcribed using the SPPAS “IPUScriber” tool.

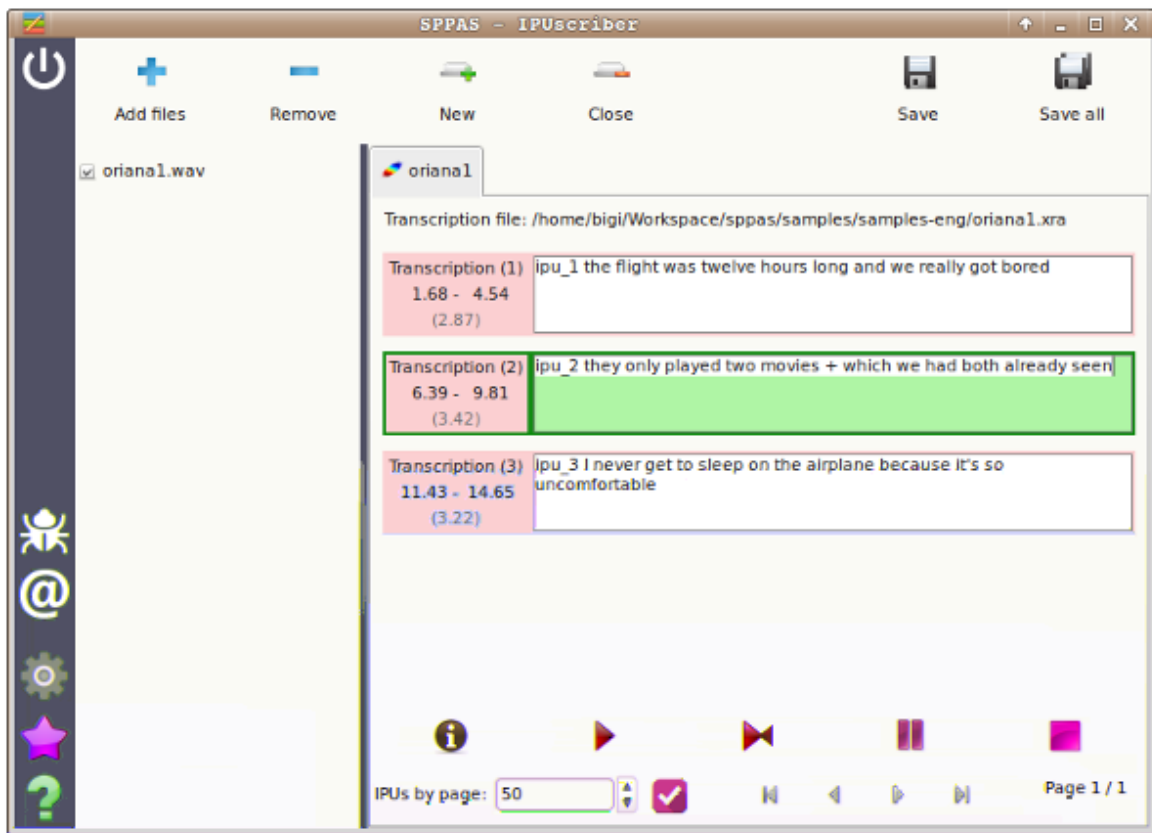


Figure 3.8: Orthographic transcription based on IPUs Segmentation

Silence/Speech segmentation time-aligned with a transcription

Inter-Pausal Units segmentation can also consist in aligning macro-units of a document with the corresponding sound.

SPPAS identifies silent pauses in the signal and attempts to align them with the utterances proposed in the transcription file, under the assumption that each such unit is separated by a silent pause. This algorithm is language-independent: it can work on any language.

In the transcription file, **silent pauses must be indicated** using both solutions, which can be combined:

- with the symbol ‘#’
- with newlines.

A recorded speech file must strictly correspond to a `txt` file of the transcription. The segmentation provides an annotated file with one tier named “IPU”. The silence intervals are labelled with the “#” symbol, as ipus intervals are labelled with “ipu_” followed by the IPU number then the corresponding transcription.

The same parameters than those indicated in the previous section must be fixed.

Important: This segmentation was tested on documents no longer than one paragraph (about 1 minute speech).

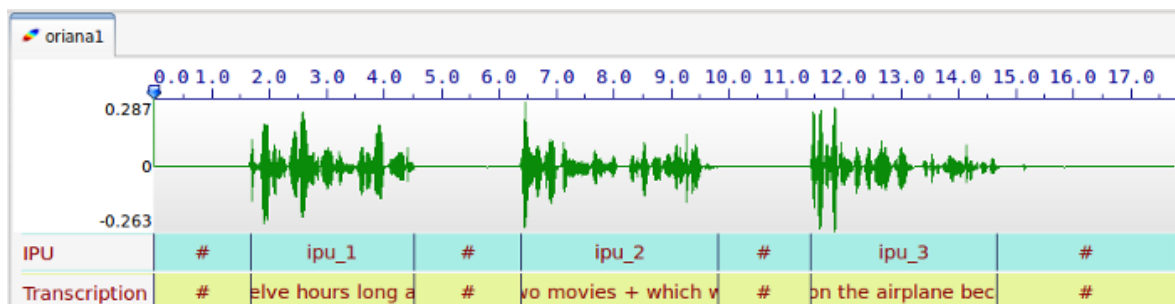


Figure 3.9: Silence/Speech segmentation with orthographic transcription

Split into multiple files

IPUs segmentation can split the sound into multiple files (one per IPU), and it creates a text file for each of the tracks. By default, the names of the output files are “track_0001”, “track_0002”, etc. Optionally, if the input annotated file contains a tier with name exactly “Name”, then the content of this tier will be used to fix output file names.

In the example above, the automatic process will create 6 files: FLIGHT.wav, FLIGHT.txt, MOVIES.wav, MOVIES.txt, SLEEP.wav and SLEEP.txt. It is up to the user to perform another IPUs segmentation of these files to get another file format than txt (xra, TextGrid, ...). Refer to the previous section “Silence/Speech segmentation time-aligned with a transcription”.

Perform IPUs Segmentation with the GUI

Click on the IPUs Segmentation activation button and on the “Configure...” blue text to fix options.



Figure 3.10: Data to split

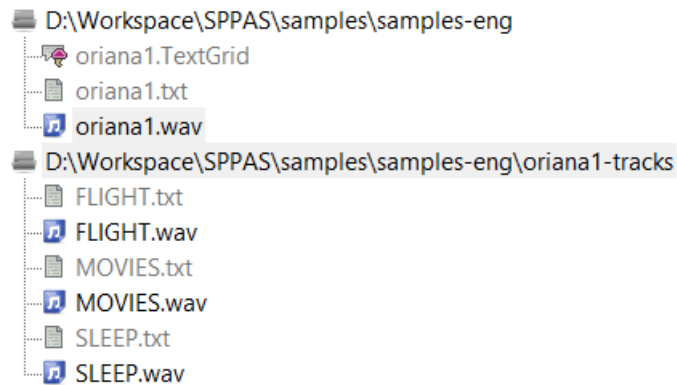


Figure 3.11: Data split

Perform IPUs Segmentation with the CLI

`wavsplit.py` is the program to perform the IPUs segmentation, i.e. silence/ipus segmentation.

```
usage: wavsplit.py -w file [options]
```

Generic options:

```

-w file          audio input file name
-d delta shift   Add this time value to each start
                  bound of the IPUs
-D delta shift   Add this time value to each end
                  bound of the IPUs
-h, --help       Show the help message and exit
  
```

Options that can be fixed for the silence/ipus segmentation:

```

-r float         Window size to estimate rms, in seconds
                  (default value is: 0.010)
-m value         Drop speech shorter than m seconds long
                  (default value is: 0.300)
-s value         Drop silences shorter than s seconds long
                  (default value is: 0.200)
-v value         Assume that a rms lower than v is a silence
                  (default value is: 0 which means to auto-adjust)
  
```

Options that can be fixed for the silence/ipus segmentation with a given orthographic transcription. It must be choose one of -t or -n options:

```
-t file      Input transcription file (default: None)
-n value     Input transcription tier number (default: None)
-N           Adjust the volume cap until it splits
            into nb tracks (default: 0=automatic)
```

Output options:

```
-o dir       Output directory name          (default: None)
-e ext       Output tracks extension        (default: txt)
-p file      File with the segmentation     (default: None)
```

Examples of use to get each IPU in a separate wav file and its corresponding transcription in a textgrid file:

```
Step1: find silences/ipus ~~~~ ./sppas/bin/wavsplit.py -w ./samples/samples-eng/oriana1.wav -d 0.01 -D 0.01
-t ./samples/samples-eng/oriana1.txt -p ./samples/samples-eng/oriana1.xra ~~~~
```

```
Step2: split ipus into individual tracks ~~~~ ./sppas/bin/wavsplit.py -w ./samples/samples-eng/oriana1.wav
-t ./samples/samples-eng/oriana1.xra -o ./samples/samples-eng/oriana1 -e textgrid ~~~~
```

Text normalization

Overview

In principle, any system that deals with unrestricted text need the text to be normalized. Texts contain a variety of “non-standard” token types such as digit sequences, words, acronyms and letter sequences in all capitals, mixed case words, abbreviations, roman numerals, URL’s and e-mail addresses... Normalizing or rewriting such texts using ordinary words is then an important issue. The main steps of the text normalization implemented in SPPAS (Bigi 2011) are:

- Replace symbols by their written form, thanks to a “replacement” dictionary, located into the folder “repl” in the “resources” directory.
- Word segmentation based on the content of a lexicon.
- Convert numbers to their written form.
- Remove punctuation.
- Lower the text.

Adapt Text normalization

Word segmentation of SPPAS is mainly based on the use of a lexicon. If a segmentation is not as expected, it is up to the user to modify the lexicon: Lexicons of all supported languages are all located in the folder “vocab” of the “resources” directory. They are in the form of “one word at a line” with [UTF-8 encoding](#) and “LF” for newline.

Support of a new language

Adding a new language in Text Normalization consists in the following steps:

1. Create a lexicon. Fix properly its encoding (utf-8), its newlines (LF), and fix the name and extension of the file as follow:
 - language name with iso639-3 standard
 - extension “.vocab”
2. Put this lexicon in the `resources/vocab` folder
3. Create a replacement dictionary for that language (take a look on the ones of the other language!)
4. Optionally, the language can be added into the `num2letter.py` program

That’s it for most of the languages! If the language requires more steps, simply write to the author to collaborate, find some funding, etc. like it was already done for Cantonese (Bigi & Fung 2015) for example.

Perform Text Normalization with the GUI

The SPPAS Text normalization system takes as input a file (or a list of files) for which the name strictly match the name of the audio file except the extension. For example, if a file with name “oriana1.wav” is given, SPPAS will search for a file with name “oriana1.xra” at a first stage if “.xra” is set as the default extension, then it will search for other supported extensions until a file is found.

This file must include a tier with an orthographic transcription. At a first stage, SPPAS tries to find a tier with `transcription` as name. If such a tier does not exist, the first tier that is matching one of the following strings is used (case-insensitive search):

1. `trans`
2. `trs`
3. `ipu`
4. `ortho`
5. `toe`

Text normalization produces a file with “-token” appended to its name, i.e. “oriana1-token.xra” for the previous example. By default, this file is including only one tier with the resulting normalization and with name “Tokens”. To get other versions of the normalized transcription, click on the “Configure” text then check the expected tiers.

Read the “Introduction” of this chapter for a better understanding of the difference between “standard” and “faked” results.

To perform the text normalization process, click on the Text Normalization activation button, select the language and click on the “Configure...” blue text to fix options.

Perform Text Normalization with the CLI

`normalize.py` is the program to perform Text Normalization, i.e. the text normalization of a given file or a raw text.

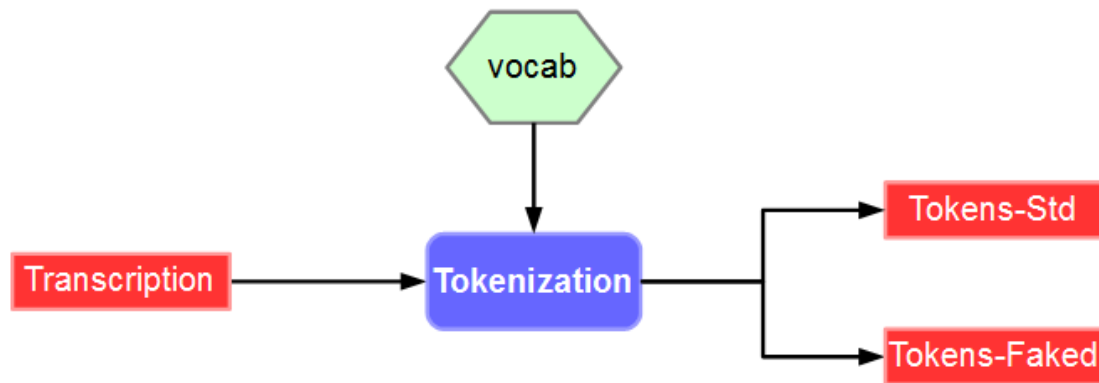


Figure 3.12: Text normalization workflow

```
usage: normalize.py -r vocab [options]

optional arguments:
  -r vocab          Vocabulary file name
  -i file          Input file name
  -o file          Output file name
  --delimiter char Use a delimiter character instead of a space for word delimiter.
  -h, --help       Show the help message and exit
```

The following situations are possible:

1. no input is given: the input is `stdin` and the output is `stdout` (if an output file name is given, it is ignored). Only the normalization with a faked orthography is printed.
2. an input and an output are given: the output file is created (or erased if the file already exists) and the result of the process is added to this file..

Example of use, using `stdin/stdout`:

```
$ echo "The te(xt) to normalize 123." | \
  ./sppas/bin/normalize.py
-r ./resources/vocab/eng.vocab
$ the te to normalize one_hundred_twenty-three
```

In that case, the elision mentioned with the parenthesis is removed and the number is converted to its written form. The character “_” is used for compound words (it replaces the whitespace).

Example of use on a transcribed file:

```
$ ./sppas/bin/normalize.py -r ./resources/vocab/eng.vocab
-i ./samples/samples-eng/oriana1.xra
-o ./samples/samples-eng/oriana1-token.xra
```

Phonetization

Overview

Phonetization, also called grapheme-phoneme conversion, is the process of representing sounds with phonetic signs. However, converting from written text into actual sounds, for any language, cause several problems that have their origins in the relative lack of correspondence between the spelling of the lexical items and their sound contents. As a consequence, SPPAS implements a dictionary based-solution which consists in storing a maximum of phonological knowledge in a lexicon. This approach is then language-independent. SPPAS phonetization process is the equivalent of a sequence of dictionary look-ups.

Most of the other systems assume that all words of the speech transcription are mentioned in the pronunciation dictionary. On the contrary, SPPAS includes a language-independent algorithm which is able to phonetize unknown words of any language as long as a (minimum) dictionary is available (Bigi 2013). The Procedure Outcome Report reports on such cases with a WARNING message.

Adapt Phonetization

Since Phonetization is only based on the use of a pronunciation dictionary, the quality of the result only depends on this resource. If a pronunciation is not as expected, it is up to the user to change it in the dictionary: Dictionaries are located in the folder “dict” of the “resources” directory. They are all with [UTF-8 encoding](#) and “[LF](#)” for newline. The format of the dictionaries is HTK-like. As example, below is a piece of the `eng.dict` file:

| | | |
|-----------|-------------|----------------|
| THE | [THE] | D @ |
| THE (2) | [THE] | D V |
| THE (3) | [THE] | D i: |
| THEA | [THEA] | T i: @ |
| THEALL | [THEALL] | T i: l |
| THEANO | [THEANO] | T i: n @U |
| THEATER | [THEATER] | T i: @ 4 3:r |
| THEATER'S | [THEATER'S] | T i: @ 4 3:r z |

The first column indicates the word, followed by the variant number (except for the first one). The second column indicates the word between brackets. The last columns are the succession of phones, separated by a whitespace. SPPAS is relatively compliant with the format and accept empty brackets or missing brackets.

The phoneset of the languages are mainly based on [X-SAMPA](#) international standard. See the chapter “Resources” of this documentation to know the list of accepted phones for a given language. This list can't be extended nor modified by users. However, new phones can be added: Send an e-mail to the author to collaborate in that way.

Actually, some words can correspond to several entries in the dictionary with various pronunciations. These pronunciation variants are stored in the phonetization result. By convention, whitespace separate words, minus characters separate phones and pipe character separate phonetic variants of a word. For example, the transcription utterance:

- Transcription: The flight was 12 hours long.
- Text Normalization: the flight was twelve hours long
- Phonetization: D-@|D-V|D-i: f-l-aI-t w-A-z|w-V-z|w-@-z|w-O:-z t-w-E-l-v aU-3:r-z|aU-r-z l-O:-N

Support of a new language

The support of a new language in Phonetization only consists in: 1. creating the pronunciation dictionary. The following constraints on the file must be respected: - its format (HTK-like), - its encoding (UTF-8), - its newlines (LF), - its phone set (X-SAMPA), - its file name (iso639-3 of the language and “.dict” extension). 2. adding the dictionary in the “dict” folder of the “resources” directory.

Perform Phonetization with the GUI

The Phonetization process takes as input a file that strictly match the audio file name except for the extension and that “-token” is appended. For example, if the audio file name is “oriana1.wav”, the expected input file name is “oriana1-token.xra” if .xra is the default extension for annotations. This file must include a **normalized** orthographic transcription. The name of such tier must contains one of the following strings:

1. “tok”
2. “trans”

The first tier that matches one of these requirements is used (this match is case-insensitive).

Phonetization produces a file with “-phon” appended to its name, i.e. “oriana1-phon.xra” for the previous example. This file contains only one tier with the resulting phonetization and with name “Phonetization”.

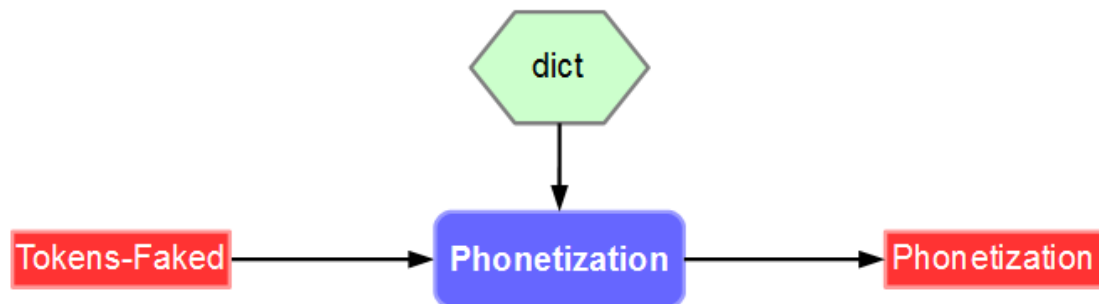


Figure 3.13: Phonetization workflow

To perform the annotation, click on the Phonetization activation button, select the language and click on the “Configure...” blue text to fix options.

Perform Phonetization with the CLI

`phonetize.py` is the program to perform Phonetization on a given file.

```
usage: phonetize.py -r dict [options]
```

optional arguments:

```

-r dict      Pronunciation dictionary file name (HTK-ASCII format)
-m map       Pronunciation mapping table
-i file      Input file name
-o file      Output file name
--nounk      Disable unknown word phonetization
-h, --help   Show the help message and exit

```

Examples of use:

```
$ echo "the te totu" |\
./sppas/bin/phonetize.py
-r ./resources/dict/eng.dict
--nounk
$ D-@|D-V|D-i: t-i: UNK
$
$ echo "the te totu" |\
./sppas/bin/phonetize.py -r ./resources/dict/eng.dict
$ D-@|D-V|D-i: t-i: t-u-t-u|t-i-t-u|t-A-t-u|t-@-t-u
```

If we suppose that the previous text was read by a French native speaker, the previous example can be phonetized as:

```
$ echo "the te totu" |\
./sppas/bin/phonetize.py
-r ./resources/dict/eng.dict
-m ./resources/dict/eng-fra.map
$ D-@|z-@|v-@|z-9|D-V|v-9|v-V|D-9|z-V|D-i:|z-i|v-i|D-i|v-i:|z-i:
t-i:|t-i
t-u-t-u|t-i-t-u|t-A-t-u|t-@-t-u
```

Example of use on a tokenized file:

```
./sppas/bin/phonetize.py
-d ./resources/dict/eng.dict
-i ./samples/samples-eng/oriana1-token.xra
-o ./samples/samples-eng/oriana1-phon.xra
```

Alignment

Overview

Alignment, also called phonetic segmentation, is the process of aligning speech with its corresponding transcription at the phone level. The alignment problem consists in a time-matching between a given speech unit along with a phonetic representation of the unit.

SPPAS Alignment does not perform the segmentation itself. It is a wrapper either for the Julius Speech Recognition Engine (SRE) or the `HVite` command of HTK-Toolkit.

Speech Alignment requires an Acoustic Model in order to align speech. An acoustic model is a file that contains statistical representations of each of the distinct sounds of one language. Each phoneme is represented by one of these statistical representations. The quality of the alignment result only depends on both this resource and on the aligner. From our past experiences, we got better results with Julius.

In addition, all acoustic models (except English, Japanese and Cantonese) include the following fillers: - dummy: un-transcribed speech - gb: garbage, for noises - @@: laughter

They allow SPPAS to time-align automatically these phenomena whose can be very frequent in speech, like laugh items (Bigi and Bertrand 2015). No other system is able to achieves this task!

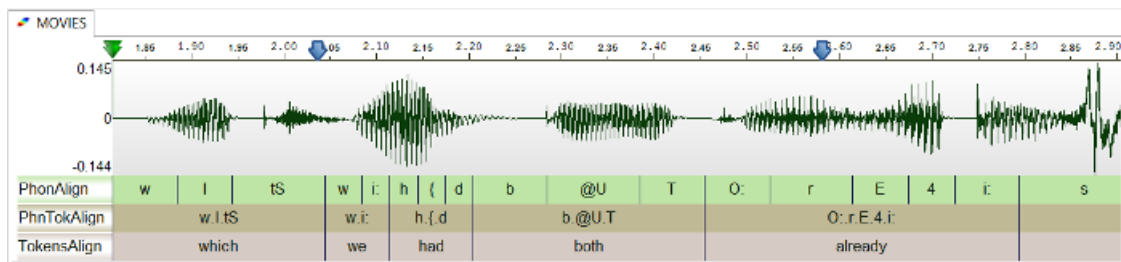


Figure 3.14: SPPAS alignment output example

Adapt Alignment

The better Acoustic Model, the better alignment results. Any user can append or replace the acoustic models included in the “models” folder of the “resources” directory. Be aware that SPPAS only supports HTK-ASCII acoustic models, trained from 16 bits, 16000 Hz wave files.

The existing models can be improved if they are re-trained with more data. To get a better alignment result, any new data is then welcome: send an e-mail to the author to share your recordings and transcripts.

Support of a new language

The support of a new language in Alignment only consists in adding a new acoustic model of the appropriate format, in the appropriate directory, with the appropriate phone set.

The articulatory representations of phonemes are so similar across languages that phonemes can be considered as units which are independent from the underlying language (Schultz et al. 2001). In SPPAS package, 9 acoustic models of the same type - i.e. same HMMs definition and acoustic parameters, are already available so that the phoneme prototypes can be extracted and reused to create an initial model for a new language.

Any new model can also be trained by the author, as soon as enough data is available. It is difficult to estimate exactly the amount of data a given language requires. That is said, we can approximate the minimum as follow:

- 3 minutes altogether of various speakers, manually time-aligned at the phoneme level.
- 10 minutes altogether of various speakers, time-aligned at the ipus level with the enriched orthographic transcription.
- more data is good data.

Perform Alignment with the GUI

The Alignment process takes as input one or two files that strictly match the audio file name except for the extension and that “-phon” is appended for the first one and “-token” for the optional second one. For example, if the audio file name is “oriana1.wav”, the expected input file name is “oriana1-phon.xra” with phonetization and optionally “oriana1-token.xra” with text normalization, if .xra is the default extension for annotations.

The speech segmentation process provides one file with name “-palign” appended to its name, i.e. “oriana1-palign.xra” for the previous example. This file includes one or two tiers:

- “PhonAlign” is the segmentation at the phone level;
- “TokensAlign” is the segmentation at the word level (if a file with tokenization was found).

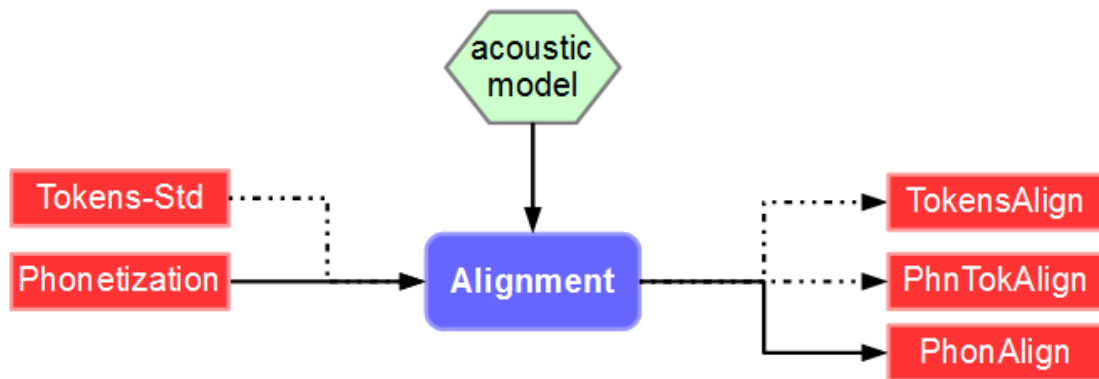


Figure 3.15: Alignment workflow

The following options are available to configure Alignment:

- choose the speech segmentation system. It can be either: julius, hvite or basic
- perform basic alignment if the aligner failed, instead such intervals are empty.
- remove working directory will keep only alignment result: it will remove working files. Working directory includes one wav file per unit and a set of text files per unit.
- create the Activity tier will append another tier with activities as intervals, i.e. speech, silences, laughter, noises...
- create the PhnTokAlign will append another tier with intervals of the phonetization of each word.

To perform the annotation, click on the Alignment activation button, select the language and click on the “Configure...” blue text to fix options.

Perform Alignment with the CLI

`alignment.py` is the program to perform automatic speech segmentation of a given file.

```
usage: alignment.py -w file -i file -r file -o file [options]
```

optional arguments:

```

-w file      Input wav file name
-i file      Input file name with the phonetization
-I file      Input file name with the tokenization
-r file      Directory of the acoustic model of the language of the text
-R file      Directory of the acoustic model of the mother language
              of the speaker
-o file      Output file name with alignments
-a name      Aligner name. One of: julius, hvite, basic (default: julius)
--extend     Extend last phoneme/token to the wav duration
--basic      Perform a basic alignment if error with the aligner
--inversp    Add 'sp' at the end of each token and let the aligner
              to decide the relevance
--noclean    Do not remove temporary data
-h, --help   Show the help message and exit

```

Example of use:

```
./sppas/bin/alignment.py
-r ./resources/models/models-eng
-w ./samples/samples-eng/oriana1.WAV
-i ./samples/samples-eng/oriana1-phon.xra
-I ./samples/samples-eng/oriana1-token.xra
-o ./samples/samples-eng/oriana1-palign.xra
```

Syllabification

Overview

The syllabification of phonemes is performed with a rule-based system from time-aligned phonemes. This phoneme-to-syllable segmentation system is based on 2 main principles:

- a syllable contains a vowel, and only one;
- a pause is a syllable boundary.

These two principles focus the problem of the task of finding a syllabic boundary between two vowels. Phonemes were grouped into classes and rules were established to deal with these classes.

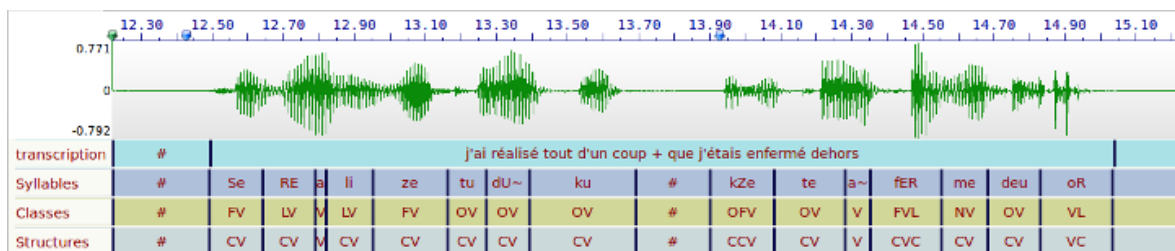


Figure 3.16: Syllabification example

Syllabification requires a configuration file to indicate phonemes, classes and rules.

Adapt Syllabification

Any user can change the set of rules by editing and modifying the configuration file of a given language. Files are located in the folder “syll” of the “resources” directory. Files are all with [UTF-8 encoding](#) and “[LF](#)” for [newline](#).

At first, the list of phonemes and the class symbol associated with each of the phonemes are described as, for example:

- PHONCLASS e V
- PHONCLASS p O

The couples phoneme/class are made of 3 columns: the first column is the key-word PHONCLASS, the second column is the phoneme symbol, the third column is the class symbol. The constraints on this definition are:

- a pause is mentioned with the class-symbol #,
- a class-symbol is only one upper-case character, except:
 - the character X is forbidden;
 - the characters V and W are reserved for vowels.

The second part of the configuration file contains the rules. The first column is a keyword, the second column describes the classes between two vowels and the third column is the boundary location. The first column can be:

- GENRULE
- EXCRULE
- OTHRULE.

In the third column, a 0 means the boundary is just after the first vowel, 1 means the boundary is one phoneme after the first vowel, etc. Here are some examples of the file for French language:

- GENRULE VXV 0
- GENRULE VXXV 1
- EXCRULE VFLV 0
- EXCRULE VOLGV 0

Finally, to adapt the rules to specific situations that the rules failed to model, we introduced some phoneme sequences and the boundary definition. Specific rules contain only phonemes or the symbol “ANY” which means any phoneme. It consists of 7 columns: the first one is the key-word OTHRULE, the 5 following columns are a phoneme sequence where the boundary should be applied to the third one by the rules, the last column is the shift to apply to this boundary. In the following example:

```
OTHRULE ANY ANY p s k -2
```

More information are available in (Bigi et al. 2010).

Support of a new language

The support of a new language in Syllabification only consists in adding its configuration file (see previous section). Fix properly its encoding (utf-8), its newlines (LF), and fix the name and extension of the file as follow:

- “syllConfig-” followed by language name with iso639-3 standard
- extension “.syll”

Perform Syllabification with the GUI

The Syllabification process takes as input a file that strictly match the audio file name except for the extension and that “-palign” is appended. For example, if the audio file name is “oriana1.wav”, the expected input file name is “oriana1-palign.xra” if .xra is the default extension for annotations. This file must include a tier containing the time-aligned phonemes with name “PhonAlign”.

The annotation provides an annotated file with “-salign” appended to its name, i.e. “oriana1-salign.xra” for the previous example. This file is including 3 tiers: Syllables, Classes and Structures.

Click on the Syllabification activation button, select the language and click on the “Configure...” blue text to fix options.

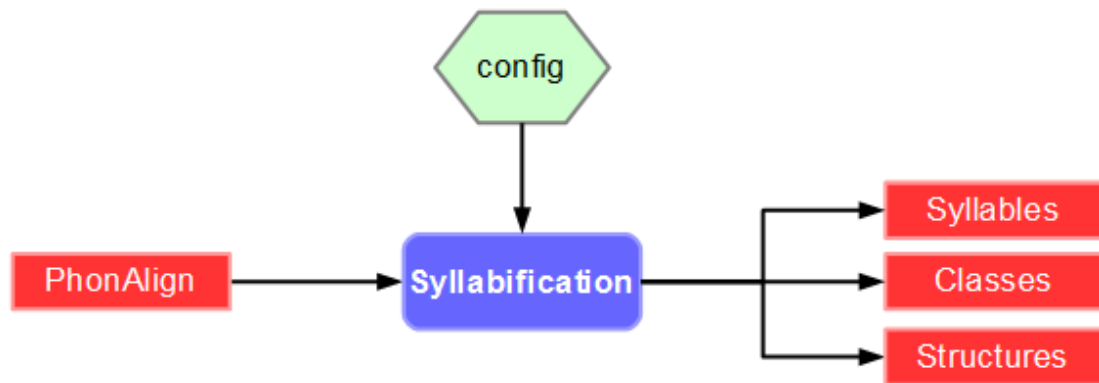


Figure 3.17: Syllabification workflow

Perform Syllabification with the CLI

`syllabify.py` is the program performs automatic syllabification of a given file with time-aligned phones.

```
usage: syllabify.py -r config [options]

optional arguments:
  -r config  Rules configuration file name
  -i file    Input file name (time-aligned phonemes)
  -o file    Output file name
  -e file    Reference file name to syllabify between intervals
  -t string  Reference tier name to syllabify between intervals
  --nophn   Disable the output of the result that does not use the reference tier
  -h, --help Show the help message and exit
```

Repetitions

Overview

This automatic detection focus on word repetitions, which can be an exact repetition (named strict echo) or a repetition with variation (named non-strict echo).

SPPAS implements *self-repetitions* and *other-repetitions* detection (Bigi et al. 2014). The system is based only on lexical criteria. The proposed algorithm is focusing on the detection of the source.

This process requires a list of stop-words, and a dictionary with lemmas but the system can process without them.

Adapt Repetitions and support of a new language

The result is significantly better if the right list of stop-words and a good dictionary of lemmas are available. Both are located in the “vocab” folder of the “resources” directory respectively with “.stp” and “.lem” extensions. These files are with [UTF-8 encoding](#) and [“LF” for newline](#).

Perform Repetitions with the GUI

The Graphical User Interface only allows to detect self-repetitions.

The automatic annotation takes as input a file with (at least) one tier containing the time-aligned tokens of the main speaker, and another file/tier for other-repetitions. The annotation provides one annotated file with 2 tiers: Sources and Repetitions.

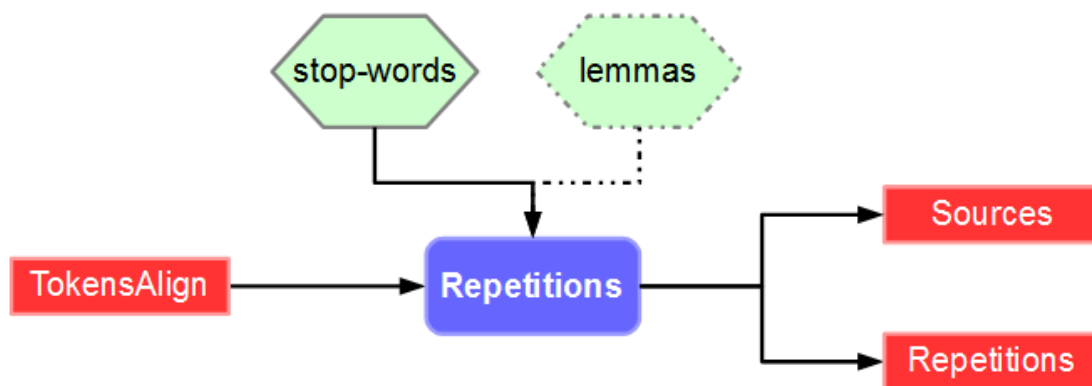


Figure 3.18: Repetition detection workflow

Click on the Self-Repetitions activation button, select the language and click on the “Configure...” blue text to fix options.

Perform Repetitions with the CLI

`repetition.py` is the program to perform automatic detection of self-repetitions or other-repetitions if data of a second speaker is given.

```
usage: repetition.py -i file [options]

optional arguments:
  -h, --help      show this help message and exit
  -i file         Input file name with time-aligned tokens of the self-speaker
  -r folder       Directory with resources
  -l lang         Language code in iso639-3
  -I file         Input file name with time-aligned tokens of the echoing-speaker
                  (if ORs)
  -o file         Output file name
```

Momel and INTSINT

Momel (modelling melody)

Momel is an algorithm for the automatic modeling of fundamental frequency (F0) curves using a technique called asymmetric modal quadratic regression.

This technique makes it possible by an appropriate choice of parameters to factor an F0 curve into two components:

- a macro-prosodic component represented by a quadratic spline function defined by a sequence of target points < ms, hz >.
- a micro-prosodic component represented by the ratio of each point on the F0 curve to the corresponding point on the quadratic spline function.

For details, see the following reference:

Daniel Hirst and Robert Espesser (1993). *Automatic modelling of fundamental frequency using a quadratic spline function*. Travaux de l'Institut de Phonétique d'Aix. vol. 15, pages 71-85.

The SPPAS implementation of Momel requires a file with the F0 values **sampled at 10 ms**. Two file formats are supported:

- “.PitchTier”, from Praat.
- “.hz”, from any tool. It is a file with one F0 value per line.

The following options can be fixed:

- Window length used in the “cible” method
- F0 threshold: Maximum F0 value
- F0 ceiling: Minimum F0 value
- Maximum error: Acceptable ratio between two F0 values
- Window length used in the “reduc” method
- Minimal distance
- Minimal frequency ratio
- Eliminate glitch option: Filter f0 values before ‘cible’

Encoding of F0 target points using the “INTSINT” system

INTSINT assumes that pitch patterns can be adequately described using a limited set of tonal symbols, T,M,B,H,S,L,U,D (standing for : Top, Mid, Bottom, Higher, Same, Lower, Up-stepped, Down-stepped respectively) each one of which characterises a point on the fundamental frequency curve.

The rationale behind the INTSINT system is that the F0 values of pitch targets are programmed in one of two ways : either as absolute tones T, M, B which are assumed to refer to the speaker's overall pitch range (within the current Intonation Unit), or as relative tones H, S, L, U, D assumed to refer only to the value of the preceding target point.

The rationale behind the INTSINT system is that the F0 values of pitch targets are programmed in one of two ways : either as absolute tones T, M, B which are assumed to refer to the speaker's overall pitch range (within the current Intonation Unit), or as relative tones H, S, L, U, D assumed to refer only to the value of the preceding target point.

A distinction is made between non-iterative H, S, L and iterative U, D relative tones since in a number of descriptions it appears that iterative raising or lowering uses a smaller F0 interval than non-iterative raising or lowering. It is further assumed that the tone S has no iterative equivalent since there would be no means of deciding where intermediate tones are located.

D.-J. Hirst (2011). *The analysis by synthesis of speech melody: from data to models*, Journal of Speech Sciences, vol. 1(1), pages 55-83.

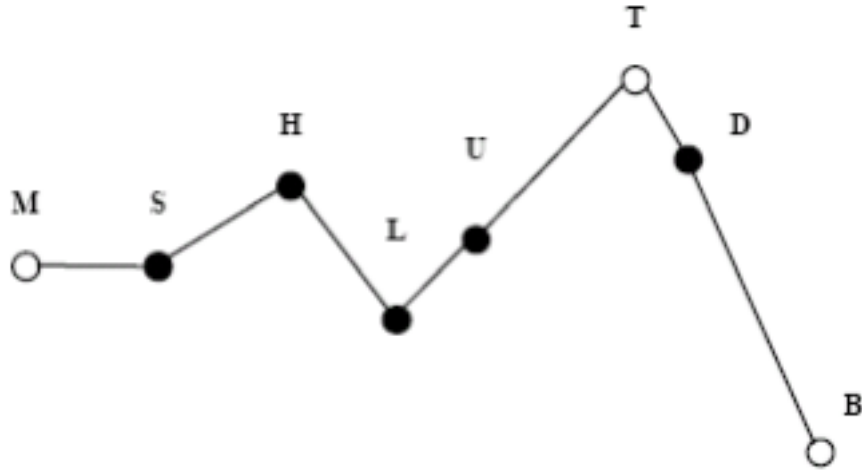


Figure 3.19: INTSINT example

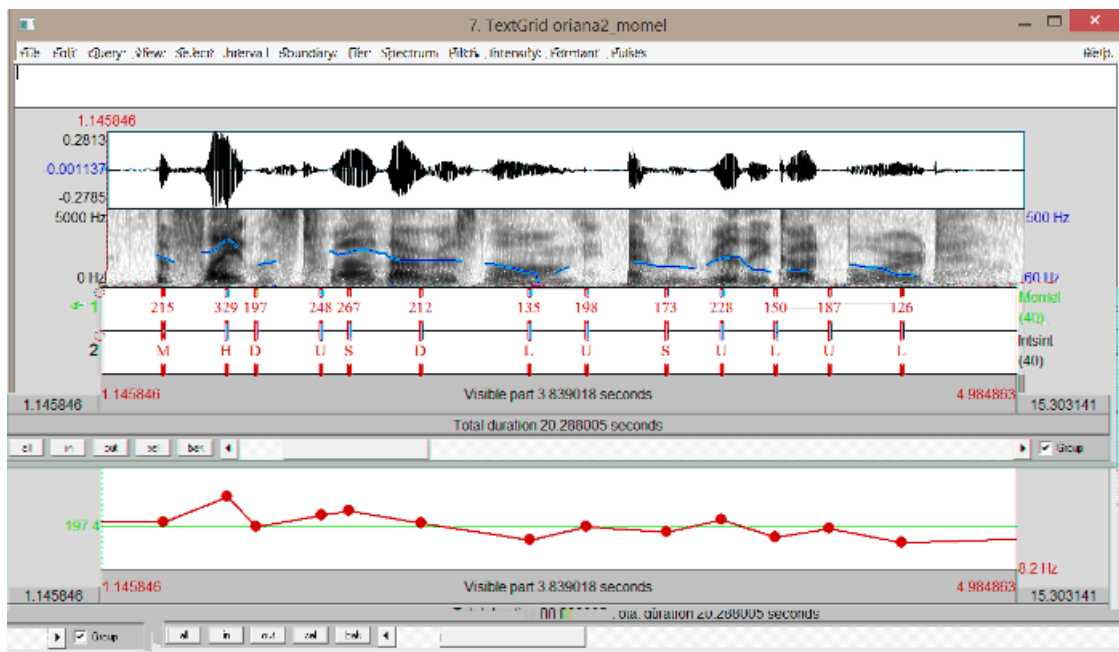


Figure 3.20:

Perform Momel and INTSINT with the GUI

Click on the Momel activation button, select the language and click on the “Configure...” blue text to fix options. And click on the INTSINT activation button.

Perform Momel and INTSINT with the CLI

`momel-intsint.py` is the program perform both momel and INTSINT.

```
usage: momel-intsint.py [options] -i file
```

optional arguments:

| | |
|--------------------------------|--|
| <code>-i file</code> | Input file name (extension: .hz or .PitchTier) |
| <code>-o file</code> | Output file name (default: stdout) |
| <code>--win1 WIN1</code> | Target window length (default: 30) |
| <code>--lo LO</code> | f0 threshold (default: 50) |
| <code>--hi HI</code> | f0 ceiling (default: 600) |
| <code>--maxerr MAXERR</code> | Maximum error (default: 1.04) |
| <code>--win2 WIN2</code> | Reduct window length (default: 20) |
| <code>--mind MIND</code> | Minimal distance (default: 5) |
| <code>--minr MINR</code> | Minimal frequency ratio (default: 0.05) |
| <code>--non-elim-glitch</code> | |
| <code>-h, --help</code> | Show the help message and exit |

Resources for Automatic Annotations

Overview

Automatic annotations included in SPPAS are implemented with language-independent algorithms. This means that adding a new language into SPPAS only consists in adding resources related to the annotation (like lexicons, dictionaries, models, set of rules, etc).

All resources can be edited, modified, changed or deleted by users.

To know what the resources are for and other information, refer to chapter 3 of this documentation: Each resource is used by an automatic annotation.

The resources are language dependent and the name of the files are based on the ISO639-3 international standard. See <http://www-01.sil.org/iso639-3/> for the list of all languages and codes.

In the next sections, the table indicates the list of phonemes that are included in the resources required for phonetization, alignment and syllabification of a given language. The first column represents the symbols used by SPPAS and the other columns are intended to help users to better understand what it means.

The encoding of phonemes in SPPAS resources is based on a computer-readable phonetic list of 7-bit printable ASCII characters: X-SAMPA. This Extended Speech Assessment Methods Phonetic Alphabet was developed in 1995 by John C. Wells, professor of phonetics at the University of London. X-SAMPA is a language-independent notation covering the entire International Phonetic Alphabet - IPA repertoire. A plugin allows to convert time-aligned phonemes from X-SAMPA to IPA.

French

All French resources are (c) *Laboratoire Parole et Langage, Aix-en-Provence, France.*

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|-------------------------------|
| p | p | voiceless bilabial | passé, par, appris |
| b | b | voiced bilabial | beau, abris, baobab |
| t | t | voiceless alveolar | tout, thé, patte |
| d | d | voiced alveolar | doux, deux, addition |
| k | k | voiceless velar | cabas, psycho, quatre, kelvin |
| g | g | voiced velar | gain, guerre, second |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|--------------------------------------|
| f | f | voiceless labiodental | fête, pharmacie |
| s | s | voiceless alveolar | sa, hausse, ce, garçon, option, scie |
| S | ʃ | voiceless postalveolar | choux, schème, shampooing |
| z | z | voiced alveolar | hasard, zéro, transit |
| Z | ʒ | voiced postalveolar | joue geai |
| v | v | voiced labiodental | vous, wagon, neuf heures |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|----------------|
| m | m | bilabial | mou, homme |
| n | n | alveolar | nous, bonne |
| N | ŋ | voiced velar | camping, bingo |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|---------------------|
| l | l | alveolar lateral | lit, ville, fil |
| R | ʀ | voiced uvular | roue, rhume, arrive |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|-----------------------|
| j | j | palatal | payer, fille, travail |
| w | w | voiced labiovelar | oui, web, whisky |
| H | ɥ | labial-palatal | huit, Puy |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------|---|
| E | ɛ | open-mid front unrounded | crème, faite, peine, fête, maître, mètre, reine |
| a | a | open front unrounded | patte, là |
| ɑ | ɑ | open back unrounded | pâte glas |
| 9 | œ | open-mid front rounded | sœur, neuf, œuf |
| O | ɔ | open-mid back rounded | sort, minimum |
| i | i | close front unrounded | si, île, régie, y |
| e | e | close-mid front unrounded | clé, les, chez, aller, pied, journée |
| o | o | close-mid back rounded | sot, hôtel, haut |
| u | u | close back rounded | cou, clown, roue |
| y | y | close front rounded | tu, sûr, rue |
| eu | ø | close-mid front rounded | ceux, jeûner, deux |
| eu | ə | schwa | le, reposer, monsieur, faisons |

Notice that /eu/ is not an X-SAMPA symbol.

Nasal vowels

| SPPAS | IPA | Examples |
|-------|-----|--------------------------------------|
| a~ | ã | sans, champ, vent, temps, Jean, taon |
| U~ | ɛ̃ | vin, pain, brin, printemps |
| U~ | œ̃ | un, parfum, brun |
| o~ | õ | son, nom, bon |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |
| fp | guh: filled pause |

Pronunciation dictionary

The French pronunciation dictionary was created by Brigitte Bigi by collecting and merging several free dictionaries loaded from the web. Some pronunciations were added using the LIA_Phon tool. Many words were manually corrected and a large set of missing words and pronunciation variants were manually added.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The French acoustic model was created by Brigitte Bigi from various corpora mainly recorded at Laboratoire Parole et Langage. Special thanks are addressed to Roxane Bertrand, Béatrice Priego-Valverde, Sophie Herment, Amandine Michelas, Muriel Lalain and Christel Portes for kindly sharing their corpora.

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Syllabification configuration file

The syllabification configuration file corresponds to the one described in the paper (Bigi et al. 2010). It is distributed under the terms of the *GNU General Public License*.

Italian

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|----------------------------|
| p | p | voiceless bilabial | primo, ampio, copertura |
| b | b | voiced bilabial | banca, cibo |
| t | t | voiceless alveolar | tranne, mito, Fiat |
| d | d | voiced alveolar | dove, idra |
| k | k | voiceless velar | cavolo, acuto, anche, quei |
| g | g | voiced velar | gatto, agro, glifo, ghetto |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|---------------------------|
| f | f | voiceless labiodental | fatto, fosforo |
| s | s | voiceless alveolar | sano, scatola, presentire |
| S | ʃ | voiceless postalveolar | scena, sciame, pesci |
| z | z | voiced alveolar | sbavare, presentare, asma |
| v | v | voiced labiodental | vado, povero |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------|-------------------------------|
| m | m | bilabial | mano, amare, campo |
| n | n | alveolar | nano, punto, pensare, anfibio |
| J | ɲ | palatal | gnocco, ogni |

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|---------------------------------|
| N | ŋ | voiced velar | fango, unghia, panchina, dunque |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|----------------------|
| l | l | alveolar lateral | lato, lievemente |
| L | ʎ | palatal lateral | gli, glielo, maglia |
| r | r | alveolar trill | Roma, quattro, morte |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|------------------|
| j | j | voiced palatal | ieri, più, Jesi |
| w | w | voiced labiovelar | uovo, fuoco, qui |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------|-----------------------|
| E | ɛ | open-mid front unrounded | elica, cioè |
| a | a | open front unrounded | alto, sarà |
| o | ɔ | open-mid back rounded | otto, posso, sarò |
| o | o | close-mid back rounded | ombra, come |
| e | e | close-mid front unrounded | vero, perché |
| i | i | close front unrounded | imposta, colibrì, zie |
| u | u | close back rounded | ultimo, caucciù, tuo |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|-------------------------|
| tS | tʃ | voiceless postalveolar | Cennini, cinque, ciao |
| ts | t͡s | voiceless alveolar | sozzo canzone marzo |
| dz | d͡z | voiced alveolar | zaino zelare mezzo |
| dZ | dʒ | voiced postalveolar | giungla, magia, fingere |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |

| SPPAS | Description |
|-------|-----------------------|
| dummy | un-transcribed speech |
| fp | eh, ah: filled pause |

Pronunciation dictionary

The Italian dictionary was downloaded in 2011 from the [Festival synthesizer tool](#). A large amount of the phonetization were manually corrected by Brigitte Bigi and a large set of missing words and pronunciation variants were added manually.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The Italian acoustic model was created during the Evalita 2011 evaluation campaign, from the CLIPS Map-Task corpus (3h30), and updated during the Evalita 2013 evaluation campaign. It is distributed under the terms of the *GNU General Public License*.

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Syllabification c

cyficati c

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|------------------------------------|
| g | ɣ | voiceless velar | trigo, amargo, sigue, signo |
| f | f | voiceless labiodental | fase, café |
| s | s | voiceless alveolar | saco, zapato, cientos, espita |
| z | z | voiced alveolar | isla, mismo, deshuesar |
| S | ʃ | voiceless postalveolar | English, abacaxi, Shakira |
| T | θ | voiceless dental | cereal, encima, zorro, enzima, paz |
| x | x | voiceless velar | jamón, eje, reloj, general |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|--------------------------|
| m | m | bilabial | madre, campo, convertir |
| n | n | alveolar | nido, anhelo, sin, álbum |
| J | ɲ | palatal | ñandú, cañón, enyesar |
| N | ŋ | voiced velar | cinco, venga, conquista |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|-------------------------|
| l | l | alveolar lateral | lino, alhaja, principal |
| L | ʎ | palatal lateral | llave, pollo, roughly |
| r | r | alveolar trill | rumbo, carro, amor |
| 4 | ɾ | alveolar flap | caro, bravo, eterno |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|-----------------------|
| j | j | voiced palatal | aliada, cielo, amplio |
| w | w | voiced labiovelar | cuadro, fuego |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------|----------------|
| a | a | open front unrounded | azahar |
| o | o | close-mid back rounded | boscoso |
| e | e | close-mid front unrounded | vehemente |
| i | i | close front unrounded | dimitir, mío |
| u | u | close back rounded | cucurucho, dúo |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|-----------------------|
| tS | tʃ | voiceless postalveolar | chubasco, acechar |
| ts | ts | voiceless alveolar | Ertzaintza, abertzale |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation Dictionary

The pronunciation dictionary was downloaded from the [CMU web page](#) in 2013. Brigitte Bigi converted the CMU phoneset to X-SAMPA, and changed the format of the file. It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The acoustic model was trained from Glissando corpus. We address special thanks to Juan-Maria Garrido for giving us access to this corpus. It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

GARRIDO, J. M. - ESCUDERO, D. - AGUILAR, L. - CARDEÑOSO, V. - RODERO, E. - DE-LA-MOTA, C. - GONZÁLEZ, C. - RUSTULLET, S. - LARREA, O. - LAPLAZA, Y. - VIZCAÍNO, F. - CABRERA, M. - BONAFONTE, A. (2013). *Glissando: a corpus for multidisciplinary prosodic studies in Spanish and Catalan*, Language Resources and Evaluation, DOI 10.1007/s10579-012-9213-0.

Catalan

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|-----------|
| p | p | voiceless bilabial | pala |
| b | b | voiced bilabial | bala, via |
| t | t | voiceless alveolar | tela |
| d | d | voiced alveolar | donar |

| SPPAS | IPA | Description | Examples |
|-------|-----|-----------------|----------|
| k | k | voiceless velar | cala |
| g | g | voiced velar | gala |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|-------------|
| D | ð | voiced dental | cada |
| G | ɣ | voiceless velar | alga, mages |
| f | f | voiceless labiodental | fals |
| s | s | voiceless alveolar | si, sala |
| z | z | voiced alveolar | desde |
| S | ʃ | voiceless postalveolar | caixa |
| Z | ʒ | voiced postalveolar | mújol |
| v | v | voiced labiodental | va, vol |
| T | θ | voiceless dental | circus |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|-----------------|
| m | m | bilabial | mena |
| n | n | alveolar | nen |
| J | ɲ | palatal | any |
| N | ŋ | voiced velar | lingot, lingual |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|----------|
| l | l | alveolar lateral | líquid |
| L | ʎ | palatal lateral | llamp |
| r | r | alveolar trill | carro |
| 4 | ɾ | alveolar flap | cara |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|----------------------|
| j | j | voiced palatal | iaia, naciós, iogurt |
| w | w | voiced labiovelar | veu, veuran |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------------|----------------|
| E | ɛ | open-mid front unrounded | sec, veça |
| a | a | open front unrounded | sac |
| O | ɔ | open-mid back rounded | soc |
| o | o | close-mid back rounded | sóc |
| e | e | close-mid front unrounded | séc, cec |
| i | i | close front unrounded | sic, ric |
| u | u | close back rounded | suc |
| @ | ə | schwa | contra, estada |
| U | ʊ | near-close near-back rounded | òpols |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|----------|
| dZ | ɖʒ | voiced postalveolar | metge |
| tS | tʃ | voiceless postalveolar | cotxe |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation dictionary

The catalan pronunciation dictionary was downloaded in 2014 from the Ralf catalog of dictionaries for the Simon ASR system at <http://spirit.blau.in/simon/import-pls-dictionary/>. It was then converted (format and phoneset) by Brigitte Bigi. Some new words were also added and phonetized manually by Eva Bosch i Roura. New entries were then added from observed pronunciations in Glissando corpus.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The acoustic model was trained from Glissando corpus. We address special thanks to Juan-Maria Garrido for giving us access to this corpus. It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

GARRIDO, J. M. - ESCUDERO, D. - AGUILAR, L. - CARDEÑOSO, V. - RODERO, E. - DE-LA-MOTA, C. - GONZÁLEZ, C. - RUSTULLET, S. - LARREA, O. - LAPLAZA, Y. - VIZCAÍNO, F. - CABRERA, M. - BONAFONTE, A. (2013). *Glissando: a corpus for multidisciplinary prosodic studies in Spanish and Catalan*, Language Resources and Evaluation, DOI 10.1007/s10579-012-9213-0.

English

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|---------------------|
| p | p | voiceless bilabial | pie, spy, cap |
| b | b | voiced bilabial | buy, cab |
| t | t | voiceless alveolar | tie, sty, cat, atom |
| d | d | voiced alveolar | dye, cad, do |
| k | k | voiceless velar | sky, crack, quick |
| g | g | voiced velar | guy, bag, luggage |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|-----------------------------------|
| D | ð | voiced dental | thy, breathe, father |
| f | f | voiceless labiodental | phi, caff, fan |
| s | s | voiceless alveolar | sigh, mass |
| S | ʃ | voiceless postalveolar | shy, cash, emotion |
| z | z | voiced alveolar | zoo, has |
| Z | ʒ | voiced postalveolar | equation, pleasure, vision, beige |
| v | v | voiced labiodental | vie, have |
| T | θ | voiceless dental | thigh, math |
| h | h | voiceless glottal | high, ahead |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|--------------------|
| m | m | bilabial | my, smile, cam |
| n | n | alveolar | nigh, snide, can |
| N | ŋ | voiced velar | sang, sink, singer |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|----------------------|---------------------|
| l | l | alveolar lateral | lie, sly, gal |
| 4 | r | alveolar flap | lyda, maddy, makita |
| r\ | ɹ | alveolar approximant | red, try, very |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|---------------------|
| j | j | voiced palatal | yes, yacht, william |
| w | w | voiced labiovelar | wye, swine, why |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------------|---------------------------|
| E | ɛ | open-mid front unrounded | dress, bed, fell, men |
| A | ɑ: | open back unrounded | palm, father, bra |
| ʌ | ɒ | open back rounded | lot, pod, John |
| O: | ɔ: | open-mid back rounded | thought, Maud, dawn, fall |
| V | ʌ | open-mid back unrounded | strut, mud, dull, gun |
| i | i | close front unrounded | happy, serious |
| i: | i: | close front unrounded | fleece, seed, feel, sea |
| u: | u: | close back rounded | goose, food, chew, do |
| @ | ə | schwa | a, baccus |
| I | ɪ | near-close near-front unrounded | kit, lid, fill, bin |
| U | ʊ | near-close near-back rounded | foot, full, woman |
| { | æ | near-open front unrounded | trap, pad, shall, ban |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|-------------------|
| dZ | ɟ͡ʒ | voiced postalveolar | giant, badge, jam |
| tS | t͡ʃ | voiceless postalveolar | China, catch |

Others

| SPPAS | IPA | Examples |
|-------|-----|---------------------------|
| aI | aɪ | price, ride, file, pie |
| aU | aʊ | mouth, loud, down, how |
| eI | eɪ | face, fail, vein, pay |
| OI | ɔɪ | choice, void, foil, boy |
| @U | oʊ | goat, code, foal, go |
| 3:r | ɜ:r | liner, foundered, current |

Pronunciation dictionary

The pronunciation dictionary is for North American English. It was downloaded in 2011 from the [CMU web page](#). This Carnegie Mellon Pronouncing Dictionary (version 0.6) is Copyright (C) 1993-2008 by

Carnegie Mellon University. We acknowledge CMU for distributing freely this resource and allowing its re-distribution.

Brigitte Bigi converted the original CMUdict encoded with ARPAbet into X-SAMPA and converted the format of the file in HTK-ASCII.

Acoustic Model

The acoustic model distributed in SPPAS resources were downloaded in 2014 from the VoxForge project at <http://www.voxforge.org/>. It was then converted to X-SAMPA by Brigitte Bigi.

The English acoustic model is under the terms of the “GNU Public License”.

Polish

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|----------|
| p | p | voiceless bilabial | pas |
| b | b | voiced bilabial | |
| t | t | voiceless alveolar | |
| d | d | voiced alveolar | |
| k | k | voiceless velar | |
| g | g | voiced velar | |
| c | c | voiceless palatal | |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|--|----------------|
| f | f | voiceless labiodental | fac, feedback |
| s | s | voiceless alveolar | sabat, subaru |
| s\ | ɕ | voiceless alveolo-palatal | świerszcz, śam |
| sʼ | ʂ | voiceless alveolar with retroflex hook | |
| S | ɹ | voiceless postalveolar | |
| z | z | voiced alveolar | |
| z\ | ʐ | voiced alveolo-palatal | żrebak |
| Z | ʒ | voiced postalveolar | |
| v | v | voiced labiodental | |
| x | x | voiceless velar | hak, chór |
| x | ç | | |
| x | h | | |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|----------|
| m | m | bilabial | |
| n | n | alveolar | |
| N | ŋ | voiced velar | |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|----------|
| l | l | alveolar lateral | |
| r | r | alveolar trill | krok |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|----------|
| j | j | palatal | jak |
| w | w | voiced labiovelar | |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------------|---------------|
| E | ɛ | open-mid front unrounded | test, ten |
| a | a | open front unrounded | pat, ptak |
| O | ɔ | open-mid back rounded | pot, kot |
| i | i | close front unrounded | pit, bit, miś |
| i | ɨ | near-close central unrounded | ryba |
| u | u | close back rounded | bum |
| y | y | close front rounded | mysz |

Nasal vowels

| SPPAS | IPA | Examples |
|-------|-----|----------|
| E~ | ɛ̃ | węże |
| o~ | ɔ̃ | wąż |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|----------|
| tS | tʃ | voiceless postalveolar | |
| ts | ts | voiceless alveolar | co |
| dz | dz | voiced alveolar | dzwon |
| dZ | dʒ | voiced postalveolar | |

Pronunciation Dictionary

The Polish pronunciation dictionary was downloaded in 2015 from the Ralf catalog of dictionaries for the Simon ASR system at <http://spirit.blau.in/simon/import-pls-dictionary/>.

It was then converted (format and phoneset) and corrected by Brigitte Bigi, thanks to the help of Katarzyna Klessa <http://katarzyna.klessa.pl/>. An update was done in 2017 to correct systematic errors.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The acoustic model was created by Brigitte Bigi. We address special thanks to Katarzyna Klessa for giving us access to a corpus.

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Portuguese

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------------|----------|
| p | p | voiceless bilabial | pacto |
| b | b | voiced bilabial | bato |
| t | t | voiceless alveolar | tacto |
| d | d | voiced alveolar | dato |
| k | k | voiceless velar | cacto |
| g | g | voiced velar | gato |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------------|----------|
| f | f | voiceless labiodental | facto |
| s | s | voiceless alveolar | saca |
| S | ʃ | voiceless postalveolar | chato |
| z | z | voiced alveolar | zaca |

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------|----------|
| Z | ʒ | voiced postalveolar | jacto |
| v | v | voiced labiodental | vaca |
| x | x | voiceless velar | rabão |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|-----------|
| m | m | bilabial | mato |
| n | n | alveolar | nato |
| N | ŋ | voiced velar | hong-kong |
| J | ɲ | palatal | pinha |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|----------|
| l | l | alveolar lateral | galo |
| L | ʎ | palatal lateral | galho |
| r | r | alveolar trill | pira |
| R | ʀ | voiced uvular | rato |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|----------|
| j | j | voiced palatal | yoga |
| w | w | voiced labiovelar | uísque |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------------|-----------|
| E | ɛ | open-mid front unrounded | ego, eira |
| a | a | open front unrounded | parto |
| O | ɔ | open-mid back rounded | pôde |
| i | i | close front unrounded | hidra |
| e | e | close-mid front unrounded | pega, elo |
| o | o | close-mid back rounded | bola |
| u | u | close back rounded | hotel |
| y | y | close front rounded | emile |
| I | ɪ | near-close near-front unrounded | dois |
| U | ʊ | near-close near-back rounded | ido |

Nasal vowels

| SPPAS | IPA | Examples |
|-------|-----|----------------|
| a~ | ã | anis |
| u~ | ũ | humberto, unha |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation Dictionary

The Portuguese pronunciation dictionary was downloaded from the Ralf catalog of dictionaries for the Simon ASR system at <http://spirit.blau.in/simon/import-pls-dictionary/>. It was then converted (format and phoneset) and corrected by Brigitte Bigi.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The acoustic model was *NOT* trained from data. Monophones of other models were cut and pasted to create this one, mainly from the Spanish and the French models.

Portuguese data are welcome! Because data implies a better acoustic model then better alignments...

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Mandarin Chinese**List of phonemes**

Any help is welcome to improve the quality of both Mandarin Chinese resources and of this documentation. Both are distributed without any warranty.

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|----------------|------------------------------|----------|
| p | p | voiceless bilabial | ?, ??? |
| p_h | p ^h | voiceless bilabial aspirated | ?, ?, ? |
| t | t | voiceless alveolar | ?, ? |

| SPPAS | IPA | Description | Examples |
|-------|----------------|------------------------------|----------|
| t_h | t ^h | voiceless alveolar aspirated | ʔʔ |
| k | k | voiceless velar | ʔ, ʔ |
| k_h | k ^h | voiceless velar aspirated | ʔ, ʔ |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|--|----------|
| f | f | voiceless labiodental | ʔ, ʔ, ʔ |
| s | s | voiceless alveolar | ʔ, ʔ |
| sʼ | ʂ | voiceless alveolar with retroflex hook | ʔ ʔ |
| zʼ | ʐ | voiced alveolar with retroflex hook | ʔ, ʔ |
| S | ʃ | voiceless postalveolar | ʔ, ʔ |
| x | x | voiceless velar | ʔ, ʔ |
| ss | | | ʔ, ʔ |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|----------|
| m | m | bilabial | ʔ, ʔ, ʔ |
| n | n | alveolar | ʔ, ʔ, ʔ |
| N | ŋ | voiced velar | ʔ, ʔ, ʔ |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|----------|
| l | l | alveolar lateral | ʔ, ʔ |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------------|---------------|
| a | a | open front unrounded | ʔ, ʔ, ʔ, ʔ, ʔ |
| o | o | close-mid back rounded | ʔ, ʔ |
| e | e | close-mid front unrounded | A, ʔ |
| i | i | close front unrounded | ʔ, ʔ, ʔ ʔ |
| i_d | ᵢ | close front unrounded dental | ʔ, ʔ |
| iʼ | ᵝ | close front unrounded retroflex | ʔʔ, ʔ |
| u | u | close back rounded | ʔ, ʔ, ʔ |
| y | y | close front rounded | ʔ, ʔ, ʔ |
| @ʼ | ə̠ | schwa with retroflex hook | ʔ, ʔ |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|------|-----------------------------------|----------|
| ts | t͡s | voiceless alveolar | ʔ, ʔ |
| tss | | | ʔ, ʔ |
| ts_h | t͡sʰ | voiceless alveolar aspirated | ʔ, ʔ |
| tsʼ | | voiceless alveolar retroflex hook | ʔ, ʔ |
| ts_hʼ | | | ʔ ʔ |
| ts_hs | | | ʔ, ʔ |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation dictionary

The pronunciation dictionary was manually created for the syllables by Zhi Na. We address special thanks to her for sharing her work.

It is distributed under the terms of the *GNU General Public License*.

Acoustic model

The acoustic model was created by Brigitte Bigi from 2 corpora: the first one at Shanghai by Zhi Na, and another one by Hongwei Ding. We address special thanks to hers for giving us access to their corpus. Both recordings are a Chinese version of the Eurom1 corpus. See the following publication for details:

Daniel Hirst, Brigitte Bigi, Hyongsil Cho, Hongwei Ding, Sophie Herment, Ting Wang (2013). *Building OMPProDat: an open multilingual prosodic database*, Proceedings of Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, Eds B. Bigi and D. Hirst, ISBN: 978-2-7466-6443-2, pp. 11-14.

Notice that the current model was trained from a very small amount of data: this will impact on the results. Do not expect to get good performances for the automatic alignment.

More Mandarin Chinese data are welcome! Because more data implies a better acoustic model then better alignments...

The model is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Southern Min (or Min Nan)

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description |
|-------|----------------|------------------------------|
| b | b | voiced bilabial |
| d | d | voiced alveolar |
| p | p | voiceless bilabial |
| p_h | p ^h | voiceless bilabial aspirated |
| t | t | voiceless alveolar |
| t_h | t ^h | voiceless alveolar aspirated |
| k | k | voiceless velar |
| k_h | k ^h | voiceless velar aspirated |
| g | g | voiced velar |

Consonant Fricatives

| SPPAS | IPA | Description |
|-------|-----|------------------------|
| f | f | voiceless labiodental |
| s | s | voiceless alveolar |
| S | ʃ | voiceless postalveolar |
| x | x | voiceless velar |
| ss | | |
| v | v | voiced labiodental |
| z | z | voiced alveolar |
| h | h | voiceless glottal |

Consonant Nasals

| SPPAS | IPA | Description |
|-------|-----|--------------|
| m | m | bilabial |
| n | n | alveolar |
| N | ŋ | voiced velar |

Consonant Liquids

| SPPAS | IPA | Description |
|-------|-----|------------------|
| l | l | alveolar lateral |

Semivowels

| SPPAS | IPA | Description |
|-------|-----|-------------------|
| w | w | voiced labiovelar |

Vowels

| SPPAS | IPA | Description |
|-------|-----|---------------------------|
| a | a | open front unrounded |
| o | o | close-mid back rounded |
| O | ɔ | open-mid back rounded |
| e | e | close-mid front unrounded |
| i | i | close front unrounded |
| u | u | close back rounded |
| y | y | close front rounded |
| @ | ə | schwa |

Nasal vowels

| SPPAS | IPA |
|-------|-----|
| a~ | ã |
| e~ | ẽ |
| o~ | õ |
| O~ | õ |
| u~ | ũ |
| i~ | ĩ |

Affricates

| SPPAS | IPA | Description |
|-------|-----------------|------------------------------|
| ts | ts | voiceless alveolar |
| ts_h | ts ^h | voiceless alveolar aspirated |
| dz | dz | voiced alveolar |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation Dictionary

The pronunciation dictionary was constructed from the most frequent observed pronunciations of the corpus described below.

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

The acoustic model was trained from a corpus of spontaneous speech. We address special thanks to Sheng-Fu Wang for giving us access to his corpus.

S-F Wang, J. Fon (2013). *A Taiwan Southern Min spontaneous speech corpus for discourse prosody*, Proceedings of Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, Eds B. Bigi and D. Hirst, ISBN: 978-2-7466-6443-2, pp. 20-23.

Cantonese

List of phonemes

| SPPAS | - IPA - | Examples |
|-------|---------|----------|
| p | | |
| p_h | | |
| m | | |
| f | | |
| t | | |
| t_h | | |
| n | | |
| l | | |
| k | | |
| k_h | | |
| N | | |
| h | | |
| k_w | | |
| k_h_w | | |
| w | | |
| ts | | |
| ts_h | | |
| s | | |
| j | | |
| a: | | |
| 6 | | |
| E: | | |
| e | | |

| SPPAS | - IPA - | Examples |
|-------|---------|----------|
| i: | | |
| I | | |
| O: | | |
| o | | |
| u: | | |
| U | | |
| 9: | | |
| y: | | |
| 8 | | |
| @ | | |
| S | | |
| tS | | |
| tS_h | | |

Acoustic Model

(C) DSP and Speech Technology Laboratory, Department of Electronic Engineering, the Chinese University of Hong Kong.

This is a monophone Cantonese acoustic model, based on Jyutping of the Linguistic Society of Hong Kong (LSHK). Each state is trained with 32 Gaussian mixtures. The model is trained with HTK 3.4.1. The corpus for training is CUSENT, also developed in our laboratory.

Generally speaking, you may use the model for non-commercial, academic or personal use.

See COPYRIGHT for the details of the license: “Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License”.

We also have other well-trained Cantonese acoustic models. If you would like to use the models and/or the CUSENT corpus for commercial applications or development, please contact Professor Tan LEE for appropriate license terms.

The character pronunciation comes from Jyutping phrase box from the Linguistic Society of Hong Kong.

“The copyright of the Jyutping phrase box belongs to the Linguistic Society of Hong Kong. We would like to thank the Jyutping Group of the Linguistic Society of Hong Kong for permission to use the electronic file in our research and/or product development.”

If you use the Cantonese acoustic model for academic research, please cite:

Tan Lee, W.K. Lo, P.C. Ching, Helen Meng (2002). *Spoken language resources for Cantonese speech processing*, Speech Communication, Volume 36, Issues 3–4, Pages 327-342

- Website: <http://dsp.ee.cuhk.edu.hk>
- Email: tanlee@ee.cuhk.edu.hk

Japanese

Not documented yet!

Korean

Korean resources are under construction.

List of phonemes

Consonant Plosives

| SPPAS | IPA | Description | Examples |
|-------|----------------|------------------------------|----------|
| b | b | voiced bilabial | ㄷ, ㄷㄷ |
| p | p | voiceless bilabial | ㅍ |
| p_h | p ^h | voiceless bilabial aspirated | ㅍ, ㅍㅍ |
| p_> | p̚ | voiceless bilabial ejective | ㅍ |
| t | t | voiceless alveolar | ㄷ |
| t_h | t ^h | voiceless alveolar aspirated | ㄷ |
| t_> | t̚ | voiceless alveolar ejective | ㄷ, ㄷ |
| d | d | voiced alveolar | ㄷ, ㄷ, ㄷ |
| k | k | voiceless velar | ㄱ, ㄱㄱㄱ |
| k_h | k ^h | voiceless velar aspirated | ㄱ |
| k_> | k̚ | voiceless velar ejective | ㄱ, ㄱㄱ |
| g | g | voiced velar | ㄱ, ㄱ, ㄱ |

Consonant Fricatives

| SPPAS | IPA | Description | Examples |
|-------|-----|-----------------------------|----------|
| s | s | voiceless alveolar | ㅅ, ㅅ, ㅅㅅ |
| s_> | s̚ | voiceless alveolar ejective | ㅅ |

Consonant Nasals

| SPPAS | IPA | Description | Examples |
|-------|-----|--------------|------------|
| m | m | bilabial | ㅁ, ㅁ, ㅁㅁ |
| n | n | alveolar | ㄴ, ㄴㄴ |
| N | ŋ | voiced velar | ㅇㅇ, ㅇㅇ, ㅇㅇ |

Consonant Liquids

| SPPAS | IPA | Description | Examples |
|-------|-----|------------------|-----------|
| l | l | alveolar lateral | ㄹ, ㄹ, ㄹ |
| 4 | r | alveolar flap | ㄹ, ㄹㄹ, ㄹㄹ |

Semivowels

| SPPAS | IPA | Description | Examples |
|-------|-----|-------------------|---------------|
| j | j | voiced palatal | ㄱ, ㄴ, ㄷ, ㄹ, ㅈ |
| w | w | voiced labiovelar | ㅊ, ㅍ, ㅑ, ㅓ, ㅕ |

Vowels

| SPPAS | IPA | Description | Examples |
|-------|-----|---------------------------|----------|
| E | ε | open-mid front unrounded | ㅓ, ㅕ |
| A | ɑ | open back unrounded | ㅗ, ㅛ |
| i | i | close front unrounded | ㅛ, ㅜ |
| e | e | close-mid front unrounded | ㅓ, ㅕ |
| o | o | close-mid back rounded | ㅗ, ㅛ |
| u | u | close back rounded | ㅜ, ㅠ |
| 2 | ø | close-mid front rounded | ㅜ |
| V | ʌ | open-mid back unrounded | ㅓ, ㅕ |
| M | u | close back unrounded | ㅜ, ㅠ |

Affricates

| SPPAS | IPA | Description | Examples |
|-------|-----|----------------------------------|----------|
| dz | ḑ | voiced alveolar | ㄸ |
| dZ | ḑ̤ | voiced postalveolar | ㄸ |
| tS_> | ṭ̚ | voiceless postalveolar ejective | ㅌ |
| tS_h | ṭ̚ʰ | voiceless postalveolar aspirated | ㅌ |

Fillers

| SPPAS | Description |
|-------|-------------------------------|
| @@ | laughter |
| gb | noises, unintelligible speech |
| dummy | un-transcribed speech |

Pronunciation dictionary

The Korean pronunciation dictionary was manually created and is still under construction. **Any help is welcome!**

It is distributed under the terms of the *GNU General Public License*.

Acoustic Model

The acoustic model was *NOT* trained from data. Monophones of other models were cut and pasted to create this one, mainly the English and Taiwanese models.

Korean data are welcome! Because data implies a better acoustic model then better alignments...

It is distributed under the terms of the *Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International Public License*.

Naija

List of phonemes

Pronunciation Dictionary

Acoustic Model

Analyses

Introduction

The analysis tools are useful for the analyses of annotated files: display the automatic alignments with the audio signal, estimates statistics on the annotations, filter the annotated data to get only the annotations you are interested in, etc.

To execute a specific analysis tool, select file(s) in the file explorer of the main frame, then click on the button of the tool. It will open the window of the tool, and add the file(s) in its file manager.

Six tools are available:

1. `DataRoamer` allows to explore the annotated files: cut/copy/paste/rename/duplicate tiers, move a tier from one file to another one, etc.
2. `AudioRoamer` allows to play and manage audio files: extract a channel, see clipping rates, change framerate, etc.
3. `IPUScriber` is useful to perform manual orthographic transcription.
4. `Visualizer` displays audio files and annotated files, and is very useful to take a screenshot! Easy way to zoom/scroll, change colours, choose the tiers to display, etc;
5. `DataFilter` allows to select a sub-set of annotations: fix a set of filters to create new tiers with only the annotations you are interested in!
6. `Statistics` estimates the number of occurrences, the duration, etc. of the annotations, and allows to save in CSV (for Excel, OpenOffice, R, MatLab,...).

All of such tools share the same look with:

- a menu at left
- a toolbar at top
- a list of files
- a notebook to open files in the tabs



Figure 5.1: The analysis tools

DataRoamer

DataRoamer displays detailed information about annotated files and allows to manage the tiers: cut/copy/paste/rename/duplicate tiers, move a tier from one file to another one, etc.

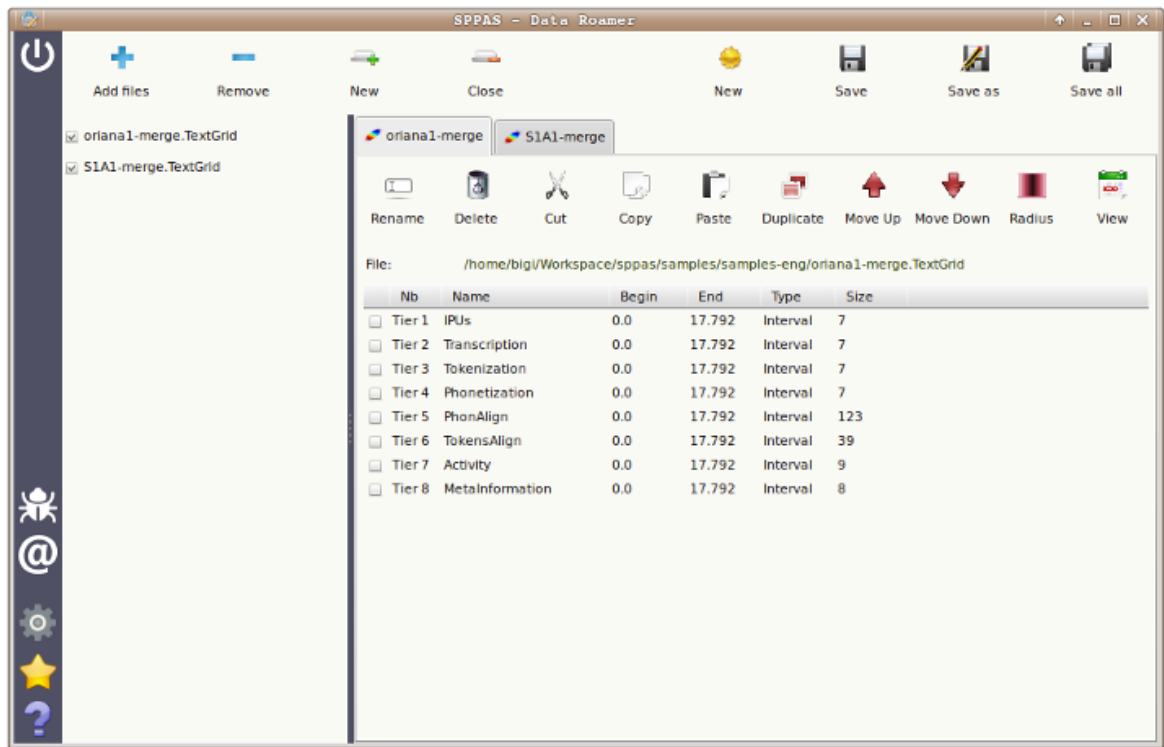


Figure 5.2: DataRoamer: explore annotated files

When an annotated file is checked in the list of files, the file is opened in a new panel of the current tab of the notebook and information about this file are displayed. At top, the name of the file is in dark green color. It is turned to blue color if some changes were applied. Below the name of the file, each tier is represented in a row of a spreadsheet:

- 1st column is a check box: select/deselect the tier;
- 2nd column indicates the number of the tier;
- 3rd column indicated the name of the tier;
- 4th column indicates the lower time value of the annotations;
- 5th column indicates the higher time values of the annotations;
- 6th column is the type of the tier: either “Interval” or “Point”;
- last column is the number of annotations in the tier.

The buttons of the toolbar can be applied on the tier(s) selected in the same tab of the notebook. For example, it is possible to copy a tier of a file and to paste it in another file only if they are both open in the same tab.

- **Rename:** Fix a new name to the selected tier. If the given name is already assigned to a tier in the same file, a number is automatically appended to the end of the new name.
- **Delete:** Definitively delete the selected tier. To recover the tier, the only way is to close the file without saving changes and to re-open it.

- Cut: Delete the tier of the file and put it in the dashboard.
- Copy: Copy the selected tier into the dashboard.
- Paste: Paste the content of the dashboard into the currently selected file.
- Duplicate: Duplicate the selected tier in the file. A number is automatically appended to the end of name of the copy.
- Move Up: Move the selected tier up in the list of tiers of the file.
- Move Down: Move the selected tier down in the list of tiers of the file.
- Radius: Fix the radius value of each localization of each annotation. A radius value indicates the vagueness around the point. It is commonly ranging from 1ms for very (very) precise annotations up to 40ms for annotations of videos for example. This value is safely saved only in XRA format. Other formats don't consider vagueness.
- View: Open a window and display the annotations of the tier.

Only the `Delete` and `Radius` actions can be applied on several selected tiers at a time. The other actions can be applied only on one selected tier.

AudioRoamer

`AudioRoamer` allows to play audio files, to display general information about a digitalized audio-PCM file and to manipulate the file.

Pulse-code modulation (PCM) is a method used to digitally represent sampled analog signals. In a PCM stream, the amplitude of the analog signal is sampled regularly at uniform intervals. A PCM stream has two basic properties that determine the stream's fidelity to the original analog signal:

1. the sampling rate, which is the number of times per second that samples are taken;
2. the bit depth, which determines the number of possible digital values that can be used to represent each sample.

Common sampling frequencies are 48 kHz as used with DVD format videos, or 44.1 kHz that was used in Compact discs. Common sample depths is 16 bits per sample: it allows values to range from -32768 to 32767.

Support for multichannel audio depends on file format and relies on interweaving or synchronization of streams.

When an audio file is checked in the list of files, a new page is opened in the notebook. The main information about the audio file are then displayed in the panel at the middle and a player is displayed at bottom. The audio file is not loaded in memory, so event very long audio files can be displayed. At the top of the page, a button "Want more?" can be clicked: the audio file will then be fully read and analyzed, then a new window will be opened to display detailed information. It will also allow to change some properties of the audio file, extract a channel, etc.

Properties of the audio file

The main properties of any audio file are displayed. SPPAS can open audio files of type "Waveform Audio" file format (WAVE), a Microsoft and IBM audio file format standard and "SunAu" file format, an audio file format introduced by Sun Microsystems. The following information are extracted or deducted of the header of the audio file:

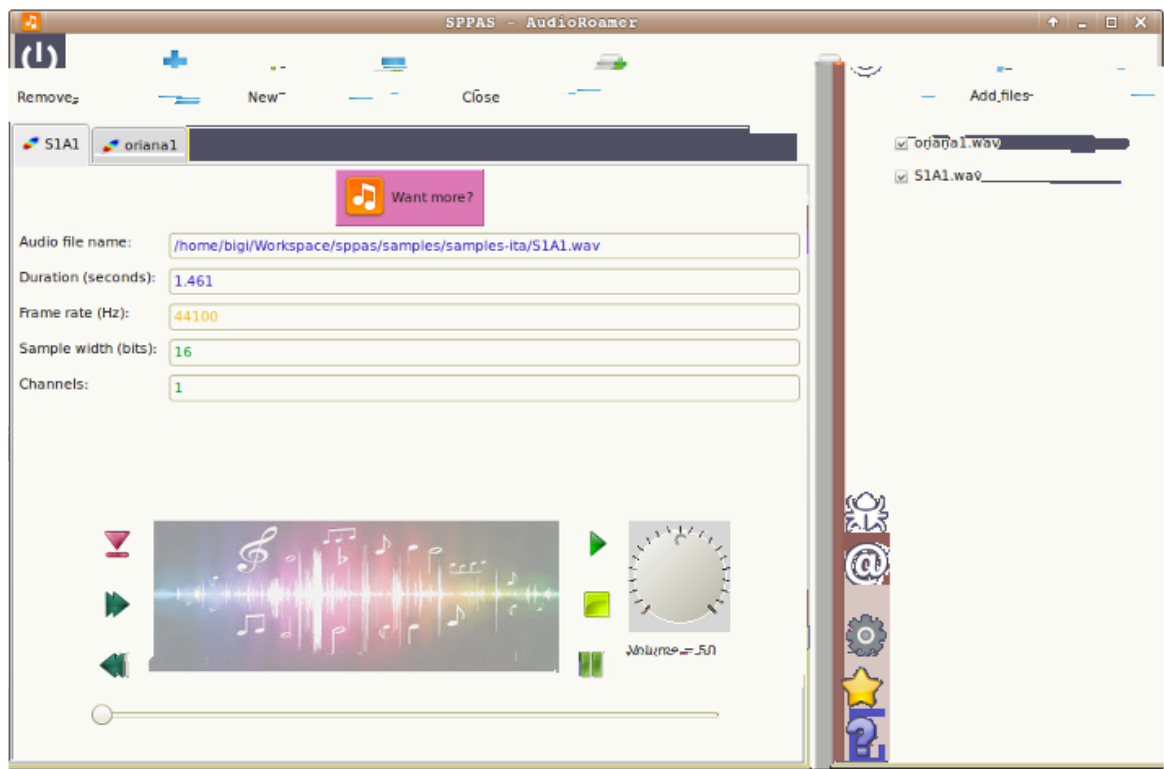


Figure 5.3: AudioRoamer: play and manage audio files

- the duration given in seconds with a maximum of 3 digits;
- the frame rate given in Hz;
- the sample width in bits (one of 8, 16, 24 or 32);
- the number of channels.

A color code is used to indicate if the file is compatible with SPPAS automatic annotations:

- Green color: the value is perfectly matching the expectations;
- Orange color: the value is not the expected one but automatic annotations will be able to convert it to the right one;
- Red color: none of the automatic annotations can work with the given value. The file must be modified.

Playing audio files

The following shortcuts can be used:

- TAB: Play
- ESC: Stop
- F6: Rewind
- F7: Pause
- F8: Next

Want more?

AudioRoamer allows to display a large amount of information for each channel. For a long audio file, it can take a while to estimate such information... For example, a mono-audio file of 243 seconds (21.5Mb) is loaded in 20 seconds. **So be patient! It's worth it!**

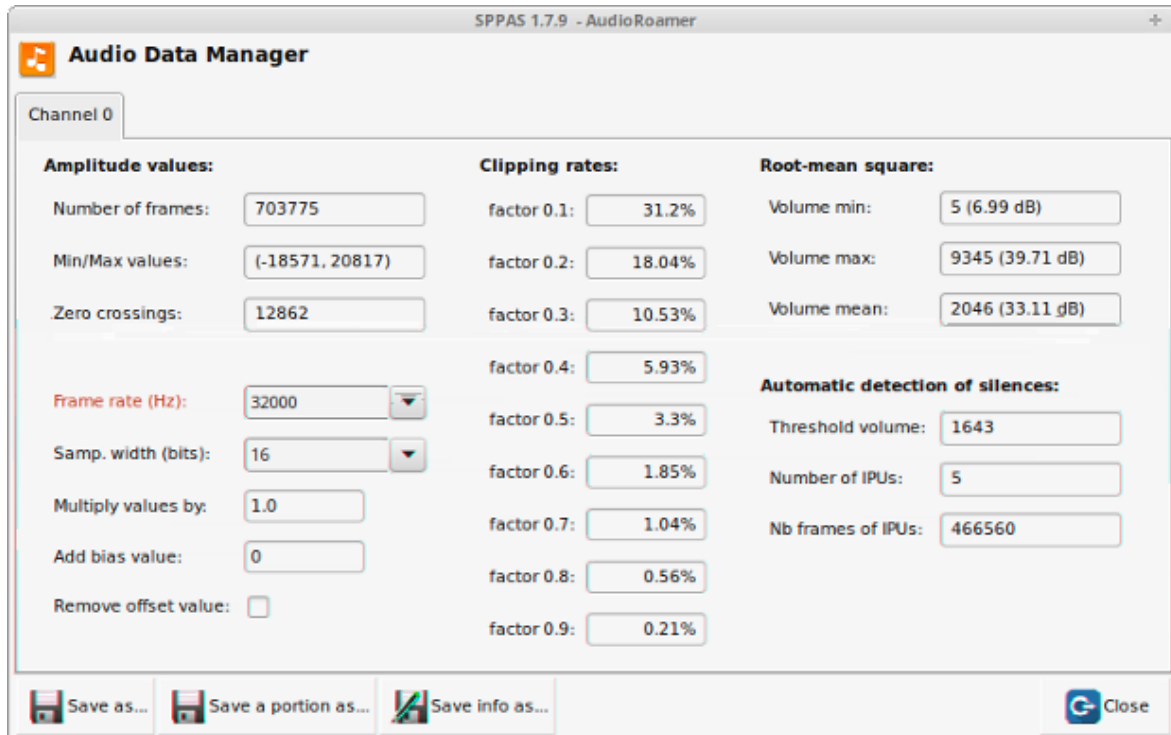


Figure 5.4: AudioRoamer if you want more

There are 3 main columns of information, related to amplitude, clipping and volume.

At the bottom of the window, it is possible to click on buttons to:

1. Save the channel currently displayed;
2. Save a portion (from...to...) of the channel;
3. Save the displayed information in a text file;
4. Close the window.

Amplitude

The amplitude is a variable characterizing the sinusoidal oscillation of the digital-audio recording. It gives the deflection of a physical quantity from its neutral position (zero point) up to a positive or negative value. With sound waves, it is the extent to which air particles are displaced, and this amplitude of sound or sound amplitude is experienced as the loudness of sound. The loudness perception of a sound is determined by the amplitude of the sound waves – the higher the amplitude, the louder the sound or the noise.

The first column of AudioRoamer Data Manager gives amplitude values of each channel of the PCM file:

- Number of frames: the number of samples, i.e. the number of amplitude values;
- Min/Max values: minimum and maximum amplitude values in the channel;

- Zero crossings: number of times continuous values are crossing the 0 value.

The 5 information below can be modified and modifications can be saved separately for each channel:

- Frame rate: the sampling frequency observed in the channel is included in the default list of possible values. If it is modified, the color is changed.
- Samp. width: the bit depth observed in the channel is included in the list of possible values. If it is modified, the color is changed.
- Multiply values by: all samples in the original channel are multiplied by the floating-point value factor. Sample values are truncated in case of overflow.
- Add bias value: a bias value is added to each sample. Sample values wrap around in case of overflow.
- Remove offset value: the average over all values is deduced to each sample. Sample values wrap around in case of overflow.

Clipping

The second column displays the clipping rates of the sample values given a factor. It will consider that all values outside the interval are clipped. The clipping rate is given as a percentage related to the total number of values. For example, if factor is 0.5 and clipping rate is 10%, it means that 10% of the amplitude values are more than the half of the maximum amplitude. This value is generally an expected rate while preparing audio recordings.

Volume

RMS: Volume is estimated with root-mean-square (RMS) of the samples, i.e. $\sqrt{\sum(S_i^2)/n}$. This is a measure of the power in an audio signal. Between parenthesis, the volume in dB is estimated as: $20 \cdot \log_{10}(\text{rms})$. Doubling of the rms value leads to an increase of 6.02dB.

Automatic detection of silences: Finally, the result of an automatic detection of silences is given. This information is given for information only: It is estimated with default parameters which should be adapted!

IPUscriber

IPUscriber is useful to perform manual orthographic transcription. When an audio file is checked in the list of files, the program search for a file with the IPU's Segmentation, i.e. a file with the same name (in the same directory) with a known extension like .xra, .TextGrid, etc. If this file is not found, an error message is displayed. Otherwise, the audio file is opened and the annotated file is loaded in a new page of the notebook.

Silences are hidden and the IPU's are displayed in a list of boxes with:

- at left: the name of the tier followed by the number of the interval, then the time values of start and end of the interval, and the duration of the interval between parenthesis.
- at right: the content text of the IPU.

At the bottom of the tab, green buttons perform actions on the audio file: get information, play, auto-play, make pause and stop playing. The following keyboard shortcuts can also be used:

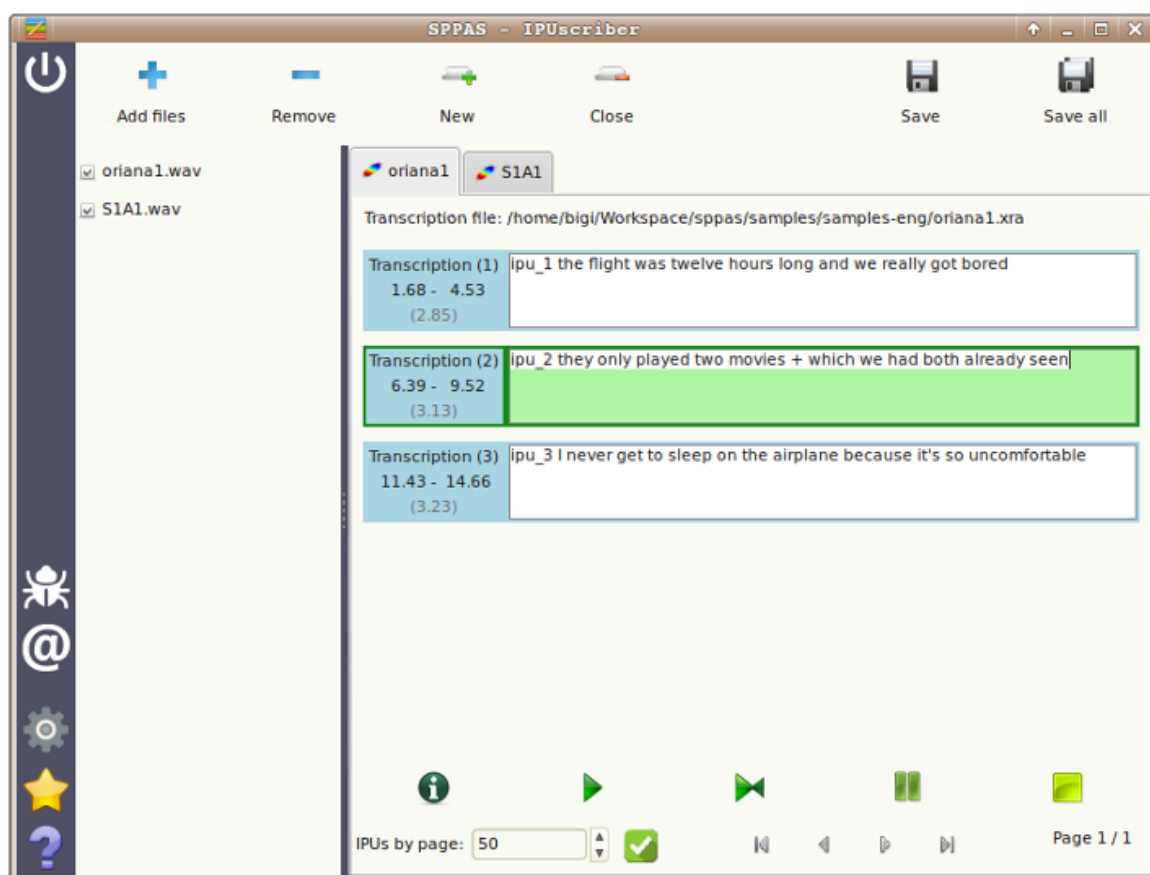


Figure 5.5: IPUscriber: for manual orthographic transcription

- TAB: Play
- ESC: Stop
- F6: Rewind
- F7: Pause
- F8: Next

By default, only 50 IPU's are displayed at a time in a tab. To get access to the next/previous IPU's, 4 small buttons in gray allow to navigate in the pages.

To transcribe an IPU, click on the IPU text box, play sound and write the corresponding text: refer to the transcription convention of this document.

Visualizer

Visualizer displays speech files and annotated files, and is very useful to take a nice screenshot.

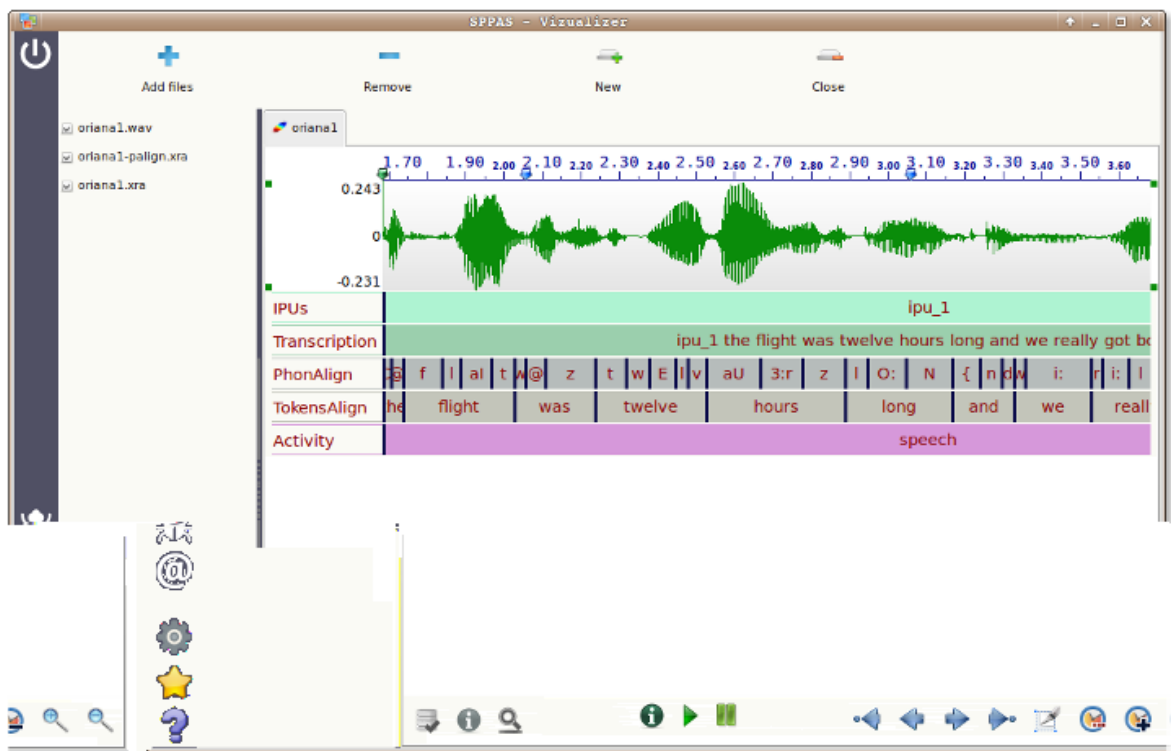


Figure 5.6: Visualizer: displays audio files and annotated files

This tool is still under-development, some “troubles/crashes” can occur while using it... however the data will never be corrupted!

When a file is checked on the file of files, it is opened and displayed in the currently opened tab of the notebook. There is not limit on the number of audio files that can be displayed nor on the number of annotated files. To select a displayed file, click anywhere of the displayed part.

At the bottom of the tab, 3 series of buttons are available:

- at left, red buttons allow to manage the selected annotated file:

1. select to tiers to display
 2. get information about the file and tiers
 3. search for annotations in the tier
- at the middle, green buttons are related to an audio file
 1. get information about the file
 2. play sound
 3. pause
 - at right, blue buttons are related to zoom and scroll.
 1. move at the beginning of the file
 2. move at left (show previous data)
 3. move at right (show next data)
 4. move at the end of the file
 5. show the selection. Selected part is the one between the blue arrows of the rule
 6. display a specific time period (from... to...)
 7. zoom in: show a smaller period
 8. zoom out: show a higher period
 9. vertical zoom in
 10. vertical zoom out

DataFilter

`DataFilter` allows to select annotations: define a set of filters to create new tiers with only the annotations you are interested in! This system is based on the creation of 2 different types of filters:

1. single filters, i.e. search in a/several tier(s) depending on the data content, the time values or the duration of each annotation;
2. relation filters, i.e. search on annotations of a/several tier(s) in time-relation with annotations of another one.

These later are applied on tiers of many kind of input files (`TextGrid`, `eaf`, `trs`, `csv`...). The filtering process results in a new tier, that can re-filtered and so on.

Filtering annotations of a tier: `SingleFilter`

Pattern selection is an important part to extract data of a corpus and is obviously and important part of any filtering system. Thus, if the label of an annotation is a string, the following filters are proposed in `DataFilter`:

- exact match: an annotation is selected if its label strictly corresponds to the given pattern;
- contains: an annotation is selected if its label contains the given pattern;
- starts with: an annotation is selected if its label starts with the given pattern;
- ends with: an annotation is selected if its label ends with the given pattern.

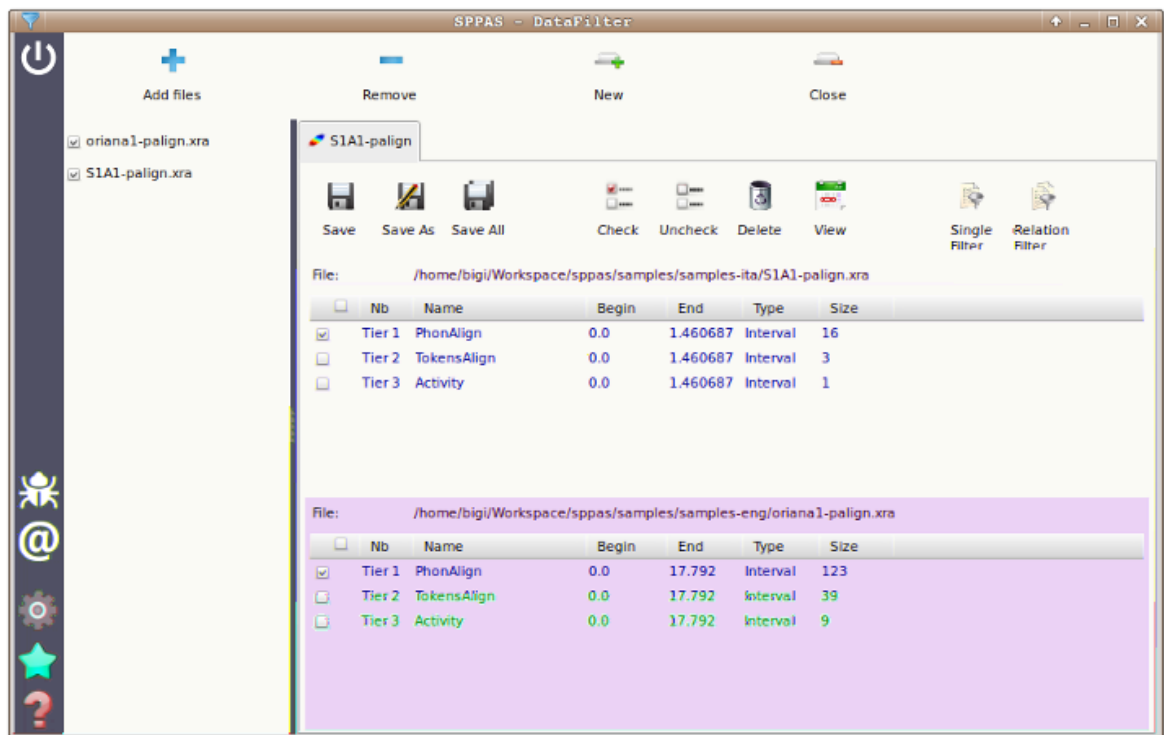


Figure 5.7: DataFilter: select annotations

All these matches can be reversed to represent respectively: does not exactly match, does not contain, does not start with or does not end with. Moreover, this pattern matching can be case sensitive or not.

For complex search, a selection based on regular expressions is available for advanced users.

A multiple pattern selection can be expressed in both ways:

- enter multiple patterns at the same time (separated by commas) to mention the system to retrieve either one pattern or the other, etc.
- enter one pattern at a time and choose the appropriate button: “Apply All” or “Apply any”.

Another important feature for a filtering system is the possibility to retrieve annotated data of a certain duration, and in a certain range of time in the timeline.

Search can also starts and/or ends at specific time values in a tier.

All the given filters are then summarized in the “SingleFilter” frame. To complete the filtering process, it must be clicked on one of the apply buttons and the new resulting tiers are added in the annotation file(s).

In the given example:

- click on “Apply All” to get either a, @ or E vowels during more than 80ms, after the 5th minute.
- click on “Apply Any” to get a, @ or E vowels, and all annotations during more than 80 ms, and all annotations after the 5th minute.

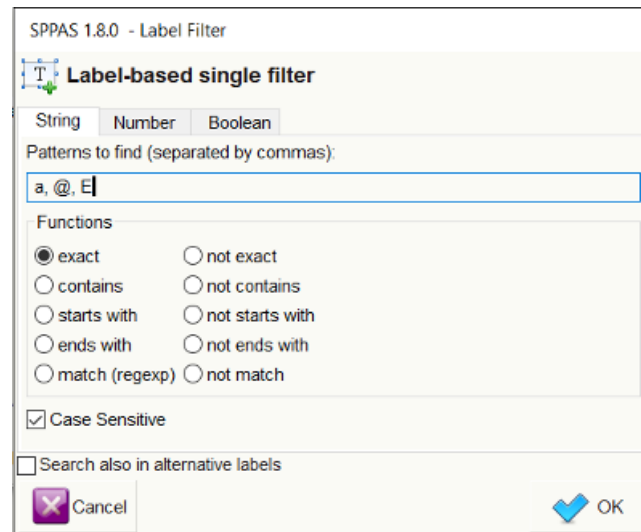


Figure 5.8: Frame to create a filter on annotation labels. In that case, filtering annotations that exactly match either a, @ or E




Figure 5.9: Frame to create a filter on annotation durations. In that case, filtering annotations that are during more that 80 ms

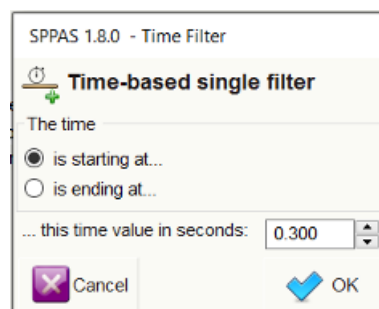


Figure 5.10: Frame to create a filter on annotation time values. In that case, filtering annotations that are starting after the 5th minute.

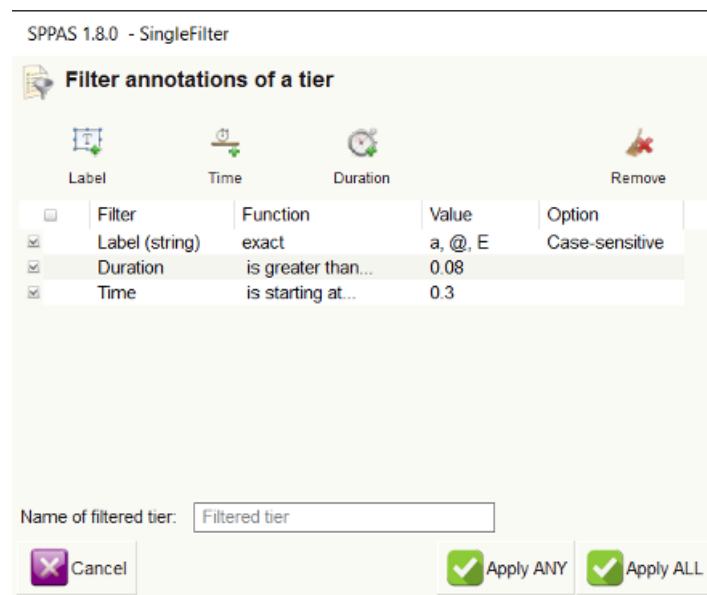


Figure 5.11: DataFilter: SingleFilter frame

Filtering on time-relations between two tiers

Regarding the searching problem, linguists are typically interested in locating patterns on specific tiers, with the possibility to relate different annotations a tier from another. The proposed system offers a powerful way to request/extract data, with the help of Allen’s interval algebra.

In 1983 James F. Allen published a paper in which he proposed 13 basic relations between time intervals that are distinct, exhaustive, and qualitative:

- distinct because no pair of definite intervals can be related by more than one of the relationships;
- exhaustive because any pair of definite intervals are described by one of the relations;
- qualitative (rather than quantitative) because no numeric time spans are considered.

These relations and the operations on them form Allen’s interval algebra. These relations were extended to Interval-Tiers as Point-Tiers to be used to find/select/filter annotations of any kind of time-aligned tiers.

For the sake of simplicity, only the 13 relations of the Allen’s algebra are available in the GUI. But actually, we implemented the 25 relations proposed Pujari and al. (1999) in the INDU model. This model is fixing constraints on INtervals (with Allen’s relations) and on DURATION (duration are equals, one is less/greater than the other). Such relations are available while requesting with Python.

At a first stage, the user must select the tiers to be filtered and click on “RelationFilter”. The second stage is to select the tier that will be used for time-relations.

The next step consists in checking the Allen’s relations that will be applied. The last stage is to fix the name of the resulting tier. The above screenshots illustrates how to select the first phoneme of each token, except for tokens that are containing only one phoneme (in this later case, the “equal” relation should be checked).

To complete the filtering process, it must be clicked on the “Apply” button and the new resulting tiers are added in the annotation file(s).




Figure 5.12: Fix time-relation tier name




Figure 5.13: DataFilter: RelationFilter frame

Statistics

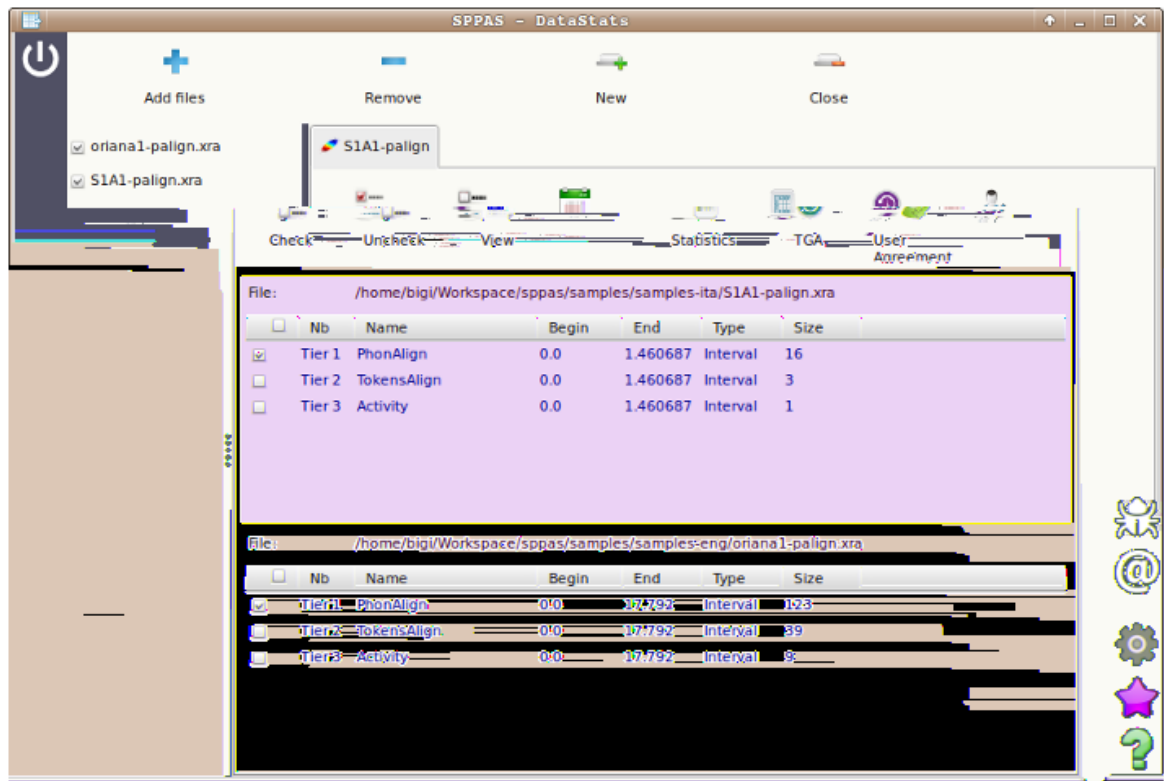


Figure 5.14: Statistics: descriptive statistics and TGA

Descriptive statistics

It allows to estimate the number of occurrences, the duration, etc. of the annotations of a set of selected tiers, and allows to save in CSV (for Excel, OpenOffice, R, MatLab,...). It offers a series of sheets organized in a notebook. The first tab is displaying a summary of descriptive statistics of the set of given tiers. The other tabs are indicating one of the statistics over the given tiers. The followings are estimated:

- occurrences: the number of observations
- total durations: the sum of the durations
- mean durations: the arithmetic mean of the duration
- median durations: the median value of the distribution of durations
- std dev. durations: the standard deviation value of the distribution of durations

All of them can be estimated on a single annotation label or on a serie of them. The length of this context can be optionally changed while fixing the “N-gram” value (available from 1 to 5), just above the sheets.

Each displayed sheet can be saved as a CSV file, which is a useful file format to be read by R, Excel, OpenOffice, LibreOffice, and so... To do so, display the sheet you want to save and click on the button “Save sheet”, just below the sheets. If you plan to open this CSV file with Excel under Windows, it is recommended to change the encoding to UTF-16. For the other cases, UTF-8 is probably the most relevant.

The annotation durations are commonly estimated on the Midpoint value, without taking the radius into account; see (Bigi et al, 2012) for explanations about the Midpoint/Radius. Optionally, the duration can either be estimated by taking the vagueness into account, then check “Add the radius value” button, or by ignoring the vagueness and estimating only on the central part of the annotation, then check “Deduct the radius value”.

For those who are estimating statistics on XRA files, you can either estimate stats only on the best label (the label with the higher score) or on all labels, i.e. the best label and all its alternatives (if any).

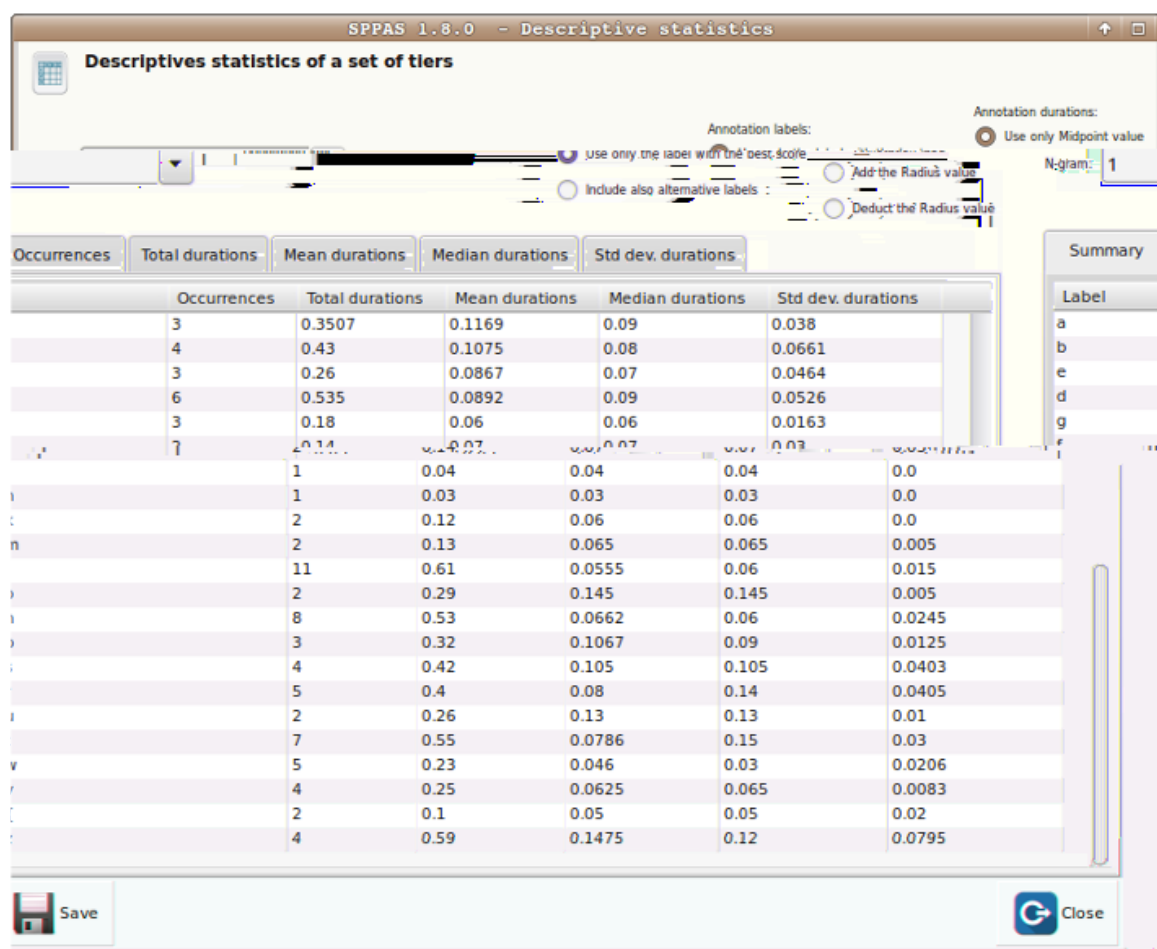


Figure 5.15: Descriptive statistics

TGA - Time Group Analyzer

TGA is originally available at <http://wwwhomes.uni-bielefeld.de/gibbon/TGA/>. It's a tool developed by Dafydd Gibbon, emeritus professor of English and General Linguistics at Bielefeld University.

The TGA is an online batch processing tool which provides a parametrised mapping from time-stamps in speech annotation files in various formats to a detailed analysis report with statistics and visualisations. TGA software calculates, inter alia, mean, median, rPVI, nPVI, slope and intercept functions within inter-pausal groups, provides visualisations of timing patterns, as well as correlations between these, and parses inter-pausal groups into hierarchies based on duration relations. Linear regression is selected mainly for the slope function, as a first approximation to examining acceleration and deceleration over large data sets.

The TGA online tool was designed to support phoneticians in basic statistical analysis of annotated speech data. In practice, the tool provides not only rapid analyses but also the ability to handle larger data sets than can be handled manually.

*Katarzyna Klessa, Dafydd Gibbon (2014). **Annotation Pro + TGA: automation of speech timing analysis**, 9th International conference on Language Resources and Evaluation (LREC), Reykjavik (Iceland). pp. 1499-1505, ISBN: 978-2-9517408-8-4.*

The integrated Annotation Pro + TGA tool incorporates some TGA features and is intended to support the development of more robust and versatile timing models for a greater variety of data.

The integration of TGA statistical and visualisation functions into Annotation Pro+TGA results in a powerful computational enhancement of the existing AnnotationPro phonetic workbench, for supporting experimental analysis and modelling of speech timing.

So, what's the novelty...

TGA is partly implemented in SPPAS. The Statistics analyses tool of SPPAS allows to estimates TGA within the SPPAS framework. It results in the following advantages:

- it can read either TextGrid, csv, Elan, HTK, or Sclite, or any file format supported by SPPAS,
- it can save TGA results either as a table in a CSV file or as an annotation file (of any of the format supported by SPPAS),
- it estimates 2 linear regressions (the y-axis is the duration in both cases):
 1. with x-axis based on positions, like in the inline TGA
 2. with x-axis based on time-stamps, like in the AnnotationPro+TGA

User agreement

SPPAS implements the estimation of the Cohen's Kappa. It is currently limited to the evaluation of this user agreement between labels of 2 tiers with the same number of intervals. It is under-development...

Scripting with Python and SPPAS

Introduction

SPPAS implements an Application Programming Interface (API), named *annotationdata*, to deal with annotated files.

annotationdata API is a free and open source Python library to access and search data from annotated data of any of the supported formats (xra, TextGrid, eaf...). *annotationdata* is based on the Programming Language Python 2.7. It won't work with Python 3.x. Notice that this API will be fully re-implemented in the scope of 1/ compatibility with Python > 3.3, 2/ PEP8 and PEP257 compliance and 3/ internationalization of the message. The new version will be available in the middle of 2018 but the current one will be maintained until the end of 2018 or later.

In this chapter, it is assumed that Python 2.7 is already installed and configured. It is also assumed that the Python IDLE is ready-to-use. For more details about Python, see:

The Python Website: <http://www.python.org>

This chapter firstly introduces basic programming concepts, then it gradually introduces how to write scripts with Python. Those who are familiar with programming in Python can directly go to the last section related to the description of the *annotationdata* API and how to use it in Python scripts.

This API can convert file formats like Elan's EAF, Praat's TextGrid and others into a *Transcription* object and convert this object into any of these formats. This object allows unified access to linguistic data from a wide range of sources.

This chapter includes exercises. The solution programs are included in the package directory **documentation**, then in the folder **solutions**.

A gentle introduction to programming

Introduction

This section includes examples in Python programming language. You may want to try out some of the examples that come with the description. In order to do this, execute the Python IDLE - available in the Application-Menu of your operating system), and write the examples after the prompt “>>>”.



Figure 6.1: The Python IDLE logo

To get information about the IDLE, get access to [the IDLE documentation](#)

Writing any program consists of writing statements so using a programming language. A *statement* is often known as a line of code that can be one of:

- comment,
- documentation,
- assignment,
- conditions,
- iterations, etc.

Lines of code are grouped in *blocks*. Depending on the programming language, blocks delimited by brackets, braces or by the indentation.

Each language has its own syntax to write these lines and the user has to follow strictly this syntax for the program to be able to interpret the program. However, the amount of freedom the user has to use capital letters, whitespace and so on is very high. Recommendations for Python language are available in the [PEP8 - Style Guide for Python Code](#).

Variables: Assignment and Typing

A *variable* is a name to give to a piece of memory with some information inside. Assignment is then the action of setting a variable to a value. The equal sign (=) is used to assign values to variables.

```
>>>a = 1
>>>b = 1.0
>>>c = "c"
>>>cc = u"ç"
>>>hello = "Hello world!"
>>>vrai = True
```

In the previous example, a, b, c, hello and vrai are variables, a = 1 is a declaration.

MISSING: Variable declarations and print in the Python IDLE./etc/screenshots/python_idle_example.png

Assignments to variables with Python language can be performed with the following operators:

```
>>> a = 10    # simple assignment operator
>>> a += 2     # add and assignment operator, so a is 12
>>> a -= 7     # minus and assignment, so a is 5
>>> a *= 20    # multiply and assignment, so a is 100
>>> a /= 10    # divide and assignment, so a is 10
>>> a          # verify the value of a...
10
```

Basic Operators

Basic operators are used to use and/or manipulate variables. The following is the list of operators that can be used with Python, i.e. equal (assignment), plus, minus, multiply, divide:

```
>>> a = 10
>>> b = 20    # Assignment
>>> a + b     # Addition
>>> a - b     # Subtraction
>>> a * b     # Multiplication
>>> a / b     # Division
```

Data types

The variables are of a data-type. For example, the declarations `a=1` and `a=1.0` are respectively assigning an integer and a real number. In Python, the command `type` allows to get the type of a variable, like in the following:

```
>>> type(a)
<type 'int'>
>>> type(b)
<type 'float'>
>>> type(c)
<type 'str'>
>>> type(cc)
<type 'unicode'>
>>> type(vrai)
<type 'bool'>
```

The following is a list of some fundamental data types, and their characteristics:

- *str* String of characters
- *unicode* Unicode string of characters
- *int* Integer in range from -2147483648 to 2147483647
- *bool* Boolean value, can take value `True` (=1) or `False` (=0)
- *float* Floating point number (max 15 digits)

Python is assigning data types dynamically. As a consequence, the result of the sum between an `int` and a `float` is a `float`. The next examples illustrate that the type of the variables have to be carefully managed.

```
>>> a = 10
>>> a += 0.
>>> a
10.0
>>> a += True
>>> a
11.0
>>> a += "a"
Traceback (most recent call last):
  File "<input>", line 1, in <module>
TypeError: unsupported operand type(s) for +=: 'float' and 'str'
>>> a = "a"
>>> a *= 5
>>> a
'aaaaa'
```

The type of a variable can be changed. This is called a “cast”, like in the following:

```
>>> a = 10
>>> b = 2
>>> a/b
5
>>> float(a) / float(b)
5.0
>>> a = 1
>>> b = 1
>>> str(a) + str(b)
'11'
```

Complex data types are often used to store variables sharing the same properties like a list of numbers, and so on. Common types in languages are lists/arrays and dictionaries. The following is the assignment of a list with name `fruits`, then the assignment of a sub-part of the list to the `to_buy` list:

```
>>> fruits = ['apples', 'tomatoes', 'peers', 'bananas']
>>> to_buy = fruits[1:2]
>>> to_buy
['tomatoes']
```

Conditions

Conditions aim to test whether a statement is True or False. The statement of the condition can include a variable, or be a variable. If the result of the condition is true and/or false, then a given action occurs. Statements of conditions are written with operators, as equal, less than, greater than, etc. The following shows examples of conditions/comparisons in Python. Notice that the comparison of variables of a different data-type is possible (but not recommended!).

```
>>> var = 100
>>> if var == 100:
```

```
...     print("Value of expression is 100.")
...
Value of expression is 100.

>>> if var == "100":
...     print("This message won't be printed out.")
... 
```

Conditions can expressed in a more complex way like:

```
>>> if a == b:
...     print('a and b are equals')
... elif a > b:
...     print('a is greater than b')
... else:
...     print('b is greater than a')
```

The simple operators for comparisons are summarized in the next examples:

```
>>> a == b    # check if equals
>>> a != b    # check if different
>>> a > b     # check if a is greater than b
>>> a >= b    # check if a is greater or equal to b
>>> a < b     # check if a is lesser than b
>>> a <= b    # check if a is lesser or equal to b
```

It is also possible to use the following operators:

- **and**: called “Logical AND operator”. If both the operands are true then the condition becomes true.
- **or**: called Logical OR Operator. If any of the two operands are non zero then the condition becomes true.
- **not** called Logical NOT Operator. Use to reverses the logical state of its operand. If a condition is true then Logical NOT operator will make false.
- **in**: evaluates to true if it finds a variable in the specified sequence and false otherwise.

```
>>> if a == "apples" and b == "peers":
...     print("You need to buy fruits.")

>>> if a == "apples" or b == "apples":
...     print("You already have bought apples.")

>>> if "tomatoas" not in to_buy:
...     print("You do not have to buy tomatoes.")
```

Loops

The `for` loop statement iterates over the items of any sequence. The next Python lines of code print items of a list on the screen:

```
>>> to_buy = ['fruits', 'viande', 'poisson', 'oeufs']
>>> for item in to_buy:
...     print(item)
...
fruits
viande
poisson
oeufs
```

A while loop statement repeatedly executes a target statement as long as a given condition returns True. The following example prints exactly the same result as the previous one:

```
>>> to_buy = ['fruits', 'viande', 'poisson', 'oeufs']
>>> i = 0
>>> while i < len(to_buy):
...     print(to_buy[i])
...     i += 1
...
fruits
viande
poisson
oeufs
```

Dictionaries

A dictionary is a very useful data type. It consists of pairs of keys and their corresponding values.

```
>>> fruits = dict()
>>> fruits['apples'] = 3
>>> fruits['peers'] = 5
>>> fruits['tomatoas'] = 1
```

`fruits['apples']` is a way to get the value - i.e. 3, of the apple key. However, an error is sent if the key is unknown, like `fruits[bananas]`. Alternatively, the `get` function can be used, like `fruits.get("bananas", 0)` that returns 0 instead of an error.

The next example is showing how use a simple dictionary: ~~~~~ {python} >>> for key in ['apples', 'peers', 'tomatoes', 'babanas']: ... value = fruits.get(key, 0) ... if value < 3: ... print("You have to buy new {s}:".format(key)) ... You have to buy new tomatoes. ~~~~~

To learn more about data structures and how to manage them, get access to [the Python documentation](#)

Scripting with Python

This section describes how to create simple Python lines of code in separated files commonly called *scripts*, and run them. Some practical exercises, appropriate to the content of each action, are proposed and test exercises are suggested at the end of the section.

To practice, you have first to create a new folder in your computer - on your Desktop for example; with name "pythonscripts" for example, and to execute the python IDLE.

Comments and documentation

Comments are not required by the program to work. But comments are necessary! Comments are expected to be appropriate, useful, relevant, adequate and always reasonable.

```
# This script is doing this and that.
# It is under the terms of a license.
# and I can continue to write what I want after the # symbol
# except that it's not the right way to tell the story of my life
```

The documentation of a program complements the comments. Both are not sharing the same goal: comments are used in all kind of programs but documentation is appended to comments for the biggest programs and/or projects. Documentation is automatically extracted and formatted thanks to dedicated tools. Documentation is required for sharing the program. See the [Docstring Conventions](#) for details. Documentation must follow a convention like for example the markup language [reST - reStructured Text](#). Both conventions are used into SPPAS programs.

Getting started with scripting in Python

In the IDLE, create a new empty file either by clicking on “File” menu, then “New File”, or with the shortcut “CTRL”+N.

Copy the following line of code in this newly created file:

```
1 print("Hello world!")
```

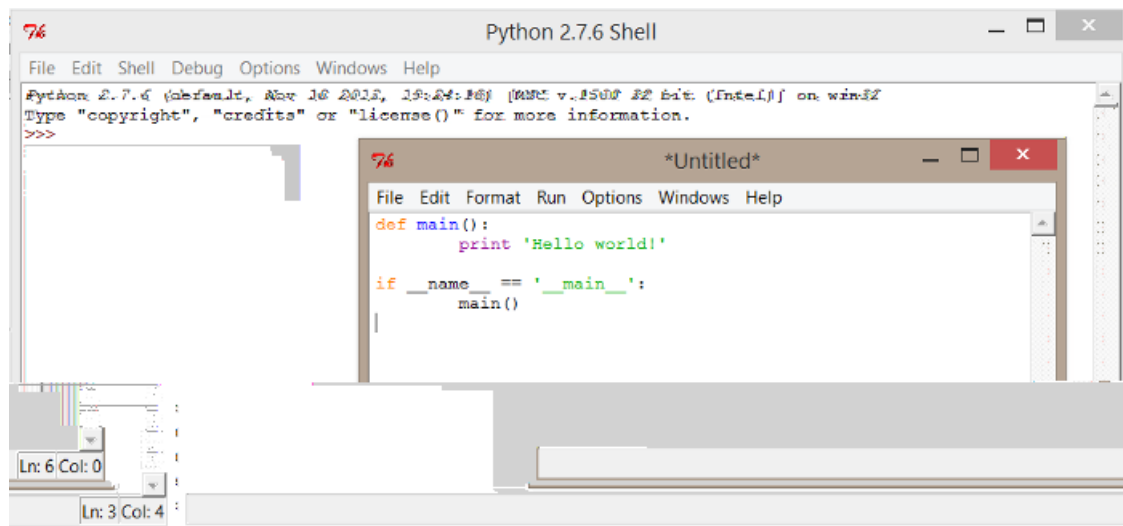


Figure 6.2: Hello world! in a Python script

Then, save the file in the “pythonscripts” folder. By convention, Python source files end with a `.py` extension, and so the name `01_helloworld.py` could be fine.

To execute the program, you can do one of:

- with the mouse: Click on the Menu “Run”, then “Run module”

- with the keyboard: Press F5

The expected output is as follow:

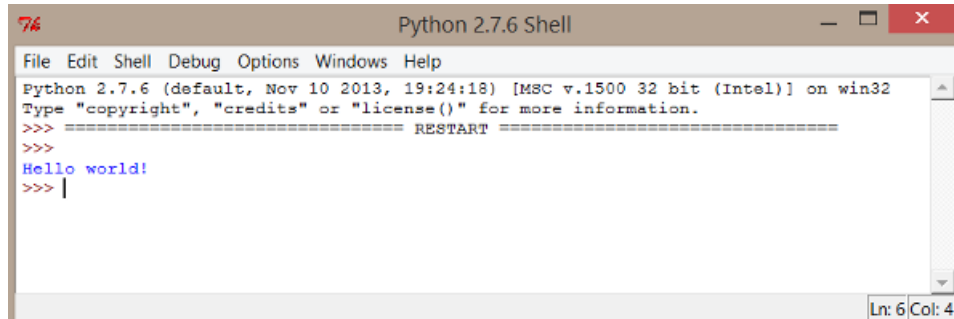


Figure 6.3: Output of the first script

A better practice while writing scripts is to describe by who, what and why this script was done. A nifty trick is to create a skeleton for any future script that will be written. Such ready-to-use script is available in the SPPAS package with the name `skeleton.py`.

Functions

Simple function

A function does something: it starts with its definition then is followed by its lines of code in a block.

Here is an example of function:

```

27  def print_vowels():
28      """ Print the list of French vowels on the screen. """
29
30      vowels = ['a', 'e', 'E', 'i', 'o', 'u', 'y', '@', '2', '9', 'a~', 'o~', 'U~']
31      print("List of French vowels:")
32      for v in vowels:
33          print(v)

```

What the `print_vowels()` function is doing? This function declares a list with name `vowels`. Each item of the list is a string representing a vowel in French encoded in X-SAMPA. Of course, this list can be overridden with any other set of strings. The next line prints a message. Then, a loop prints each item of the list.


At this stage, if a script including this function is executed, it will do... nothing! Actually, the function is created, but it must be invoked in the main function to be interpreted by Python. The new version is as follow:

```

40  if __name__ == '__main__':
41      print_vowels()

```

Practice: create a copy of the file `skeleton.py`, then make a function to print “Hello World!”.
(solution: `ex01_hello_world.py`).

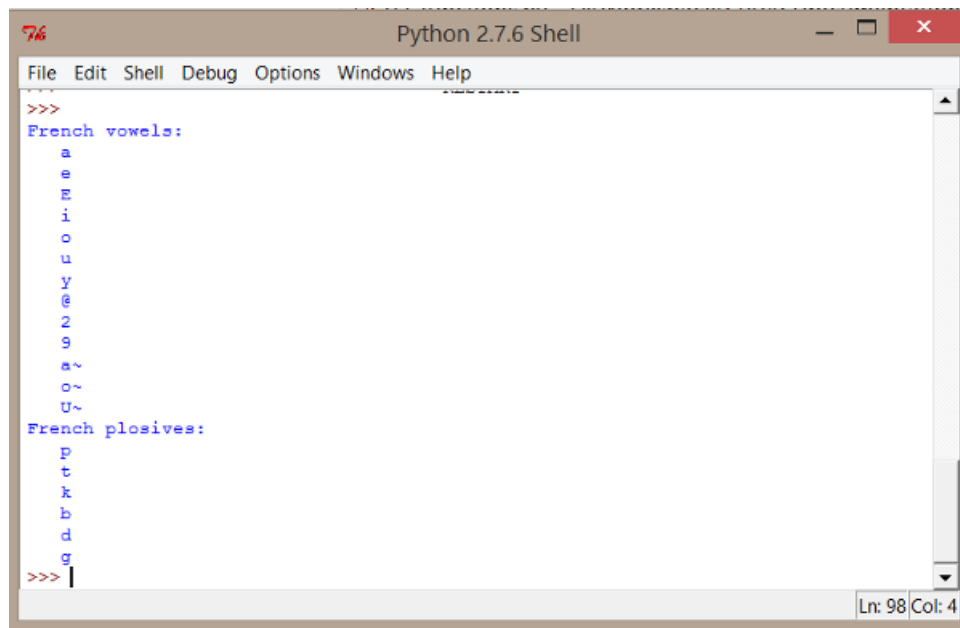

```

Python 2.7.6 Shell
File Edit Shell Debug Options Windows Help
>>>
French vowels:
a
e
E
i
o
u
Y
@
2
9
a~
o~
U~
French plosives:
P
t
k
b
d
g
>>>
Ln: 98 Col: 4

```

Figure 6.4: Output of the second script

Practice: add a function to print plosives and call it in the main function (solution: ex02_functions.py).

One can also create a function to print glides, another one to print affricates, and so on. Hum... this sounds a little bit fastidious! Lets update, or refactor, our printing function to *make it more generic*.

Function with parameters

Rather than writing the same lines of code with only a minor difference over and over, we can declare *parameters* to the function. Notice that the number of parameters of a function is not limited!

In the example, we can replace the `print_vowels()` function and the `print_plosives()` function by a single function `print_list(mylist)` where `mylist` can be any list containing strings or characters. If the list contains other typed-variables like numerical values, they must be converted to string to be printed out. This can result in the following function:

```

27 def print_list(mylist, message=""):
28     """ Print a list on the screen.
29
30     :param mylist: (list) is the list to print
31     :param message: (string) is an optional message to print before each element
32
33     """
34     for item in mylist:
35         print("{0} {1}".format(message, item))

```

Function return values


Functions are used to do a specific job and the result of the function can be captured by the program. In the following example, the function would return a boolean value, i.e. True if the given string has no character.

```

27  def is_empty(mystr):
28      """ Return True if mystr is empty. """
29
30      return len(mystr.strip()) == 0

```

Practice: Add this function in a new script and try to print various lists (solution: ex03_functions.py)

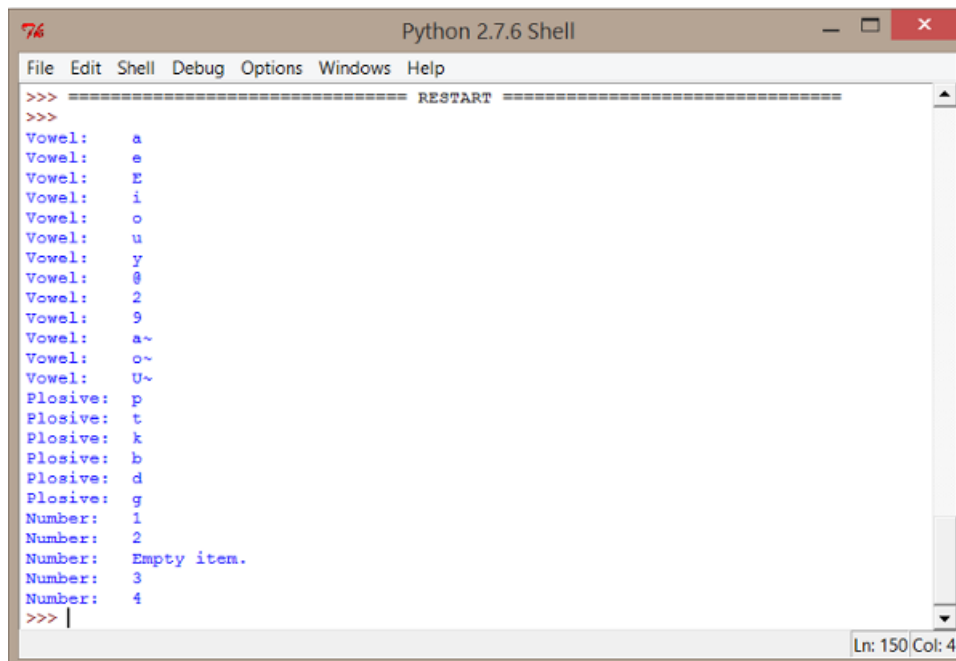

```

Python 2.7.6 Shell
File Edit Shell Debug Options Windows Help
>>> ===== RESTART =====
>>>
Vowel:  a
Vowel:  e
Vowel:  E
Vowel:  i
Vowel:  o
Vowel:  u
Vowel:  y
Vowel:  ø
Vowel:  2
Vowel:  9
Vowel:  a~
Vowel:  o~
Vowel:  U~
Plosive: p
Plosive: t
Plosive: k
Plosive: b
Plosive: d
Plosive: g
Number:  1
Number:  2
Number:  Empty item.
Number:  3
Number:  4
>>> |
Ln: 150 Col: 4

```

Figure 6.5: Expected output of the 3rd script

Reading/Writing files

Reading data from a file

Now, we'll try to get data from a file. Create a new empty file with the following lines - and add as many lines as you want; then, save it with the name "phonemes.csv" by using UTF-8 encoding:

```

occlusives ; b ; b
occlusives ; d ; d
fricatives ; f ; f
liquids ; l ; l
nasals ; m ; m
nasals ; n ; n
occlusives ; p ; p

```

```
glides ; w ; w
vowels ; a ; a
vowels ; e ; e
```

The following statements are typical statements used to read the content of a file. The first parameter of the `open` function is the name of the file, including the path (relative or absolute); and the second argument is the opening mode ('r' is the default value, used for reading).

Practice: Add this lines of code in a new script and try it (solution: `ex04_reading_simple.py`)

```
21 fp = open("C:\Users\Me\Desktop\pythonscripts\phonemes.csv", 'r')
22 for line in fp:
23     # do something with the line stored in variable l
24     print(line.strip())
25 f.close()
```

The following is a more generic solution, with the ability to deal with various file encodings, thanks to the `codecs` library:

```
21 def read_file(filename):
22     """ Get the content of file.
23
24     :param filename: (string) Name of the file to read, including path.
25     :returns: List of lines
26
27     """
28     with codecs.open(filename, 'r', encoding="utf8") as fp:
29         return fp.readlines()
```

In the previous code, the `codecs.open` functions got 3 parameters: the name of the file, the mode to open, and the encoding. The `readlines()` function gets each line of the file and store it into a list.

Practice: Write a script to print the content of a file (solution: `ex05_reading_file.py`)

Notice that Python `os` module provides useful methods to perform file-processing operations, such as renaming and deleting. See Python documentation for details: <https://docs.python.org/2/>

Writing data to a file

Writing a file requires to open it in a writing mode:

- 'w' is the mode to write data; it will erase any existing file;
- 'a' is the mode to append data in an existing file.

A file can be opened in an encoding and saved in another one. This could be useful to write a script to convert the encoding of a set of files. The following could help to create such script:

```
10     # getting all files of a given folder:
11     path = 'C:\Users\Me\data'
12     dirs = os.listdir( path )

15     # Converting the encoding of a file:
16     file_stream = codecs.open(file_location, 'r', file_encoding)
17     file_output = codecs.open(file_location+'utf8', 'w', 'utf-8')
18
19     for line in file_stream:
20         file_output.write(line)
```

Python tutorials

Here is a list of web sites with tutorials, from the easiest to the most complete:

1. [Learn Python, by DataCamp](#)
2. [Tutorial Points](#)
3. [The Python documentation](#)

Exercises to practice

Exercise 1: How many vowels are in a list of phonemes? (solution: `ex06_list.py`)

Exercise 2: Write a X-SAMPA to IPA converter. (solution: `ex07_dict.py`)

Exercise 3: Compare 2 sets of data using NLP techniques (Zipf law, Tf.Idf) (solution: `ex08_counter.py`)

The API of SPPAS to manage data

In this section, we are going to create Python scripts with the SPPAS Application Programming Interface *annotationdata* and then run them.

Overview

We are now going to write Python scripts using the *annotationdata* API included in SPPAS. This API is useful to read/write and manipulate files annotated from various annotation tools like SPPAS, Praat or Elan for example.

First of all, it is important to understand the data structure included into the API to be able to use it efficiently. Details can be found in the following publication:

Brigitte Bigi, Tatsuya Watanabe, Laurent Prévot (2014). **Representing Multimodal Linguistics Annotated data**, Proceedings of the 9th edition of the Language Resources and Evaluation Conference, 26-31 May 2014, Reykjavik, Iceland.

Why developing a new API?

In the Linguistics field, multimodal annotations contain information ranging from general linguistic to domain specific information. Some are annotated with automatic tools, and some are manually annotated. In annotation tools, annotated data are mainly represented in the form of “tiers” or “tracks” of annotations. Tiers are series of intervals defined by:

- a time point to represent the beginning of the interval;
- a time point to represent the end of the interval;
- a label to represent the annotation itself.

Of course, depending on the annotation tool, the internal data representation and the file formats are different. In Praat, tiers can be represented by a time point and a label (such tiers are respectively named `PointTiers` and `IntervalTiers`). `IntervalTiers` are made of a succession of consecutive intervals (labelled or un-labelled). In Elan, points are not supported; and unlabelled intervals are not represented nor saved.

The *annotationdata* API was designed to be able to manipulate all data in the same way, regardless of the file type. The API supports to merge data and annotations from a wide range of heterogeneous data sources.

The API class diagram

After opening/loading a file, its content is stored in a `Transcription` object. A `Transcription` has a name, and a list of `Tier` objects. Two tiers can't share the same name. The list of tiers can be empty. A hierarchy between tiers can be defined. Actually, subdivision relations can be established between tiers. For example, a tier with phonemes is a subdivision reference for syllables, or for tokens, and tokens are a subdivision reference for the orthographic transcription in IPU's. Such subdivisions can be of two categories: alignment or constituency.

A `Tier` has a name, and a list of `Annotation` objects. It also contains a set of meta-data and it can be associated to a controlled vocabulary.

An annotation is made of 2 objects:

- a `Location` object,
- a `Label` object.

A `Label` object is representing the “content” of the annotation. It is a list of `Text` associated to a score.

A `Location` is representing where this annotation occurs in the media. Then, a `Location` is made of a list of `Localization` which includes the `BasePlacement` associated with a score. A `BasePlacement` object is one of:

- a `TimePoint` object; or
- a `TimeInterval` object, which is made of 2 `TimePoint` objects; or
- a `TimeDisjoint` object which is a list of `TimeInterval`; or
- a `FramePoint` object; or
- a `FrameInterval` object; or
- a `FrameDisjoint` object.

The whole API documentation is available at the following URL: <http://www.sppas.org/manual/module-tree.html>

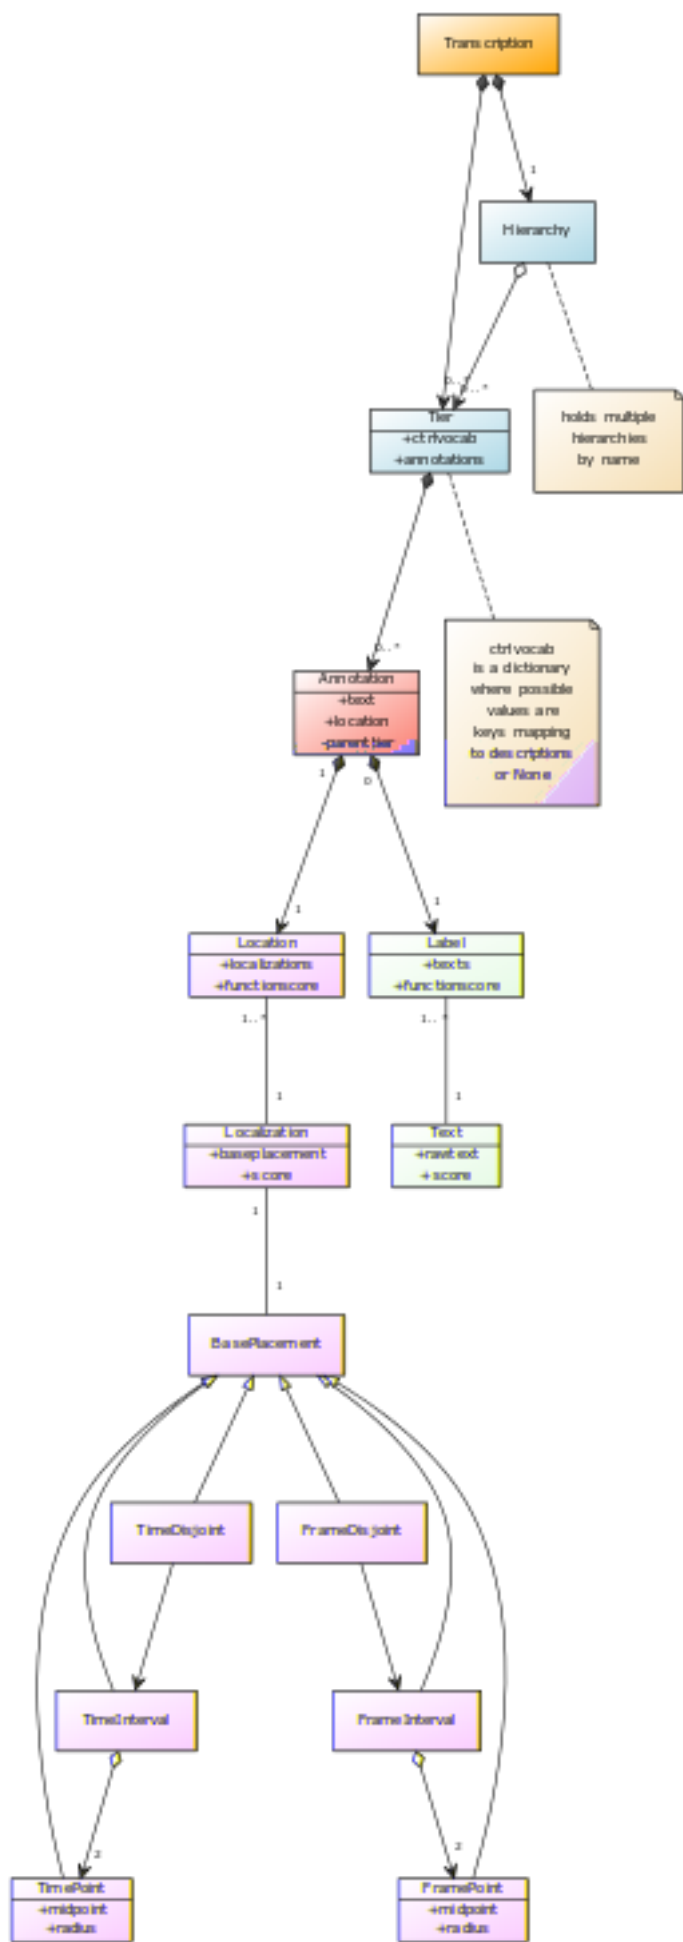


Figure 6.6: ADX1 model

Label representation

Each annotation holds at least one label, mainly represented in the form of a string, freely written by the annotator or selected from a list of categories, depending on the annotation tool. The *annotationdata* API allows to assign a score to each label, and allows multiple labels for one annotation.

Location representation

In the *annotationdata* API, a `TimePoint` is considered *as an imprecise value*. It is possible to characterize a point in a space immediately allowing its vagueness by using:

- a midpoint value (center) of the point;
- a radius value.

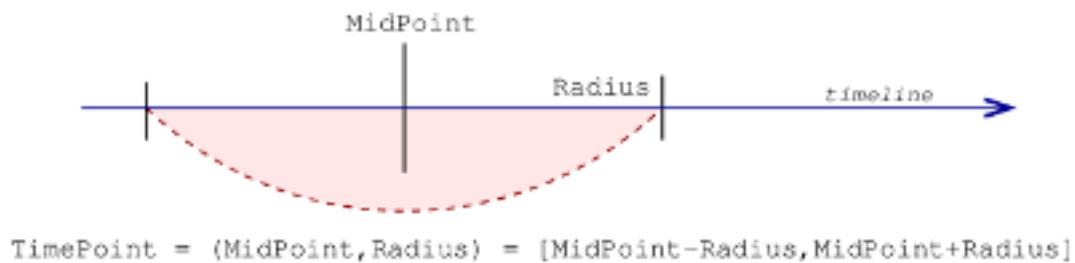


Figure 6.7: Representation of a TimePoint

Example

The screenshot below shows an example of multimodal annotated data, imported from 3 different annotation tools. Each `TimePoint` is represented by a vertical dark-blue line with a gradient color to refer to the radius value.

In the screenshot the following radius values were assigned:

- 0ms for prosody,
- 5ms for phonetics, discourse and syntax
- 40ms for gestures.

Creating scripts with annotationdata API

Preparing the data

To practice, you have first to create a new folder in your computer - on your Desktop for example; with name “sppasscripts” for example, and to execute the python IDLE.

Open a File Explorer window and go to the SPPAS folder location. Then, copy the `sppas` directory into the newly created “sppasscripts” folder. Then, go to the solution directory and copy/paste the files `skeleton-sppas.py` and `F_F_B003-P9-merge.TextGrid` into your “sppasscripts” folder. Then, open the skeleton script with the python IDLE and execute it. It will do... nothing! But now, you are ready to do something with the API of SPPAS!

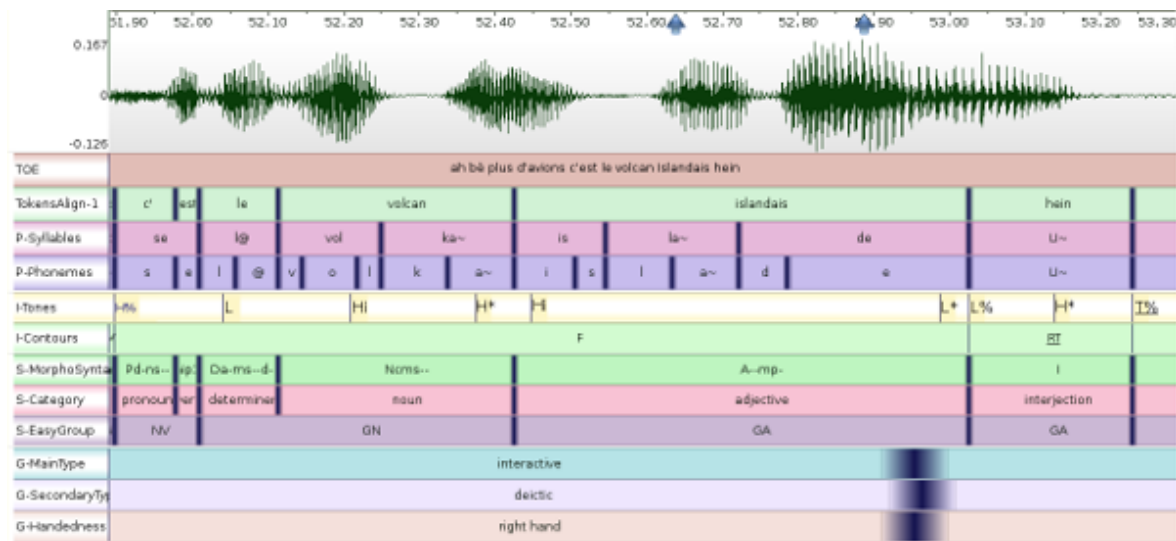


Figure 6.8: Example of multimodal data

Read/Write annotated files

We are being to Open/Read a file of any format (XRA, TextGrid, Elan, ...) and store it into a `Transcription` object instance. Then, this latter will be saved into another file.

```
1 trs = trsio.read(filename_in)
2 trsaio.write(filename_out, trs)
```

Only these two lines of code are required to convert a file from one format to another one! The appropriate reader/writer for the format is given by the extension of the name of the file.

To get the list of accepted extensions that the API can read, just use `trsaio.extensions_in`. The list of accepted extensions that the API can write is given by `trsaio.extensions_out`.

Currently, accepted input file extensions are:

- xra
- csv, txt
- TextGrid, PitchTier, IntensityTier
- eaf
- trs
- mrk
- sub, srt
- hz
- antx
- tdf

Possible output file extensions are:

- xra
- csv, txt, lab, ctm, stm

- TextGrid, PitchTier
- eaf
- mrk
- sub, srt
- antx

Practice: Write a script to convert a TextGrid file into CSV (solution: ex10_read_write.py)

Manipulating a Transcription object

The most useful functions used to manage a Transcription object are:

- Append(tier), Pop()
- Add(tier, index), Remove(index)
- Find(name, case_sensitive=True)

Append() is used to add a tier at the end of the list of tiers of the Transcription object; and Pop() is used to remove the last tier of such list.

Add() and Remove() do the same, except that it does not put/delete the tier at the end of the list but at the given index.

Find() is useful to get a tier from its name.

```
15     trs = trsaio.read('Filename-align.TextGrid')
16     for tier in trs:
17         # do something with the tier:
18         print(tier.GetName())
19     phonemes_tier = trs.Find("PhonAlign")
```

Transcription object has an iterator to get access to tiers.

```
15     trs = trsaio.read('Filename-align.TextGrid')
16     phonemes_tier = trs[0]
```

Practice: Write a script to select a set of tiers of a file and save them into a new file (solution: ex11_transcription.py).

Manipulating a Tier object

A tier is made of a name, a list of annotations and meta-data. To get the name of a tier, or to fix a new name, the easier way is to use tier.GetName().

The following block of code allow to get a tier and change its name. It should be tested into a script...

```
43     trs = trsaio.read(filename)
44     tier = trs[0]
45     print(tier.GetName())
46     tier.SetName("toto")
47     print(tier.GetName())
48     print(trs[0].GetName())
```

The most useful functions to manage a Tier object are:

- `Append(annotation), Pop()`
- `Add(annotation), Remove(begin, end, overlaps=False)`
- `IsDisjoint(), IsInterval(), IsPoint()`
- `Find(begin, end, overlaps=True)`
- `Near(time, direction)`
- `SetRadius(radius)`

Practice: Write a script to open an annotated file and print information about tiers (solution: `ex12_tiers_info.py`)

Goodies:

The file `ex12_tiers_info_wx.py` proposes a GUI to print information of one file, or all files of a directory, and to ask the file/directory name with a dialogue frame, instead of fixing it in the script. This script can be executed simply by double-clicking on it in the File Explorer of your system. Many functions of this script can be cut/pasted in any other script.

Main information on Annotation/Location/Label objects

The most useful methods used to manage an Annotation object are:

- `IsSilence(), IsLabel()`
- `IsPoint(), IsInterval(), IsDisjoint()`
- `GetBegin(), SetBegin(time)`, only if time is a `TimeInterval`
- `GetEnd(), SetEnd(time)`, only if time is a `TimeInterval`
- `GetPoint(), SetPoint(time)`, only if time is a `TimePoint`

The following example shows how to get/set a new label, and to set a new time value to an annotation:

```
1  if ann.GetLabel().IsEmpty():
2      ann.GetLabel().SetValue("dummy")
3  if ann.GetLocation().IsPoint():
4      p = ann.GetLocation().GetPoint()
5      p.SetMidPoint(0.234)
6      p.SetRadius(0.02)
7  if ann.GetLocation().IsInterval():
8      ann.GetLocation().GetBegin().SetMidPoint(0.123)
9      ann.GetLocation().GetEnd().SetMidPoint(0.234)
```

If something forbidden is attempted, the object will raise an Exception. This means that the program will stop except if the script “raises” the exception.

Exercises

Exercise 1: Write a script to print information about annotations of a tier (solution: `ex13_tiers_info.py`)

Exercise 2: Write a script to estimates the frequency of a specific annotation label in a file/corpus (solution: `ex14_freq.py`)

Search in annotations: Filters

Overview

This section focuses on the problem of *searching and retrieving* data from annotated corpora.

The filter implementation can only be used together with the `Tier()` class. The idea is that each `Tier()` can contain a set of filters, that each reduce the full list of annotations to a subset.

SPPAS filtering system proposes 2 main axis to filter such data:

- with a boolean function based either on the content, the duration or on the time of annotations,
- with a relation function between annotation locations of 2 tiers.

A set of filters can be created and combined to get the expected result. To be able to apply filters to a tier, some data must be loaded first. First, a new `Transcription()` has to be created when loading a file. Then, the tier(s) to apply filters on must be fixed. Finally, if the input file was NOT an XRA, it is widely recommended to fix a radius value depending on the annotation type.

Creating a boolean function

In the following, let `Bool` and `Rel` two predicates, a tier `T`, and a filter `f`.

Thus, the following matching predicates are proposed to select annotations (intervals or points) depending on their label. Notice that `P` represents the text pattern to find:

- exact match: `pr = Bool(exact=P)`, means that a label is valid if it strictly corresponds to the expected pattern;
- contains: `pr = Bool(contains=P)`, means that a label is valid if it contains the expected pattern;
- starts with, `pr = Bool(startswith=P)`, means that a label is valid if it starts with the expected pattern;
- ends with, `pr = Bool(endswith=P)`, means that a label is valid if it ends with the expected pattern.

These predicates are then used while creating a filter on labels. All these matches can be reversed, to represent does not exactly match, does not contain, does not start with or does not end with.

The next examples illustrate how to work with such filters and patterns. In this example, `f1` is a filter used to get all phonemes with the exact label 'a'. On the other side, `f2` is a filter that ignores all phonemes matching with 'a' (mentioned by the symbol '~') with a case insensitive comparison (`ixexact` means insensitive-exact).

```
tier = trs.Find("PhonAlign")
ft = Filter(tier)
f1 = LabelFilter(Bool(exact='a'), ft)
f2 = LabelFilter(~Bool(ixexact='a'), ft)
```

For complex search, a selection based on regular expressions is available by using `pr = Bool(regex=R)`.

A multiple pattern selection can be expressed with the operators `|` to represent the logical "or" and the operator `&` to represent the logical "and".

With this notation in hands, it is possible to formulate queries as, for example: *Extract words starting by "ch" or "sh", like:*

```
pr = Bool(startswith="ch") | Bool(startswith="sh")
```

Filters on duration can also be created on annotations if Time instance is of type TimeInterval. In the following, *v* represents the value to be compared with:

- lower: `pr = Bool(duration_lt=v)`, means that an annotation of *T* is valid if its duration is lower than *v*;
- lower or equal: `pr = Bool(duration_le=v)`;
- greater: `pr = Bool(duration_gt=v)`;
- greater or equal: `pr = Bool(duration_ge=v)`;
- equal: `pr = Bool(duration_e=v)`;

Search can also starts and ends at specific time values in a tier by creating filters with `begin_ge` and `end_le`.

Finally, the user must apply the filter to get filtered data from the filter.

```
1      # creating a complex boolean function
2      predicate = (Bool(icontains="a") | Bool(icontains="e")) & Bool(duration_ge=0.08)
3
4      # to create a filter:
5      ft = Filter(tier)
6      flab = LabelFilter(predicate, ft)
7
8      # to get filtered data from the filter:
9      tier = flab.Filter()
10     tier.SetName('Filtered with a-e-0.8')
```

Creating a relation function

Relations between annotations is crucial if we want to extract multimodal data. The aim here is to select intervals of a tier depending on what is represented in another tier.

We implemented the 13 Allen interval relations: before, after, meets, met by, overlaps, overlapped by, starts, started by, finishes, finished by, contains, during and equals. Actually, we implemented the 25 relations proposed in the INDU model. This model is fixing constraints on INtervals (with Allen's relations) and on DURATION (duration are equals, one is less/greater than the other).

MISSING:List of Allen interval relations./etc/screenshots/allen.png

Below is an example of implementing the request: *Which syllables stretch across 2 words?*

```
1      # Get tiers from a Transcription object
2      tiersyll = trs.Find("Syllables")
3      tiertoks = trs.Find("TokensAlign")
4
5      # Create filters
6      fsyll = Filter(tiersyll)
7      ftoks = Filter(tiertoks)
8
9      # Create the filter with the relation function (link both filters)
```

```
10 predicate = Rel("overlaps") | Rel("overlappedby")
11 f = RelationFilter(relation, fsyll, ftoks)
12
13 # to get filtered data from the filter:
14 tier = f.Filter()
15 tier.SetName('Syllables across Tokens')
```

Exercises

Exercise 1: Create a script to filter annotated data on their label (solution: `ex15_annotation_label_filter.py`).

Exercise 2: Idem with a filter on duration or time. (solution: `ex16_annotation_time_filter.py`).

Exercise 3: Create a script to get tokens followed by a silence. (solution: `ex17_annotations_relation_filter1.py`).

Exercise 4: Create a script to get tokens preceded by OR followed by a silence. (solution: `ex17_annotations_relation_filter2.py`).

Exercise 5: Create a script to get tokens preceded by AND followed by a silence. (solution: `ex17_annotations_relation_filter3.py`).

More with SPPAS API

In addition to *annotationdata*, SPPAS contains several other API that could be relevant for users to simplify their lives!!! They are all free and open source Python libraries, with a documentation and a set of tests.

Among others:

- *audiodata* to manage digital audio data: load, get information, extract channels, re-sample, search for silences, mix channels, etc.
- *calculus* to perform some math on data, including descriptive statistics.
- *resources* to access and manage linguistic resources like lexicons, dictionaries, etc.

References

References about SPPAS

How to cite SPPAS?

By using SPPAS, you agree to cite any of the references in this chapter. For a general citation of SPPAS, simply use the main reference below. A PDF version of this publication is available in the folder `documentation` of the SPPAS package.

Brigitte Bigi (2015). SPPAS - Multi-lingual Approaches to the Automatic Annotation of Speech. In “the Phonetician” - International Society of Phonetic Sciences, ISSN 0741-6164, Number 111-112 / 2015-I-II, pages 54-69.

For a specific purpose of SPPAS, like for automatic syllabification, forced-alignment, or for the request system, please refer to the related specific publication. All the papers are available on [the author website](http://www.lpl-aix.fr/~bigi/publications.html), at the following URL: <http://www.lpl-aix.fr/~bigi/publications.html>

SPPAS software description

Brigitte Bigi (2012). SPPAS: a tool for the phonetic segmentations of Speech, The eight international conference on Language Resources and Evaluation, Istanbul (Turkey), pages 1748-1755, ISBN 978-2-9517408-7-7.

Brigitte Bigi, Daniel Hirst (2012) SPeech Phonetization Alignment and Syllabification (SPPAS): a tool for the automatic analysis of speech prosody, Speech Prosody, Tongji University Press, ISBN 978-7-5608-4869-3, pages 19-22, Shanghai (China).

Brigitte Bigi, Daniel Hirst (2013). What’s new in SPPAS 1.5?, Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, pp. 62-65.

About Text Normalization

Brigitte Bigi (2011). **A Multilingual Text Normalization Approach**, 2nd Less-Resourced Languages workshop, 5th Language & Technology Conference, Poznan (Poland).

Brigitte Bigi (2014). **A Multilingual Text Normalization Approach**, Human Language Technologies Challenges for Computer Science and Linguistics LNAI 8387, Springer, Heidelberg. ISBN: 978-3-319-14120-6. Pages 515-526.

Roxana Fung, Brigitte Bigi* (2015). **Automatic Word Segmentation for Spoken Cantonese**, The Oriental Chapter of COCOSDA (International Committee for the Co-ordination and Standardization of Speech Databases and Assessment Techniques).

About Phonetization

Brigitte Bigi, Pauline Péri, Roxane Bertrand (2012). **Orthographic Transcription: Which Enrichment is required for Phonetization?**, Language Resources and Evaluation Conference, Istanbul (Turkey), pages 1756-1763, ISBN 978-2-9517408-7-7.

Brigitte Bigi (2013). **A phonetization approach for the forced-alignment task**, 3rd Less-Resourced Languages workshop, 6th Language & Technology Conference, Poznan (Poland).

Brigitte Bigi (2016). **A phonetization approach for the forced-alignment task in SPPAS**, Human Language Technologies Challenges for Computer Science and Linguistics, LNAI 9561, pp. 515–526, Springer, Heidelberg. ISBN: 978-3-319-14120-6.

About Forced-Alignment

Brigitte Bigi (2012). **The SPPAS participation to Evalita 2011**, Working Notes of EVALITA 2011, Rome (Italy), ISSN: 2240-5186.

Brigitte Bigi (2014). **Automatic Speech Segmentation of French: Corpus Adaptation**. 2nd Asian Pacific Corpus Linguistics Conference, p. 32, Hong Kong.

Brigitte Bigi (2014). **The SPPAS participation to Evalita 2014**, Proceedings of the First Italian Conference on Computational Linguistics CLiC-it 2014 and the Fourth International Workshop EVALITA 2014, Pisa (Italy). Editors R. Basili, A. Lenci, B. Magnini. ISBN 978-886741-472-7. Volume 2. Pages 127-130.

About Syllabification

Brigitte Bigi, Christine Meunier, Irina Nesterenko, Roxane Bertrand (2010). **Automatic detection of syllable boundaries in spontaneous speech**, Language Resource and Evaluation Conference, pages 3285-3292, La Valetta, Malte.

Brigitte Bigi, Caterina Petrone, Leonardo Lancia (2014). **Automatic Syllabification of Italian: adaptation from French**. Laboratory Approaches to Romance Phonology VII, Aix-en-Provence (France).

Brigitte Bigi, Caterina Petrone (2014). **A generic tool for the automatic syllabification of Italian**, Proceedings of the First Italian Conference on Computational Linguistics CLiC-it 2014 and the Fourth International Workshop EVALITA 2014, Pisa (Italy). Editors R. Basili, A. Lenci, B. Magnini. ISBN 978-886741-472-7. Volume 1. Pages 73-77.

Brigitte Bigi, Katarzyna Klessa (2015). **Automatic Syllabification of Polish**, 7th Language and Technology Conference: Human Language Technologies as a Challenge for Computer Science and Linguistics, pp. 262–266, Poznan, Poland.

About Repetitions

Brigitte Bigi, Roxane Bertrand, Mathilde Guardiola (2014). **Automatic detection of other-repetition occurrences: application to French conversational speech**, 9th International conference on Language Resources and Evaluation (LREC), Reykjavik (Iceland), pages 2648-2652. ISBN: 978-2-9517408-8-4.

About analyses tools

Brigitte Bigi, Jorane Saubesty (2015). **Searching and retrieving multi-levels annotated data**, Proceedings of Gesture and Speech in Interaction, Nantes (France).

About the API

Brigitte Bigi, Tatsuya Watanabe, Laurent Prévot (2014). **Representing Multimodal Linguistics Annotated Data**, 9th International conference on Language Resources and Evaluation (LREC), Reykjavik (Iceland), pages 3386-3392. ISBN: 978-2-9517408-8-4.

Related references

Some results of analyses

Marion Tellier, Gale Stam, Brigitte Bigi (2012). **Same speech, different gestures?**, 5th International Society for Gesture Studies (ISGS), Lund, Sweden.

Marion Tellier, Gale Stam, Brigitte Bigi (2013). **Gesturing While Pausing In Conversation: Self-oriented Or Partner-oriented?**, TIGER, Tillburg.

Laurent Prévot, Brigitte Bigi, Roxane Bertrand (2013). **A quantitative view of feedback lexical markers in conversational French**, 14th Annual Meeting of the Special Interest Group on Discourse and Dialogue, Metz, France.

Brigitte Bigi, Katarzyna Klessa, Laurianne Georgeton, Christine Meunier (2015). **A syllable-based analysis of speech temporal organization: a comparison between speaking styles in dysarthric and healthy populations.** Interspeech2015, Dresden (Germany), pages 2977-2981.

Laurent Prevot, Jan Gorisch, Roxane Bertrand, Emilien Gorene and Brigitte Bigi (2015). **A SIP of CoFee: A Sample of Interesting Productions of Conversational Feedback**, 16th Annual Meeting of the Special Interest Group on Discourse and Dialogue, Prague (Czech Republic), pp. 149–153.

Brigitte Bigi, Roxane Bertrand (2016). **Laughter in French Spontaneous Conversational Dialogs**, Tenth International Conference on Language Resources and Evaluation (LREC 2016), pp. 2168-2174, Portoroz, Slovenia.

Some corpora

Sophie Herment, Anastasia Loukina, Anne Tortel, Daniel Hirst, Brigitte Bigi (2012). **AixOx, a multi-layered learners corpus: automatic annotation**, Proceedings of international conference on corpus linguistics, Jaën (Spain).

Ellen Gurman Bard, Corine Astésano, Alice Turk, Mariapaola D'imperio, Noel Nguyen, Laurent Prévot, Brigitte Bigi (2013). **Aix MapTask: A (rather) new French resource for prosodic and discourse studies**, Proceedings of Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, Eds B. Bigi and D. Hirst, ISBN: 978-2-7466-6443-2, pp. 15-19.

Daniel Hirst, Brigitte Bigi, Hyongsil Cho, Hongwei Ding, Sophie Herment, Ting Wang (2013). **Building OMProDat: an open multilingual prosodic database**, Proceedings of Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, Eds B. Bigi and D. Hirst, ISBN: 978-2-7466-6443-2, pp. 11-14.

Jan Gorish, Corine Astésano, Ellen Gurman Bard, Brigitte Bigi, Laurent Prévot (2014). **Aix Map Task corpus: The French multimodal corpus of task-oriented dialogue**, 9th International conference on Language Resources and Evaluation (LREC), Reykjavik (Iceland), pages 2648-2652. ISBN: 978-2-9517408-8-4.

Christine Meunier, Cécile Fougeron, Corinne Fredouille, Brigitte Bigi, Lise Crevier-Buchman, Elisabeth Delais-Roussarie, Laurianne Georgeton, Alain Ghio, Imed Laaridh, Thierry Legou, Claire Pillot-Loiseau, Gilles Pouchoulin (2016). **The TYPALOC Corpus: A Collection of Various Dysarthric Speech Recordings in Read and Spontaneous Styles**, Tenth International Conference on Language Resources and Evaluation (LREC 2016), pp. 4658-4665, Portoroz, Slovenia.

Tools re-implemented into SPPAS

Daniel Hirst and Robert Espesser (1993). *Automatic modelling of fundamental frequency using a quadratic spline function.* Travaux de l'Institut de Phonétique d'Aix. vol. 15, pages 71-85.

D.-J. Hirst (2011). *The analysis by synthesis of speech melody: from data to models*, Journal of Speech Sciences, vol. 1(1), pages 55-83.

Dafydd Gibbon (2013). **TGA: a web tool for Time Group Analysis**, Tools and Resources for the Analysis of Speech Prosody, Aix-en-Provence, France, pp. 66-69.

SPPAS in research projects

You used SPPAS into your research project? Send an e-mail to the author to append it into this section!

MULTIPHONIA

SPPAS was used to annotate the MULTIPHONIA corpus (MULTImodal database of PHONetics teaching methods in classroom InterActions) created by Charlotte ALAZARD, Corine ASTESANO, Michel BILLIÈRES.

This database consists of audio-video classroom recording comparing two methods of phonetic correction (the “traditional” articulatory method, and the Verbo-Tonal Method). This database is composed of 96 hours of pronunciation classes with beginners and advanced students of French as a Foreign Language. Every class lasted approximatively 90 minutes. This multimodal database constitutes an important resource for Second Language Acquisition’s researchers. Hence, MULTIPHONIA will be enriched at many different levels, to allow for segmental, prosodic, morphosyntactic, syntactic, lexical and gestural analyses of L2 speech.

Charlotte Alazard, Corine Astésano, Michel Billières **MULTIPHONIA: a MULTImodal database of PHONetics teaching methods in classroom InterActions**, Language Resources and Evaluation Conference, Istanbul (Turkey), May 2012.

MULTIPHONIA: <http://www.sldr.org/sldr000780/en>

Amennpro

SPPAS was used for the annotation of the French part of the AixOx corpus.

- four way recordings of French and English texts;
- read by English and French speakers;
- non-native speakers were divided into advanced and beginners.

Download the AixOx corpus: <http://www.sldr.fr/sldr000784/>

Remark:

Some examples are located in the samples-fra directory (files F_F_*.*) and in the samples-eng (files E_E*.*) .

Evalita 2011: Italian phonetization and alignment

Evalita 2011 was the third evaluation campaign of Natural Language Processing and Speech tools for Italian, supported by the NLP working group of AI*IA (Associazione Italiana per l'Intelligenza Artificiale/Italian Association for Artificial Intelligence) and AISV (Associazione Italiana di Scienze della Voce/Italian Association of Speech Science).

SPPAS participated to the Forced Alignment on Spontaneous Speech for both tasks:

- Phone segmentation
- Word segmentation

The corpus was a set of Dialogues, map-tasks:

- 3h30 speech;
- 15% phones are: “sil”, filled-pauses, garbage.

Cofee: Conversational Feedback

In a conversation, feedback is mostly performed through short utterances produced by another participant than the main current speaker. These utterances are among the most frequent in conversational data. They are also considered as crucial communicative tools for achieving coordination in dialogue. They have been the topic of various descriptive studies and often given a central role in applications such as dialogue systems. Cofee project addresses this issue from a linguistic viewpoint and combines fine-grained corpus analyses of semi- controlled data with formal and statistical modelling.

Cofee is managed by Laurent Prévot: <http://cofee.hypotheses.org/>

Cofee corpora and the use of SPPAS on such corpora is presented in:

Jan Gorish, Corine Astésano, Ellen Gurman Bard, Brigitte Bigi, Laurent Prévot (2014).
Aix Map Task corpus: The French multimodal corpus of task-oriented dialogue, 9th International conference on Language Resources and Evaluation (LREC), Reykjavik (Iceland).

Variamu: Variations in Action: a Multilingual approach

Variamu is an international collaborative joint project co-funded by Amidex. The scientific object of the collaboration is the issue of language variation addressed from a comparative perspective. Speech and language knowledge supports a growing number of strategic domains such as Human Language Technologies (HLT), Language Learning (LL), and Clinical Linguistics (CL). A crucial issue to these domains is language variation, which can result from dysfunction, proficiency, dialectal specificities, communicative contexts or even inter-individual differences. Variation is often an important part of the question itself.

This network will be structured around 3 research axes, all centered on the variation concept:

1. Language technologies,
2. Linguistics and Phonetics,
3. Speech and Language Pathologies.

SPPAS is mainly concerned by the first axe.

The first result of this project is the participation of SPPAS at the Evalita 2014 campaign, for the FACS task: Forced-Alignment on Children Speech.

The second result of this project is the support of Cantonese into SPPAS, thanks to a collaboration with Prof. Tan Lee of the University of Hong Kong.

SPPAS Release notes

The early versions

Versions 1.0 to 1.3 was made only of `tcsh` and `gawk` scripts. It was developed under Linux system and was efficiently tested under Windows with Cygwin.

Version 1.0 (2011, 9th March)

The only feature was that it was able to perform speech segmentation of English read speech.

Version 1.1 (2011, 7th June)

This was mainly the debug of the previous version and some code re-organization and cleaning.

Version 1.2 (2011, 23th July)

The support of English, French and Italian was added: a lexicon, a pronunciation dictionary and an acoustic model of each language was created. Three annotations were implemented: Tokenization, Phonetization, Alignment. The basis for a *multi-lingual methodology* was then already there.

Version 1.3 (2011, 12th December)

This is a transitional version, from the scripts language to Python programming language. The main fixes and improvements were:

Development:

- MacOS support
- bugs corrected in many scripts
- `check.csh` -> `check.py`
- `sppas.csh` -> `sppas.py`

- GUI: zenity -> pyGtk
- sox limited to the use of re-sampling audio signal
- a python library to manage wav files is added.
- IPU's segmentation automatic annotation

Resources:

- Italian dictionary improved
- Italian acoustic model changed (triphones trained from map-task dialogues)
- French acoustic model changed

But the program still haven't a name and isn't distributed.

The birth of SPPAS

SPPAS 1.4.0 (2012, 14th June)

It's the official birth of SPPAS: the software has a name, a license, a GUI, a web-page and is freely distributed to the community.

The source code is only based on Python 2.7 language and the GUI is based on WxPython 2.8.x or 2.9.x (on MacOS, wxpython must be 32 bits). SPPAS requires also `sox` and `julius` software to be installed.

Automatic annotations main changes:

- add Momel: Momel (MOdelling MELody) is an algorithm developed by Daniel Hirst and Robert Espesser for the analysis and synthesis of intonation patterns. Momel needs a .hz files with pitch values: ASCII file with one value each 10ms. This Momel implementation can be used directly, with a large set of options: `> python $SPPAS/scripts/lib/momel.py -h`

or in SPPAS, using the GUI, or in text-mode (only with default options): `> $SPPAS/sppas.py -i INPUT -momel`

- add the first version of INTSINT, proposed by Daniel Hirst. INTSINT is an acronym for INternational Transcription System for INTonation. INTSINT codes the intonation of an utterance by means of an alphabet of 8 discrete symbols constituting a surface phonological representation of the intonation.

Packaging:

- merge AUTHORS, VERSION and README files in the README file
- create packages in the lib directory (2012-03-20)
- ipu-segmentation in python (2012-02-16)
- improve ipu segmentation algorithm (2012-05-24)
- phonetization in python (2012-02-27), with an unknown word phonetization.
- alignment entirely in python (2012-03-29)
- syllabification implemented with python, and tool/syllabify.py
- add a simple terminal controller (not needed for Unix, just for "DOS")

- Momel can read PitchTier (from Praat) files
- Momel can deal with long sounds (not only one IPU)
- manage source files, comments, exceptions...
- SPPAS works as a single instance by mean of a lock file.
- SPPAS can be installed in a directory containing spaces and can deal with file names with spaces (bug fixed: 2012-06-11)

GUI:

- GUI with the wxpython library (2012-03-27)
- Manage a list of selected files
- Add a “File information”
- Add a “Wav player”
- Fix options to each annotation step with the menu
- Open the log file after each process

Resources:

- French dictionary is using UTF-8 (instead of iso8859-1 in previous versions)
- French dictionary is based on X-SAMPA phone set
- Chinese: work with chinese characters instead of pinyin.

Known Bugs:

- The wav player can not play wav files if the filename contains ‘#’.
- The first line of the Italian dictionary must be changed to “# [#] #”.

SPPAS 1.4.1 (2012, 13th July)

Resources:

- Updated English acoustic model (from voxforge, 2012-06-25)
- English acoustic models converted to X-SAMPA

Annotations:

- IPU's Segmentation annotation performs a simple silence detection if no transcription is available (the volume is automatically adjusted)
- A specific language can be selected for each annotation depending on available resources
- Updated transcription conventions:
 - truncated words: a ‘-’ at the end of the token string (an ex- example)
 - liaisons: the ‘letter’ between ‘=’ (an =n= example)
 - noises: * (only for FR and IT)
 - short pauses: + (a + example)
 - silences: # (a # example)

GUI:

- Create (systematically) a merged annotations TextGrid file.

Development:

- Package's management

SPPAS 1.4.2 (2012, 2nd August)

GUI:

- add a panel with a Transcription editor
- IPU segmentation can split a wav into tracks
- IPU segmentation can fix a shift value to boundaries
- IPU segmentation: min-volume option is removed (because the min-volume value is automatically adjusted)
- “File Information” button adds some tier manipulation tools: cut/copy/paste/rename/duplicate/move/preview/filter

Known bug:

- The filter frame is not working under Windows XP.

SPPAS 1.4.3 (2012, 10th October)

This is primarily a bug-fix release. The author is addressing many thanks to all users who send their comments!

GUI:

- Frames and Dialog design is more uniform.
- Users preferences changed. Themes and colors introduced.
- Help is available.

Annotations:

- Bug fixed for phonetization/alignement if the input transcription contains series of silence intervals or series of speech intervals. Previous versions was supposing a **strict IPUs** input transcription.
- Tokenization is done.

Development:

- Code cleaning in the package wxGUI.
- Debug...

SPPAS 1.4.4 (2012, 6th December)

GUI:

- add information/options when “Request” a file
- debug Request/Filter (for Windows systems)

Annotations:

- New Italian acoustic model
- New Chinese acoustic model, and some minor changes in the dictionary

Development:

- “.trs” files support (transcriptions from Transcriber)
- debug (alignment, tokenization)
- add “.lab” files export (HTK format)

Known bugs:

- Alignment: it fails under Windows, if `julius` is not installed properly.
- Syllabification: the last syllable of each file is “broken”.
- Alignment error if unknown words during phonetization.

SPPAS 1.4.5 (2013, 15th January)

Development:

- Correct a few bugs of the previous version (phonetization, alignment, syllabification)
- “.eaf” files support (transcriptions from Elan software)

Annotations:

- Experimental version of Vietnamese
- add Tokenization as a specific annotation level
- add Phonetization of PinYin

GUI:

- Request/Filter a tier: multiple patterns filtering
- Request: add a “New File” button

Tools/scripts:

- `tierfilter.py`
- `tiercombine.py`

SPPAS 1.4.6 (2013, 12th February)

GUI:

- Improved Request/Filter a tier:
- add new modes: not contains, not starts with, not ends with
- add time constraints: minimum duration, maximum duration, meets
- multiple modes selection (replace radio buttons by check buttons)
- Add Requests/Stats to obtain basic statistics
- Requests Copy/Cut/Paste/Duplicate/Save debugged

Annotations:

- IPU segmentation: can take a “Name” tier to fix names of tracks (if the “Split into tracks” option is checked)

SPPAS 1.4.7 (2013, 25th March)

Requests/Filter:

- “Starts search at...” and “Ends search at...”
- remove negative search (because of a bug...). Replaced by a “reverse” option.

Development:

- re-organization of lib, except for the wxGUI library.
- Cancel the sppas.lock file creation when SPPAS is running.

Resources:

- add experimental version of Taiwanese automatic segmentation (from romanized transcriptions)

Annotations:

- New version of INTSINT, based on the algorithm proposed in (Hirst 2011) and implemented in the last version of Momel/INTSINT Praat plugin!

SPPAS 1.4.8 (2013, 30th May)

Development:

- reorganization of the GUI code. SPPAS is made of:
- automatic annotations;
- 3 components (wavplayer, transcriber, requests).

- sppas.py removed. sppas.bat created (for Windows).
- Input/Output library entirely changed

GUI:

- components (wavplayer, transcriber, requests) in separate frames
- new design
- Help and documentation changed, expanded and improved

SPPAS 1.4.9 (2013, 3rd July)

SPPAS has a new and more colored logo!

Development:

- bug correction:
- Bug fixed in IPU segmentation with option “Split into tracks”
- Bug fixed in Momel with some rare files
- Bug fixed to create a merged file
- Bug fixed in align and IPU seg.
- Bug fixed in Transcriber
- library organization revised

GUI:

- Add an export button to the File List Panel
- Migrate wav infos from the Requests component to the Wav player component
- Volume control removed in the Wav Player component
- Save As improved in the Requests component

SPPAS 1.5.0 (2013, 2nd August)

Development:

- bug correction

Annotation:

- Tokenization: TOE support finalized

GUI:

- Transcribe: debug of IPU player, for MacOS

Resources:

- New French acoustic model. Attention: phoneset changed.
- New French dictionary: use the new phoneset!
- New Taiwanese acoustic model. Attention: phoneset changed: accept some chinese...
- New Taiwanese dictionary: use the new phoneset + some chinese syllables added.
- Vietnamese removed: due to the lack of data, the model can't be improved.

SPPAS 1.5.1 (2013, 29th August)

Development:

- bug correction in annotations
- help system debugged

Annotation:

- Phonetization of unknown words improved

Resources:

- French dict modified

SPPAS 1.5.2 (2013, 27th September)

All resources are moved into the “resources” directory.

Development:

- bug correction in annotations and GUI

Resources:

- French dict modified
- New resources for the tokenization

Components:

- “Statistics”: an advanced component to estimate (and save!) descriptive statistics on multiple annotated files

SPPAS 1.5.3 (2013, 25th October)

Resources:

- Add Spanish support

Components:

- improved Statistics component
- Add a “Filter” component, first version with a basic GUI

GUI:

- Help updated.

SPPAS 1.5.4 (2013, 3rd December)

Components:

- Wav Player changed.
- Information and Requests removed. Replaced by Data Roamer.
- Transcriber removed. Replaced by IPU Transcriber.
- Statistics updated.
- Filter updated.

Annotations:

- Add Repetitions (detection of sources only)

Notice that this is the first stable release.

SPPAS 1.5.5 (2013, 23th December)

Development:

- improved annotationdata (add methods: Find, Index; add uncertain label; debug radius).

Components:

- debug

GUI:

- Tips at start-up
- New theme: Christmast

SPPAS 1.5.6 (2014, 28th January)

Development:

- improved annotationdata (add methods: Near, Search).
- Package cleaning!

Components:

- debug

Resources:

- New Italian dictionary (including gemination)

SPPAS 1.5.7 (2014, 18th February)

Plugins manager added.

Resources:

- Japanese support, thanks to the resources available on the Julius website.

SPPAS 1.5.8 (2014, 18th March)

Development:

- annotationdata: more flexibility while adding annotations, add sub-divisions, export csv modified, doc-strings, import/export in a native format (xra, version 1.0).

Documentation:

- add a PDF file of slides: “SPPAS for dummies”

SPPAS 1.5.9 (2014, 15th April)

Components:

- new: DataViewer, experimental version

Annotations:

- syllabification rules: accept 2 types of vowels (V and W)
- syllabification: faster!

Development:

- Export Elan
- Import/Export xra. XRA is the native format of SPPAS annotation files. See etc/xra for details.

Resources:

- New French acoustic model

SPPAS 1.6.0 (2014, 22th May)

Package:

- Rename folder “Doc” to “documentation”
- A documentation is created
- SPPAS-for-dummies updated

Development:

- helpsystem removed
- GUI: package re-organization, re-implementation.
- Alignment: choice of the aligner (julius, hvite or basic)

Resources:

- new acoustic model: FR-Read and FR
- new acoustic model: ZH
- new acoustic model: TW
- new acoustic model: SP

SPPAS 1.6.1 (2014, 26th September)

Development:

- bug correction (export, syllabification, alignment)
- DataViewer, major bugs corrected.

Resources:

- Italian: new pronunciation dictionary and new acoustic model
- add resources for Catalan

GUI:

- add a new Export button

SPPAS 1.6.2 (2014, 21th October)

Resources:

- language names changed. They are now corresponding to the international standard ISO639-3. See <http://www-01.sil.org/iso639-3/>
- Mandarin Chinese dictionary changed.
- Catalan dictionary changed.

SPPAS 1.6.3 (2014, 2nd November)

Resources:

- Add resources for Cantonese

Documentation:

- It's now (more or less) finished!

Development:

- Support of Elan improved (add Controlled vocabulary)

GUI:

- Change the organization of the main frame: annotations above components

This version is known to be a stable release.

The childhood of SPPAS

SPPAS 1.6.4 (2014, 5th December)

From this version, SPPAS requires wxpython to be updated to version 3.0, particularly for MacOS users, and they need to install the 64 bits version. It is recommended to Windows users to install Python 2.7 and wxpython in 32bits.

Development:

- Package re-organized!
- Phonetization of unknown words improved
- Support of upper/lower of the extension of speech files (wav, WAV)
- Tokenization of languages with dictionaries in upper case (eng, ita): bug fixed.
- Creates systematically a dump file of resources for a faster load at the next use
- Read TextGrid files exported by Elan: bug fixed.
- `sppas.command` checks the system and run either in 32 or 64 bits (MacOS)

Components:

- IPUscribe replaces IPUTranscriber mainly for the support of large files: tested with a file of 1 hour speech (143 Go) and 800 IPU's.
- SndRoamer replaces WavPlayer
- Dataroamer has also a new version

SPPAS 1.6.5 (2014, 17th December)

This is primarily a bug-fix release.

Development:

- all programs in “bin” and “scripts” sub-directories were revised and tested, or removed.

Annotation:

- Tokenization: code cleaning and re-organisation.

GUI:

- Procedure outcome report: print a warning message in the log file if no file is matching the expected extension

SPPAS 1.6.6 (2015, 19th January)

Web site host has changed: <http://sldr.org/sldr00800/preview/>

Documentation completed and updated. Now, only the documentation of all the components is missing.

Annotations:

- log messages more explicit and status printed with intuitive colors.
- management of input/output file format re-done: now easier for the user.

Development:

- package architecture revised: mainly “sppasgui” and “components” merged in “wxgui”, and many other changes.
- thread removed in automatic annotation process.
- debug of alignment: if too short units.
- radius value properly fixed in most of the automatic annotations.

GUI:

- GUI is more homogeneous and pretty (hope!)
- Show the date in the status bar
- New Settings frame:
 - 4 icon themes available
 - Choice of foreground and background colours
 - Choice of the font
 - Choice of the input/output file format of annotations

- New in Help menu:
 - access to the project homepage
 - access to the online documentation
- New Feedback window
- New Help browser
- Add Keyboard shortcuts:
 - ALT+F4 to exit,
 - CTRL+A to add files in FLP
 - SHIFT+CTRL+A to add a directory in FLP
 - Del to remove selected files of the FLP
 - SHIFT+Del to erase selected files of the FLP
 - CTRL+C to copy files
 - CTRL+E to export files
 - F5 to refresh the FLP
 - F1 to open the help browser
 - F2 to open the “About” frame

Components:

- GUI design unified for DataRoamer, SndPlayer, IPUScribe and SppasEdit
- New Tier Preview frame (still under development)
- SndPlayer print information about a sound file with colors:
 - Green: the information corresponds to the SPPAS requirements
 - Orange: the information does not exactly corresponds to the requirements however SPPAS is able to deal with (after conversion)
 - Red: SPPAS does not support. It must be converted before using it!

SPPAS-1.6.7 (2015, 16th February)

Automatic Annotations:

- By default, tokenization produces only one tier. Check an option to get TokensStd and TokensFaked, in case of EOT.
- radius value properly fixed in most of the automatic annotations.

GUI:

- Tested and debugged on MacOS (version 10.9.5, with wxpython 3.0.2)

Development:

- Tier hierarchy partly implemented: TimeAlignement and TimeAssociation are two “links” that can be fixed between tiers.

Annotations:

- Add Polish support

SPPAS-1.6.8 (2015, 9th April)

Resources:

- new French acoustic model
- new English acoustic model (VoxForge nightly build of March, 15th, 2015)
- add phoneset mapping tables

Development:

- Add a phoneme mapping in models, to allow both the dictionary to include real X-SAMPA symbols and the acoustic model to be compatible with Hvite requirements (only ASCII).
- annotationdata bug correction with min and max values
- IPU Segmentation:
 - bug correction when split into tracks with a tier “Name”
 - add the ipu number in speech segments if silence/speech segmentation
- Self-repetitions debug in finding the repetition interval

GUI:

- DataRoamer: “New” button debugged
- DataRoamer: Add a button “Radius” to adjust manually the vagueness of each bounday of a tier

The development phase

SPPAS-1.6.9 (2015, 14th May)

The installation of dependencies is simplified: `sox` is unnecessary. Python 2.7.x, WxPython and Julius are the only remaining dependencies.

Development:

- package `annotationdata.filter` updated to support last changes in `annotationdata`: multiple labels and numerical labels.
- package `annotationdata.io`:

- praat.py newly created. Support of TextGrid, PitchTier and IntensityTier files completely re-written
 - htk.py newly created to support .lab and .mlf files
 - sclite.py newly created to support .stm and .ctm files
 - signaux.py newly created to support .hz files
 - SPPAS native format XRA upgraded to version 1.1 to support improvements of the library.
- package annotationdata:
 - updated object Transcription to support more/different input data
 - updated hierarchy
 - updated meta-data
- package signal: partially re-written. As a consequence, sox won't be neither used, but the file conversion (if required) is slower.

GUI:

- DataFilter component partially re-written to facilitate its use
- Preview frame modified

SPPAS-1.7.0 (2015, 3th July)

Development:

- package annotationdata.io:
 - add support of subtitles: sub, srt
 - elan.py created to replace eaf.py: allows a full support of Elan annotations
 - transcriber.py created to replace trs.py for a better support of Transcriber files
 - anvil.py allows to import anvil files
- package annotationdata:
 - updated hierarchy (simplified)
 - updated meta-data
- package signal:
 - support of audio files re-written: can open/save wav, aiff and au files
 - add a lot of possibilities to manage one channel of an audio file

GUI:

- DataFilter component finalized: can deal with alternative labels, and typed labels (string, number, boolean)
- Statistics component fully re-written to facilitate its use
- SndRoamer displays more properties of audio files (min, mean and max added)

Annotations:

- IPU's Segmentation produces 2 tiers if a transcription is given: the IPU's segmentation itself, and the Transcription time-aligned at the IPU's level.

SPPAS-1.7.1 (2015, 5th August)

Development:

- package re-organization:
 - package signal is now standalone
 - package resources is now standalone
 - package presenters created
- updated statistics estimations
- package annotationdata:
 - add Media object
 - add CtrlVocab object
 - add inheritance of MetaObject for Annotation
- package annotationdata.io:
 - full debug of all file formats
 - add comments and documentation
 - add also some tests
 - add Media/CtrlVocab in some file formats
 - add Annotation Pro support of antx files (in API)

Components:

- add Time Group Analyser (TGA) in Statistics
- add Kappa estimation on labels of 2 tiers with the same number of intervals

Annotations:

- New version of XRA: 1.2
- Make XRA the default input/output file format

SPPAS-1.7.2 (2015, 3th September)

Development:

- updated XRA reader/writer to solve problems with upper/lower cases of elements
- updated Elan reader to be compatible with format 2.8
- updated Praat reader/writer for single/double quotes
- support of AnnotationPro antx files in the GUI
- add the julius score in PhonAlign annotation (can be seen only if XRA)
- remove tk dependency

SPPAS-1.7.3 (2015, 9th October)

Resources:

- New word-based vocab for Cantonese
- New word-based dict for Cantonese
- New phoneme-based acoustic model for Cantonese

Development:

- Descriptive statistics debugged for detailed panels.

SPPAS-1.7.4 (2015, 6th November)

Resources:

- Add a vocab for Portuguese
- Add a dict for Portuguese
- Add an acoustic model for Portuguese. It has to be noticed that it was constructed from French/Spanish/Italian models, not trained from data.

Samples:

- Add Portuguese
- Change some samples in various languages

Development:

- Debug of the Tokenizer.

SPPAS-1.7.5 (2015, 11th December)

Development:

- Add vagueness to the annotation duration estimation
- Bug correction while saving the procedure outcome report in the GUI

GUI:

- Changed all pictures to remove the problem with colorset of some of them
- Add a christmas theme for the pictures of tips
- IPUScribe improvements:
 - add keyboard shortcuts to play/pause/stop the sound
 - add a new button to auto-play the sound

SPPAS-1.7.6 (2016, 28th January)

Web site host has changed: <http://www.sppas.org/>

Development:

- IPU segmentation:
 - bug correction with option “split into tracks”
 - new option to add or not add the IPU index of each IPU into the transcription tier
- Tokenization:
 - bug correction in input tier selection
 - bug correction for replacements

Resources:

- add a vocabulary of Korean
- add an acoustic model for Korean (made from the English and the Taiwanese ones).

GUI:

- DataRoamer: bug correction of “Duplicate”

Others:

- Add a sample in Korean
- Updated references to cite SPPAS in publications

SPPAS-1.7.7 (2016, 30th March)

Resources:

- Correction of errors in most of the acoustics models, for /@@/ and /dummy/ models
- New vocabulary and pronunciation dictionary for Mandarin Chinese.

GUI:

- Dialogs are customized
- DataRoamer debug and changes: save buttons moved in the main toolbar.
- HelpSystem is (welcome) back!

Development:

- Add the API and a script to train acoustic models with HTK.
- Add Kullback-Leibler distance estimator.
- Add a script to compare segmentation of 2 tiers.
- Classes of the package resources are debugged, improved and extended.
- Alignment: bug correction if input starts by an empty interval.
- `sppas.command` modified for MacOS-X (use python if python2 not available)
- GUIs in `bin` directory are updated (test of python, wxpython, and so on).

SPPAS-1.7.8 (2016, 5th May)

Resources:

- Add a pronunciation mapping table `eng-fra.map`: to be used for the speech segmentation for French speakers reading an English text.

Development:

- Phonetization is extended: it can take into account a mapping table of phones to generate new pronunciation variants.
- Phonetization: use of minus instead of dots to separate phones as recommended in X-SAMPA standard.
- Alignment is restructured and extended: it can take into account two acoustics models and mix them.
- Filter is extended: Relations can be based on a delay between the intervals
- annotationdata: add Xtrans reader (extension: `.tdf`)
- Code cleaning in several packages.

GUI:

- Automatic annotations: more explicit log messages.

SPPAS-1.7.9 (2016, 3th June)

GUI:

- Some debug in SppasEdit
- SndPlayer renamed AudioRoamer because new functionalities were added:
 - See detailed information about each channel of an audio file
 - Can extract/save a channel or a fragment of channel
 - Can modify the frame rate and the sample width of a channel
 - Can add a bias on amplitude values of a channel
 - Can multiply amplitude values of a channel
 - Can remove the offset of amplitude values of a channel

Automatic annotations:

- IPU's Segmentation fully re-implemented.
 - Silence/speech segmentation improved for both quality and fastness
 - Package code cleaning and re-organization.

The stabilization phase

SPPAS-1.8.0 (2016, 30th August)

GUI:

- Design fully revisited and tested under Linux Mint, Windows 10 and MacOS 10.9

Development:

- SLM package created: can estimate a statistical language model (without smooth method) on a small corpus

Automatic annotations:

- Add a diagnosis of files
- Tokenize extended: applied also on alternative labels
- Phonetize extended: applied also on alternative labels
- Alignment code cleaning and partly re-implemented
- Add “Chunk alignment”
- Use of a .ini file to configure each annotation instead of a sppas.conf file

SPPAS-1.8.1 (2016, 28th November)

A few tutorials are available on the web site.

Automatic annotations:

- Align: an ActivityDuration tier can be optionally added.
- Support of 3-columns tab-delimited files with .txt extension. It allows the compatibility with Audacity Label track files.
- Acoustic models training validated.

Resources:

- Catalan: new pronunciation dictionary and new acoustic model.

SPPAS-1.8.2 (2017, 18th January)

Analysis:

- debug of DataFilter

Resources:

- French vocabulary and dictionary updated

Development:

- new plugins package with a new plugin manager
- GUI integration of this new plugins system
- some unittest appended and all existing ones updated
- annotationdata.io renamed annotationdata.aio
- docstrings of some packages converted from epytext to reST syntax

GUI:

- DataStats, DataFilter and DataRoamer toolbars don't scroll anymore
- Themes management changed.
- Main font is managed by the Themes.

SPPAS-1.8.3 (2017, 10th March)

Development:

- Elan reader highly improved (faster reader).
- updated plugins

SPPAS 1.8.4 (2017, 10th April)

Development:

- Elan writer modified: create a time slot for each localization.

SPPAS 1.8.5 (2017, 20th April)

Development:

- Vizualizer renamed Visualizer
- AudioRoamer: bug with an icon corrected
- New Phonedit mrk format support.
- Updated AnnotationPro Antx reader/writer

SPPAS 1.8.6 (2017, 19th June)

Resources:

- Polish dictionary and acoustic model updated.

SPPAS 1.9 (2017, 16th August)

Development:

- Relative imports used in the standard way for Python
- PEP 8 code style (except for wxgui)
- PEP 257 reST code documentation style (except for wxqui)
- Unittests:
 - existing tests verified, improved, extended
 - new tests added
 - tests migrated into the packages
- Compatibility for both Python 2.7 and Python > 3.2:
 - makeunicode.py contains functions and classes to deal with strings
 - utils, term, structs, resources, presenters, plugins, calculus packages: migration is done
- Exceptions are separately managed
- introduction of a system for the internationalization of the messages. Done in English and French for the packages: audiodata, calculus, plugins, resources, structs, term, utils
- Package re-organization:
 - new package “models”, with acm and slm
 - utils
 - resources
- meta.py is replacing sp_glob.py
- new scripts: tieraligntophon.py, dictmerge.py
- Robustness to read malformed HTK-ASCII pronunciation dictionaries.
- Bug corrected in the management of pronunciation variants

Resources:

- Add support of Naija language (pcm)
- English-French mapping table updated

Annotations:

- Tokenizer renamed into Text Normalization:
 - re-structured package
 - debug: mainly for English language, and punctuations
 - new option: output a customized tier.

- Repetitions:

- re-structured package
- debug

Communication:

- Add a description document of the orthographic transcription convention in the package.
- Web page updated, new tutorials available
- Documentation updated # Appendix

Appendix

List of error messages

Since version 1.9.0, SPPAS introduced a system for internationalization of the messages. In the same time, a quality and a number was assigned progressively to each of them in the packages. The following indicates the list of error messages that can occur while using SPPAS.

:ERROR 1010: Unknown option with key {key}.

:ERROR 1020: Empty input tier {name}.

:ERROR 1030: Missing input tier. Please read the documentation.

:ERROR 1040: Bad input tier type. Expected time-aligned intervals.

:ERROR 1050: Inconsistency between the number of intervals of the input tiers. Got: { :d} and { :d}.

:ERROR 1210: The directory {dirname} does not exist.

:ERROR 1220: The directory {dirname} does not contain relevant data.

:ERROR 2000: No audio file is defined.

:ERROR 2005: Audio type error: not supported file format {extension}.

:ERROR 2010: Opening, reading or writing error.

:ERROR 2015: No data or corrupted data in the audio file {filename}.

:ERROR 2020: {number} is not a right index of channel.

:ERROR 2025: From {value1} to {value2} is not a proper interval.

:ERROR 2050: No channel defined.

:ERROR 2060: Channels have not the same sample width.

:ERROR 2061: Channels have not the same frame rate.

:ERROR 2062: Channels have not the same number of frames.

:ERROR 2070: Invalid sample width {value}.

:ERROR 2080: Invalid frame rate {value}.

:ERROR 3010: Both vectors p and q must have the same length and must contain probabilities.

:ERROR 3015: Value must range between 0 and 1. Got {f}.

:ERROR 3016: Probabilities must sum to 1. Got {f}.

:ERROR 3025: Error while estimating Euclidian distances of rows and columns.

:ERROR 3030: The given data must be defined or must not be empty.

:ERROR 3040: Value {value} is out of range: expected value in range [{min_value},{max_value}].

:ERROR 4010: Missing plugin configuration file.

:ERROR 4014: Missing section {section_name} in the configuration file.

:ERROR 4016: Missing option {s} in section {s} of the configuration file.

:ERROR 4020: Unsupported plugin file type.

:ERROR 4024: Unsupported plugin file type.

:ERROR 4030: A plugin with the same name is already existing in the plugins folder.

:ERROR 4040: No plugin with identifier {plugin_id} is available.

:ERROR 4050: No such plugin folder: {s}.

:ERROR 4060: A plugin with the same key is already existing or plugin already loaded.

:ERROR 4070: {command_name} is not a valid command on your operating system.

:ERROR 4075: No command was defined for the system: {s}. Supported systems of this plugin are: {s}.”””

:ERROR 4080: No option with key {s}.

:ERROR 6010: {meta} is not a known meta information.

:ERROR 6020: Unknown resource type: expected file or directory. Got: {string}.

:ERROR 6024: The resource folder {dirname} does not exists.

:ERROR 6028: The language must be “und” or one of the language list. Unknown language {lang}.