

FTP SERVER

(FILE TRANSFER PROTOKOL)

NAMA : BRILIAN ABEDNEGO WIRYAWAN
KELAS : XI TJKT 1
ABSEN : 6

1. Hal yang dilakukan pertama adalah **login akun root su -**

```
brilian@brilian:~$ su -  
Password:  
root@brilian:~# pwd
```

2. Selanjutnya lakukan setting ip untuk client (statis) dan dan internet (dynamic) **NANO**
/ETC/NETWORK/INTERFACES.

```
root@brilian:~# nano /etc/network/interfaces
```

3. Sesuaikan coding seperti gambar di bawah:

```
GNU nano 7.2 /etc/network/interfaces *  
# This file describes the network interfaces available on your system  
# and how to activate them. For more information, see interfaces(5).  
  
source /etc/network/interfaces.d/*  
  
# The loopback network interface  
auto lo  
iface lo inet loopback  
# enp0s3  
auto enp0s3  
iface enp0s3 inet dhcp  
  
#bakwan goreng  
allow-hotplug enp0s8  
iface enp0s8 inet static  
    address 10.10.6.56  
    netmask 255.255.255.224
```


4. Setelah selesai lakukan restart supaya coding yang dimasukkan dapat diperbarui/di proses.

```
root@brilian:~# /etc/init.d/networking restart  
Restarting networking (via systemctl): networking.service.
```

5. Setelah itu lakukan perintah **IP A**

```
root@brilian:~# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default
    link/ether 08:00:27:12:22:ee brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic enp0s3
        valid_lft 86297sec preferred_lft 86297sec
    inet6 fe80::a00:27ff:fe12:22ee/64 scope link
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default
    link/ether 08:00:27:bd:1a:c3 brd ff:ff:ff:ff:ff:ff
    inet 10.10.6.56/27 brd 10.10.6.63 scope global enp0s8
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:febd:1ac3/64 scope link
```

6. Lalu, **check DVD/Drive optic** lalu pilih file sesuai kebutuhan.

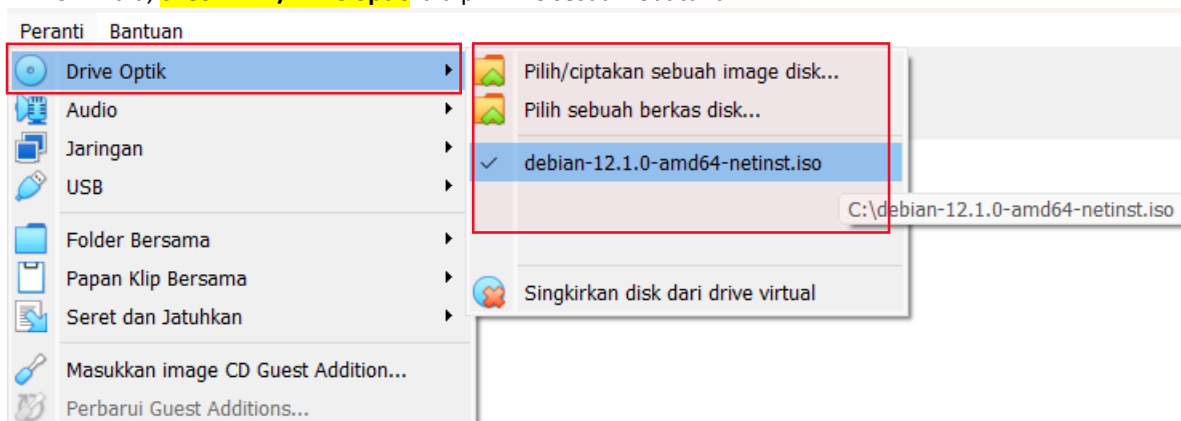

7. Jika sudah lakukan **perintah apt-cdrom add**.

```
root@brilian:~# apt-cdrom add
Using CD-ROM mount point /media/cdrom/
Identifying... [e46ada59c5871c43954b2204af63f664-2]
Scanning disc for index files...
Found 2 package indexes, 0 source indexes, 0 translation indexes and 0 signatures
This disc is called:
'Debian GNU/Linux 12.1.0 _Bookworm_ - Official amd64 NETINST with firmware 20230722-10:48'
Reading Package Indexes... Done
Writing new source list
Source list entries for this disc are:
deb cdrom:[Debian GNU/Linux 12.1.0 _Bookworm_ - Official amd64 NETINST with firmware 20230722-10:48]
Repeat this process for the rest of the CDs in your set.
```

8. Jika sudah, lakukan **perintah apt-get install proftpd** dan jika ada keterangan ingin melanjutkan atau tidak seperti gambar di bawah **tekan Y saja**.

```
root@brilian:~# apt install proftpd
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Note, selecting 'proftpd-core' instead of 'proftpd'
The following package was automatically installed and is no longer required:
  libdbus-glib-1-2
Use 'apt autoremove' to remove it.
The following additional packages will be installed:
  libhashkit2 libhiredis0.14 libmemcached11 libmemcachedutil2 libpcre2-posix3
  proftpd-doc
Suggested packages:
  openssh-sftp-server | inet-superserver proftpd-mod-ldap proftpd-mod-mysql
  proftpd-mod-odbc proftpd-mod-pgsql proftpd-mod-sqlite proftpd-mod-geoip
  proftpd-mod-snmp proftpd-mod-crypto proftpd-mod-wrap
The following NEW packages will be installed:
  libhashkit2 libhiredis0.14 libmemcached11 libmemcachedutil2 libpcre2-posix3
  proftpd-core proftpd-doc
0 upgraded, 7 newly installed, 0 to remove and 110 not upgraded.
Need to get 3,694 kB of archives.
After this operation, 8,127 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
```

9. Jika berhasil maka tampilannya akan seperti ini.

```
Preparing to unpack .../6-proftpd-doc_1.3.8+dfsg-4+deb12u4_all.deb ...
Unpacking proftpd-doc (1.3.8+dfsg-4+deb12u4) ...
Setting up proftpd-doc (1.3.8+dfsg-4+deb12u4) ...
Setting up libhashkit2:amd64 (1.1.4-1) ...
Setting up libpcre2-posix3:amd64 (10.42-1) ...
Setting up libmemcached11:amd64 (1.1.4-1) ...
Setting up libhiredis0.14:amd64 (0.14.1-3) ...
Setting up libmemcachedutil2:amd64 (1.1.4-1) ...
Setting up proftpd-core (1.3.8+dfsg-4+deb12u4) ...
Adding system user `proftpd' (UID 115) ...
Adding new user `proftpd' (UID 115) with group `nogroup' ...
Not creating home directory `/run/proftpd'.
Adding system user `ftp' (UID 116) ...
Adding new user `ftp' (UID 116) with group `nogroup' ...
Creating home directory `/srv/ftp' ...
'/usr/share/proftpd/templates/welcome.msg' -> '/srv/ftp/welcome.msg.proftpd-new
Server configured as standalone.
Created symlink /etc/systemd/system/multi-user.target.wants/proftpd.service -> /
lib/systemd/system/proftpd.service.
Processing triggers for man-db (2.11.2-2) ...
Processing triggers for libc-bin (2.36-9+deb12u8) ...
```

10. Lalu ikuti perintah berikut **NANO /ETC/PROFTPD/PROFTPD.CONF**

```
root@brilian:~# nano /etc/proftpd/proftpd.conf
```

11. Jika tampilannya seperti gambar berikut maka ubah pada kotak dibawah sesuai kebutuhan:

```
# Set off to disable IPv6 support which is annoying on IPv4 only boxes.
UseIPv6 on
# If set on you can experience a longer connection delay in many cases.
<IfModule mod_ident.c>
    IdentLookups off
</IfModule>

ServerName "Debian"
# Set to inetd only if you would run proftpd by inetd/xinetd/socket.
# Read README.Debian for more information on proper configuration.
ServerType standalone

^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line

ServerName "Brilian.ftp.net"
# Set to inetd only if you would run proftpd by inetd/xinetd/socket.
# Read README.Debian for more information on proper configuration.
ServerType standalone

^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

12. Dibagian ini jika port berbeda sesuaikan standar port pada gambar di bawah.

```
# Port 21 is the standard FTP port.
Port 21
```

13. Di bagian ini hapus pagar di depan dan isi sesuai kotak merah isi dengan kebutuhan masing-masing.

```
# A basic anonymous configuration, no upload directories.

# <Anonymous ~ftp>
# User ftp
# Group nogroup
# # We want clients to be able to login with "anonymous" as well as "ftp"
# UserAlias anonymous ftp
# # Cosmetic changes, all files belongs to ftp user
# DirFakeUser on ftp
```

14. Ubah anonymous (Alamat directory) dan user (nama user ftp) dengan keinginan dan kebutuhan.

```
# A basic anonymous configuration, no upload directories.

<Anonymous /home/ftp-server>
User Brilianftp

# Group nogroup
# # We want clients to be able to login with "anonymous" as well as "ftp"
# UserAlias anonymous ftp
# # Cosmetic changes, all files belongs to ftp user
# DirFakeUser on ftp
```

15. Dibagian ini hapus pagar depan pada kotak merah di bawah.

```
# # Uncomment this if you're brave.
# # <Directory incoming>
# # # Umask 022 is a good standard umask to prevent new files and dirs
# # # (second parm) from being group and world writable.
# # Umask 022 022
# # <Limit READ WRITE>
# # DenyAll
# # </Limit>
# # <Limit STOR>
# # AllowAll
# # </Limit>
# # </Directory>
#
</Anonymous>
```

16. Lalu jika sudah selesai **ctrl x, tekan y, dan enter**.

17. Masuk ke dalam directory /home, cek isi directory dengan **perintah cd /home**

```
root@brilian:~# cd /home
root@brilian:/home# ls
brilian
-
```

18. Bikin directory baru karna di sebelumnya saat hapus pagar tadi memerlukan directory untuk menyimpan file. Lakukan perintah **MKDIR FTP-SERVER**

```
root@brilian:/home# mkdir ftp-server
root@brilian:/home# ls
brilian ftp-server
```

19. Sekarang saatnya kita ubah mode directory nya dengan perintah **CHMOD 777**

```
root@brilian:/home# chmod 777 ftp-server
```

20. Sekarang menambahkan user baru karna sama seperti tadi di keterangan no 19. Lakukan perintah **adduser**

```
root@brilian:/home# adduser brilianftp
Adding user `brilianftp' ...
Adding new group `brilianftp' (1001) ...
Adding new user `brilianftp' (1001) with group `brilianftp (1001)' ..
Creating home directory `/home/brilianftp' ...
Copying files from `/etc/skel' ...
```

21. Buat password user baru

```
New password:
Retype new password:
passwd: password updated successfully
Changing the user information for brilianftp
Enter the new value, or press ENTER for the default
```


22. Isi informasi user sesuai kebutuhan, **lalu tekan Y**.

```
Enter the new value, or press ENTER for the default
  Full Name []: brilian
  Room Number []:
  Work Phone []:
  Home Phone []:
  Other []:
Is the information correct? [Y/n]
```


23. Setelah itu restart dengan perintah **/ETC/INIT.D/PROFTPD RESTART**
root@brilian:/home# /etc/init.d/proftpd restart
Restarting proftpd (via systemctl): proftpd.service.

KONFIGURASI IIP PADA CLIENT DI WINDOWS

24. Sekarang ke **control panel**, lalu ubah ip pada Ethernet yang terhubung oleh VIRTUALBOX.



25. Ubah ip disini, klik ok.

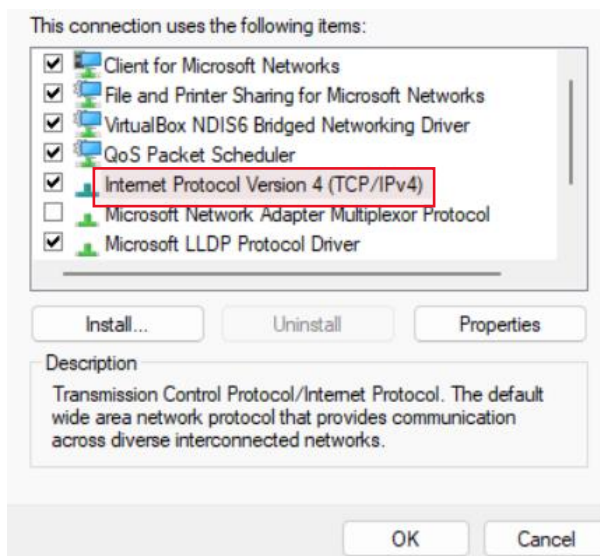

26. Isi ip sampai gateway sesuai kebutuhan kalian dan cocokan pada settingan sebelumnya yang kalian atur, **lalu klik ok**.

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address: 10 . 10 . 6 . 57

Subnet mask: 255 . 255 . 255 . 224

Default gateway: 10 . 10 . 6 . 56

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server: . . .

Alternate DNS server: . . .

☐ Validate settings upon exit

Advanced...

OK Cancel

UJI COBA KONGFIGURASI FTP SERVER

27. Selanjutnya, **di aplikasi FILEZILLA** unduh jika tidak punya. Jika sudah masuk pada aplikasi **FILEZILLA**.



28. Lakukan login sesuai di virtual box tadi **lalu quickconnect**.

Host: 10.10.6.56 Username: brilianftp Password: . Port: 21 Quickconnect

Dan pada gambar di bawah ini jika success.

Status: Insecure server, it does not support FTP over TLS.

Status: Logged in

Status: Retrieving directory listing...

Status: Directory listing of "/" successful

29. lalu coba upload untuk mengirim file pada client.


Filename	Filesize	Filetype	Last modified	Filename	Filesize	Filetype	Last modified
..				..			
saves		File folder	09/08/2024 09:	Forza Horizon 4 ...	30.919.7...	MP4 File	15/01/2025...
C_WINDOWS_syste...	7.607.338	MP4 File	22/07/2024 14:				
desktop.ini	190	Configuration ...	29/04/2023 09:				
Forza Horizon 4 202...	30.919.7...	MP4 File	30/09/2024 06:				

30. check pada virtual box jika berhasil maka akan muncul seperti contoh dibawah ini.

```
oot@brilian:~# cd /home
oot@brilian:/home# ls
rilian brilianftp ftp-server
oot@brilian:/home# cd ftp-server
oot@brilian:/home/ftp-server# ls
Forza Horizon 4 2024-09-30 06-50-27.mp4
oot@brilian:/home/ftp-server#
```

31. sekarang kita coba bikin file untuk di download oleh client/host server.
oot@brilian:/home/ftp-server# touch brilianganteng

32. lalu kita check di filezilla apakah ada. Jika iya kita coba download.

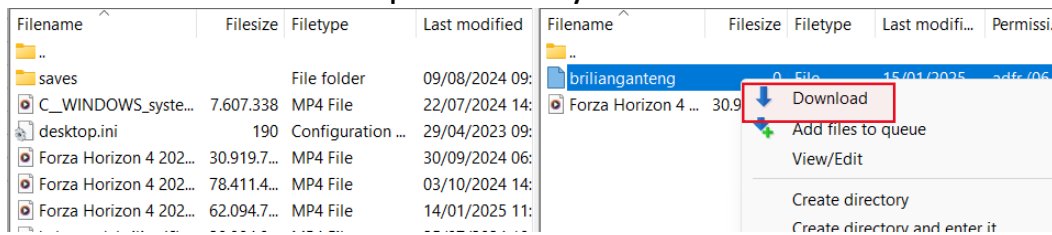

33. jika berhasil maka projek ftp kita telah berhasil semua.

brilianganteng	0	File	15/01/2025 10:
C_WINDOWS_syste...	7.607.338	MP4 File	22/07/2024 14:

SEKIAN TERIMAKASIH.