

WEB SERVER

(APACHE2)

NAMA : BRILIAN ABEDNEGO WIRYAWAN
KELAS : XI TJKT 1
ABSEN : 6

1. Hal yang dilakukan pertama adalah **login akun root su -**

```
brilian@brilian:~$ su -  
Password:  
root@brilian:~# pwd
```

2. Selanjutnya lakukan setting ip untuk client (statis) dan dan internet (dynamic) **NANO**
/ETC/NETWORK/INTERFACES.

```
root@brilian:~# nano /etc/network/interfaces
```

3. Sesuaikan coding seperti gambar di bawah:


```
GNU nano 7.2 /etc/network/interfaces *  
# This file describes the network interfaces available on your system  
# and how to activate them. For more information, see interfaces(5).  
  
source /etc/network/interfaces.d/*  
  
# The loopback network interface  
auto lo  
iface lo inet loopback  
# enp0s3  
auto enp0s3  
iface enp0s3 inet dhcp  
  
#bakwan goreng  
allow-hotplug enp0s8  
iface enp0s8 inet static  
    address 10.10.6.56  
    netmask 255.255.255.224
```

4. Setelah selesai lakukan restart supaya coding yang dimasukkan dapat diperbarui/di proses.

```
root@brilian:~# /etc/init.d/networking restart  
Restarting networking (via systemctl): networking.service.
```

5. Setelah itu lakukan perintah **SESUAI GAMBAR DIBAWAH**

```
root@brilian:~# nano /etc/apt/sources.list
```

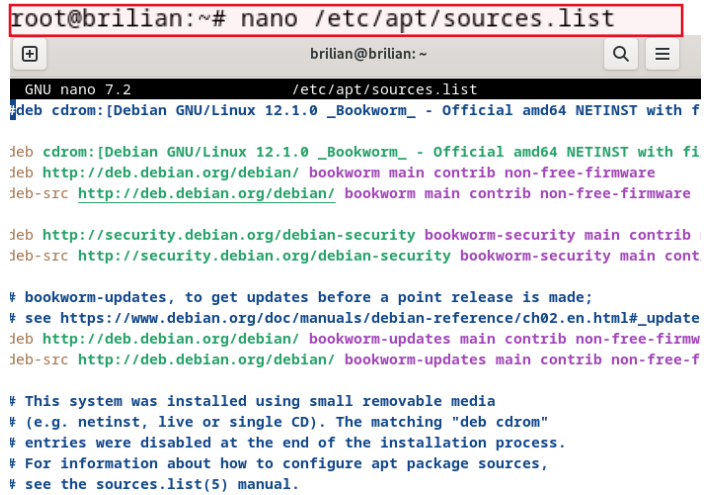

```
GNU nano 7.2 /etc/apt/sources.list
deb cdrom:[Debian GNU/Linux 12.1.0 _Bookworm_ - Official amd64 NETINST with f
deb cdrom:[Debian GNU/Linux 12.1.0 _Bookworm_ - Official amd64 NETINST with fi
deb http://deb.debian.org/debian/ bookworm main contrib non-free-firmware
deb-src http://deb.debian.org/debian/ bookworm main contrib non-free-firmware
deb http://security.debian.org/debian-security bookworm-security main contrib
deb-src http://security.debian.org/debian-security bookworm-security main cont
# bookworm-updates, to get updates before a point release is made;
# see https://www.debian.org/doc/manuals/debian-reference/ch02.en.html#_update
deb http://deb.debian.org/debian/ bookworm-updates main contrib non-free-firmw
deb-src http://deb.debian.org/debian/ bookworm-updates main contrib non-free-f
# This system was installed using small removable media
# (e.g. netinst, live or single CD). The matching "deb cdrom"
# entries were disabled at the end of the installation process.
# For information about how to configure apt package sources,
# see the sources.list(5) manual.
```

6. Lalu lakukan ping untuk mengecek saja.

```
root@brilian:~# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=115 time=17.5 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=115 time=17.0 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=115 time=17.0 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=115 time=17.0 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=115 time=17.1 ms
64 bytes from 8.8.8.8: icmp_seq=6 ttl=115 time=17.1 ms
```

7. Lalu, **upgrade dan update sesuai perintah di bawah.**

```
root@brilian:~# apt upgrade&&update
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Calculating upgrade... Done
```

8. Jika sudah akan seperti gambar dibawah.

```
Fetchd 282 kB in 1s (276 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
```

9. Jika sudah, lakukan **perintah apt install apache2** dan jika ada keterangan ingin melanjutkan atau tidak seperti gambar di bawah **tekan Y saja**.

```
root@brilian:~# apt install apache2
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done

Need to get 593 kB of archives.
After this operation, 1,905 kB of additional
Do you want to continue? [Y/n]
```

10. Jika berhasil akan seperti ini.

```
Created symlink /etc/systemd/system/multi-user.target.wants:
service -> /lib/systemd/system/apache-htcacheclean.service.
Processing triggers for man-db (2.11.2-2) ...
root@brilian:~#
```

11. Proses instalasi apache2 sudah berhasil dan selesai dilakukan. Selanjutnya kita check instalasi dengan perintah **dpkg -l apache2**.

```
root@brilian:~# dpkg -l apache2
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name          Version          Architecture Description
+++-+-----+
ii apache2        2.4.62-1~deb12u2 amd64        Apache HTTP Server
lines 1-6/6 (END)
```

Lihat **tanda ii** di depan **apache2** jika ada maka instalasi sudah berhasil dan terpasang.

12. Selanjutnya kita coba check isi file apache2, **gunakan perintah seperti dibawah**.

```
root@brilian:~# cd /etc/apache2/sites-available/
root@brilian:/etc/apache2/sites-available# ls
000-default.conf default-ssl.conf
```

13. Selanjutnya kita lakukan **copy file** yang ada diatas yang sudah kita munculkan **000-default.conf** dengan **perintah dibawah**. Jika berhasil akan muncul seperti gambar dibawah.

```
root@brilian:/etc/apache2/sites-available# cp 000-default.conf brilian.conf
root@brilian:/etc/apache2/sites-available# ls
000-default.conf brilian.conf default-ssl.conf
```

14. Kemudian kita **edit file** yang baru saja kita **copy file**. Ikuti perintah dibawah.

```
root@brilian:/etc/apache2/sites-available# nano brilian.conf
```

15. Selanjutnya kita ubah ServerAdmin lalu isi dengan gmail kalian.
<VirtualHost *:80>

```
# The ServerName directive sets the default ServerName
# the server uses to identify itself for the default
# redirection URLs. In the context of a VirtualHost, it
# specifies what hostname must appear in the URL
# match this virtual host. For the VirtualHost, the
# value is not decisive as it is only used for the
# However, you must set it for any other purpose.
#ServerName www.example.com
```

```
ServerAdmin tes504429@gmail.com
DocumentRoot /var/www/html
```

16. Dibagian ini kita aktifkan file default dengan perintah gambar dibawah.
root@brilian:/etc/apache2/sites-available# a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
systemctl reload apache2

17. Selanjutnya kita aktifkan file yang kita ubah tadi lakukan perintah dibawah.
root@brilian:/etc/apache2/sites-available# a2ensite brilian.conf
Enabling site brilian.
To activate the new configuration, you need to run:
systemctl reload apache2

18. Selanjutnya kita pindah ke directory html dengan perintah gambar di bawah.
root@brilian:/etc/apache2/sites-available# cd /var/www/html/
root@brilian:/var/www/html#

19. Alasannya menggunakan directory ini untuk menampung file-file yang kita buat nanti. Ikuti perintah pada gambar dibawah.

```
root@brilian:/var/www/html# nano index.html
```



```
GNU nano 7.2 index.html M
</p>
<p>
Please report bugs specific to modules (such as PHP and others)
to respective packages, not to the web server itself.
</p>
</div>

</div>
</div>
<div class="validator">
</div>
</body>
</html>
```

20. Silde semua coding lalu hapus semua.

21. Kemudian **isi html** dengan kebutuhan sendiri. ikuti gambar dibawah.


```
<html>
SELAMAT DATANG BRILIAN
<BR/>
DI KAWASAN MOBIL CUMI DARAT LINTAS JALAN PANTURA.
```

22. Jika sudah selesai lakukan restart **pada gambar dibawah.**


```
root@brilian:/var/www/html# /etc/init.d/apache2 restart
```

KONGFIGURASI IP DI WINDOWS


23. Sekarang masuk windows control panel untuk mengatur ip kita diawal.

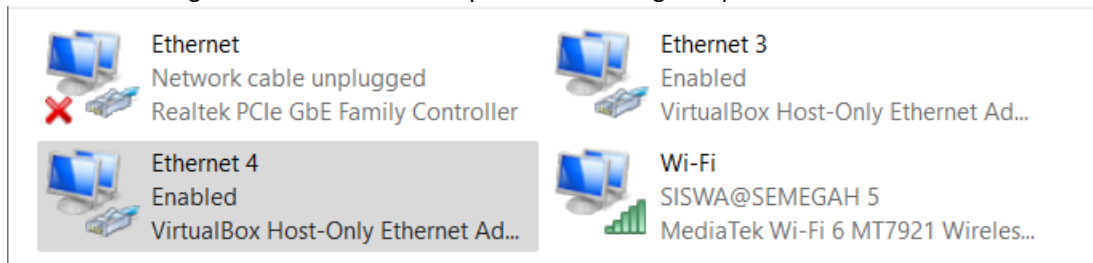


24. Masukk properties.

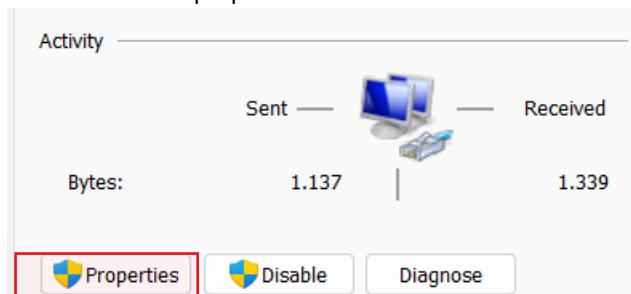

25. **Masuk internet protocol.**

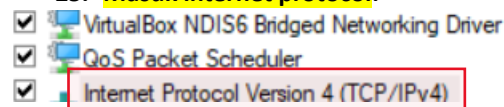

26. lalu isi **ip sampai default gateway.**

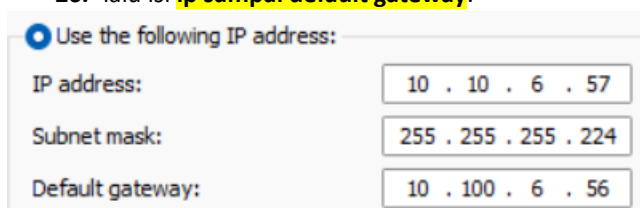


27. selanjutnya kita **ping ip kita di commant prompt.**

```
C:\Users\ABED NEGO>ping 10.10.6.56

Pinging 10.10.6.56 with 32 bytes of data:
Reply from 10.10.6.56: bytes=32 time<1ms TTL=64
Reply from 10.10.6.56: bytes=32 time<1ms TTL=64
Reply from 10.10.6.56: bytes=32 time<1ms TTL=64
Reply from 10.10.6.56: bytes=32 time<1ms TTL=64

Ping statistics for 10.10.6.56:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

28. selanjutnya, kita masukkan ip web server kita pada platfom media google chrome atau firefox.

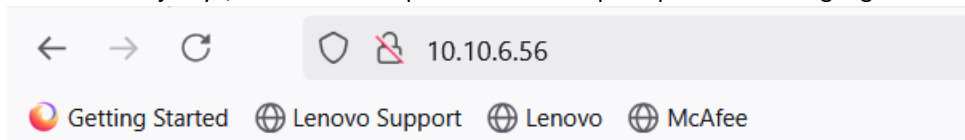

**SELAMAT DATANG BRILIAN
DI KAWASAN MOBIL CUMI DARAT LINTAS JALAN PANTURA.**

29. Maka tampilannya akan seperti ini.

SEKIAN TERIMAKASIH.