



# Readout weighting changes knee-trajectory fidelity

ViTPose inputs; original, low-scalar and dense readouts share their family's frozen encoder


**A Delta encoder**

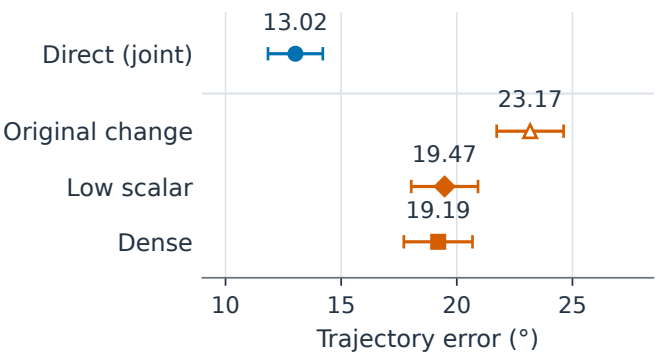


**B Endpoint encoder**

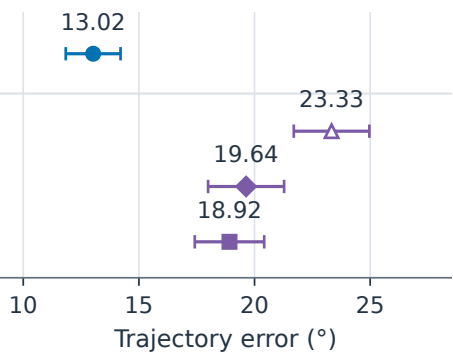

**C Primary family gains**

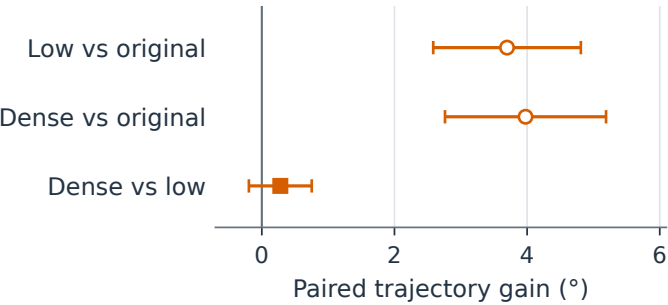

**D Secondary family gains**

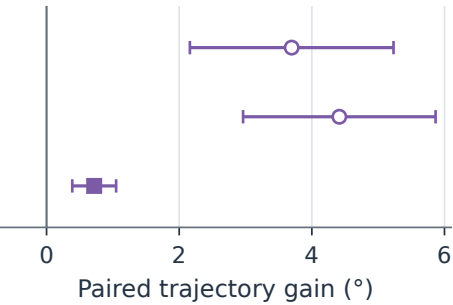

14 people; 95% person-t intervals after averaging 3 fitted seeds. Failures cost 180°. Declared primary: delta dense versus low scalar. Other displayed effects are secondary or exploratory. Direct is jointly trained. Positive gains favor the first named readout. Response preservation is not established.