


One landmark array, two anatomical selections

Highlighting selects a use for a point; all 33 positions stay in the input.

A | Full input


33 landmarks

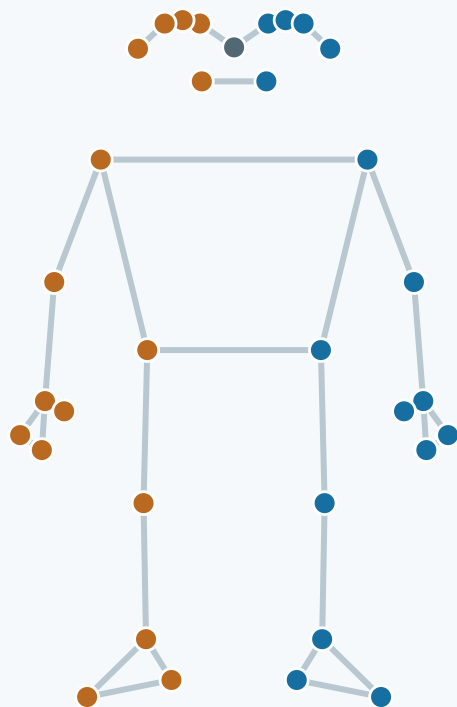

Coordinates + validity
retain named joint identities.

B | Training anatomy


12 gait landmarks

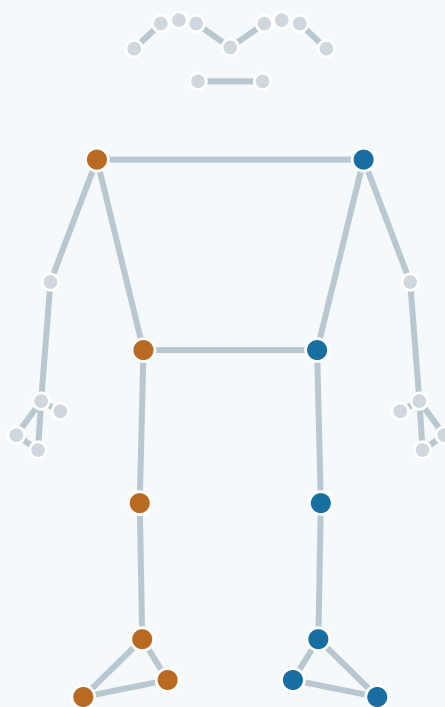

Shoulders, hips, knees,
ankles, heels, foot tips.

C | Signed target

10 target landmarks

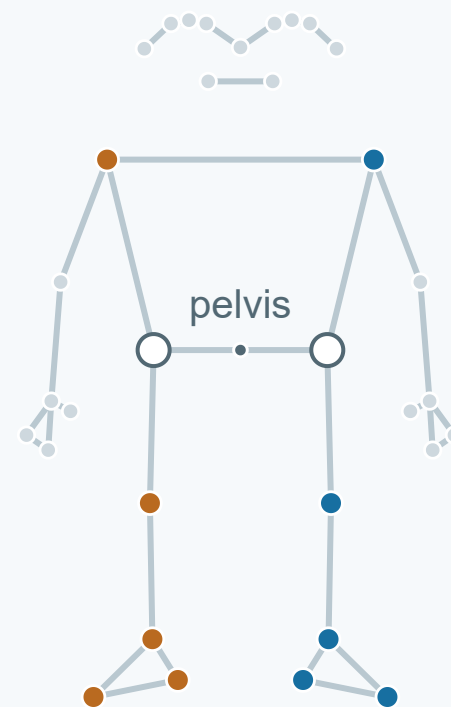

Five left/right pairs;
hips supply a reference.

● Anatomical left ● Anatomical right ● Unselected, still present

Front view: the person's left appears on the viewer's right.

The two selections answer different questions

Training: historical target eligibility and VICReg use the 12 gait points.

Latest motion / region samplers can select other body tokens.

Target: use observed timestamps before interpolation or 64-frame resizing.