


1 Build a controlled gait pair

Illustrative keypoints

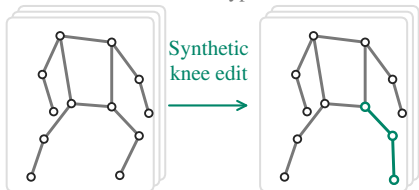

Original window a

Edited window b

Each window: 128 frames $\times$ 12 joints

Noisy 2D poses + projected references

2 Fit on 112 training people

Noisy poses $\longrightarrow$ Student + predictor

Clean references $\longrightarrow$ Teacher targets

Same base loss; separate runs

Endpoint

Match each
motion's features

OR

Delta

Match their
feature difference

Freeze encoder $\rightarrow$ fit a readout

Readout targets: reference coordinates

3 Evaluate on 14 development people

3 fitted seeds

Observed window
 a or b

Frozen encoder
+ trained readout

Restored
joints

Paired asymmetry-change error
Knee-angle trajectory error
Left-right naming (post hoc)

References a, b



Restore separately; score the change from both windows.