

NAME:Brishti Dhara

ROLL NO:BTECH/CSE/23/090

SDITO LAB ASSIGNMENTS


Assignment no :- 05

P.S:CREATE A PUBLIC BUCKET IN AWS.UPLOAD A FILE AND GIVE THE NECESSARY PERMISSION TO CHECK WHETHER THE FILE URL IS WORKING.

SOLUTIONS: -


1: At first, we need to login the AWS console.

STEP-2:Then search s3 in the search bar.

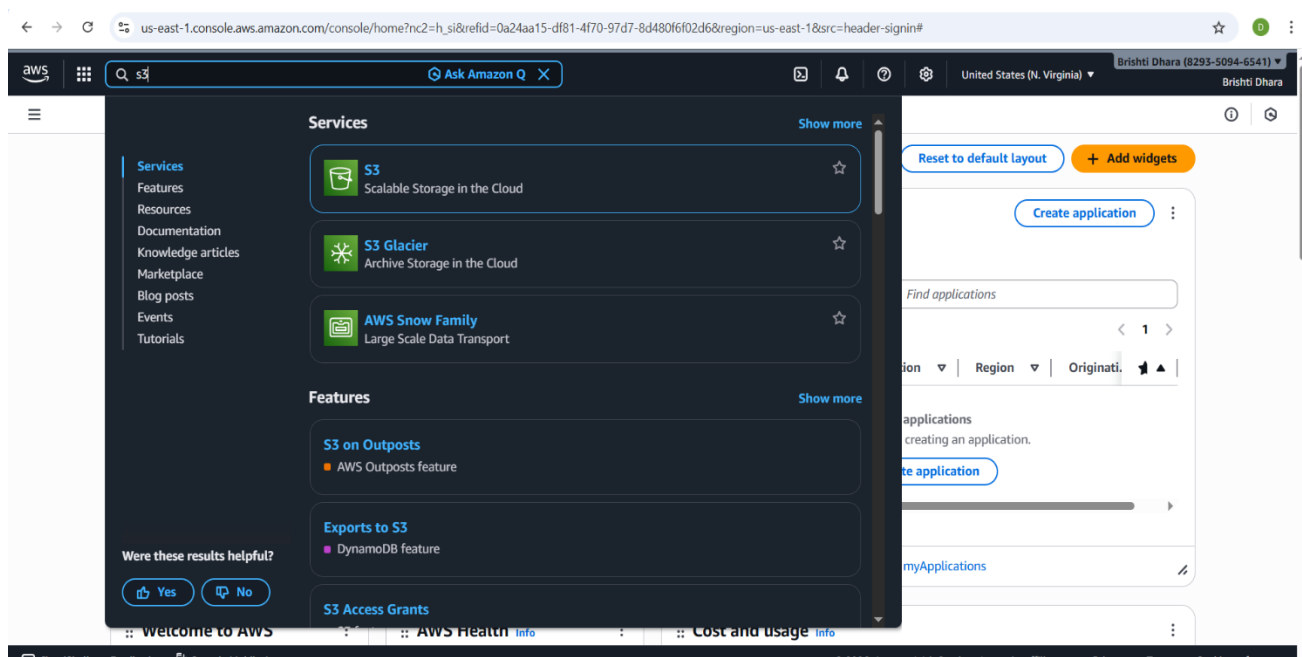

STEP-4: Now we redirect to the s3 interface.

Step-5: In the s3 interface click on the create bucket.

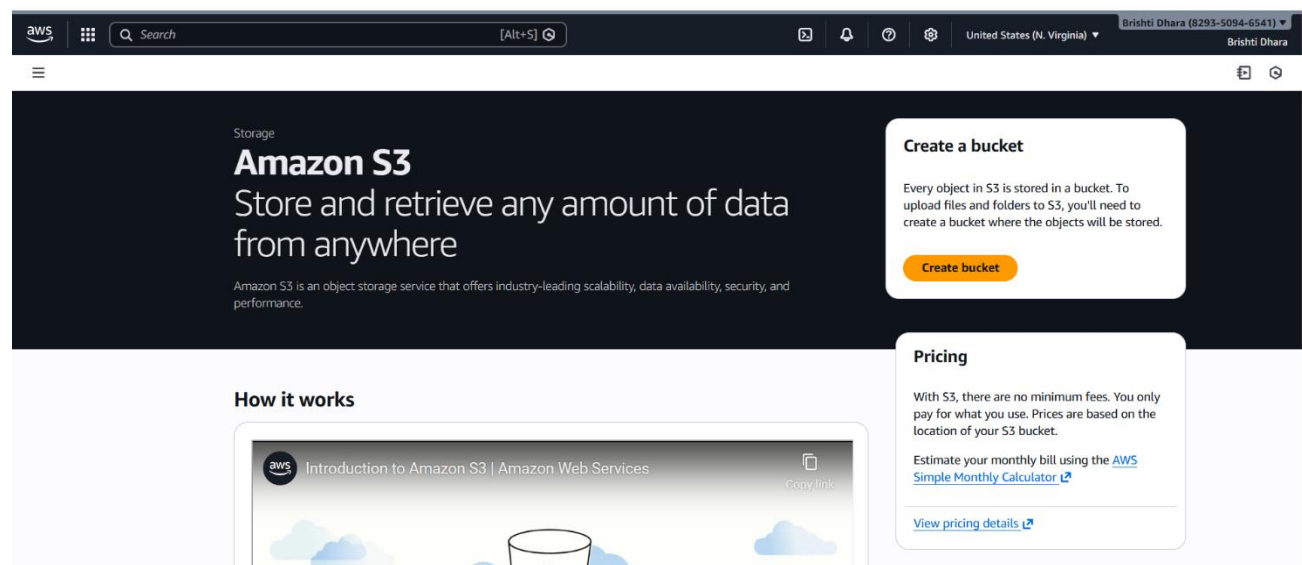

STEP-6: After click on create bucket we redirect to the create bucket interface. In this interface the bucket type will be “General purpose”, and give the bucket name

The screenshot shows the 'Create bucket' page in the AWS console. The 'General configuration' section is active. Under 'AWS Region', 'US East (N. Virginia) us-east-1' is selected. Under 'Bucket type', 'General purpose' is selected with a radio button. A description states: 'Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.' The 'Directory' option is unselected. Under 'Bucket name', the text 'brishiti2-2026-public' is entered in a text field. A note below the field states: 'Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)'. Below this, a section titled 'Copy settings from existing bucket - optional' includes a 'Choose bucket' button and a format example: 'Format: s3://bucket/prefix'.

General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)
brishiti2-2026-public

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

STEP-7: For create public bucket, we keep the ACLs enabled and uncheck “block all public access”

The screenshot shows the 'Object Ownership' section of the 'Create bucket' page. Two radio buttons are visible: 'ACLs disabled (recommended)' and 'ACLs enabled'. The 'ACLs enabled' option is selected. A description for 'ACLs enabled' states: 'Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.' Below this, a yellow warning box contains the text: 'We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.' Under 'Object Ownership', the 'Bucket owner preferred' option is selected. A description states: 'If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.' The 'Object writer' option is unselected. A blue information box at the bottom states: 'If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)'.

Object Ownership [Info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ **Object writer**
The object writer remains the object owner.

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

The screenshot shows the 'Block Public Access settings for this bucket' section. A paragraph explains that public access is granted through ACLs, bucket policies, access point policies, or all, and that these settings apply only to this bucket and its access points. Below this, four checkboxes are listed: 'Block all public access', 'Block public access to buckets and objects granted through new access control lists (ACLs)', 'Block public access to buckets and objects granted through any access control lists (ACLs)', and 'Block public access to buckets and objects granted through new public bucket or access point policies'. The 'Block all public access' checkbox is checked. A yellow warning box states: 'Turning off block all public access might result in this bucket and the objects within becoming public. AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.' Below this, a blue checkmark icon is followed by the text: 'I acknowledge that the current settings might result in this bucket and the objects within becoming public.' The 'Bucket Versioning' section is partially visible at the bottom.

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.


☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you

STEP-8: All the other fields are remain same and then click on create bucket.

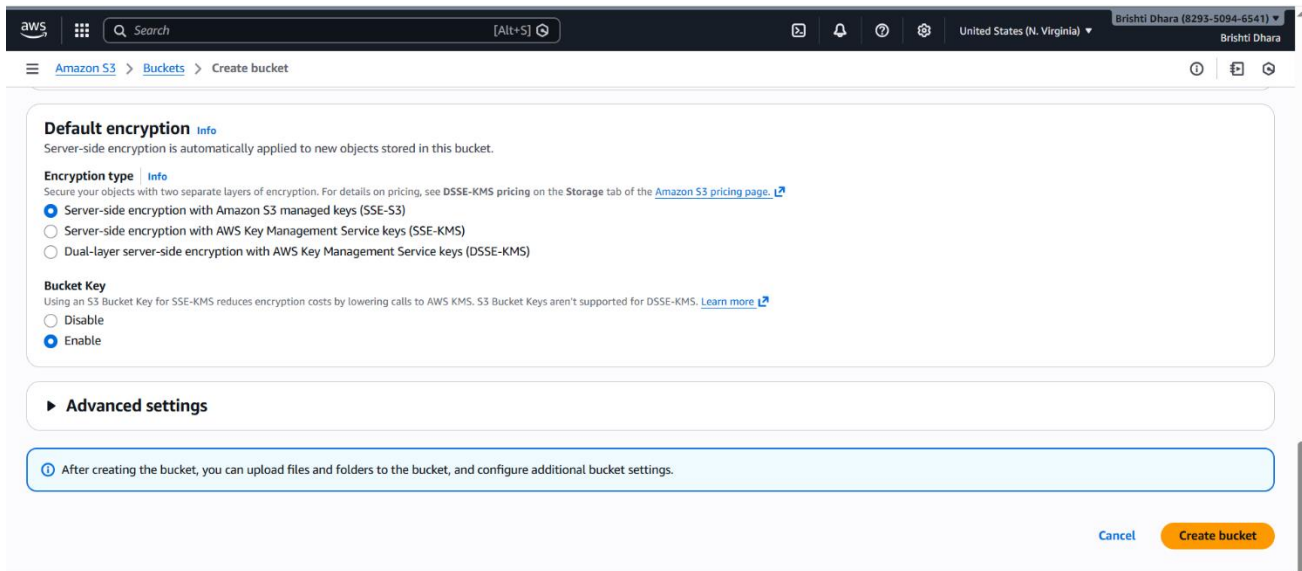

Default encryption [Info](#)
Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ Disable
- ☒ Enable


► **Advanced settings**

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

[Cancel](#) [Create bucket](#)

STEP-9: The bucket “brishti2-2026-public” is created successfully. STEP-10: Then click on bucket name.

STEP-10: Then click on bucket name.

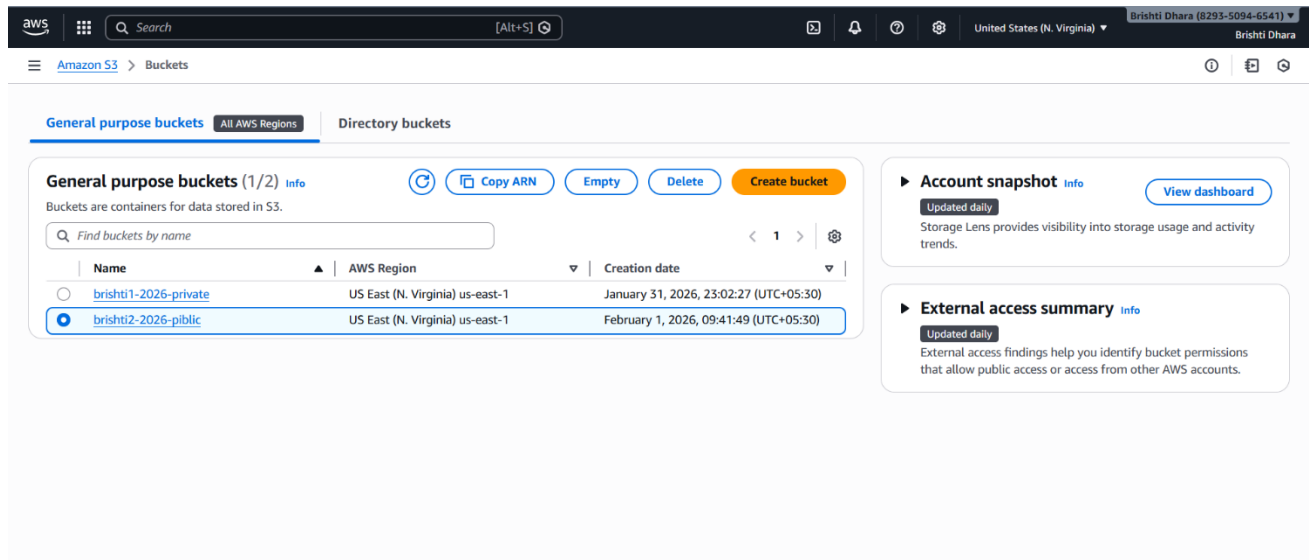

General purpose buckets [All AWS Regions](#) [Directory buckets](#)

General purpose buckets (1/2) [Info](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.


Find buckets by name

Name	AWS Region	Creation date
brishti1-2026-private	US East (N. Virginia) us-east-1	January 31, 2026, 23:02:27 (UTC+05:30)
brishti2-2026-public	US East (N. Virginia) us-east-1	February 1, 2026, 09:41:49 (UTC+05:30)

Account snapshot [Info](#) [View dashboard](#)
Updated daily
Storage Lens provides visibility into storage usage and activity trends.

External access summary [Info](#)
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

STEP-11: After that click on upload option.

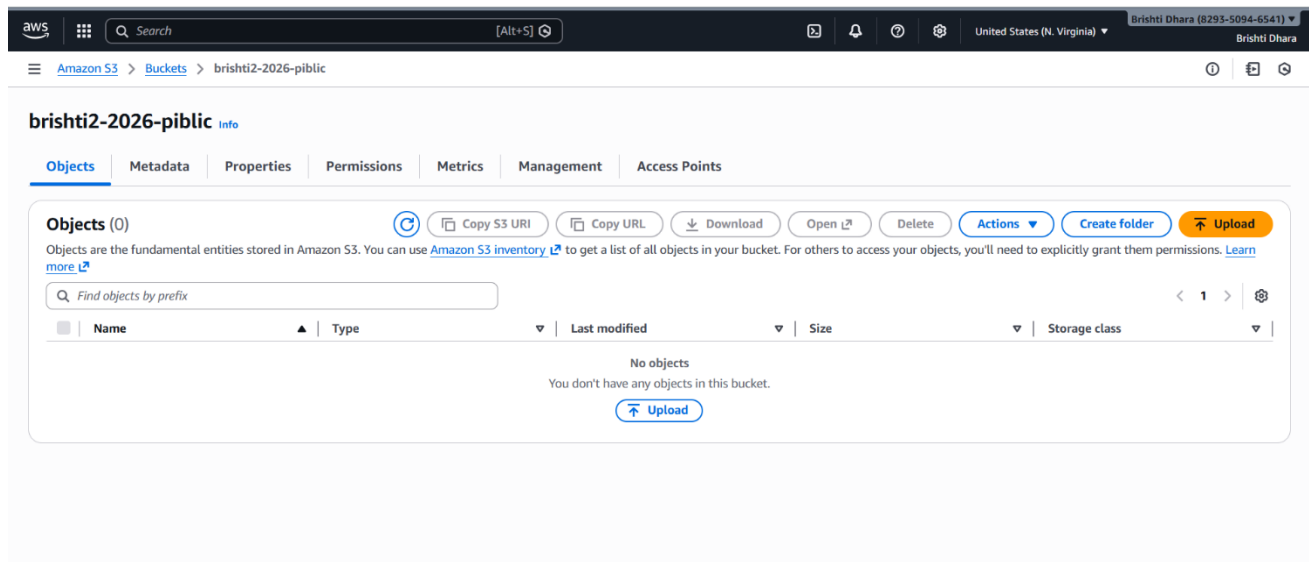

brishti2-2026-public [Info](#)

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [Access Points](#)

Objects (0) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Name	Type	Last modified	Size	Storage class
No objects You don't have any objects in this bucket.				

[Upload](#)

STEP-12: Inside the bucket click on upload and click on Add files

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 total, 138.3 KB) [Remove](#) [Add files](#) [Add folder](#)

All files and folders in this table will be uploaded.

☐	Name	Folder	Type	Size
☐	WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg	-	image/jpeg	138.3 KB

Destination [Info](#)

Destination
[s3://brishiti2-2026-public](#)

Destination details
Bucket settings that impact new objects stored in the specified destination.

STEP-13: we take a file from our device.

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 total, 138.3 KB) [Remove](#) [Add files](#) [Add folder](#)

All files and folders in this table will be uploaded.

☐	Name	Folder	Type	Size
☐	WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg	-	image/jpeg	138.3 KB

Destination [Info](#)

Destination
[s3://brishiti2-2026-public](#)

Destination details
Bucket settings that impact new objects stored in the specified destination.

STEP-14: To give permission, click on “Grant-public-read-access” and upload the file.

Permissions
Grant public access and access to other AWS accounts.

Access control list (ACL)
Grant basic read/write permissions to other AWS accounts. [Learn more](#)

☐ AWS recommends using S3 bucket policies or IAM policies for access control. [Learn more](#)

Access control list (ACL)

☒ Choose from predefined ACLs

☐ Specify individual ACL permissions

Predefined ACLs

☐ Private (recommended)
Only the object owner will have read and write access.

☒ **Grant public-read access**
Anyone in the world will be able to access the specified objects. The object owner will have read and write access. [Learn more](#)

Granting public-read access is not recommended
Anyone in the world will be able to access the specified objects. [Learn more](#)

☒ I understand the risk of granting public-read access to the specified objects.

STEP-15:the file uploaded successfully. And click on the file name.

The screenshot shows the AWS Management Console interface. At the top, there's a green notification bar stating "Upload succeeded" with a link to "Files and folders table". Below this, a summary box shows the upload details: Destination is "s3://brishiti2-2026-public", Succeeded is "1 file, 138.3 KB (100.00%)", and Failed is "0 files, 0 B (0%)". The "Files and folders" tab is selected, showing a table with one file: "WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg".

Name	Folder	Type	Size	Status	Error
WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg	-	image/jpeg	138.3 KB	Succeeded	-

STEP-16 : Afterthat from the file properties copy the object URL and paste it in a new window

The screenshot shows the "Properties" tab for the file "WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg". The "Object overview" section displays various metadata: Owner (5c08d517ac18ac745673ea41c206ad7c9018a83fdb8239cc65c3f9e3a37b214), AWS Region (US East (N. Virginia) us-east-1), Last modified (February 1, 2026, 09:50:29 (UTC+05:30)), Size (138.3 KB), Type (jpeg), and Key (WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg). The "S3 URI" is "s3://brishiti2-2026-public/WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg". The "Amazon Resource Name (ARN)" is "arn:aws:s3::brishiti2-2026-public/WhatsApp Image 2026-02-01 at 9.24.46 AM.jpeg". The "Entity tag (Etag)" is "91a672d2f987a46611c92c53cfabf5df". The "Object URL" is "https://brishiti2-2026-public.s3.us-east-1.amazonaws.com/WhatsApp+Image+2026-02-01+at+9.24.46+AM.jpeg".

STEP-18:Now we can access the object .

