Entity Relationship Diagram (ERD)

Redbox Apparel — Database Schema

Field	Value
Version	1.0
Date	2026-03-08
Database	Convex Document Store
Total Tables	43

Legend: **PK** = Primary Key (auto `_id`) | **FK** = Foreign Key Reference | **idx** = Indexed Field | **?** = Optional Field

All tables have an auto-generated `_id` primary key and `_creationTime` system field (Convex).

High-Level Domain Relationship Map

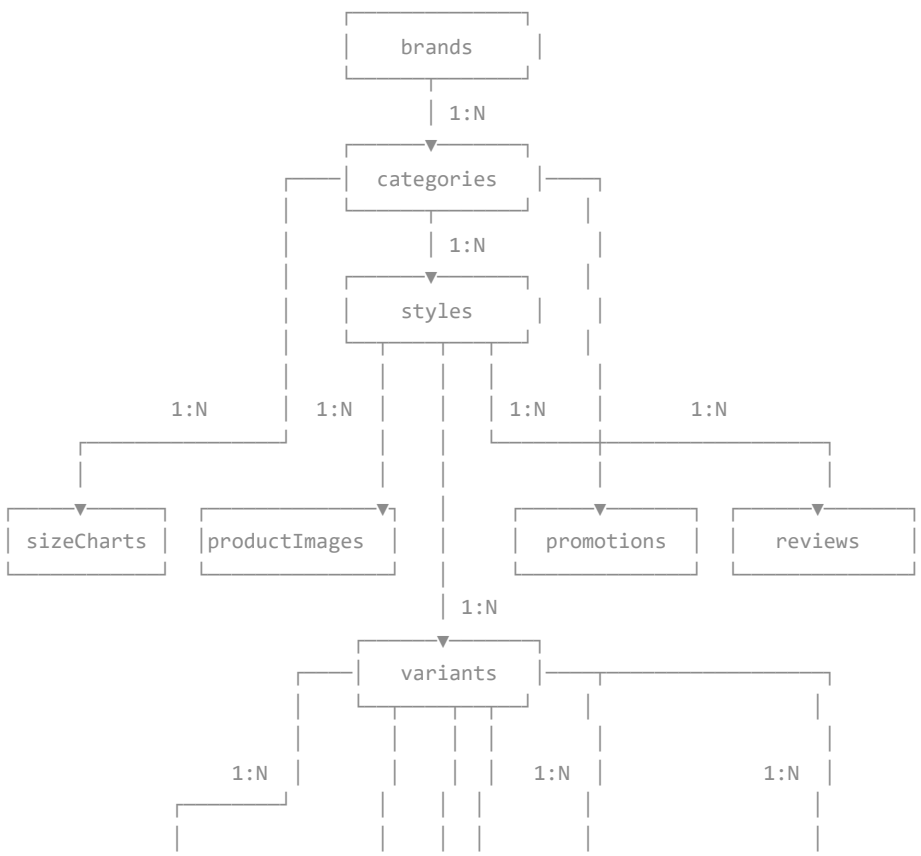

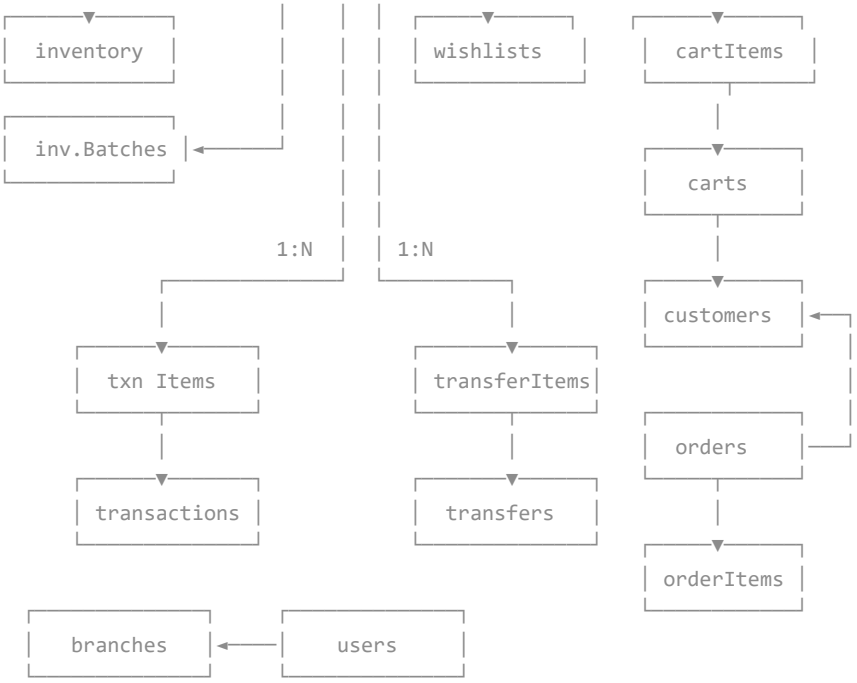
inventory
inv.Batches
wishlists
cartItems
carts
1:N
1:N
customers
txn Items
transferItems
orders
transactions
transfers
orderItems
branches
users

1. IDENTITY & ACCESS CONTROL

users

Column	Type	Constraints	Description
_id	`Id<"users">`	PK	Auto-generated
clerkId	`string`	**idx**, unique	Clerk OAuth identifier
email	`string`		User email
name	`string`		Display name
role	`string`	**idx**	`admin` | `manager` | `cashier` | `warehouseStaff` | `hqStaff` | `viewer` | `driver` | `supplier`
branchId	`Id<"branches">?`	**idx**, **FK→branches**	Assigned branch (optional for admin/hq)
assignedBrands	`string[]?`		Brand access list (for suppliers)
isActive	`boolean`		Soft-delete flag
createdAt	`number`		Unix timestamp (ms)
updatedAt	`number`		Unix timestamp (ms)

branches

Column	Type	Constraints	Description
_id	`Id<"branches">`	PK	Auto-generated
name	`string`		Branch name
address	`string`		Physical address
type	`string?`		`retail` | `warehouse`
classification	`string?`		`premium` | `aclass` | `bnc` | `outlet`
isActive	`boolean`		
phone	`string?`		Contact number
latitude	`number?`		Geo coordinates
longitude	`number?`		Geo coordinates
configuration	`object?`		`{ timezone, businessHours: { openTime, closeTime } }`
createdAt	`number`		
updatedAt	`number`		

settings

Column	Type	Constraints	Description
_id	`Id<"settings">`	PK	
key	`string`	**idx**	Setting key
value	`string`		Setting value (JSON stringified)
updatedAt	`number`		

---

2. PRODUCT CATALOG

brands

Column	Type	Constraints	Description
_id	`Id<"brands">`	PK	
name	`string`		Brand name
logo	`string?`		Legacy logo URL
storageId	`Id<"_storage">?`		Logo file in Convex Storage
bannerStorageId	`Id<"_storage">?`		Banner image
tags	`string[]?`		Taxonomy tags
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

categories

Column	Type	Constraints	Description
_id	`Id<"categories">`	PK	
brandId	`Id<"brands">`	**idx**, **FK→brands**	Parent brand
name	`string`		Category name
tag	`string?`		Display tag
storageId	`Id<"_storage">?`		Category image
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

styles

Column	Type	Constraints	Description
_id	`Id<"styles">`	PK	
categoryId	`Id<"categories">`	**idx**, **FK→categories**	Parent category
name	`string`		Style/design name
description	`string?`		Product description

basePriceCentavos	`number`		Base price in centavos (₱)
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

variants

Column	Type	Constraints	Description
_id	`Id<"variants">`	PK	
styleId	`Id<"styles">`	**idx**, **FK→styles**	Parent style
sku	`string`	**idx**, unique	Stock Keeping Unit
barcode	`string?`	**idx**	Scannable barcode
sizeGroup	`string?`		Size group label
size	`string`		Size value (S, M, L, 42, etc.)
color	`string`		Color name
gender	`string?`		`mens` | `womens` | `unisex` | `kids` | `boys` | `girls`
priceCentavos	`number`		Variant-specific price
costPriceCentavos	`number?`		Cost/purchase price
storageId	`Id<"_storage">?`		Variant-specific image
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

productImages

Column	Type	Constraints	Description
_id	`Id<"productImages">`	PK	
styleId	`Id<"styles">`	**idx**, **FK→styles**	Parent style
storageId	`Id<"_storage">`		Image file
isPrimary	`boolean`		Primary display image
sortOrder	`number`		Display ordering
createdAt	`number`		

colors

Column	Type	Constraints	Description
_id	`Id<"colors">`	PK	
name	`string`	**idx**	Color name
hexCode	`string?`		Hex color code
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

sizes

Column	Type	Constraints	Description
_id	`Id<"sizes">`	PK	
name	`string`		Size label
sortOrder	`number`	**idx**	Display ordering
sizeType	`string?`		Legacy field
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

---

3. INVENTORY & STOCK MANAGEMENT

inventory

Column	Type	Constraints	Description
_id	`Id<"inventory">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	Stock location
variantId	`Id<"variants">`	**idx**, **FK→variants**	Product variant
quantity	`number`		Available quantity
reservedQuantity	`number?`		Held for pending transfers
lowStockThreshold	`number?`		Alert trigger level
updatedAt	`number`		

Composite Index: `by_branch_variant` → `[branchId, variantId]` (unique per branch-variant pair)

inventoryBatches

Column	Type	Constraints	Description
_id	`Id<"inventoryBatches">`	PK	
branchId	`Id<"branches">`	**FK→branches**	
variantId	`Id<"variants">`	**FK→variants**	
quantity	`number`		Batch quantity
costPriceCentavos	`number`		Cost at time of receipt
receivedAt	`number`		Receipt timestamp (aging tier basis)
source	`string`		`supplier | transfer | adjustment | legacy`
sourceId	`string?`		Reference to source document
notes	`string?`		
createdAt	`number`		

Composite Index: `by_branch_variant_received` → `[branchId, variantId, receivedAt]`

lowStockAlerts

Column	Type	Constraints	Description
_id	`Id<"lowStockAlerts">`	PK	

branchId	`Id<"branches">`	**idx**, **FK→branches**	
variantId	`Id<"variants">`	**idx**, **FK→variants**	
quantity	`number`		Current stock when alert created
threshold	`number`		Threshold that was breached
status	`string`	**idx**	`active | dismissed | resolved`
dismissedBy	`Id<"users">?`	**FK→users**	
createdAt	`number`		
updatedAt	`number`		

---

4. POINT OF SALE (POS)

transactions

Column	Type	Constraints	Description
_id	`Id<"transactions">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	Sale location
cashierId	`Id<"users">`	**idx**, **FK→users**	Processing cashier
receiptNumber	`string`		Unique receipt number
subtotalCentavos	`number`		Pre-discount total
vatAmountCentavos	`number`		12% VAT amount
discountAmountCentavos	`number`		Senior/PWD discount
totalCentavos	`number`		Final total
paymentMethod	`string`		`cash` | `gcash` | `maya`
discountType	`string?`		`senior` | `pwd` | `none`
customerId	`string?`		Customer identifier
amountTenderedCentavos	`number?`		Cash tendered
changeCentavos	`number?`		Change given
isOffline	`boolean`		Created while offline
syncedAt	`number?`		When synced to server
promotionId	`Id<"promotions">?`	**FK→promotions**	Applied promotion
promoDiscountAmountCentavos	`number?`		Promo discount value
createdAt	`number`	**idx**	Transaction timestamp

transactionItems

Column	Type	Constraints	Description
_id	`Id<"transactionItems">`	PK	
transactionId	`Id<"transactions">`	**idx**, **FK→transactions**	Parent transaction
variantId	`Id<"variants">`	**FK→variants**	Sold variant
quantity	`number`		Quantity sold
unitPriceCentavos	`number`		Price per unit
lineTotalCentavos	`number`		quantity × unitPrice

cashierShifts

Column	Type	Constraints	Description
_id	`Id<"cashierShifts">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	
cashierId	`Id<"users">`	**idx**, **FK→users**	
cashFundCentavos	`number`		Opening cash fund
status	`string`	**idx**	`open | closed`
openedAt	`number`		
closedAt	`number?`		
closedCashBalanceCentavos	`number?`		Closing cash count
notes	`string?`		

reconciliations

Column	Type	Constraints	Description
_id	`Id<"reconciliations">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	
cashierId	`Id<"users">`	**idx**, **FK→users**	
reconciliationDate	`string`	**idx**	ISO date (YYYY-MM-DD)
expectedCashCentavos	`number`		System-calculated cash
actualCashCentavos	`number`		Physical cash count
differenceCentavos	`number`		Variance
transactionCount	`number`		Total transactions for day
cashSalesCentavos	`number`		Cash payment total
gcashSalesCentavos	`number`		GCash payment total
mayaSalesCentavos	`number`		Maya payment total
totalSalesCentavos	`number`		Grand total
notes	`string?`		
createdAt	`number`		

---

5. TRANSFERS & LOGISTICS

transfers

Column	Type	Constraints	Description
_id	`Id<"transfers">`	PK	
fromBranchId	`Id<"branches">`	**idx**, **FK→branches**	Source branch
toBranchId	`Id<"branches">`	**idx**, **FK→branches**	Destination branch
requestedById	`Id<"users">`	**FK→users**	Requestor
type	`string?`		`stockRequest | return`
status	`string`	**idx**	`requested → approved → packed → inTransit → delivered`
notes	`string?`		
driverId	`Id<"users">?`	**idx**, **FK→users**	Assigned driver
packedAt/packedById	`number? / Id?`		Pack timestamp & user
shippedAt/shippedById	`number? / Id?`		Ship timestamp & user
deliveredAt/deliveredById	`number? / Id?`		Delivery timestamp & user
approvedById/approvedAt	`Id? / number?`		Approval details
rejectedById/rejectedAt/rejectedReason			Rejection details
cancelledById/cancelledAt			Cancellation details
createdAt	`number`		
updatedAt	`number`		

transferItems

Column	Type	Constraints	Description
_id	`Id<"transferItems">`	PK	
transferId	`Id<"transfers">`	**idx**, **FK→transfers**	Parent transfer
variantId	`Id<"variants">`	**FK→variants**	
requestedQuantity	`number`		Originally requested
packedQuantity	`number?`		Actually packed
receivedQuantity	`number?`		Actually received

damageNotes	`string?`		Damage at receiving

internalInvoices

Column	Type	Constraints	Description
_id	`Id<"internalInvoices">`	PK	
transferId	`Id<"transfers">`	**idx**, **FK→transfers**	
fromBranchId	`Id<"branches">`	**FK→branches**	
toBranchId	`Id<"branches">`	**idx**, **FK→branches**	
invoiceNumber	`string`		Unique invoice number
subtotalCentavos	`number`		
vatAmountCentavos	`number`		
totalCentavos	`number`		
status	`string`		`generated`
generatedById	`Id<"users">`	**FK→users**	
createdAt	`number`	**idx**	

internalInvoiceItems

Column	Type	Constraints	Description
_id	`Id<"internalInvoiceItems">`	PK	
invoiceId	`Id<"internalInvoices">`	**idx**, **FK→internalInvoices**	
variantId	`Id<"variants">`	**FK→variants**	
quantity	`number`		
unitCostCentavos	`number`		Cost price per unit
lineTotalCentavos	`number`		

---

6. PROMOTIONS & PRICING

promotions

Column	Type	Constraints	Description
_id	`Id<"promotions">`	PK	
name	`string`		Promotion name
description	`string?`		
promoType	`string`		`percentage | fixedAmount | buyXGetY | tiered`
percentageValue	`number?`		% discount (for percentage type)
maxDiscountCentavos	`number?`		Cap on percentage discount
fixedAmountCentavos	`number?`		Flat discount (for fixedAmount type)
buyQuantity	`number?`		Buy X (for buyXGetY type)
getQuantity	`number?`		Get Y free (for buyXGetY type)
minSpendCentavos	`number?`		Minimum spend (for tiered type)
tieredDiscountCentavos	`number?`		Discount amount (for tiered type)
Scoping			
branchIds	`Id<"branches">[]`	**FK→branches**	Empty = all branches
branchClassifications	`string[]?`		Filter by branch classification
brandIds	`Id<"brands">[]`	**FK→brands**	Empty = all brands
categoryIds	`Id<"categories">[]`	**FK→categories**	Empty = all categories
variantIds	`Id<"variants">[]`	**FK→variants**	Empty = all variants
styleIds	`Id<"styles">[]?`	**FK→styles**	Empty = all styles
genders	`string[]?`		Gender filter
colors	`string[]?`		Color filter
sizes	`string[]?`		Size filter
agingTiers	`string[]?`		`green | yellow | red`
Validity			
startDate	`number`	**idx**	Promo start timestamp
endDate	`number?`		Promo end (null = no expiry)
isActive	`boolean`	**idx**	

priority	`number`		Lower = higher priority
createdById	`Id<"users">`	**FK→users**	
createdAt	`number`		
updatedAt	`number`		

---

7. STOREFRONT — CUSTOMERS & ORDERS

customers

Column	Type	Constraints	Description
_id	`Id<"customers">`	PK	
clerkId	`string`	**idx**	Clerk OAuth ID
email	`string`	**idx**	
firstName	`string`		
lastName	`string`		
phone	`string?`		
avatarUrl	`string?`		
gender	`string?`		`male | female | other`
dateOfBirth	`string?`		ISO date
isActive	`boolean`		
createdAt	`number`		
updatedAt	`number`		

customerAddresses

Column	Type	Constraints	Description
_id	`Id<"customerAddresses">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
label	`string`		"Home", "Office", etc.
recipientName	`string`		
phone	`string`		
addressLine1	`string`		
addressLine2	`string?`		
city	`string`		
province	`string`		
postalCode	`string`		
country	`string`		
isDefault	`boolean`		Default shipping address

createdAt	`number`		
updatedAt	`number`		

carts

Column	Type	Constraints	Description
_id	`Id<"carts">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	One cart per customer
updatedAt	`number`		

cartItems

Column	Type	Constraints	Description
_id	`Id<"cartItems">`	PK	
cartId	`Id<"carts">`	**idx**, **FK→carts**	
variantId	`Id<"variants">`	**FK→variants**	
quantity	`number`		
addedAt	`number`		

Composite Index: `by_cart_variant` → `[cartId, variantId]`

orders

Column	Type	Constraints	Description
_id	`Id<"orders">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
orderNumber	`string`	**idx**	Unique order number
status	`string`	**idx**	`pending → paid → processing → shipped → delivered`
subtotalCentavos	`number`		
vatAmountCentavos	`number`		
shippingFeeCentavos	`number`		
discountAmountCentavos	`number`		
totalCentavos	`number`		
shippingAddressId	`Id<"customerAddresses">?`	**FK→customerAddresses**	

shippingAddress	`object?`		Snapshot of address at order time
paymentMethod	`string`		`cod | gcash | maya | card | bankTransfer`
paymentReference	`string?`		
paidAt	`number?`		
promotionId	`Id<"promotions">?`	**FK→promotions**	
voucherCode	`string?`		
promoDiscountCentavos	`number?`		
fulfilledFromBranchId	`Id<"branches">?`	**FK→branches**	
notes	`string?`		
createdAt	`number`	**idx**	
updatedAt	`number`		
cancelledAt	`number?`		
cancelReason	`string?`		

orderItems

Column	Type	Constraints	Description
_id	`Id<"orderItems">`	PK	
orderId	`Id<"orders">`	**idx**, **FK→orders**	
variantId	`Id<"variants">`	**FK→variants**	
quantity	`number`		
unitPriceCentavos	`number`		
lineTotalCentavos	`number`		

shipments

Column	Type	Constraints	Description
_id	`Id<"shipments">`	PK	
orderId	`Id<"orders">`	**idx**, **FK→orders**	
carrier	`string`		J&T, LBC, Ninja Van, etc.
trackingNumber	`string?`	**idx**	
status	`string`		`preparing → pickedUp → inTransit → outForDelivery → delivered`

estimatedDelivery	`number?`		
shippedAt	`number?`		
deliveredAt	`number?`		
createdAt	`number`		
updatedAt	`number`		

---

8. STOREFRONT — ENGAGEMENT & LOYALTY

wishlists

Column	Type	Constraints	Description
_id	`Id<"wishlists">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
variantId	`Id<"variants">`	**FK→variants**	
addedAt	`number`		

reviews

Column	Type	Constraints	Description
_id	`Id<"reviews">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
styleId	`Id<"styles">`	**idx**, **FK→styles**	
orderId	`Id<"orders">?`	**FK→orders**	Verified purchase link
rating	`number`		1–5 stars
title	`string?`		
body	`string?`		Review text
imageStorageIds	`Id<"_storage">[]?`		Review photos
isVerifiedPurchase	`boolean`		
isApproved	`boolean`	**idx**	Moderation flag
helpfulCount	`number?`		Upvote count
createdAt	`number`		
updatedAt	`number`		

vouchers

Column	Type	Constraints	Description
_id	`Id<"vouchers">`	PK	
code	`string`	**idx**	Promo code
promotionId	`Id<"promotions">`	**idx**, **FK→promotions**	Linked promotion
usageLimit	`number?`		Max total redemptions

usedCount	`number`		Current redemption count
perCustomerLimit	`number?`		Max per customer
minOrderCentavos	`number?`		Minimum order value
startDate	`number`		
endDate	`number?`		
isActive	`boolean`		
createdAt	`number`		

voucherRedemptions

Column	Type	Constraints	Description
_id	`Id<"voucherRedemptions">`	PK	
voucherId	`Id<"vouchers">`	**idx**, **FK→vouchers**	
customerId	`Id<"customers">`	**FK→customers**	
orderId	`Id<"orders">`	**FK→orders**	
redeemedAt	`number`		

loyaltyAccounts

Column	Type	Constraints	Description
_id	`Id<"loyaltyAccounts">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
tier	`string`	**idx**	`bronze | silver | gold | platinum`
pointsBalance	`number`		Current points
lifetimePoints	`number`		All-time points earned
lifetimeSpendCentavos	`number`		All-time spend
tierExpiresAt	`number?`		Tier expiration
createdAt	`number`		
updatedAt	`number`		

loyaltyTransactions

Column	Type	Constraints	Description
_id	`Id<"loyaltyTransactions">`	PK	
loyaltyAccountId	`Id<"loyaltyAccounts">`	**idx**, **FK→loyaltyAccounts**	

type	`string`	**idx**	`earn` | `redeem` | `expire` | `bonus` | `adjustment`
points	`number`		+earn/bonus, −redeem/expire
orderId	`Id<"orders">?`	**FK→orders**	
description	`string`		
createdAt	`number`		

notifications

Column	Type	Constraints	Description
_id	`Id<"notifications">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
type	`string`		`order` | `promo` | `restock` | `price_drop` | `system`
title	`string`		
body	`string`		
linkUrl	`string?`		Deep link
isRead	`boolean`	**idx**	
createdAt	`number`	**idx**	

recentlyViewed

Column	Type	Constraints	Description
_id	`Id<"recentlyViewed">`	PK	
customerId	`Id<"customers">`	**idx**, **FK→customers**	
styleId	`Id<"styles">`	**FK→styles**	
viewedAt	`number`		

---

9. DEMAND, ANALYTICS & AI

demandLogs

Column	Type	Constraints	Description
_id	`Id<"demandLogs">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	
loggedById	`Id<"users">`	**FK→users**	Staff who logged
brand	`string`		Requested brand
design	`string?`		Requested design
size	`string?`		Requested size
notes	`string?`		
createdAt	`number`	**idx**	

demandWeeklySummaries

Column	Type	Constraints	Description
_id	`Id<"demandWeeklySummaries">`	PK	
weekStart	`number`	**idx**	Week start timestamp
brand	`string`	**idx**	
requestCount	`number`		Total requests
topDesigns	`{ design, count }[]`		Top requested designs
topSizes	`{ size, count }[]`		Top requested sizes
branchBreakdown	`{ branchId, count }[]`		Per-branch counts
generatedAt	`number`		

auditLogs

Column	Type	Constraints	Description
_id	`Id<"auditLogs">`	PK	
action	`string`		Action performed
userId	`Id<"users">`	**idx**, **FK→users**	Who performed it
branchId	`Id<"branches">?`	**idx**, **FK→branches**	
entityType	`string`	**idx**	Table name

entityId	`string`	**idx**	Document ID
before	`any?`		State before change
after	`any?`		State after change
timestamp	`number`	**idx**	

restockSuggestions

Column	Type	Constraints	Description
_id	`Id<"restockSuggestions">`	PK	
branchId	`Id<"branches">`	**FK→branches**	
variantId	`Id<"variants">`	**FK→variants**	
suggestedQuantity	`number`		AI-recommended restock qty
currentStock	`number`		Stock at time of suggestion
avgDailyVelocity	`number`		Sales velocity
daysUntilStockout	`number`		Projected stockout
incomingStock	`number`		Pending transfer qty
confidence	`string`		`high | medium | low`
rationale	`string`		AI explanation
status	`string`	**idx**	`active | accepted | dismissed`
acceptedById	`Id<"users">?`	**FK→users**	
transferId	`Id<"transfers">?`	**FK→transfers**	Created transfer
generatedAt	`number`		
expiresAt	`number`		

branchScores

Column	Type	Constraints	Description
_id	`Id<"branchScores">`	PK	
branchId	`Id<"branches">`	**idx**, **FK→branches**	
period	`string`	**idx**	Scoring period (YYYY-MM-DD)
salesVolumeScore	`number`		0-100
stockAccuracyScore	`number`		0-100
fulfillmentSpeedScore	`number`		0-100
compositeScore	`number`		Weighted average

salesRevenueCentavos	`number`		
salesTransactionCount	`number`		
activeAlertCount	`number`		
avgTransferHours	`number`		
generatedAt	`number`		

---

10. RESERVATIONS & SUPPLIERS

reservations

Column	Type	Constraints	Description
_id	`Id<"reservations">`	PK	
customerName	`string`		
customerPhone	`string`		
variantId	`Id<"variants">`	**FK→variants**	Reserved product
branchId	`Id<"branches">`	**idx**, **FK→branches**	Pickup branch
quantity	`number`		
status	`string`	**idx**	`pending | fulfilled | expired | cancelled`
confirmationCode	`string`	**idx**	Unique pickup code
expiresAt	`number`	**idx**	Auto-expiry timestamp
createdAt	`number`		
updatedAt	`number`		

supplierProposals

Column	Type	Constraints	Description
_id	`Id<"supplierProposals">`	PK	
supplierId	`Id<"users">`	**idx**, **FK→users**	
brand	`string`		Target brand
items	`{ description, sku?, quantity, unitPriceCentavos }[]`		Proposed items
totalCentavos	`number`		Total proposal value
notes	`string?`		
status	`string`	**idx**	`pending | accepted | rejected`
reviewedBy	`Id<"users">?`	**FK→users**	
reviewedAt	`number?`		
reviewNotes	`string?`		
createdAt	`number`		

sizeCharts

Column	Type	Constraints	Description
_id	`Id<"sizeCharts">`	PK	
categoryId	`Id<"categories">`	**idx**, **FK→categories**	
sizeGroup	`string`	**idx**	"Apparel", "EU", "US"
entries	`{ size, chest?, waist?, hips?, length?, shoulder?, footLength? }[]`		Measurements
createdAt	`number`		
updatedAt	`number`		

banners

Column	Type	Constraints	Description
_id	`Id<"banners">`	PK	
title	`string`		
subtitle	`string?`		
imageStorageId	`Id<"_storage">`		Banner image
linkUrl	`string?`		Click destination
placement	`string`	**idx**	`hero | category | flash_sale | promo`
sortOrder	`number`		Display ordering
isActive	`boolean`	**idx**	
startDate	`number?`		Scheduled start
endDate	`number?`		Scheduled end
createdAt	`number`		

RELATIONSHIP SUMMARY

All Foreign Key References

From Table	Column	→ To Table	Cardinality
users	branchId	branches	N:1
categories	brandId	brands	N:1

styles	categoryId	categories	N:1
variants	styleId	styles	N:1
productImages	styleId	styles	N:1
inventory	branchId	branches	N:1
inventory	variantId	variants	N:1
inventoryBatches	branchId	branches	N:1
inventoryBatches	variantId	variants	N:1
lowStockAlerts	branchId	branches	N:1
lowStockAlerts	variantId	variants	N:1
lowStockAlerts	dismissedBy	users	N:1
transactions	branchId	branches	N:1
transactions	cashierId	users	N:1
transactions	promotionId	promotions	N:1
transactionItems	transactionId	transactions	N:1
transactionItems	variantId	variants	N:1
cashierShifts	branchId	branches	N:1
cashierShifts	cashierId	users	N:1
reconciliations	branchId	branches	N:1
reconciliations	cashierId	users	N:1
transfers	fromBranchId	branches	N:1
transfers	toBranchId	branches	N:1
transfers	requestedById	users	N:1
transfers	driverId	users	N:1
transferItems	transferId	transfers	N:1
transferItems	variantId	variants	N:1
internalInvoices	transferId	transfers	N:1
internalInvoices	fromBranchId	branches	N:1
internalInvoices	toBranchId	branches	N:1
internalInvoices	generatedById	users	N:1
internalInvoiceItems	invoiceId	internalInvoices	N:1
internalInvoiceItems	variantId	variants	N:1
promotions	createdById	users	N:1
demandLogs	branchId	branches	N:1
demandLogs	loggedById	users	N:1

auditLogs	userId	users	N:1
auditLogs	branchId	branches	N:1
restockSuggestions	branchId	branches	N:1
restockSuggestions	variantId	variants	N:1
restockSuggestions	acceptedById	users	N:1
restockSuggestions	transferId	transfers	N:1
branchScores	branchId	branches	N:1
reservations	variantId	variants	N:1
reservations	branchId	branches	N:1
supplierProposals	supplierId	users	N:1
supplierProposals	reviewedBy	users	N:1
customers	—	—	(Clerk-linked)
customerAddresses	customerId	customers	N:1
carts	customerId	customers	N:1
cartItems	cartId	carts	N:1
cartItems	variantId	variants	N:1
orders	customerId	customers	N:1
orders	shippingAddressId	customerAddresses	N:1
orders	promotionId	promotions	N:1
orders	fulfilledFromBranchId	branches	N:1
orderItems	orderId	orders	N:1
orderItems	variantId	variants	N:1
shipments	orderId	orders	N:1
wishlists	customerId	customers	N:1
wishlists	variantId	variants	N:1
reviews	customerId	customers	N:1
reviews	styleId	styles	N:1
reviews	orderId	orders	N:1
vouchers	promotionId	promotions	N:1
voucherRedemptions	voucherId	vouchers	N:1
voucherRedemptions	customerId	customers	N:1
voucherRedemptions	orderId	orders	N:1
loyaltyAccounts	customerId	customers	N:1
loyaltyTransactions	loyaltyAccountId	loyaltyAccounts	N:1

loyaltyTransactions	orderId	orders	N:1
notifications	customerId	customers	N:1
recentlyViewed	customerId	customers	N:1
recentlyViewed	styleId	styles	N:1
sizeCharts	categoryId	categories	N:1
banners	—	—	(standalone)