

OCI DevOps: Pipeline Your Terraform Stack from GitHub to OCI Devops



Kosseila Hd

Founder, Principal Consultant

CloudThrill



Hi, I'm Kosseila



Cloud Dude

- I live in Toronto 🇨🇦
- Founder @CloudThrill
- Principal Consultant
- Podcaster



Cloudthrill.ca






Linkedin.com/in/kousshd



GitHub.com/brokedba

CloudThrill
expertise worth sharing...



CloudThrill

Expertise worth Sharing

- »» DevOps & Automation
- »» Cloud Ops & Migration
- »» Security & Compliance
- »» Database migrations
- »» Advisory & training
- »» Private LLM Solutions

Private LLM Solutions (Cloud/hybrid)

Data Privacy

Preserve confidentiality of your sensitive data (business, customer PII) by keeping it **within your own infrastructure**.

Implementation

Deploy a **scalable**, and multi-purpose local AI solutions with RAG capabilities, ensuring regulatory compliance & control over storage/processing/access.

Cost-Effective

Leverage private & affordable inference using your existing **commodity compute (CPU)** when GPU is not an option.



AGENDA

1- CI/CD

- ❑ CI/CD Solutions in the market (SaaS/Cloud native)
- ❑ The risk of using 3rd party Solutions and Why OCI Devops is the right fit

2- OCI Devops

- ❑ The features & benefits
- ❑ Prerequisites
- ❑ Explore OCI Devops Components (project, Code Repository, Resource Manager integration)
- ❑ Difference between Build and deploy pipeline

3- Pipeline Your Terraform Stack from GitHub to OCI Devops

- ❑ My GitHub terraform Target Stack & workflow overview
- ❑ Demo & What's Next

4- Q&A

1
User managed

Open Source



Jenkins



GoCD




GitLab CI



Drone CI



Spinnaker



Buildbot

SaaS

3


Cloud Services




Open Source



SaaS

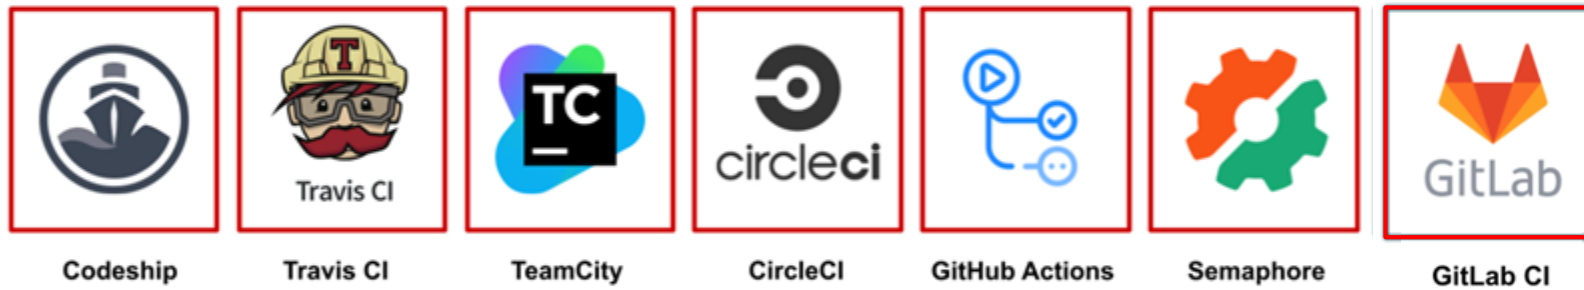

Cloud Services

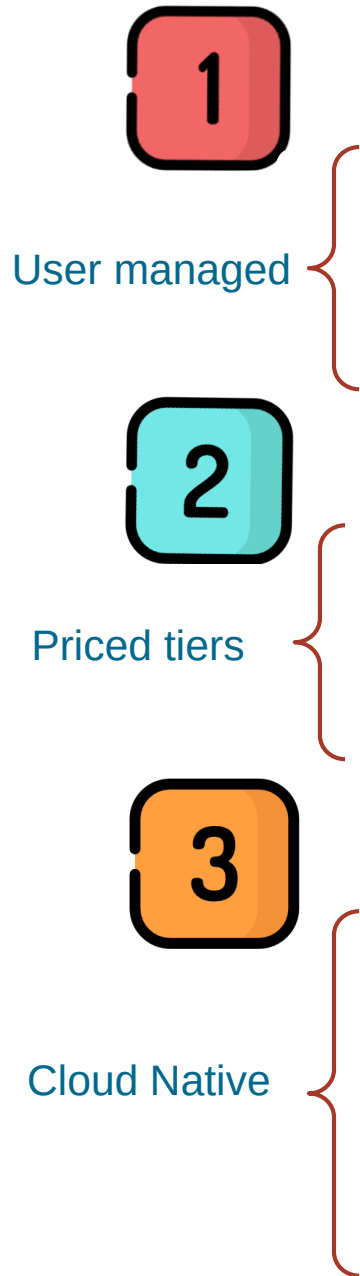

Open Source

 Jenkins	 GoCD	 GitLab CI	 Drone CI	 Spinnaker	 Buildbot
--	---	--	---	--	---

SaaS

 Codeship	 Travis CI	 TeamCity	 CircleCI	 GitHub Actions	 Semaphore	 GitLab CI
---	--	---	---	---	--	--

Cloud Services

 ORACLE Cloud Infrastructure DEV OPS	 Azure DevOps	 AWS CodePipeline	 Google Cloud Build
--	---	---	---

The risk of using 3rd party Solutions

Leaked Today, Vulnerable Tomorrow


23,770,171 +25%

New secrets detected in public
GitHub commits in 2024

Data analysis by GitGuardian

Breakdown of valid secrets found in public Docker images

- Google Cloud
- MongoDB
- AWS
- OpenAI
- PostgreSQL
- GitHub
- Other

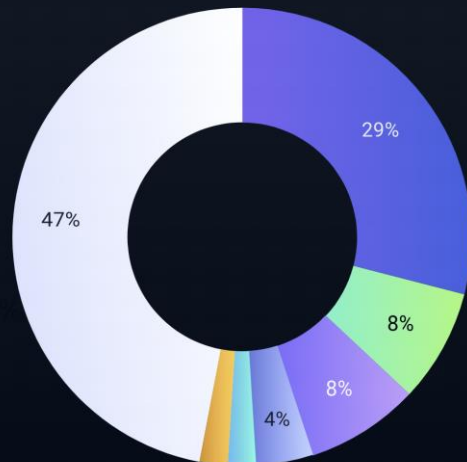


23 million

credentials from GitHub were accessible in 2024 alone.

By 2025, **45%** of organizations worldwide will have experienced attacks on their software supply chains, a three-fold increase from 2021.

New secrets detected on GitHub

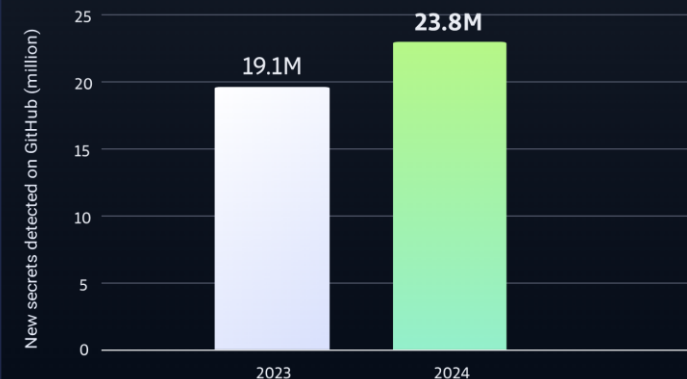


25%




Increase in leaked
credentials from the
previous year, indicating
that secrets sprawl is
worsening over time.

The risk of using 3rd party Solutions

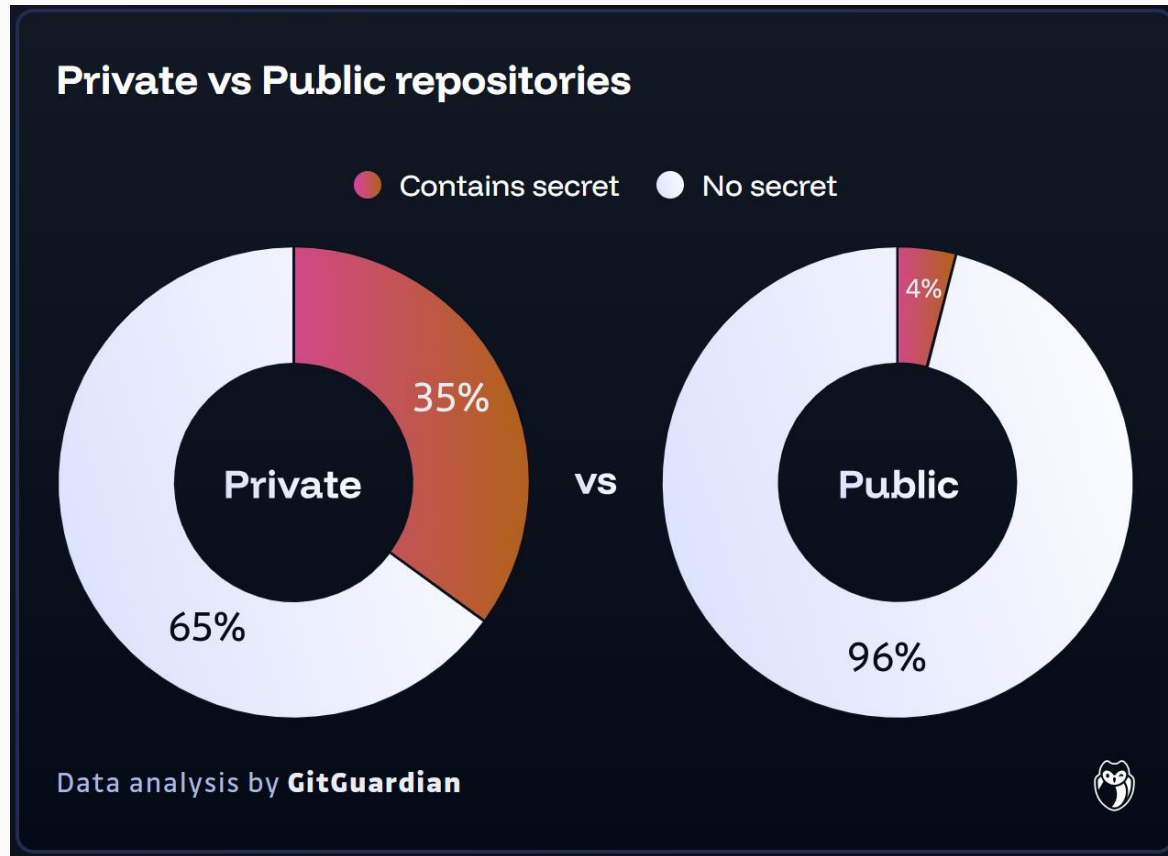


23 million credentials from GitHub were accessible in 2024 alone.

By 2025, **45%** of organizations worldwide will have experienced attacks on their software supply chains, a three-fold increase from 2021.

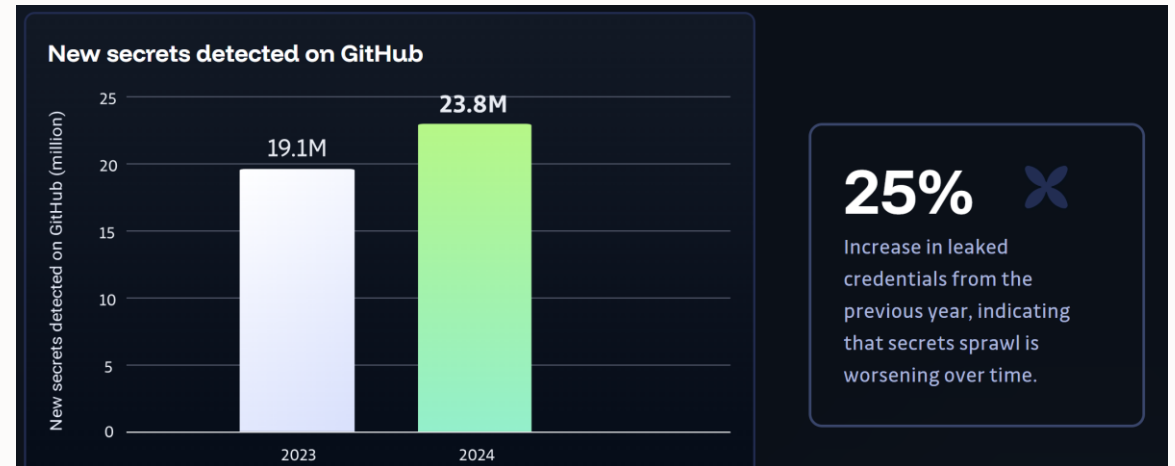

The risk of using 3rd party Solutions

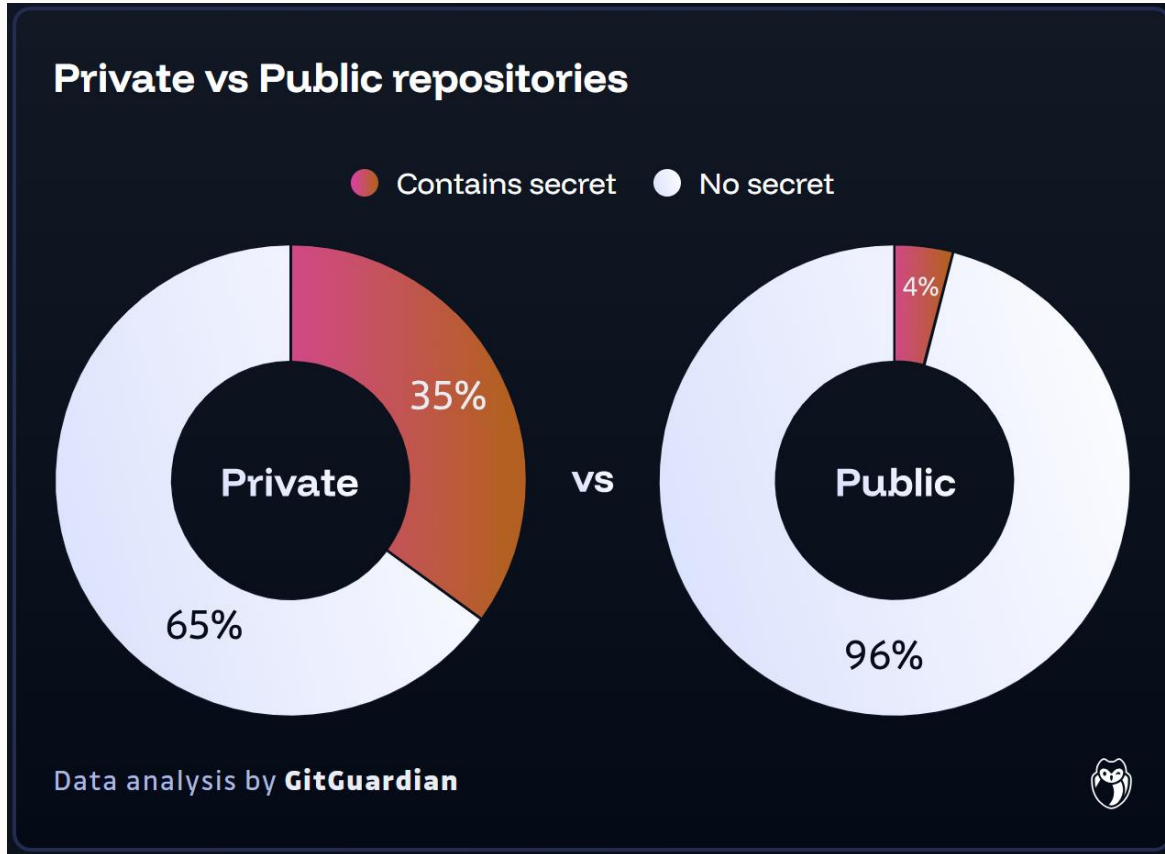


Uber SAMSUNG TOYOTA

Infosys NVIDIA verizon

23 million
credentials from GitHub were accessible in 2024 alone.

By 2025, **45%** of organizations worldwide will have experienced attacks on their software supply chains, a three-fold increase from 2021.

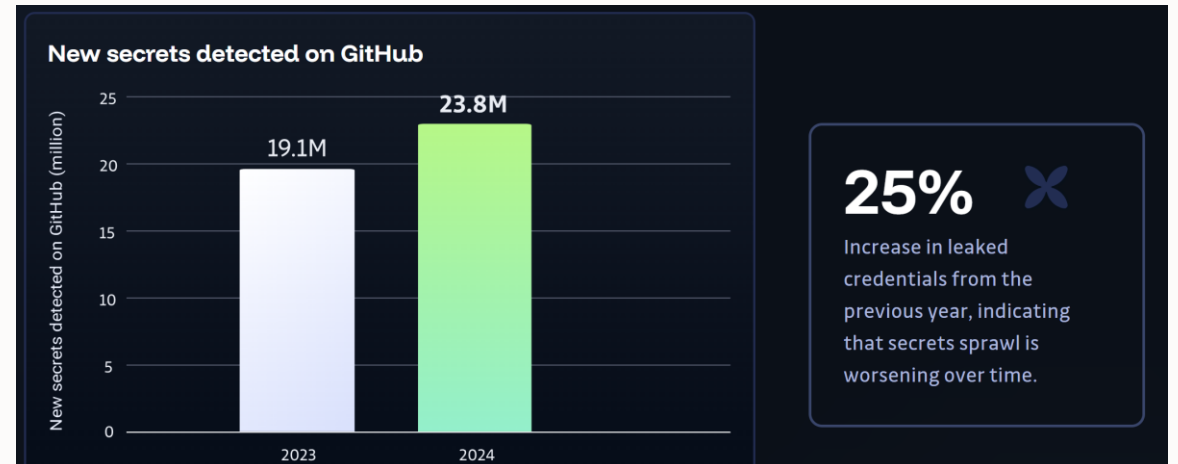

OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation

OCI DevOps Service: Features & advantages

Why OCI DevOps?

Cloud-native: no DevOps servers to maintain and operate. CI/CD workflows integrated with the OCI platform: logging, notifications, identity, security.

Security: securely deploy to compute hosts, OKE. More secure than 3rd party CI/CD

Flexible: meet developers where they are, integrate with CI/CD existing tooling. Automate the CD part

Developer friendly pricing: no per-user charge. DevOps costs are underlying build run compute + code repo storage

Advantages

Quick building and deployment of applications and services using DevOps practices (CI/CD pipelines, Infrastructure as code).

target environment: Kubernetes clusters, OCI functions, or Instance groups

Integrates With GitHub and GitLab for easy and secure source code management.

Deploy globally Across regions (deploy to different environments in parallel)

OCI DevOps Service: Features & advantages

Why OCI DevOps?

Cloud-native: no DevOps servers to maintain and operate. CI/CD workflows integrated with the OCI platform: logging, notifications, identity, security.

DevOps Continuous Integration (CI)



Serverless, Scalable
No instances to manage

Serverless pricing, pay for consumed build memory and compute. Pay for code repositories storage.

Create **concurrent** builds with Dynamic Limits.



Integrated
Works with your resources

Run a build pipeline with your **GitHub** or **GitLab** repositories.

DevOps Code Repositories –secure, private Git storage.



GitHub



GitLab



Complete
Native CI/CD Platform

Connect deployments from a build pipeline.

Trigger build from a commit

Deliver to OCI Artifact Repositories

Manage build **secrets** with OCI Vault

Advantages

Quick building and deployment of applications and services using DevOps practices (CI/CD pipelines, Infrastructure as code).

target environment:
Kubernetes clusters, OCI functions, or Instance groups

Integrates With GitHub and GitLab for easy and secure source code management.

Deploy globally Across regions (deploy to different environments in parallel)

OCI DevOps Service: Features & advantages

Why OCI DevOps?

Cloud-native: no DevOps servers to maintain and operate. CI/CD workflows integrated with the OCI platform: logging, notifications, identity, security.

DevOps Continuous Integration (CI)



Security

Take advantage of Cloud Security

Leverage **OCI security** for your CI/CD Pipeline: Container image scanning, signing and deployment validation to OKE.

Control CI/CD pipeline access to resources with **IAM policy**



Governance

End to end Visibility

Fully integrated with OCI **observability, logging, governance**. Track issues in production deployments back to commits.



Complete

Native CI/CD Platform

Connect deployments from a build pipeline.

Trigger build from a commit

Deliver to OCI Artifact Repositories

Manage build **secrets** with OCI Vault

Advantages

Quick building and deployment of applications and services using DevOps practices (CI/CD pipelines, Infrastructure as code).

target environment: Kubernetes clusters, OCI functions, or Instance groups

Integrates With GitHub and GitLab for easy and secure source code management.

Deploy globally Across regions (deploy to different environments in parallel)

OCI DevOps Service: Features & advantages

Why OCI DevOps?

Cloud-native: no DevOps servers to maintain and operate. CI/CD workflows integrated with the OCI platform: logging, notifications, identity, security.

DevOps Continuous Deployment (CD)



Release Strategies

Reduce downtime, faster recovery

Blue/Green deployments, Canary stage – minimize downtime and increase confidence in your deployment

Perform **global deployments** across regions.

Integrated

Connect your workflows

Jenkins plugin to run a DevOps deployment from your Jenkins pipeline.

Orchestrate **multi-cloud** deployments with Spinnaker



Rollback

Recover from errors

Automatic or manual rollback of a deployment stage

Advantages

Quick building and deployment of applications and services using DevOps practices (CI/CD pipelines, Infrastructure as code).

target environment: Kubernetes clusters, OCI functions, or Instance groups

Integrates With GitHub and GitLab for easy and secure source code management.

Deploy globally Across regions (deploy to different environments in parallel)



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



Git Source Repo
External/
Internal

Event triggers

Scope

IAM

CI
CD

Observability

Target
Deployment

Build Storage



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Event triggers

Scope

IAM

CI
CD

Observability

Target
Deployment

Build Storage



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Event triggers

Scope

IAM

Build Pipelines

Deploy Pipelines

Observability

Target
Deployment

Build Storage



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Triggers

Setup continuous integration from your code repo to start a build pipeline.

Scope

IAM

Build Pipelines

Deploy Pipelines

Target
Deployment

Build Storage

Observability



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Triggers

Setup continuous integration from your code repo to start a build pipeline.

Scope

IAM

Build Pipelines

Deploy Pipelines

Environments

Configure target platform for your automated service deployments

Build Storage

Observability



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Triggers

Setup continuous integration from your code repo to start a build pipeline.

Scope

IAM

Build Pipelines

Deploy Pipelines

Environments

Configure target platform for your automated service deployments

Artifacts

Manage and specify software package version for automated deployment

Observability



OCI DevOps Service

Simplifying the OCI developer experience with software delivery automation



External Connections

Connect DevOps to your existing GitHub and GitLab source code repository

Code Repositories

Create a private Git repo for your team to work with, or mirror existing GitHub / GitLab repo

Triggers

Setup continuous integration from your code repo to start a build pipeline.

Scope

IAM

Build Pipelines

Deploy Pipelines

Logs

Work Requests

Environments

Configure target platform for your automated service deployments


Artifacts

Manage and specify software package version for automated deployment


Metrics

View and manage Build and Deployment pipeline metrics

Complete CI/CD Platform

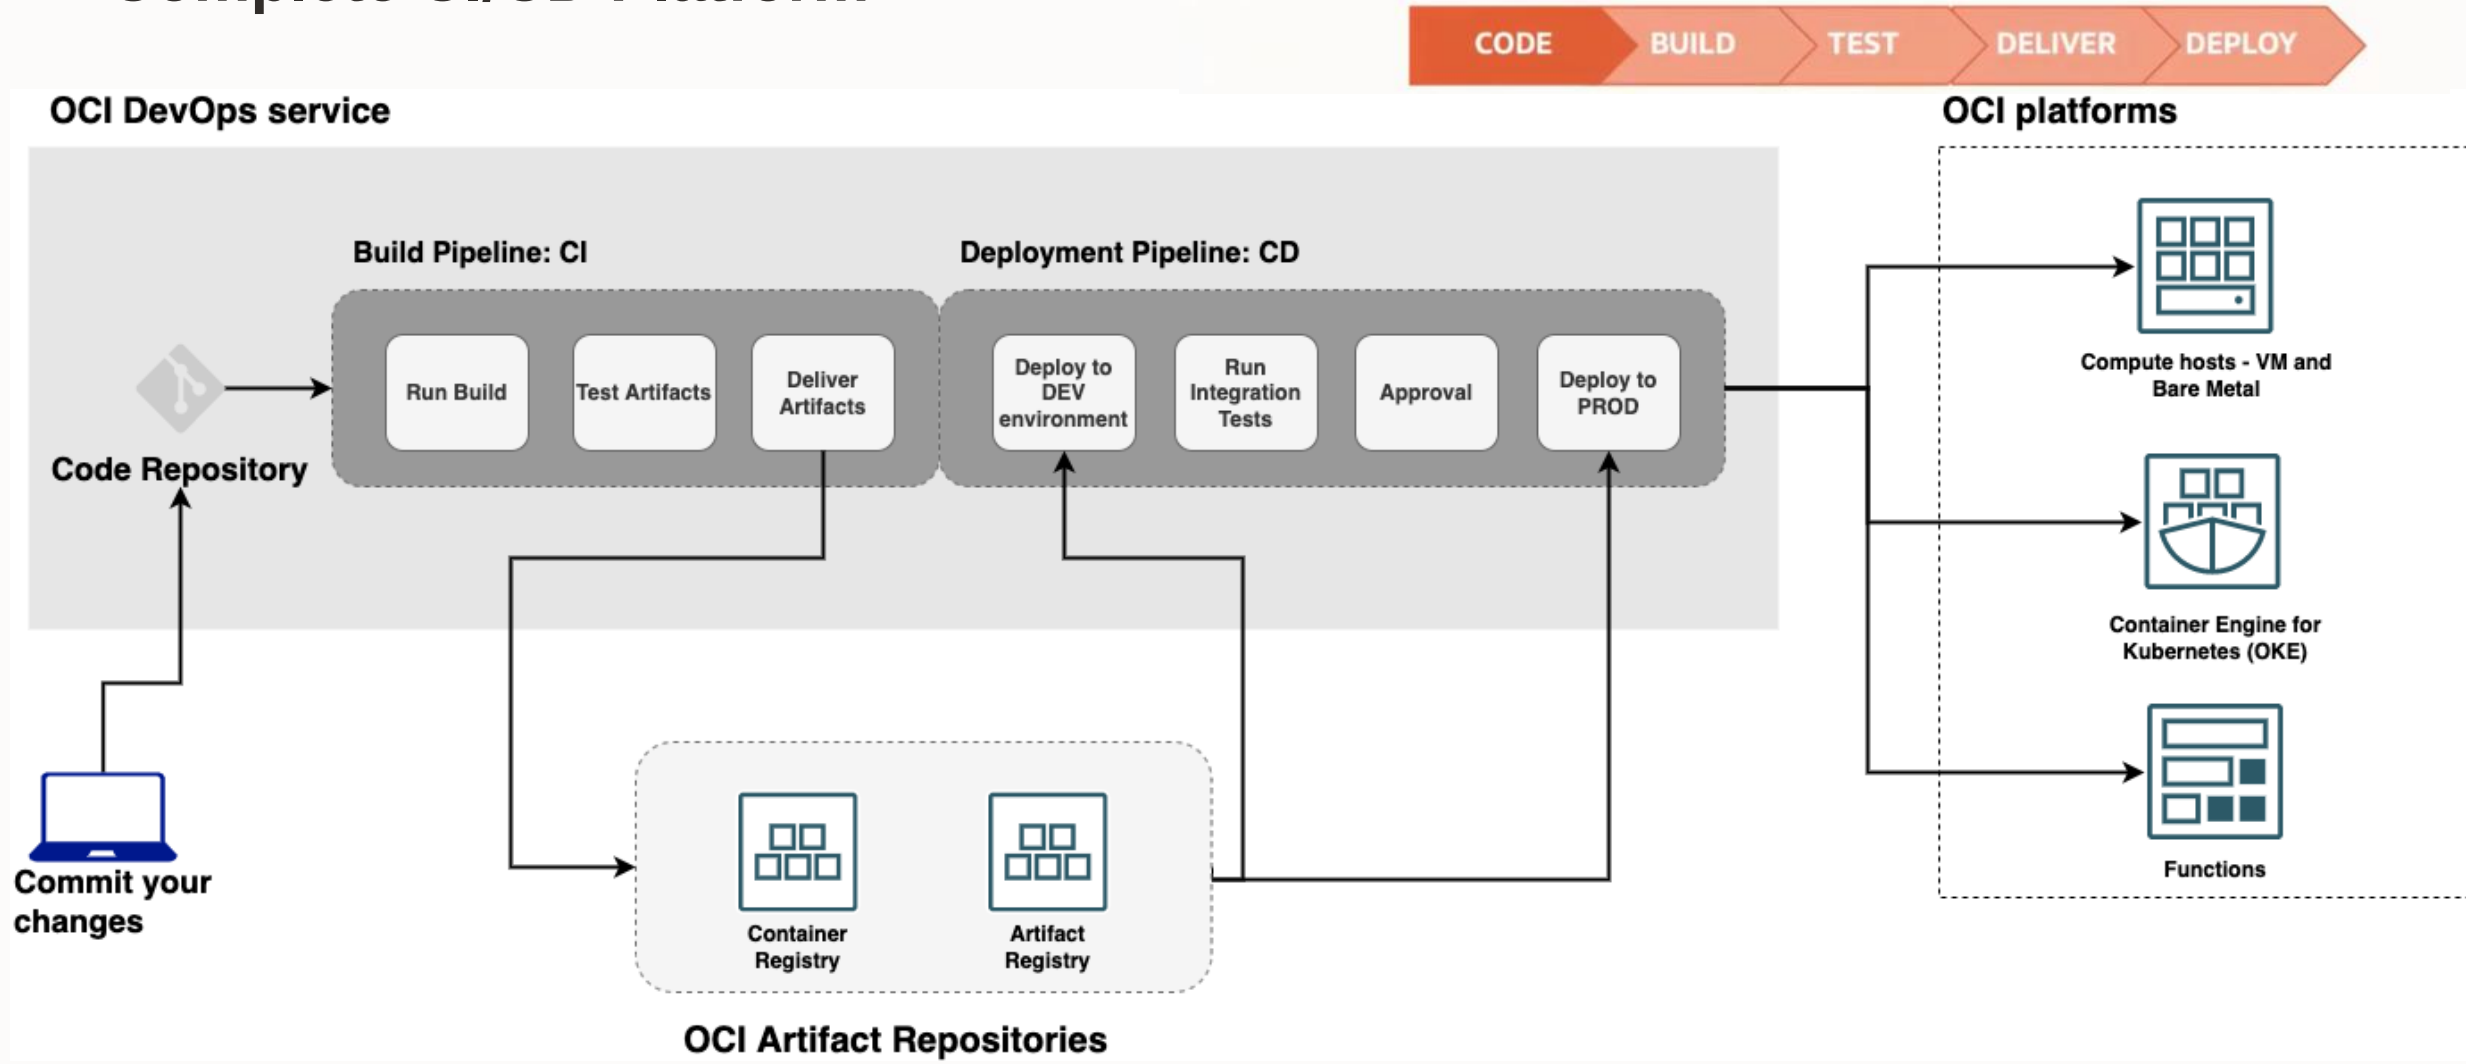


Complete CI/CD Platform

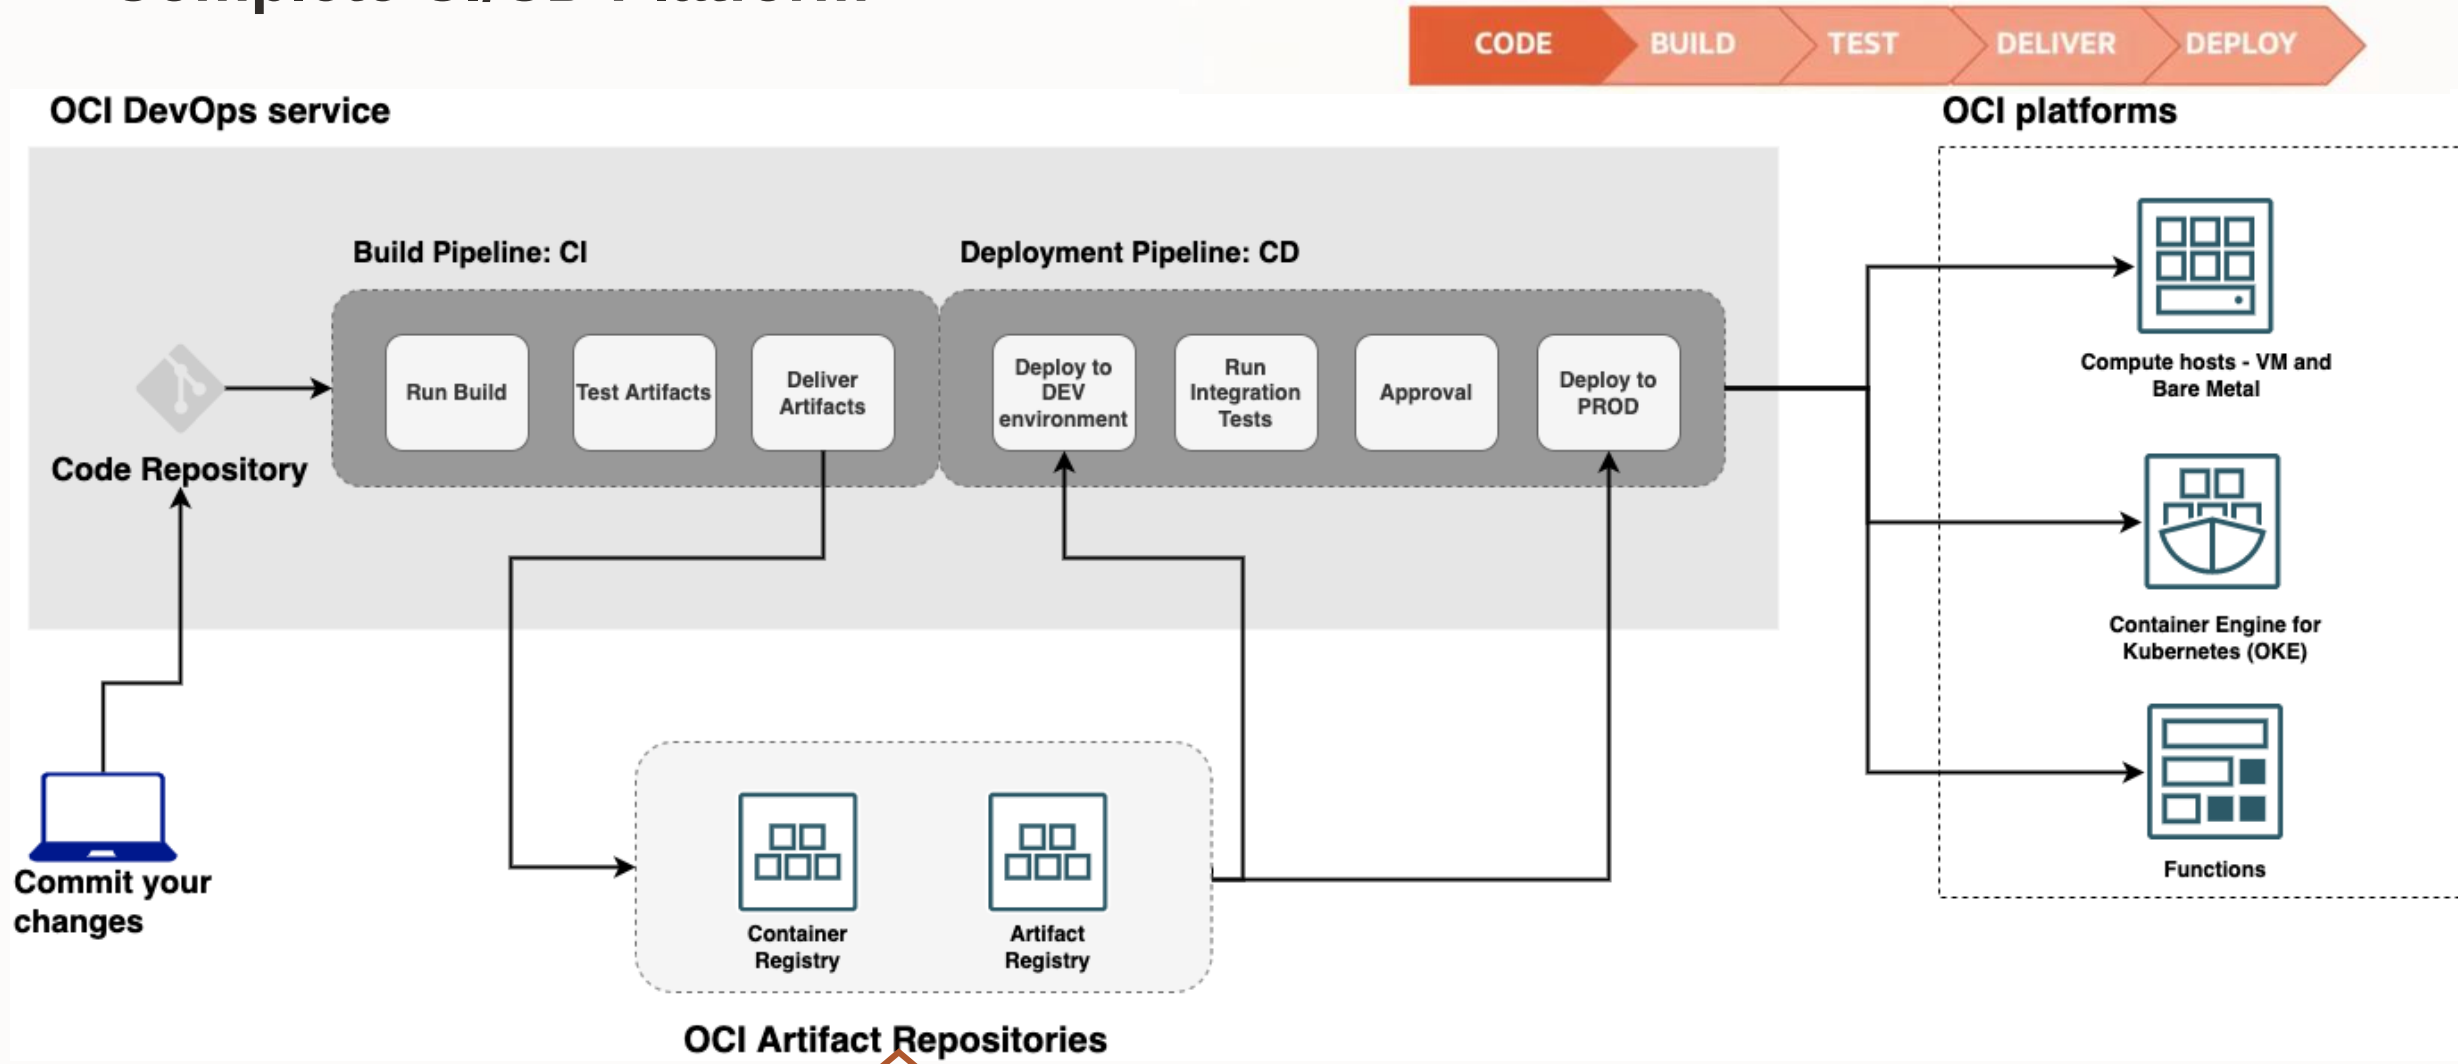

❑ Generic Artifact repository (java pkg, tarball, manifest etc.)




Complete CI/CD Platform

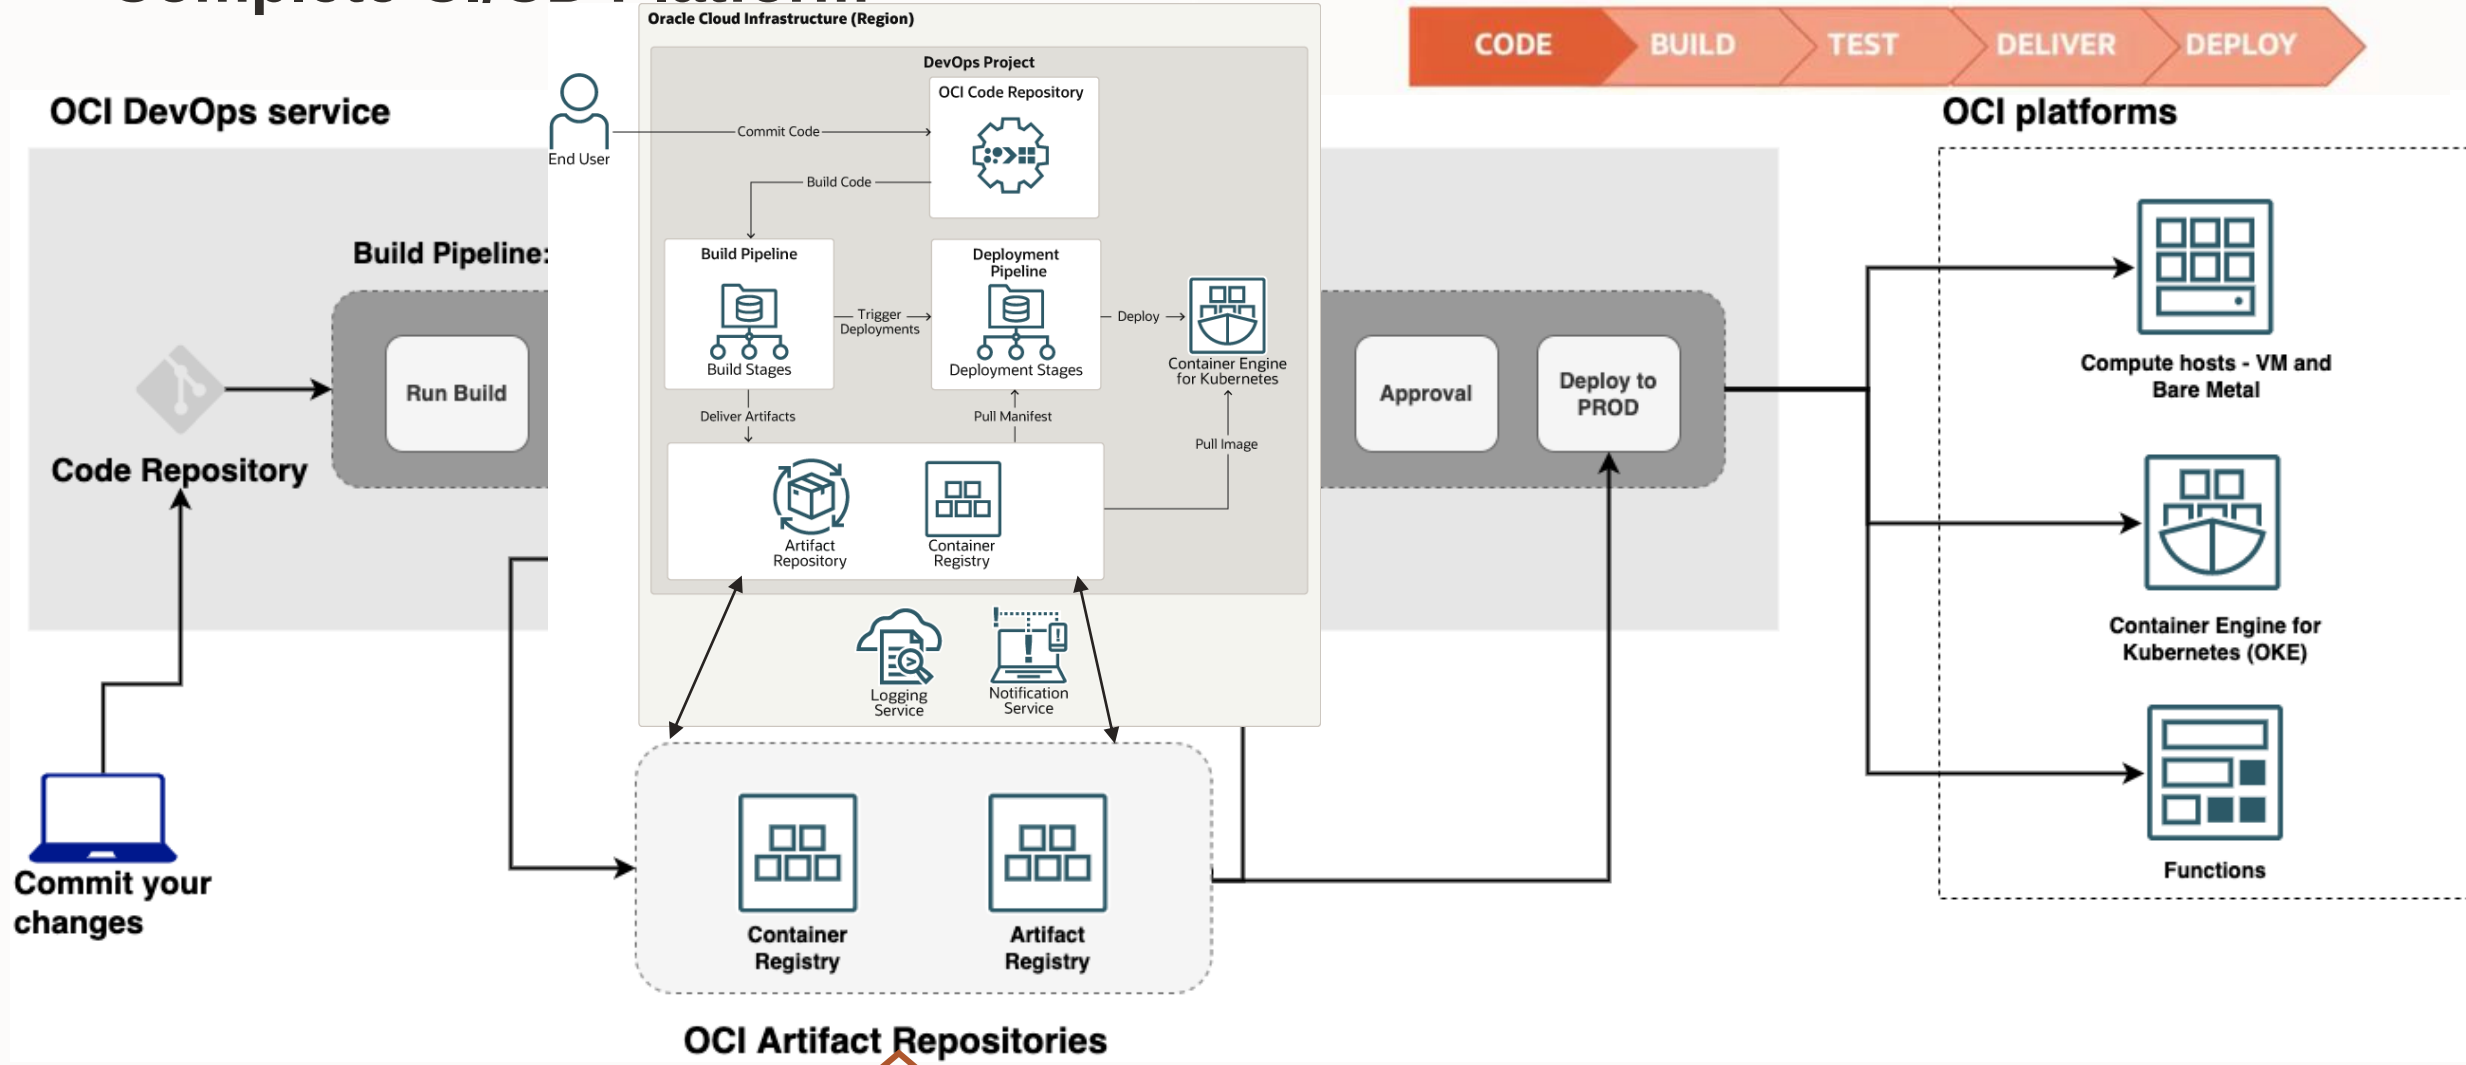

❑ Generic Artifact repository (java pkg, tarball, manifest etc.)




Complete CI/CD Platform

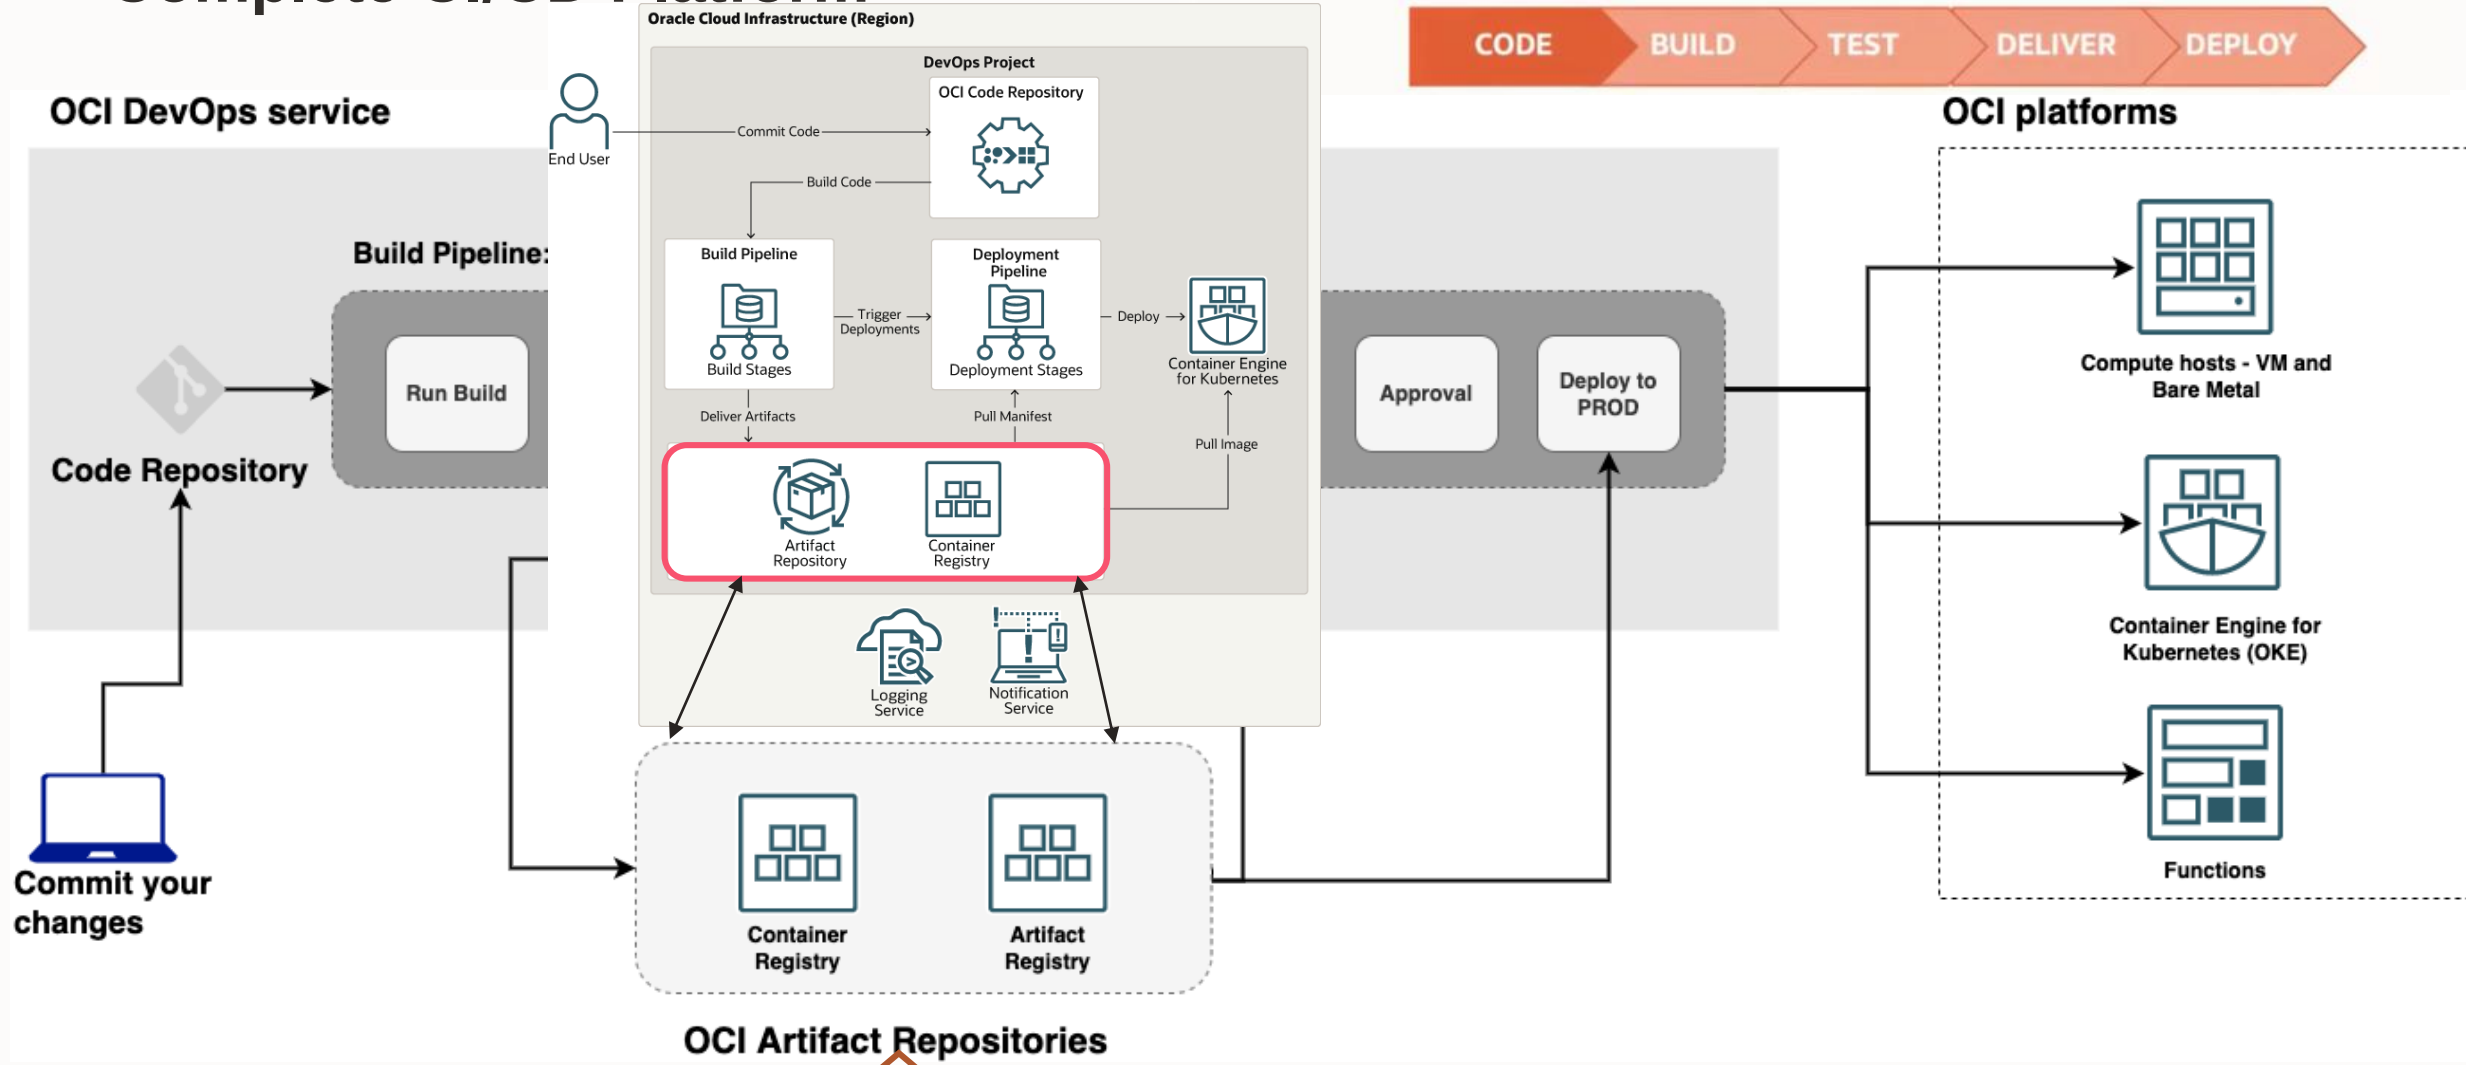

❑ Generic Artifact repository (java pkg, tarball, manifest etc.)




Complete CI/CD Platform

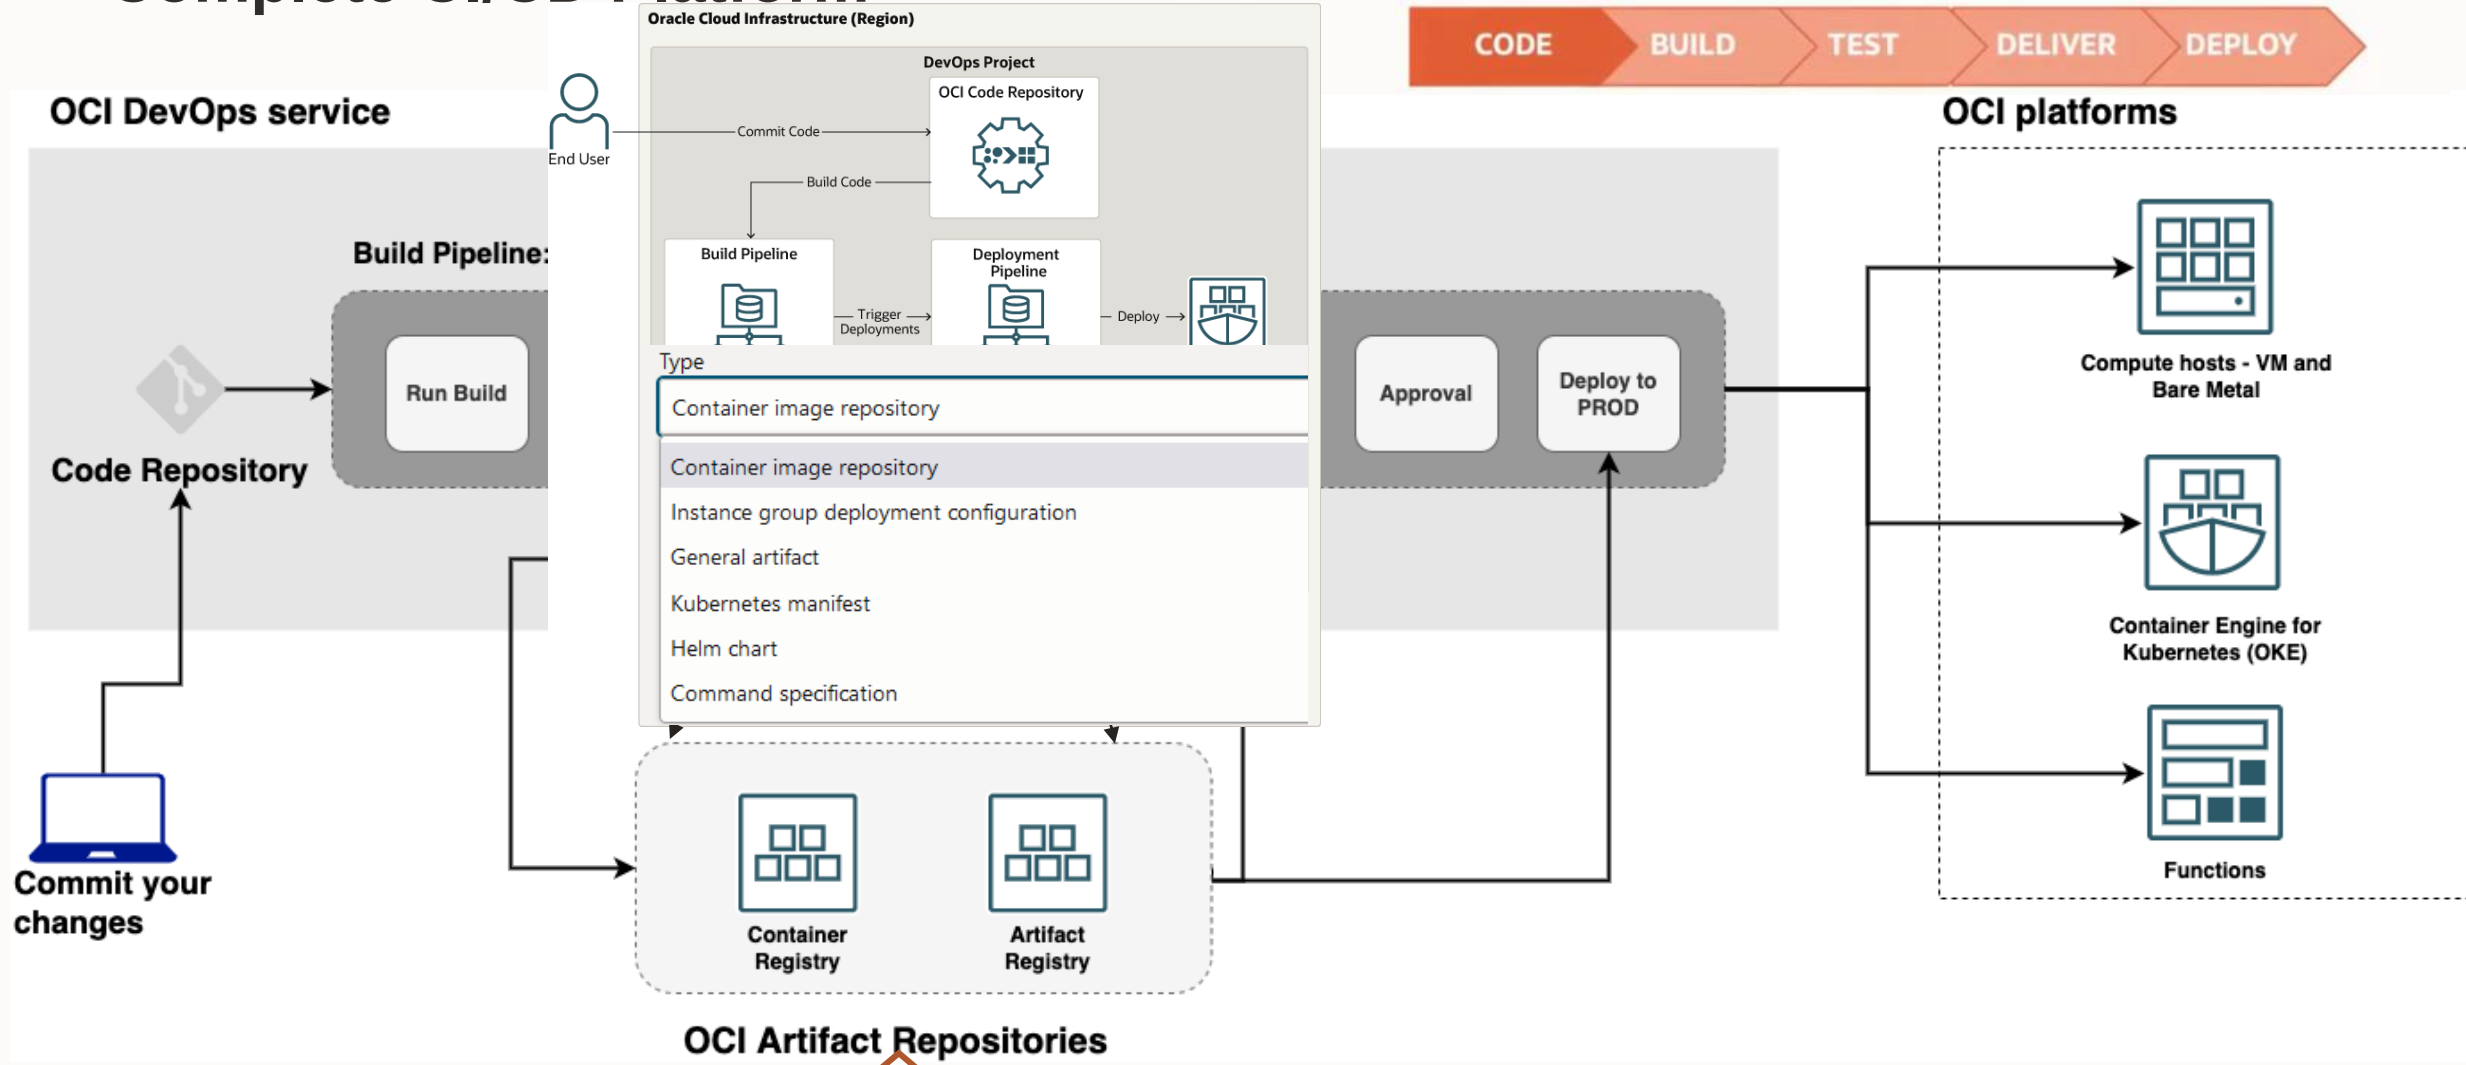

❑ Generic Artifact repository (java pkg, tarball, manifest etc.)



Complete CI/CD Platform

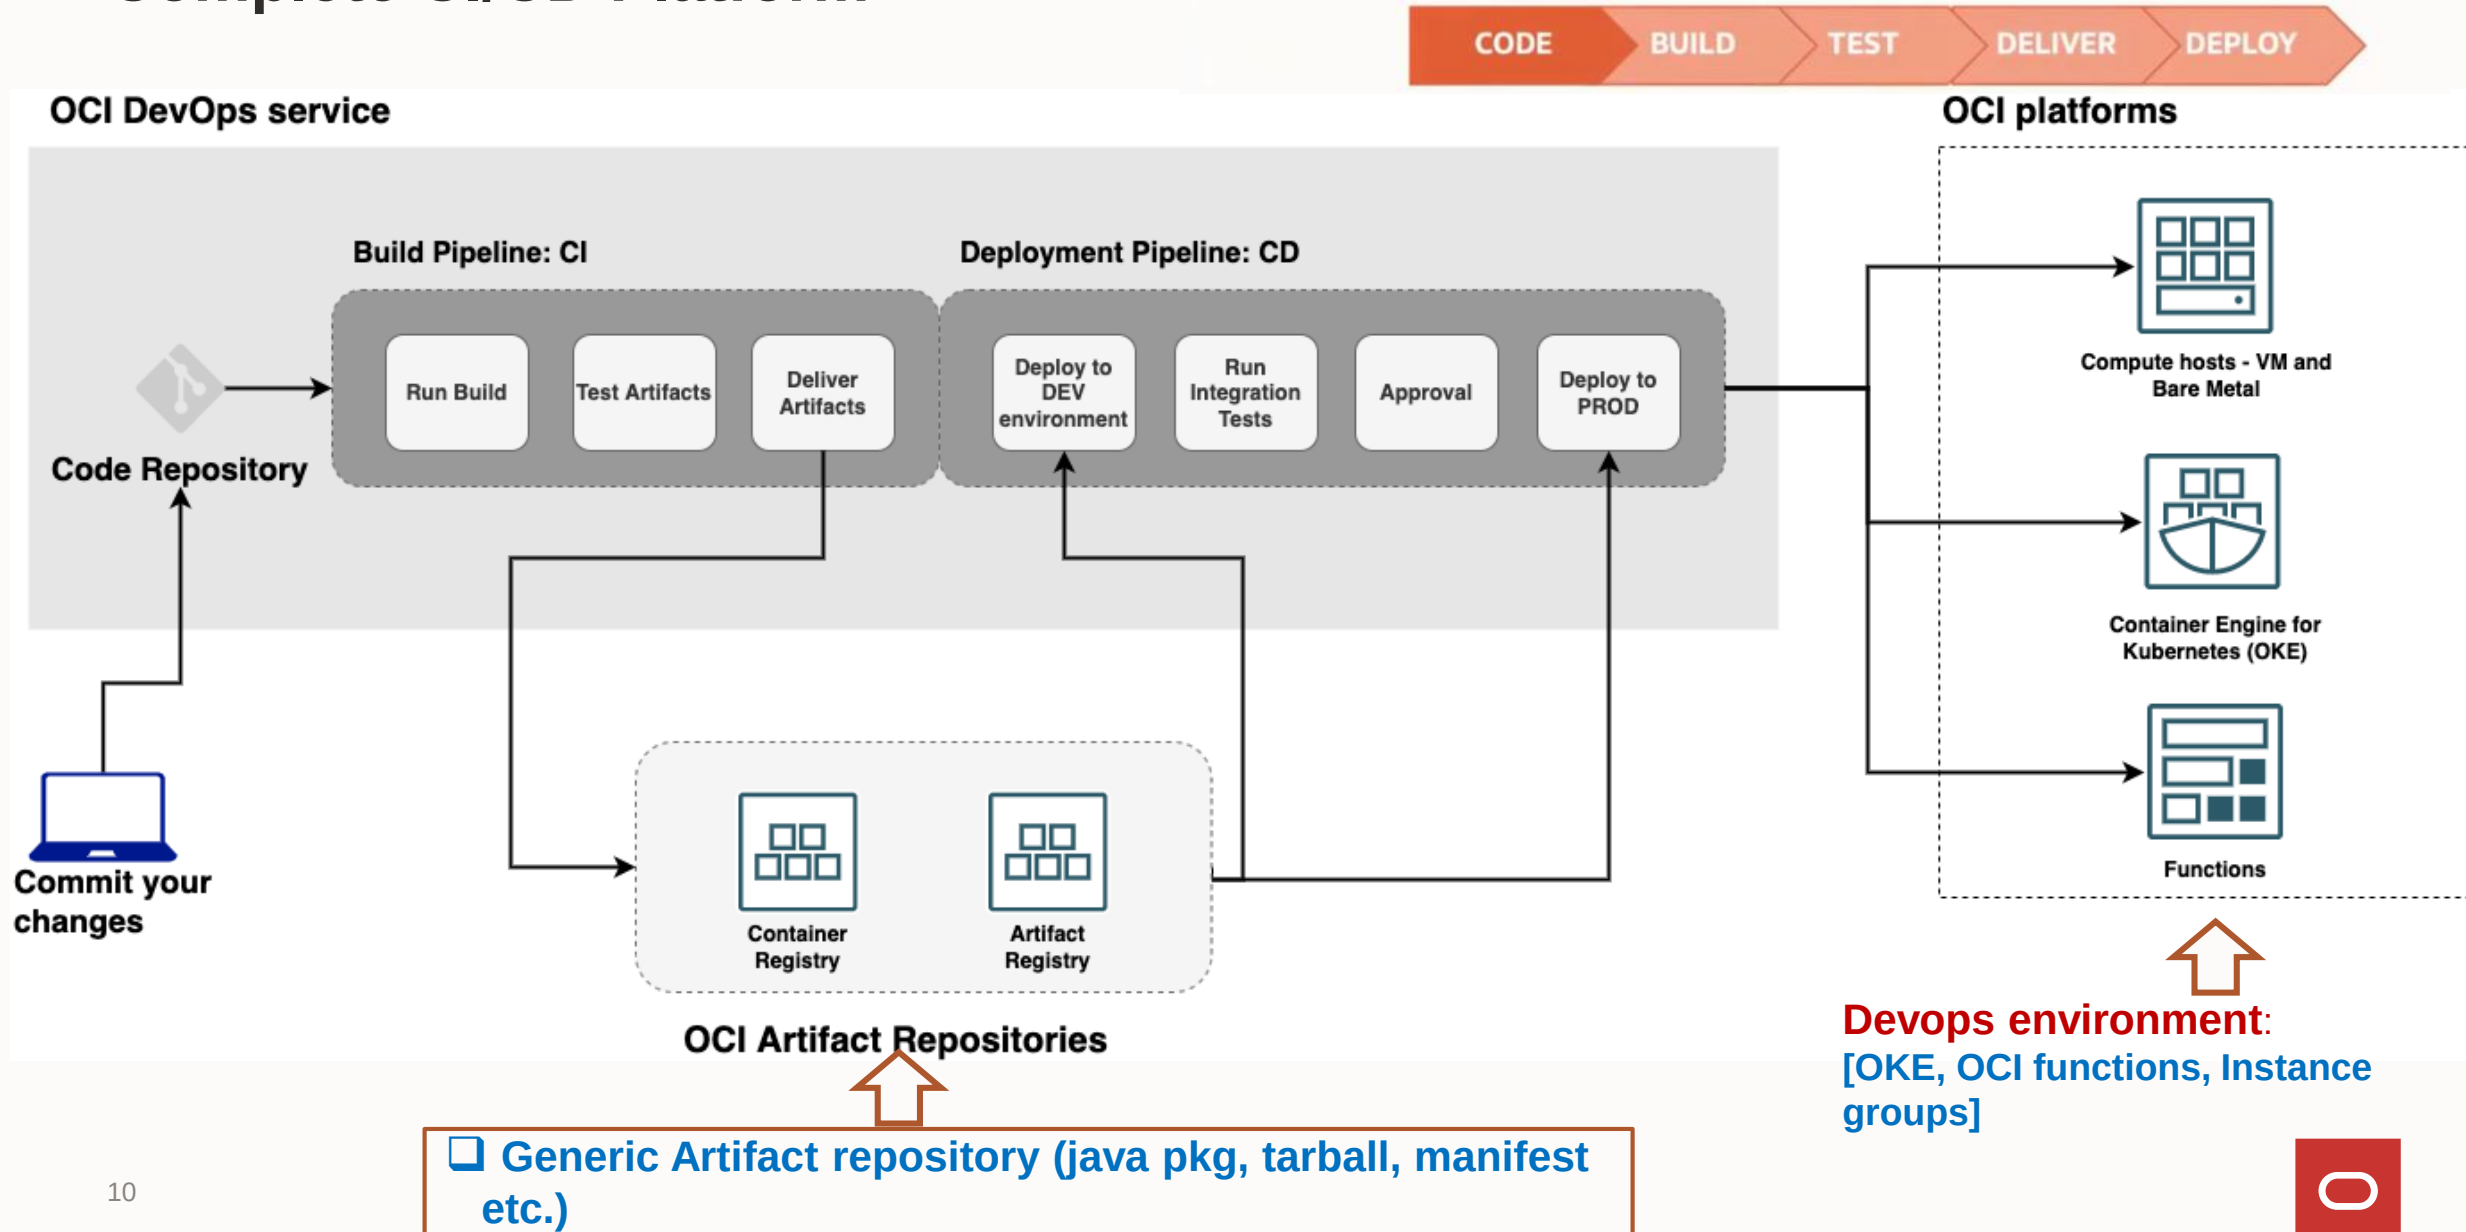

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

- **Project**

A logical container of DevOps resources (pipelines, code repo , triggers, and environments).

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

- **Code repositories / External connections**

Private Git repositories hosted locally by OCI DevOps or **external connection** to GitHub/Gitlab repos.

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

- **Build pipelines (CI)** Stages that define the build process compiling, testing, before deployment
- **Deployment pipelines (CD)** Stages behind deploying a set of artifacts to a target environment.

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

- **Environment**

Target platform where artifacts are deployed (Instance groups, OKE, OCI functions)

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

- **Artifacts**

A collection of binaries, manifests delivered to the target environment (container image, yaml)

OCI DevOps: *Console view*

Primary Resources within DevOps Projects

External connections

Connect DevOps to your existing GitHub or GitLab source code repository.

[Learn more about external connections](#)

Code repositories

Create a private Git repo for your team to work with, and mirror an existing GitHub or GitLab repo to speed up your build pipelines.

[Learn more about code repositories](#)

Triggers

Set up continuous integration from your code repository to start a build pipeline from your commit.

[Learn more about triggers](#)

Build pipelines

Build and test your latest changes with a fully-managed build runner, then deliver your built artifacts and start a deployment.

[Learn more about build pipelines](#)

Environments

Configure target platforms for your automated service deployments in any compartment or region.

[Learn more about environments](#)

Artifacts

Manage and specify software package versions for automated deployment to your environments.

[Learn more about artifacts](#)

Deployment pipelines

Quickly and safely automate software deployments to your Oracle Cloud compute services such as Compute Instances, Functions, and Container Engine for Kubernetes.

[Learn more about deployment pipelines](#)

•Triggers

Any change to the Code repository(push, Pull request,..) can trigger a pipeline

OCI DevOps: Prerequisites

- **Create DevOps dynamic group**

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)

- **IAM Policies**

DevOps services rely upon IAM policies to authenticate and authorize cross-service functions

- ☐ Read vault secrets
- ☐ Manage repos
- ☐ Manage artifacts
- ☐ Use topics, establish remote repo connections

OCI DevOps: Prerequisites

- **Create DevOps dynamic group**

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)

- **IAM Policies**

DevOps services rely upon IAM policies to authenticate and authorize cross-service functions

- ☐ Read vault secrets
- ☐ Manage repos
- ☐ Manage artifacts
- ☐ Use topics, establish remote repo connections



Project requires notification **Topic** & **Logging** enabled to run build and deployment pipelines

OCI DevOps: Prerequisites

- **Create DevOps dynamic group**

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)



```
1. Create Dynamic Group : DevOpsDynamicGroup
2. Description: "Dynamic group for OCI DevOps resources"
3. Matching Rules:
ALL {resource.type = 'devopsrepository', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}
ALL {resource.type = 'devopsdeploypipeline', resource.compartment.id = 'ocid1.compartment.xxx'}
ALL {resource.type = 'devopsbuildpipeline', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}
```



Project requires notification **Topic** & **Logging** enabled to run build and deployment pipelines

OCI DevOps: Prerequisites

- **Create DevOps dynamic group**

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)

1 Dynamic Group

1. Create Dynamic Group : DevOpsDynamicGroup
2. Description: "Dynamic group for OCI DevOps resources"
3. Matching Rules:

```
ALL {resource.type = 'devopsrepository', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}  
ALL {resource.type = 'devopsdeploypipeline', resource.compartment.id = 'ocid1.compartment.xxx'}  
ALL {resource.type = 'devopsbuildpipeline', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}
```

OCI DevOps: Prerequisites

- Create DevOps dynamic group

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)

1 Dynamic Group

1. Create Dynamic Group : DevOpsDynamicGroup
2. Description: "Dynamic group for OCI DevOps resources"
3. Matching Rules:

```
ALL {resource.type = 'devopsrepository', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}  
ALL {resource.type = 'devopsdeploypipeline', resource.compartment.id = 'ocid1.compartment.xxx'}  
ALL {resource.type = 'devopsbuildpipeline', resource.compartment.id = 'ocid1.compartment.oc1.xxx'}
```



Dynamic Group Matching rule setting, must be “**match Any** instead of **matching All**”

Matching Rules

☒ Match any rules defined below

OCI DevOps: Prerequisites

- **Create DevOps dynamic group**

For your DevOps resources (build/deployment pipelines, artifacts, and code repositories)

2 IAM Policies

```
Allow dynamic-group DevOpsDynamicGroup to manage devops-family in tenancy
Allow dynamic-group DevOpsDynamicGroup to read secret-family in compartment DevOps
Allow dynamic-group DevOpsDynamicGroup to use devops-connection in compartment DevOps
Allow dynamic-group DevOpsDynamicGroup to manage repos in compartment DevOps
Allow dynamic-group DevOpsDynamicGroup to use ons-topics in compartment DevOps
Allow dynamic-group DevOpsDynamicGroup to manage generic-artifacts in compartment DevOps
Allow dynamic-group DevOpsDynamicGroup to manage all-resources in compartment DevOps
```

OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

- ☐ Can use GitHub Webhooks to trigger build pipelines (i.e. push)

- **Mirrored repositories**

Local repositories that synchronize from/to external sources through branches/commits .

- ☐ Default Refresh rate 15 minutes
- ☐ Faster to load

OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

1

GitHub Personal access tokens (PAT)

brokedba_git_token

What's this token for?

Expiration *

Custom...

2024-08-30



Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)

- | | |
|---|--------------------------------------|
| ☒ repo | Full control of private repositories |
| ☒ repo:status | Access commit status |
| ☒ repo_deployment | Access deployment status |
| ☒ public_repo | Access public repositories |
| ☒ repo:invite | Access repository invitations |
| ☒ security_events | Read and write security events |



ghp_

[Redacted token]



OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

1 GitHub Personal access tokens (PAT)

brokedba_git_token

What's this token for?

Expiration *

Custom... 2024-08-30

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)

☒ repo	Full control of private repositories
☒ repo:status	Access commit status
☒ repo_deployment	Access deployment status
☒ public_repo	Access public repositories
☒ repo:invite	Access repository invitations
☒ security_events	Read and write security events



ghp_

[Redacted token]



2 Create Secret In OCI Vault



Create in Compartment

brokedba

brokedbacloud (root)/brokedba

Name

devops-github-secret

Description

PAT token secret for devops project github repository (terraform)

Encryption Key in **brokedba** ⓘ [\(Change compartment\)](#)

brokedba-Vault-Master-key

Secret Type Template

Plain-Text

Secret Contents

ghp_XXXXXXXXXXXXXXXXXXXX

OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

1 GitHub Personal access tokens (PAT)

brokedba_git_token

What's this token for?

Expiration *

Custom... 2024-08-30

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)

☒ repo	Full control of private repositories
☒ repo:status	Access commit status
☒ repo_deployment	Access deployment status
☒ public_repo	Access public repositories
☒ repo:invite	Access repository invitations
☒ security_events	Read and write security events



ghp_

[Redacted token]



2 Create Secret In OCI Vault



Create in Compartment

brokedba

brokedbacloud (root)/brokedba

Name

devops-github-secret

Description

PAT token secret for devops project github repository (terraform)

Encryption Key in **brokedba** ⓘ [\(Change compartment\)](#)

brokedba-Vault-Master-key

Secret Type Template

Plain-Text

Secret Contents

ghp_XXXXXXXXXXXXXXXXXXXX



OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

Create External Connection

Create an external connection to connect to your existing Git

Name
external-connection-GitHub-brokedba

Description *Optional*
external connection to brokedba GitHub repositories

Type ⓘ
GitHub

Vault secret

Vault in **brokedba** ⓘ [\(Change compartment\)](#)
brokedba-vault

Secret in **brokedba** ⓘ [\(Change compartment\)](#)
devops-github-secret

Create Save as stack Cancel



Link the **remote GitHub repo** to OCI DevOps

OCI DevOps: Remote Repository

- **External connection (GitHub, GitLab)**

This option will allow you to connect to a remote git repo using access token (no local repo)

Create External Connection

Create an external connection to connect to your existing Git

Name
external-connection-GitHub-brokedba

Description *Optional*
external connection to brokedba GitHub repositories

Type ⓘ
GitHub

Vault secret

Vault in **brokedba** ⓘ [\(Change compartment\)](#)
brokedba-vault

Secret in **brokedba** ⓘ [\(Change compartment\)](#)
devops-github-secret

Create Save as stack Cancel

3

Link the **remote GitHub repo** to OCI DevOps

brokedba-devops > External Connections > external-connection-GitHub-brokedba

Validation result updated

External connection: external-connection-GitHub-brokedba

external connection to brokedba GitHub repositories

Edit Validate connection Add tags Delete

External connection information Tags

OCI DevOps: Resource Manager

- local code repository

- ☐ Create code repository in OCI DevOps
- ☐ Git clone it using Auth token
- ☐ Add terraform configuration files and commit them
- ☐ Git Push to OCI Devops Repo

- Resource Manager

- ☐ Create a stack and select our OCI DevOps repo as source Code repository

OCI DevOps: Resource Manager

- local code repository

- ☐ Create code repository in OCI DevOps
- ☐ Git clone it using Auth token
- ☐ Add terraform configuration files and commit them
- ☐ Git Push to OCI Devops Repo

- Resource Manager

- ☐ Create a stack and select our OCI DevOps repo as source Code repository




The terraform files in the local repo will be used by RM to run terraform Deploy

OCI DevOps: Resource Manager

1

- local code repository

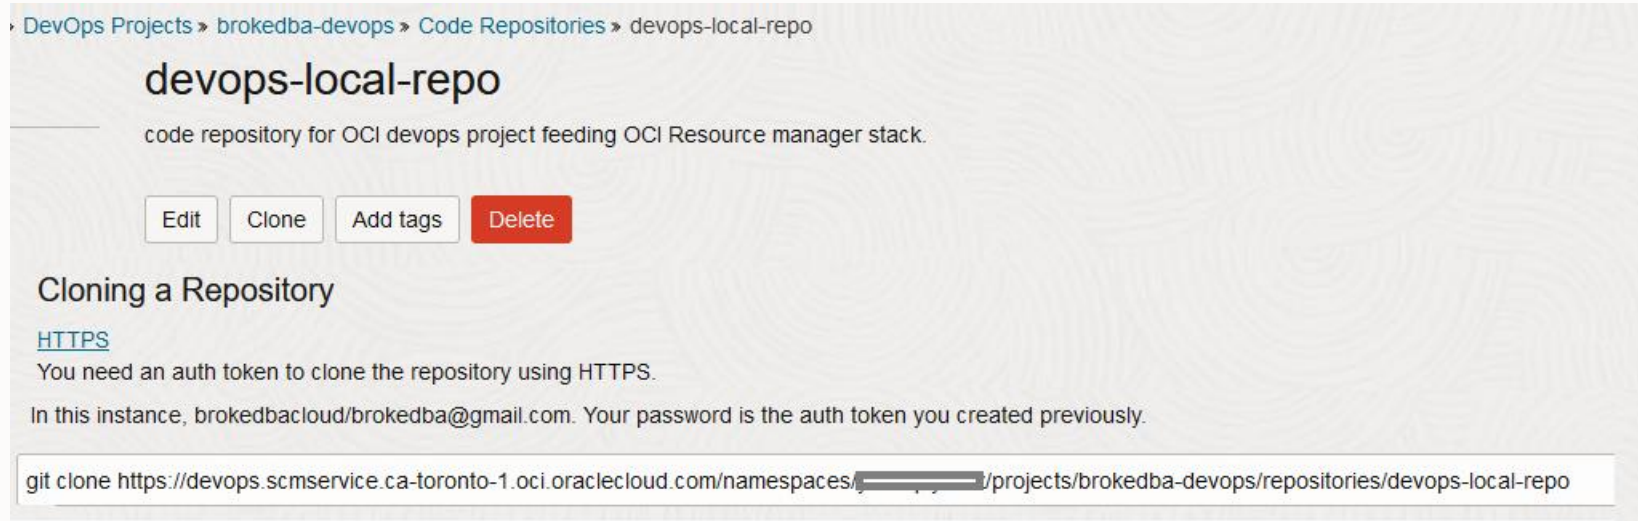

- Resource Manager

- ☐ Create a stack and select our OCI DevOps repo as source Code repository




The terraform files in the local repo will be used by **RM** to run terraform **Deploy**

OCI DevOps: Resource Manager

1

- local code repository

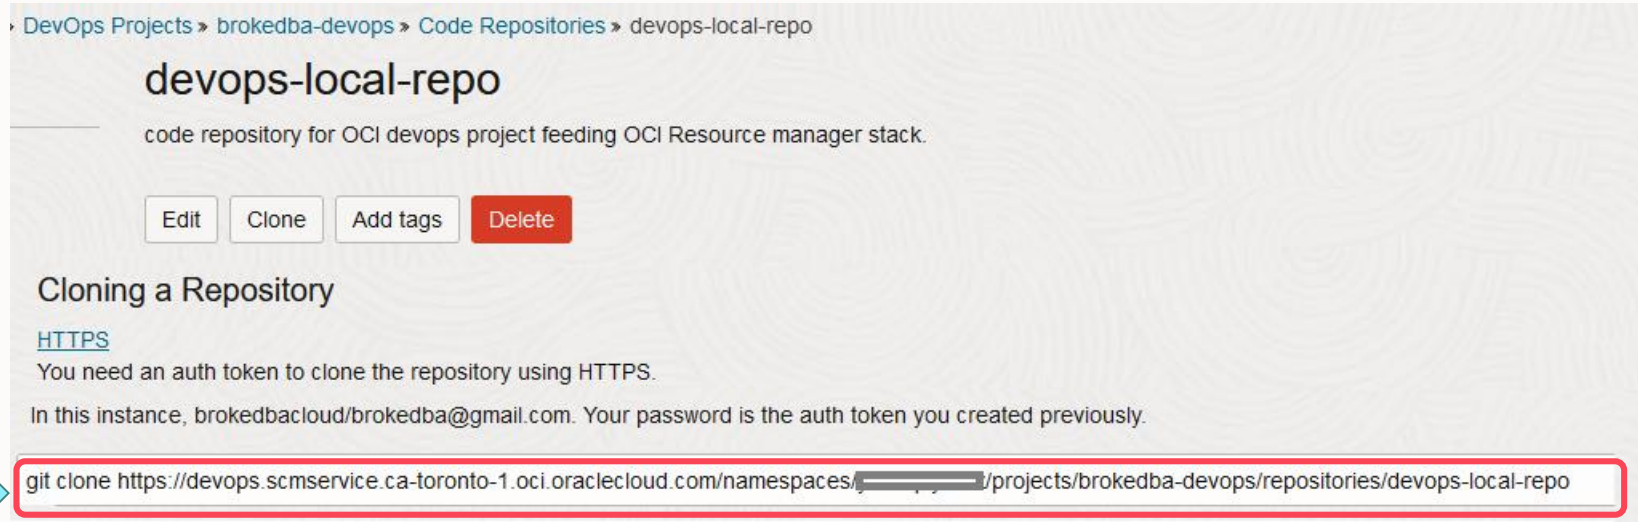

Clone

- Resource Manager

- ☐ Create a stack and select our OCI DevOps repo as source Code repository



The terraform files in the local repo will be used by **RM** to run terraform **Deploy**

OCI DevOps: Resource Manager

1

• local code repository

DevOps Projects » brokedba-devops » Code Repositories » devops-local-repo

devops-local-repo

code repository for OCI devops project feeding OCI Resource manager stack.

Edit

Clone

Add tags

Delete

Cloning a Repository

HTTPS

You need an auth token to clone the repository using HTTPS.

In this instance, brokedbacloud/brokedba@gmail.com. Your password is the auth token you created previously.

git clone https://devops.scmsservice.ca-toronto-1.oci.oraclecloud.com/namespaces/[redacted]/projects/brokedba-devops/repositories/devops-local-repo

2

• Resource Manager

Resource Manager

Overview

Stacks

Jobs

Private templates

Configuration source providers

Private endpoints

Stacks in brokedba Compartment

i

Templates are now available for creating stacks. Use a template to d

A [stack](#) is a [Terraform configuration](#) that you can use to provision and manag

Create stack

Name	Description
oci/provider	partner

y

OCI DevOps: Resource Manager

Create stack

1 Stack information

2 Configure variables

3 Review

A [stack](#) is a [Terraform configuration](#) that you can use to provision and manage stack, [apply the configuration](#).

Choose the origin of the Terraform configuration. The Terraform configuration c

☐ My configuration

Upload Terraform configuration files.

☐ Template

Select an Oracle-provided template or private template.

☒ Source code control system

Select a Terraform configuration from Bitbucket Cloud, Bitbucket Server, DevOps, GitHub, or GitLab

☐ Existing compartment

Create a stack that captures resources from the selected compartment (resource discovery).

Stack configuration ⓘ

Source Code Management Type

DevOps

Bitbucket Cloud

Bitbucket Server

DevOps

GitHub

GitLab

Branch

No branches exist in the specified repository

OCI DevOps: Resource Manager

Create stack

- 1 **Stack information**
- 2 [Configure variables](#)
- 3 [Review](#)

A [stack](#) is a [Terraform configuration](#) that you can use to provision and manage stack, [apply the configuration](#).

Choose the origin of the Terraform configuration. The Terraform configuration c

- ☐ My configuration
Upload Terraform configuration files.
- ☐ Template
Select an Oracle-provided template or private template.
- ☒ Source code control system
Select a Terraform configuration from Bitbucket Cloud, Bitbucket Server, DevOps, GitHub, or GitLab
- ☐ Existing compartment
Create a stack that captures resources from the selected compartment (resource discovery).

Stack configuration ⓘ

Source Code Management Type

DevOps
Bitbucket Cloud
Bitbucket Server
DevOps
GitHub
GitLab
Branch
No branches exist in the specified repository

OCI DevOps: Resource Manager

Create stack

1 Stack information

2 Configure variables

3 Review

A [stack](#) is a [Terraform configuration](#) that you can use to provision and manage stack, [apply the configuration](#).

Choose the origin of the Terraform configuration. The Terraform configuration c

☐ My configuration

Upload Terraform configuration files.

☐ Template

Select an Oracle-provided template or private template.

☒ Source code control system

Select a Terraform configuration from Bitbucket Cloud, Bitbucket Server, DevOps, GitHub, or GitLab

☐ Existing compartment

Create a stack that captures resources from the selected compartment (resource discovery).

Stack configuration ⓘ

Source Code Management Type

DevOps

DevOps projects in **brokedba** [\(Change compartment\)](#)

brokedba-devops

Repository

devops-local-repo

devops-local-repo

Select a value

OCI DevOps: Resource Manager

Create stack

- 1 **Stack information**
- 2 [Configure variables](#)
- 3 [Review](#)

A [stack](#) is a [Terraform configuration](#) that you can use to provision and manage stack, [apply the configuration](#).

Choose the origin of the Terraform configuration. The Terraform configuration c

- ☐ My configuration
Upload Terraform configuration files.
- ☐ Template
Select an Oracle-provided template or private template.
- ☒ Source code control system
Select a Terraform configuration from Bitbucket Cloud, Bitbucket Server, DevOps, GitHub, or GitLab
- ☐ Existing compartment
Create a stack that captures resources from the selected compartment (resource discovery).

Stack configuration ⓘ

Source Code Management Type

DevOps

DevOps projects in **brokedba** [\(Change compartment\)](#)


brokedba-devops

Repository

devops-local-repo

devops-local-repo

Repo git



OCI DevOps: Code repository

Developer Services » DevOps » DevOps Projects » Build_Test » Code Repositories » node-express-getting-started » Details

Code Repository

node-express-getting-started

node-express-getting-started

Getting started, build w/ OCI DevOps

Details

Files

Commits

Compare

Branches

Git Tags

Work Requests

Edit

Clone

Add Tags

Delete

Local / Standalone

Repository Details

Tags

OCID: ...tzqqhq [Show](#) [Copy](#)

Total Commits in Repository: 24

Default Branch: [refs/heads/main](#)

Mirrored: No

Branches: [2](#)

Storage:
43.68 KiB / 1 GiB

main



Search by File or Folder Name

Name

Last Commit

Last Update

[bin](#)

Setting up Express hello world with pug initial unit tests

Sat, Aug 14, 2021, 04:15:10

[public](#)

Setting up Express hello world with pug initial unit tests

Sat, Aug 14, 2021, 04:15:10



OCI DevOps: Code repository

ORACLE Cloud

devops

US East (Ashburn)

>

🔔

?

🌐

👤

Developer Services » DevOps » DevOps Projects » Build_Test » Code Repositories » node-express-getting-started » Commits

node-express-getting-started

Commits

main

Local / Standalone

Details

Files

Commits

Compare

Branches

Git Tags

Work Requests

Filters

Author

All

Start Date

End Date

Search by Commit Message

Commit	Author	Commit Date	Commit Id
Demo for Takamol!	Jonathan Schreiber	Wed, Sep 15, 2021, 14:24:07 UTC	bd10829 Copy
Adding info in the example build_spec on how to use vaultVariables to access secrets	Jonathan Schreiber	Wed, Sep 15, 2021, 00:11:57 UTC	a8a31e4 Copy
Initial readme of steps to setup DevOps CI + CD	Jonathan Schreiber	Mon, Aug 30, 2021, 19:23:48 UTC	857a4f1 Copy
more clear directions on why we need this variable	Jonathan Schreiber	Mon, Aug 23, 2021, 17:14:46 UTC	eeba21b Copy
Will tag the container image with the \${BUILDRUN_HASH} value Oops, got the wrong cont...	Jonathan Schreiber	Fri, Aug 20, 2021, 05:51:39 UTC	3c72268 Copy
k8s manifest to run node getting started on OKE	Jonathan Schreiber	Fri, Aug 20, 2021, 05:27:20 UTC	408be75 Copy
oops, case matters	Jonathan Schreiber	Thu, Aug 19, 2021, 23:03:37 UTC	9d529ae Copy
config needed to build a container image of the example express app	Jonathan Schreiber	Thu, Aug 19, 2021, 22:36:27 UTC	e574fe0 Copy
Oops, typo for the build run paramater	Jonathan Schreiber	Sat, Aug 14, 2021, 05:39:06 UTC	8a801d0 Copy
example express app build file	Jonathan Schreiber	Sat, Aug 14, 2021, 05:39:06 UTC	4d5b6da Copy

https://console.us-ashburn-1.oraclecloud.com/devops-coderepository/repositories/ocid1.devopsrepository.oc1.iad.amaaaaaay6pyaa6odoctcmze4pxnyhc7zrvgzapwqevpxy2h3sm5tzqqhq/commits

© 2021, Oracle and/or its affiliates. All rights reserved.



OCI DevOps: Build pipeline

Add a stage

1 Select stage type

2 [Configure](#)

Filter stage types

Continuous integration

Managed Build

Build and test your software with a fast, scalable OCI DevOps service managed build runner



Optional

Deliver artifacts

Publish your software packages created from Managed Build to OCI artifact repositories (can't be first stage in a build pipeline)

Trigger deployment

Start a deployment pipeline with the results from this build pipeline

Wait

This is a timer for testing your build pipeline

OCI DevOps: Build pipeline

Add a stage

1 Select stage type

2 [Configure](#)

Filter stage types

Continuous integration

Managed Build

Build and test your software with a fast, scalable OCI DevOps service managed build runner



Optional

Deliver artifacts

Publish your software packages created from Managed Build to OCI artifact repositories (can't be first stage in a build pipeline)

Trigger deployment

Start a deployment pipeline with the results from this build pipeline

Wait

This is a timer for testing your build pipeline

Stages

OCI DevOps: Build pipeline

The screenshot displays the Oracle Cloud Infrastructure (OCI) console interface for configuring a DevOps Build pipeline. The browser address bar shows the URL: `console.us-ashburn-1.oraclecloud.com/devops-build/projects/ocid1.devopsproject.oc1.iad.amaaaaaay6pyaaqsfygiqzssgmldadehdgufz4ook3zdev3zlx2o...`. The OCI Cloud header includes the 'devops' search bar and the 'US East (Ashburn)' region selector.

The breadcrumb navigation path is: **Developer Services » DevOps Projects » Build_Test » Build Pipelines » Build Node Express**. The 'Build Pipeline' tab is active, showing the 'Build Node Express' pipeline configuration. The 'Last saved' timestamp is '9/15/2021, 7:38 AM PDT'. A 'Start Manual Run' button is visible in the top right corner.

The pipeline is visualized as a vertical sequence of three steps on a grid background:

- Step 1:** Build and test Express app (Managed Build)
- Step 2:** Deliver getting started container image (Deliver Artifacts)
- Step 3:** Run Deployment to OKE (Trigger Deployment)

Each step is represented by a box with a plus icon at the top and a plus icon at the bottom, connected by a vertical line. A sidebar on the left contains icons for adding (+), removing (-), and refreshing (↻) steps. A small OCI logo is located in the bottom right corner of the pipeline canvas.



OCI DevOps: Build pipeline

The screenshot displays the Oracle Cloud Infrastructure (OCI) console interface for configuring a Build Pipeline. The browser address bar shows the URL: `console.us-ashburn-1.oraclecloud.com/devops-build/projects/ocid1.devopsproject.oc1.iad.amaaaaaay6pyaaqsfygiqzssgmldadehdgufz4ook3zdev3zlx2o...`. The OCI Cloud header includes the 'devops' search bar and the region 'US East (Ashburn)'. The breadcrumb navigation path is: **Developer Services » DevOps Projects » Build_Test » Build Pipelines » Build Node Express**. The main content area is titled 'Build Pipeline' with tabs for 'Build History', 'Parameters', 'Work Requests', and 'Tags'. The specific pipeline is 'Build Node Express', last saved on 9/15/2021 at 7:38 AM PDT. A large blue 'BUILD' watermark is centered on the screen. The pipeline is visualized as a vertical sequence of three stages on a grid background:

- Build and test Express app** (Managed Build)
- Deliver getting started container image** (Deliver Artifacts)
- Run Deployment to OKE** (Trigger Deployment)

A blue bracket on the left side of the stages is labeled 'Stages'. Each stage box includes a status icon (green checkmark or triangle), a title, a subtitle, and a three-dot menu. The background grid features a small '+' icon in the top-left corner and a '-' icon in the top-right corner. A small OCI logo is visible in the bottom-right corner of the pipeline canvas.

OCI DevOps: Build stages

 devops 

US East (Ashburn)      

Developer Services » DevOps Projects » Build_Test » Build Pipelines » Build Node Express

Build Pipeline | **Build Run** | Parameters | Work Requests | Tags

< Build Node Express-20210924-0948

Status: ● Succeeded

Status Details: -

Repository: https://devops.scm.service.us-ashburn-1.oci.oraclecloud.com/namespaces/odx-pipelines/projects/Build_Test/repositories/swagger-adb-app-iad

Commit ID: 1d411816f2ecd86105ef145a37e27d819866c1c5

Total Duration: 3min 59s

Stages Completed: 3 of 3

Triggered By: -

Branch: main

Started: Fri, Sep 24, 2021, 16:50:41 UTC

Stages Running: 0

Build and test Express app
Managed Build

Deliver getting started container image
Deliver Artifacts

Run Deployment to OKE
Trigger Deployment

Build run progress

Build and test Express app

2min 3s 

SETUP_SOFTWARE_BUILD_ENV

0min 5s 

DOWNLOAD_SOURCE

0min 1s 

PARSE_BUILD_SPEC

0min 1s 

DOWNLOAD_INPUT_ARTIFACTS

0min 0s 

Export variables

0min 1s 

Install Prereqs

0min 8s 

NPM install

0min 29s 

Run Tests

0min 2s 

Build container image

0min 16s 

SAVE_OUTPUT_ARTIFACTS

0min 5s 

Deliver getting started container image

1min 32s 

Find...

Timestamp	Message
2021-09-24T16:50:57.210Z	Acquiring build runner.
2021-09-24T16:51:04.060Z	Acquired build runner.
2021-09-24T16:51:04.253Z	Provisioning build runner.
2021-09-24T16:51:16.838Z	Starting Build Execution..
2021-09-24T16:51:20.439Z	Starting Download source node_express, url https://devops.scm.service.us-ashburn-1.oci.oraclecloud.com/namespaces/odx-pipelines/projects/Build_Test/repositories/swagger-adb-app-iad
2021-09-24T16:51:20.966Z	Download source node_express, url https://devops.scm.service.us-ashburn-1.oci.oraclecloud.com/namespaces/odx-pipelines/projects/Build_Test/repositories/swagger-adb-app-iad
2021-09-24T16:51:21.186Z	Using build spec: build_spec.yaml
2021-09-24T16:51:21.289Z	Using build spec: build_spec.yaml
2021-09-24T16:51:21.290Z	Starting PARSE_BUILD_SPEC
2021-09-24T16:51:21.839Z	Completed PARSE_BUILD_SPEC
2021-09-24T16:51:21.848Z	Starting BUILD_SPEC_EXECUTION
2021-09-24T16:51:21.852Z	Starting DOWNLOAD_INPUT_ARTIFACTS
2021-09-24T16:51:21.853Z	Completed DOWNLOAD_INPUT_ARTIFACTS successful
2021-09-24T16:51:22.007Z	Starting EXECUTING_BUILD_SPEC_STEPS
2021-09-24T16:51:22.009Z	Executing BUILD_SPEC_STEP : Export variable
2021-09-24T16:51:22.014Z	Executing step: Export variables with shell
2021-09-24T16:51:22.693Z	EXEC: BUILD_RUN_HASH: ay6ab7o

[Terms of Use and Privacy](#) [Cookie Preferences](#)

Copyright © 2021, Oracle and/or its affiliates. All rights reserved.

18



OCI DevOps: Deployment pipelines

Deploy

 Apply manifest to your Kubernetes cluster

OKE: Default

 Blue/Green strategy

A group of stages to orchestrate software release using two identical environments where one is active and the other is standby

 Canary strategy

A group of stages to orchestrate software release using a canary environment for a small subset of user traffic

 Deploy incrementally through Compute instance groups

Instance Group: Rolling

 Uses the built-in Functions update strategy

Function: Default

 Install Helm chart to Kubernetes cluster

Stage used to deploy Helm charts to OKE cluster

Control

 Pause the deployment for approvals

Approval

 Traffic Shift

Route traffic between two environments

 Wait

This is a timer for testing your deployment pipeline

Integrations

 Run a custom logic through a function

Invoke Function

 Execute shell command

Shell

OCI DevOps: Deployment pipelines

Deploy

🚀 Apply manifest to your Kubernetes cluster

OKE: Default

🔄 Blue/Green strategy

A group of stages to orchestrate software release using two identical environments where one is active and the other is standby

🐦 Canary strategy

A group of stages to orchestrate software release using a canary environment for a small subset of user traffic

📦 Deploy incrementally through Compute instance groups

Instance Group: Rolling

fx Uses the built-in Functions update strategy

Function: Default

⚙️ Install Helm chart to Kubernetes cluster

Stage used to deploy Helm charts to OKE cluster

Control

✅ Pause the deployment for approvals

Approval

✅ Traffic Shift

Route traffic between two environments

✅ Wait

This is a timer for testing your deployment pipeline

Integrations

🧪 Run a custom logic through a function

Invoke Function

🔧 Execute shell command

Shell



OCI DevOps: Deployment pipelines

ORACLE Cloud

Search for resources, services, and documentation

US East (Ashburn)

>

🔔

?

💬

🌐

👤

Developer Services » DevOps Projects » JS_HelloWorld » Pipelines » Release HelloWorld to Production

PipelineDeploymentsParametersWork RequestsTagsMetrics

< Release HelloWorld to Production-20210629-1222

Deployment

Re-Run

Status: ● Succeeded

Total duration: 12min 11s

Stages complete: 3 of 3

Started at: Tue, Jun 29, 2021, 19:22:27 UTC

Stages running: 0

+

-

🔄

OKE DEV DEPLOY

Deploy OKE: Rolling

OKE DEV

Release Manager Approval

Control: Approval

PROMOTE TO PROD

Deploy OKE: Rolling

OKE PROD

Deployment Progress

OKE DEV DEPLOY

0min 18s

✓

⋮

Apply kubernetes manifest

0min 4s

✓

Check deployment status

0min 12s

✓

Release Manager Approval

11min 33s

✓

⋮

PROMOTE TO PROD

0min 8s

✓

⋮

Apply kubernetes manifest

0min 5s

✓

Check deployment status

0min 2s

✓

Find...

Timestamp	Message
2021-06-29T19:22:27.420Z	Deployment started. Deployment na
2021-06-29T19:22:28.770Z	Starting executing stage. StageId
2021-06-29T19:22:33.178Z	Starting to execute OKE deploymen
2021-06-29T19:22:35.220Z	Invoked apply command for resourc
2021-06-29T19:22:35.245Z	Invoked apply command for resourc
2021-06-29T19:22:35.264Z	Invoked apply command for resourc
2021-06-29T19:22:35.264Z	Apply manifest succeeded. Artific
2021-06-29T19:22:35.462Z	Checking OKE deployment status
2021-06-29T19:22:45.038Z	Checking OKE deployment status
2021-06-29T19:22:47.298Z	Current state of resource: demo-o

Terms of Use and Privacy

Cookie Preferences

Copyright © 2021, Oracle and/or its affiliates. All rights reserved.

19



OCI DevOps: Continuous delivery

The screenshot displays the Oracle Cloud DevOps console interface. The top navigation bar includes the Oracle Cloud logo, a search bar with the text 'devops', and the region 'US East (Ashburn)'. The breadcrumb trail indicates the path: Developer Services » DevOps Projects » Build_Test » Pipelines » Release Node. The main content area is divided into two panels. The left panel shows a deployment pipeline for 'devopsdeployment20210924165431' with a status of 'In progress' and a start time of 'Fri, Sep 24, 2021, 16:54:44 UTC'. The pipeline steps include 'Deploy to PROD', 'Get release manager approval', and 'Deploy to PHX'. The 'Get release manager approval' step is highlighted with an orange border. The right panel shows the 'Stage Details' for the 'Get release manager approval' stage. It includes buttons for 'Approve' and 'Reject', a 'Summary' tab, and a table for approvals. The table is currently empty, showing 'No items found.' and 'Showing 0 Items'. A log section at the bottom of the right panel shows the following messages:

Timestamp	Message
2021-09-24T16:55:24.566Z	Started executing manual approval stage
2021-09-24T16:55:31.428Z	Manual approval stage: Waiting for required approvals

Large blue text 'Manual Approval' is overlaid on the right side of the screenshot.

Terms of Use and Privacy Cookie Preferences

Copyright © 2021, Oracle and/or its affiliates. All rights reserved.

Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps



Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps



Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps



HashiCorp

Terraform

Our terraform CI/CD workflow

1. Fetch the code from GitHub repository.



Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps



HashiCorp

Terraform

Our terraform CI/CD workflow

1. Fetch the code from GitHub repository.
2. Build a pipeline that will run **terraform Init – validate - and Plan** triggered by each repo commit.



Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps



HashiCorp

Terraform

Our terraform CI/CD workflow

1. Fetch the code from GitHub repository.
2. Build a pipeline that will run **terraform Init – validate - and Plan** triggered by each repo commit.
3. Allow to manually trigger a deploy or destroy steps.



Pipeline Terraform Stack from GitHub to OCI Devops

Demo: terraform CI/CD pipeline with OCI DevOps




HashiCorp

Terraform

Our terraform CI/CD workflow

1. Fetch the code from GitHub repository.
2. Build a pipeline that will run **terraform Init – validate - and Plan** triggered by each repo commit.
3. Allow to manually trigger a deploy or destroy steps.

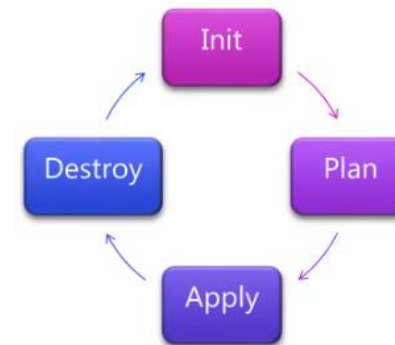

Pipeline Terraform Stack from GitHub to OCI Devops

My GitHub terraform for dummies project

 [brokedba / terraform-examples](#)



 terraform-provider-oci



 create-vcn

 database-system

 launch-instance

 compartments

 oke-quickstartz

 publicIPs

Pipeline Terraform Stack from GitHub to OCI Devops

My GitHub terraform for dummies project

 [brokedba / terraform-examples](#)



 terraform-provider-oci


ORACLE
CLOUD

 create-vcn

 database-system

 launch-instance

 compartments

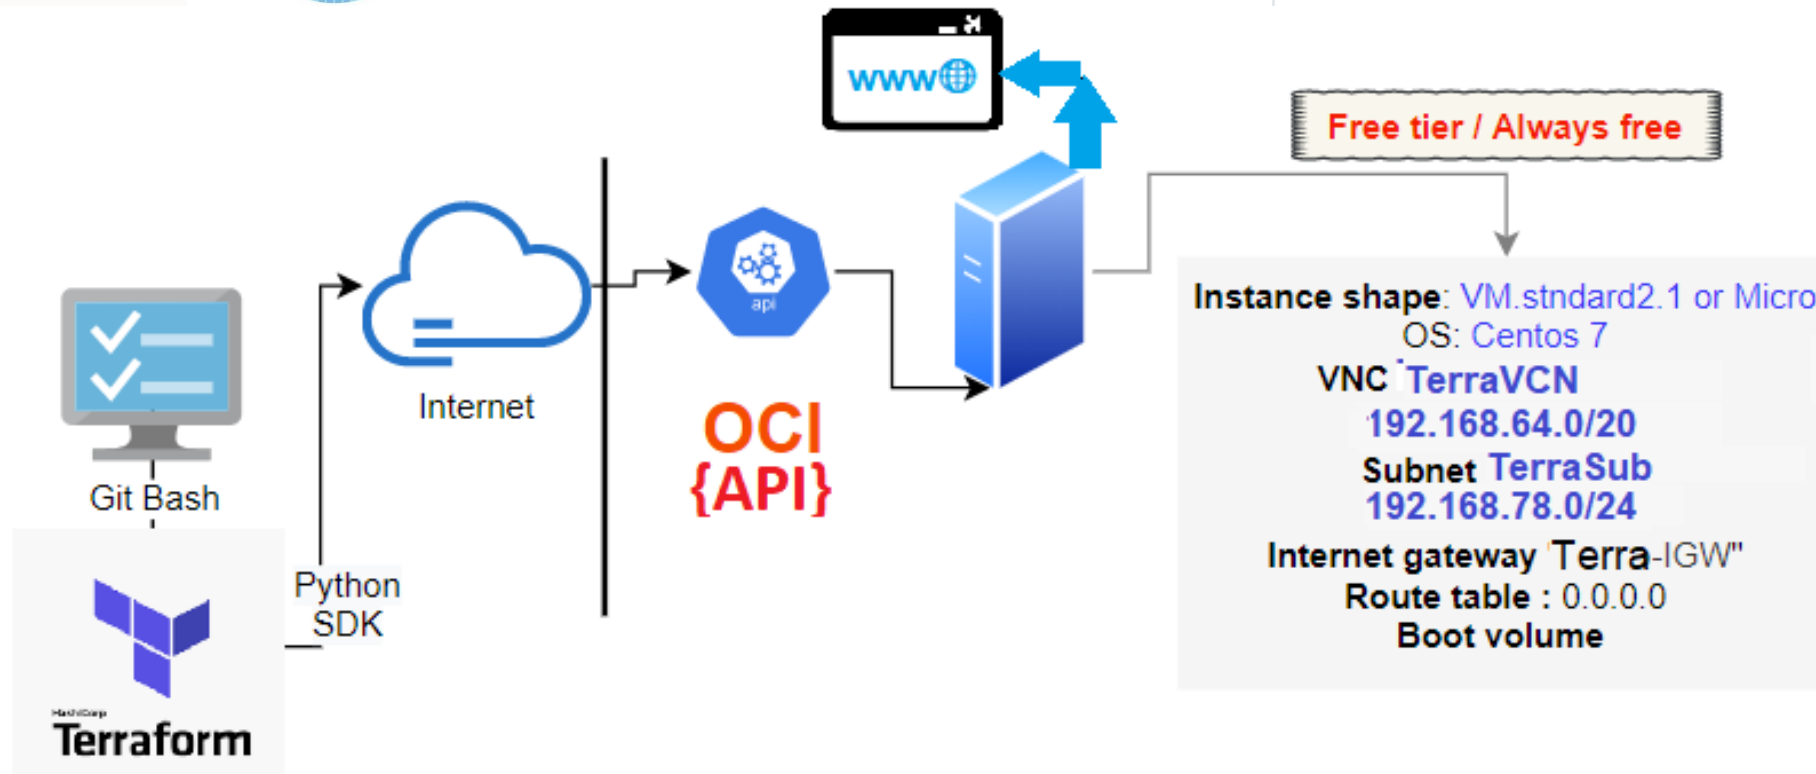

Pipeline Terraform Stack from GitHub to OCI Devops

My GitHub terraform for dummies project

 [brokedba / terraform-examples](#)



 terraform-provider-oci

ORACLE
CLOUD

 create-vcn

 database-system

 launch-instance

 compartments



Git Bash



Terraform



Free tier / Always free

Instance shape: VM.stndard2.1 or Micro

OS: Centos 7

VNC TerraVCN

192.168.64.0/20

Subnet TerraSub


192.168.78.0/24

Internet gateway Terra-IGW"

Route table : 0.0.0.0

Boot volume

Terraform Deploy using OCI DevOps

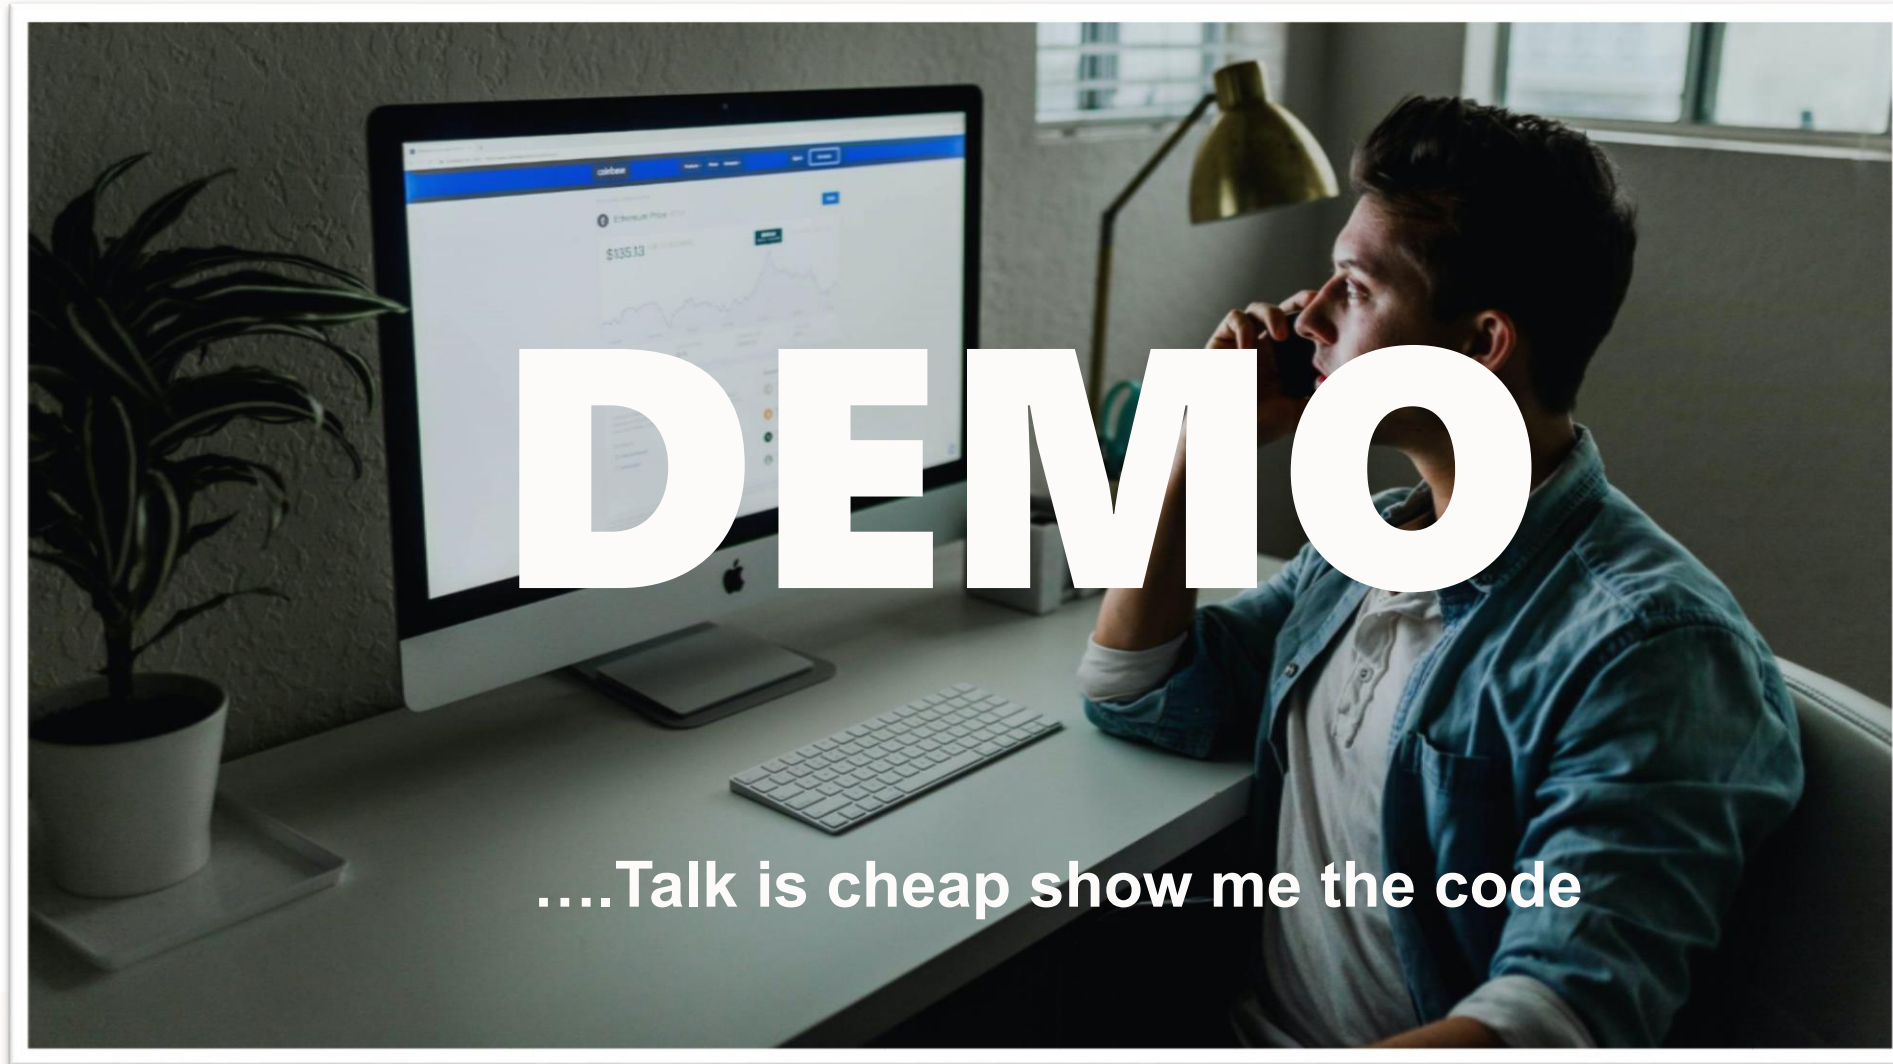




oracle-devrel /



oci-devops-examples

OCI Devops functional Enhancement request #63



brokedba opened this issue on Jun 14 · 2 comments

Please Upvote the Issue!



brokedba commented on Jun 14

Hi team ,

I wanted to share my feedback after trying OCI devops for few weeks . Especially the CI part.

Enhancement Request for OCI DevOps

Title: Suggestions for Improved OCI DevOps User Experience

Feature Suggestions:

1. Consolidate Build Stages in a Single YAML File

- Allow users to define and manage all build stages within a single YAML file.
- Simplify the configuration process by consolidating build stage definitions.

example github workflow can have many jobs which contain multiple steps





Tech Beats unplugged



Cloud Dude

Kosseila Hd

Principal Consultant @CloudThrill



www.Coudthrill.ca/blog



[Linkedin.com/in/kousshd](https://www.linkedin.com/in/kousshd)



[GitHub.com/brokedba](https://github.com/brokedba)



GitHub



oracle-devrel /



oci-devops-examples