



Born2BeRoot G

Do not lose your Born2BeRoot : get a ...

[Installing Debian](#) > [BONUS: Partition Disks](#)

Copy


BONUS: logical volume root

Now we have created the volume group, now we gonna fill this group with these logical volumes:

```
# lsblk
```


NAME	MAJ:MIN	RM	SIZE	RO	TYPE	MOUNTPOINT
sda	8:0	0	30.8G	0	disk	
└─sda1	8:1	0	500M	0	part	/boot
└─sda2	8:2	0	1K	0	part	
└─sda5	8:5	0	30.3G	0	part	
└─┬─sda5_crypt	254:0	0	30.3G	0	crypt	
│ └─LVGroup-root	254:1	0	10G	0	lvm	/
│ └─LVGroup-swap	254:2	0	2.3G	0	lvm	[SWAP]
│ └─LVGroup-home	254:3	0	5G	0	lvm	/home
│ └─LVGroup-var	254:4	0	3G	0	lvm	/var
│ └─LVGroup-srv	254:5	0	3G	0	lvm	/srv
│ └─LVGroup-tmp	254:6	0	3G	0	lvm	/tmp
│ └─LVGroup-var--log	254:7	0	4G	0	lvm	/var/log
sr0	11:0	1	1024M	0	rom	

1. Select

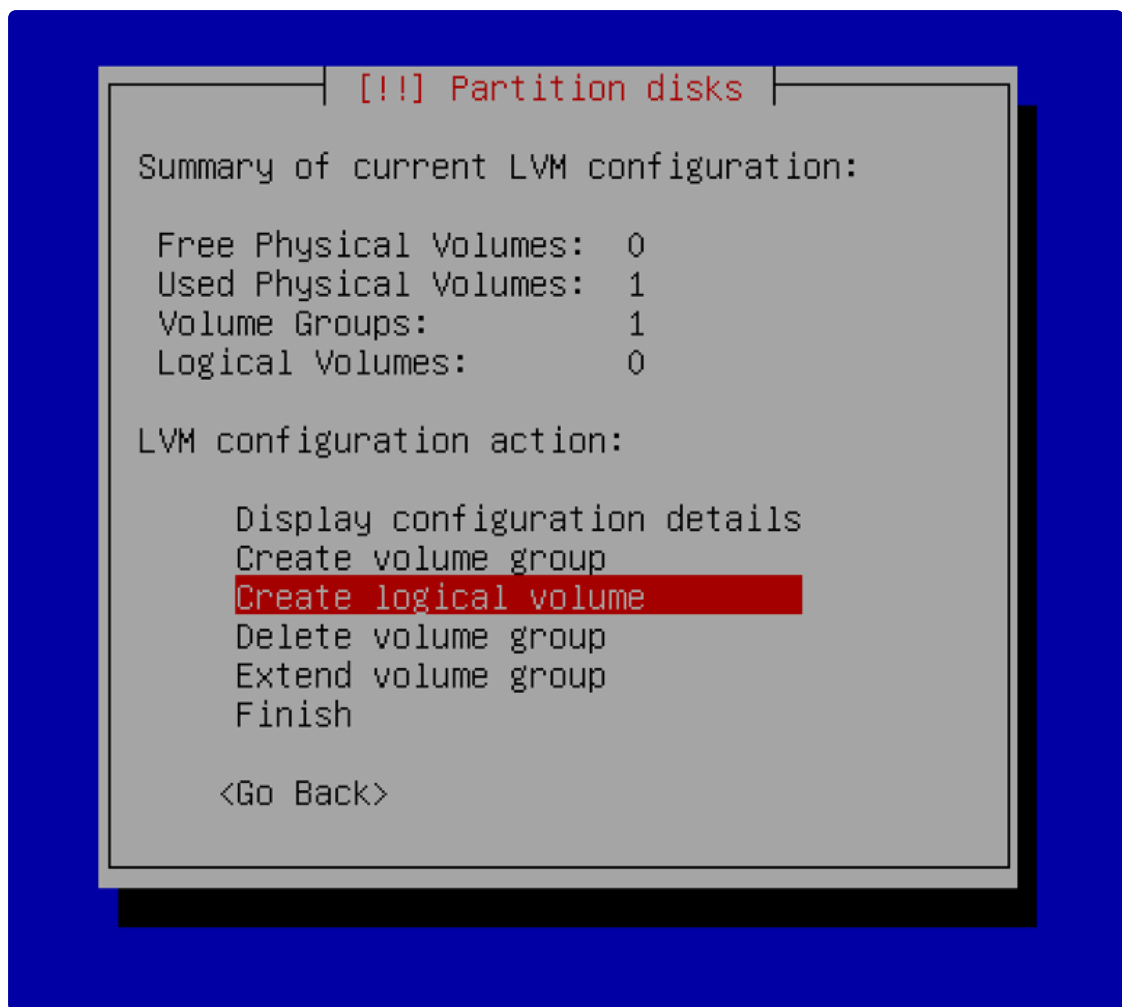


Partition disks configuration on Debian


2. We will start by choosing the group where we want them to be created. We select the only one available (the one we just created).

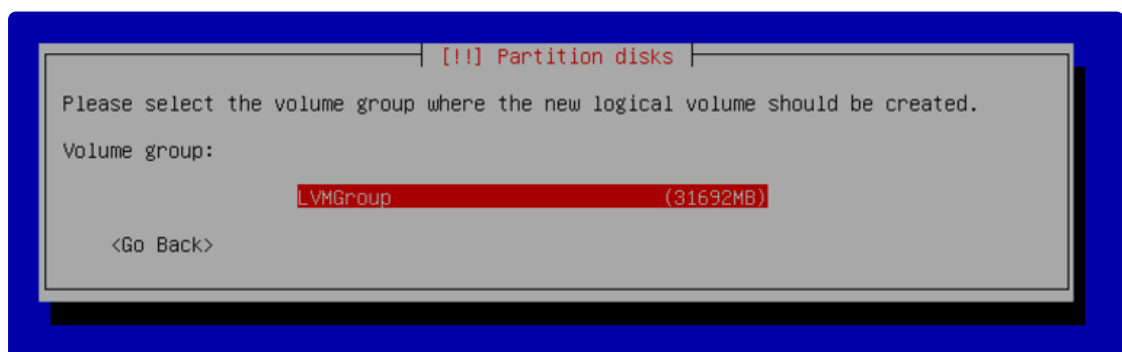

3. The order of creation of the logical units will be the same as indicated in the subject, so we will start with root and end with var-log. Then we will select the name of the logical volume.

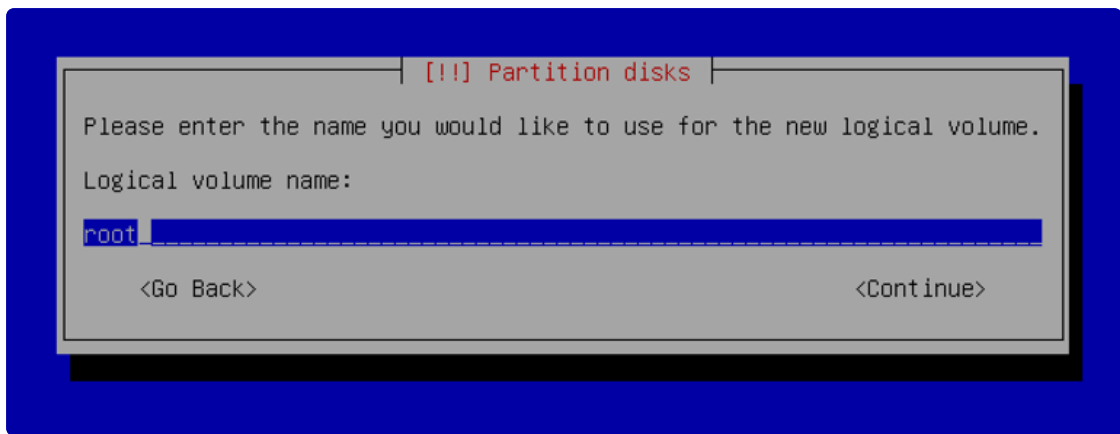

4. Size, as indicated in the subject, will be 10g.

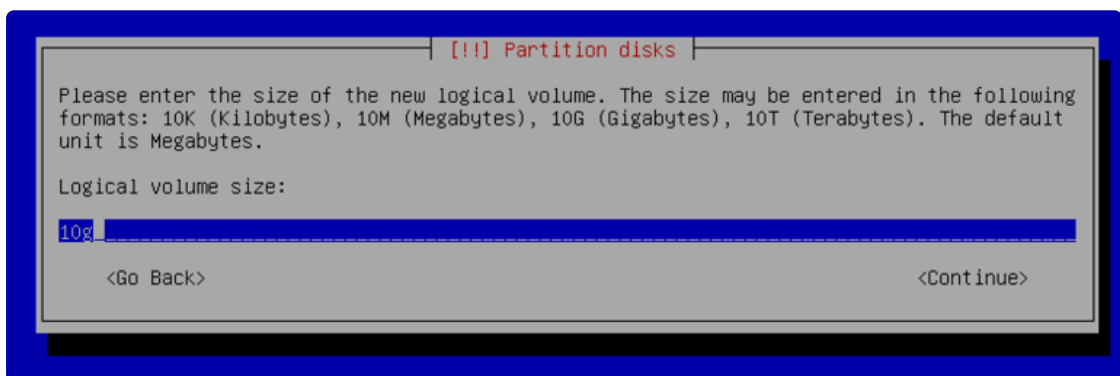

[Previous](#)
[BONUS: logical volume group](#)

[Next](#)
[BONUS: logical volume swap](#)

Last updated 2 years ago