



Born2BeRoot G

Do not lose your Born2BeRoot : get a ...



Virtual machine setup

Copy



Installing & configuring SSH

SSH: The acronym SSH stands for "Secure Shell." The SSH protocol was designed as a secure alternative to unsecured remote shell protocols. It utilizes a client-server paradigm, in which clients and servers communicate via a secure channel.

1. **Update the system:** First, we should update the system using:

```
sudo apt update
```

2. **Install OpenSSH server:** Next, we will install the main tool for remote access with the SSH protocol, using **OpenSSH**. The installation requires the following package:

```
sudo apt install openssh-server
```


When asked for confirmation, type **y** and press Enter. The installation will then proceed.

```
root@gemartin42:/home/gemartin# sudo apt install openssh-server
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libcbor0 libfido2-1 libpam-systemd libwrap0 libx11-6 libx11-data libxau6 libxcb1 libxdmcp6
  libxext6 libxmuu1 ncurses-term openssh-client openssh-sftp-server runit-helper xauth
Suggested packages:
  keychain libpam-ssh monkeysphere ssh-askpass molly-guard ufw
The following NEW packages will be installed:
  libcbor0 libfido2-1 libpam-systemd libwrap0 libx11-6 libx11-data libxau6 libxcb1 libxdmcp6
  libxext6 libxmuu1 ncurses-term openssh-client openssh-server openssh-sftp-server runit-helper
  xauth
0 upgraded, 17 newly installed, 0 to remove and 0 not upgraded.
Need to get 3,683 kB of archives.
After this operation, 15.4 MB of additional disk space will be used.
Do you want to continue? [Y/n] y_
```

3. **Verify installation:** To confirm that the installation has completed successfully, we can check the SSH service status:

```
sudo service ssh status
```

This command will show the current state of the SSH service. You should see **Active (running)** to confirm it's working properly.

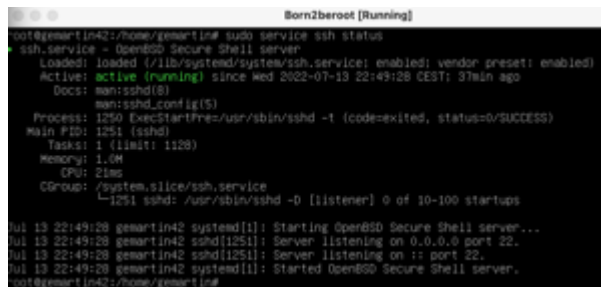

```
Born2beroot [Running]
root@martin42:/home/gemartin# sudo service ssh status
ssh.service - OpenSSH Secure Shell server
Loaded: loaded (/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
Active: active (running) since Wed 2022-07-13 22:49:28 CEST; 37min ago
Docs: man:sshd(8)
      man:sshd_config(5)
Process: 1250 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
Main PID: 1251 (sshd)
Tasks: 1 (limit: 1120)
Memory: 1.0M
CPU: 2ms
CGroup: /system.slice/ssh.service
        └─1251 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups

Jul 13 22:49:28 gemartin42 systemd[1]: Starting OpenSSH Secure Shell server...
Jul 13 22:49:28 gemartin42 sshd[1251]: Server listening on 0.0.0.0 port 22.
Jul 13 22:49:28 gemartin42 sshd[1251]: Server listening on :: port 22.
Jul 13 22:49:28 gemartin42 systemd[1]: Started OpenSSH Secure Shell server.
root@gemartin42:/home/gemartin#
```

[Previous](#)
[Adding a user to a group](#)

[Next](#)
[Configuring SSH](#)

Last updated 1 year ago