



Born2BeRoot G

Do not lose your Born2BeRoot : get a ...

[Virtual machine setup](#) > [Installing & configuring SSH](#)

Copy

Configuring SSH

Now we need to configure the SSH service by editing its configuration files.

We'll use [Nano](#) as our text editor. If you prefer [VIM](#), you can install it using

```
sudo apt install vim.
```

Editing SSH Configuration

1. **Edit the SSH configuration file:** We need to modify `/etc/ssh/sshd_config`. Since this is a system file, we need root privileges. Switch to root first:


```
su  
nano /etc/ssh/sshd_config
```

2. **Modify the configuration:** Lines starting with `#` are commented out. We need to uncomment and modify the following lines:

Change the port from 22 to 4242:

Find: `#Port 22`

Change to: `Port 4242`

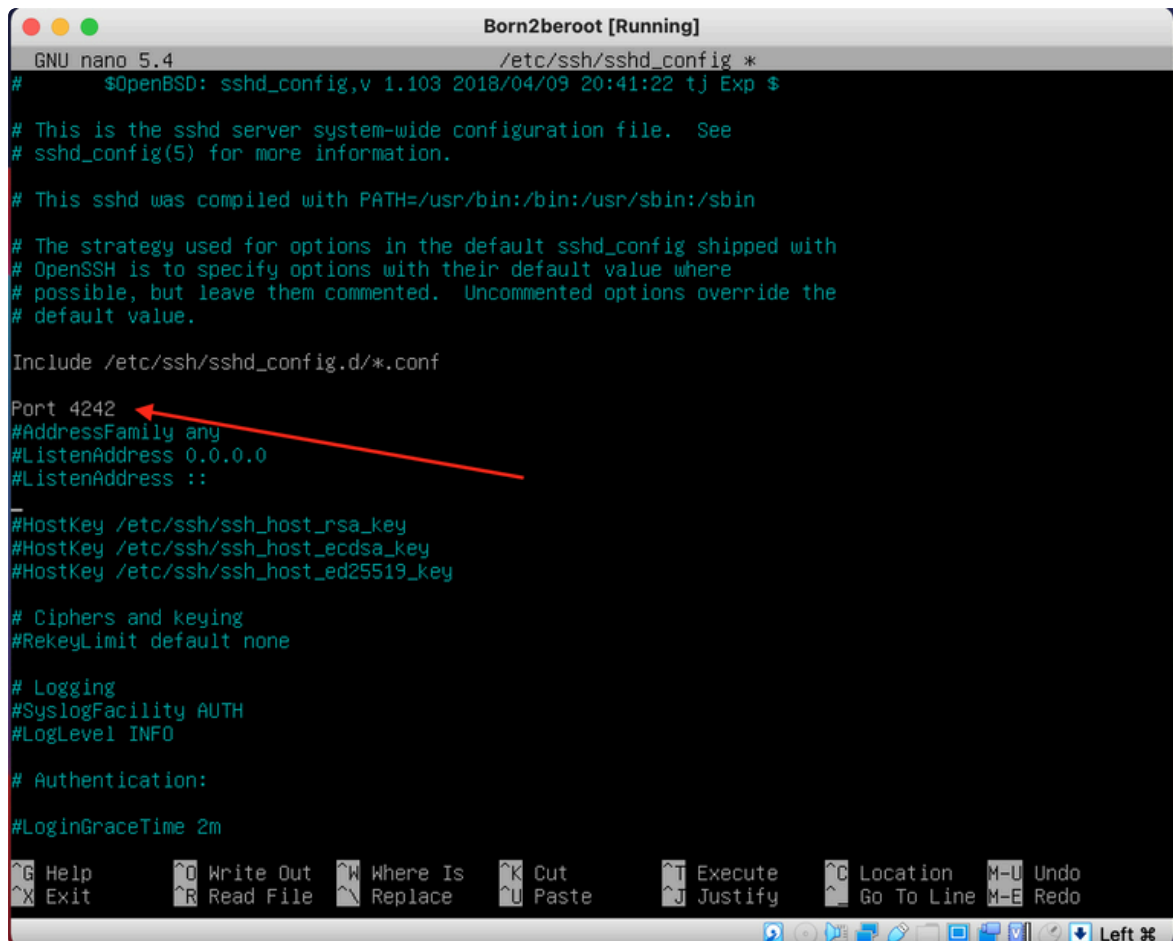

```
Born2beroot [Running]
GNU nano 5.4 /etc/ssh/sshd_config *
# $OpenBSD: sshd_config,v 1.103 2018/04/09 20:41:22 tj Exp $

# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/bin:/bin:/usr/sbin:/sbin

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.

Include /etc/ssh/sshd_config.d/*.conf

Port 4242
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:


#LoginGraceTime 2m

^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo
^X Exit      ^R Read File  ^_ Replace    ^U Paste      ^J Justify    ^_ Go To Line  M-E Redo
```

Disable root login via SSH:

Find: `#PermitRootLogin prohibit-password`

Change to: `PermitRootLogin no`

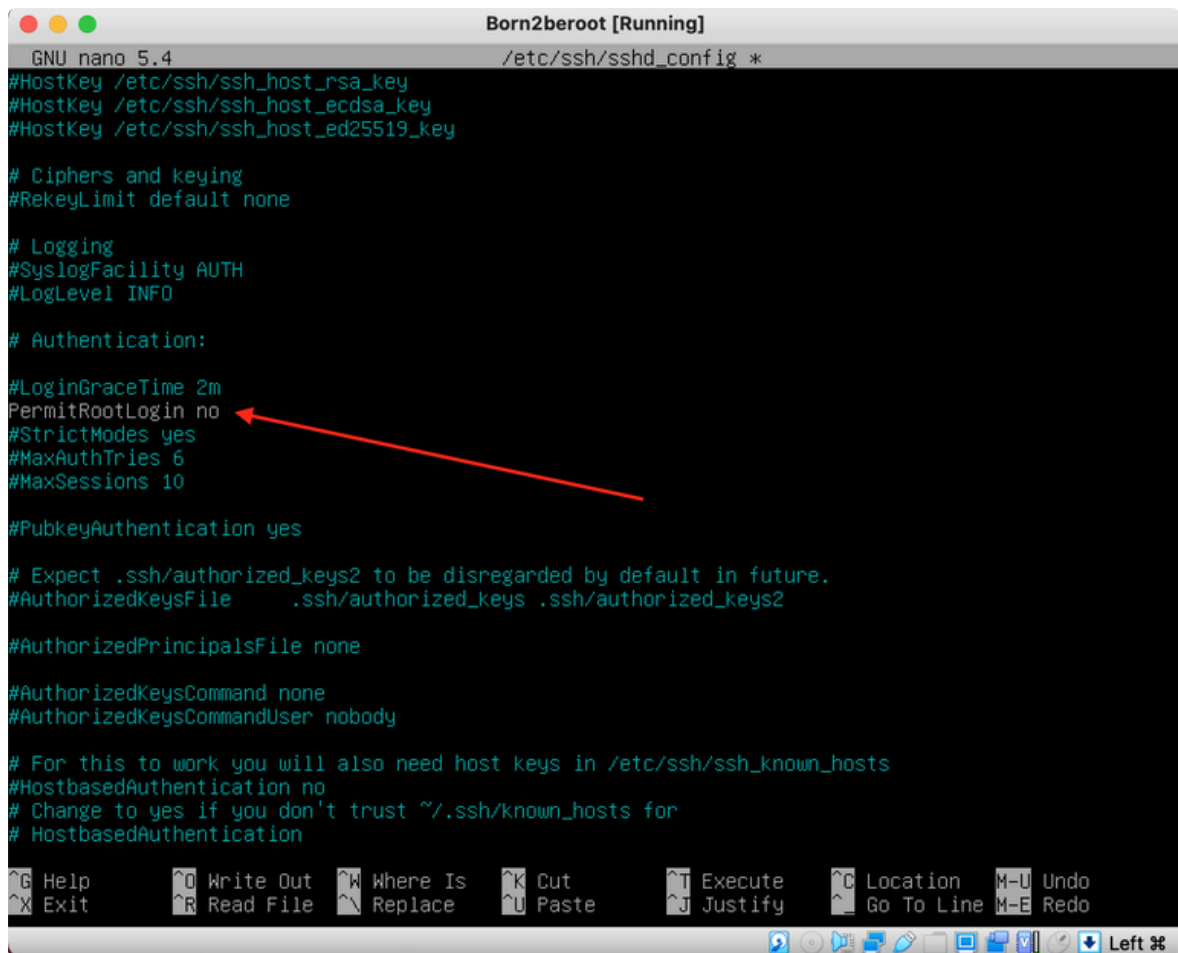

```
Born2beroot [Running]
GNU nano 5.4 /etc/ssh/sshd_config *
#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin no
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile .ssh/authorized_keys .ssh/authorized_keys2

#AuthorizedPrincipalsFile none


#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
# Change to yes if you don't trust ~/.ssh/known_hosts for
# HostbasedAuthentication
```

3. **Save the changes:** When finished editing, save the file and exit the editor (in Nano: `Ctrl+X`, then `Y`, then `Enter`).
4. Now with the file `/etc/ssh/ssh_config`. (not `sshd_config`)

```
nano /etc/ssh/ssh_config
```

```
#Port 22 → Port 4242
```

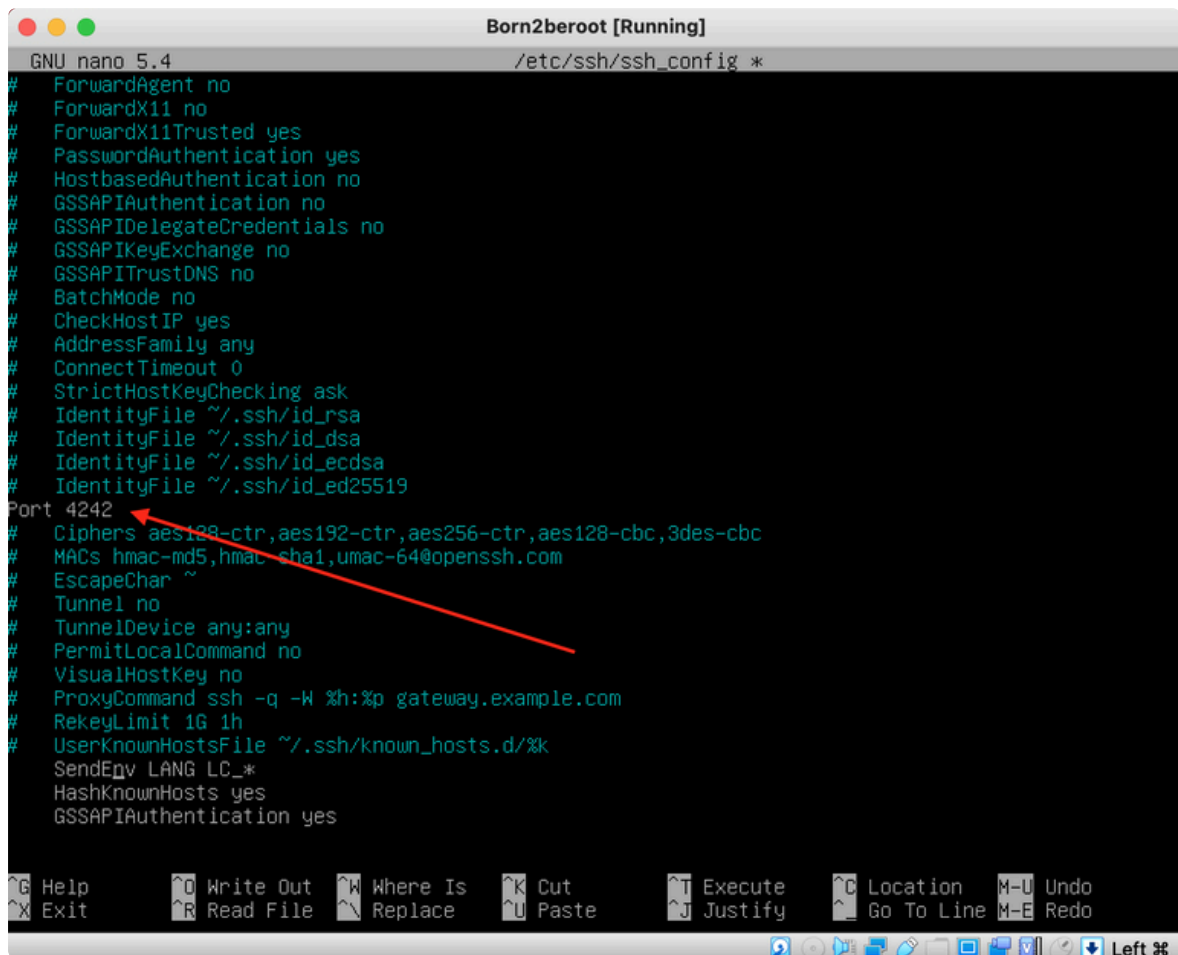

```

Born2beroot [Running]
GNU nano 5.4 /etc/ssh/ssh_config *
# ForwardAgent no
# ForwardX11 no
# ForwardX11Trusted yes
# PasswordAuthentication yes
# HostbasedAuthentication no
# GSSAPIAuthentication no
# GSSAPIDelegateCredentials no
# GSSAPIKeyExchange no
# GSSAPITrustDNS no
# BatchMode no
# CheckHostIP yes
# AddressFamily any
# ConnectTimeout 0
# StrictHostKeyChecking ask
# IdentityFile ~/.ssh/id_rsa
# IdentityFile ~/.ssh/id_dsa
# IdentityFile ~/.ssh/id_ecdsa
# IdentityFile ~/.ssh/id_ed25519
Port 4242
# Ciphers aes128-ctr,aes192-ctr,aes256-ctr,aes128-cbc,3des-cbc
# MACs hmac-md5,hmac-sha1,umac-64@openssh.com
# EscapeChar ~
# Tunnel no
# TunnelDevice any:any
# PermitLocalCommand no
# VisualHostKey no
# ProxyCommand ssh -q -W %h:%p gateway.example.com
# RekeyLimit 1G 1h
# UserKnownHostsFile ~/.ssh/known_hosts.d/%k
SendEgv LANG LC_*
HashKnownHosts yes
GSSAPIAuthentication yes

^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo
^X Exit      ^R Read File  ^_ Replace    ^U Paste      ^J Justify    ^_ Go To Line M-E Redo

```


4. Finally we must restart the ssh service so it can be updated. For that purpose we will use:

```
sudo service ssh restart
```

and once it is done we will check the service state with:

```
sudo service ssh status
```

and confirm that everything is alright.

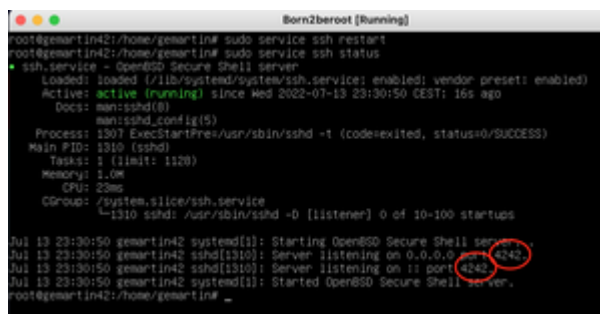

```

Born2beroot [Running]
root@gemartin42:/home/gemartin# sudo service ssh restart
root@gemartin42:/home/gemartin# sudo service ssh status
ssh.service - OpenBSD Secure Shell server
Loaded: loaded (/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
Active: active (running) since Wed 2022-07-13 23:30:50 CEST; 16s ago
Docs: man:sshd(8)
      man:sshd_config(5)
Process: 1307 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
Main PID: 1310 (sshd)
Tasks: 1 (limit: 1120)
Memory: 1.0M
CPU: 23ms
CGroup: /system.slice/ssh.service
        └─1310 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups

Jul 13 23:30:50 gemartin42 systemd[1]: Starting OpenBSD Secure Shell server:
Jul 13 23:30:50 gemartin42 sshd[1310]: Server listening on 0.0.0.0 port 4242.
Jul 13 23:30:50 gemartin42 sshd[1310]: Server listening on :: port 4242.
Jul 13 23:30:50 gemartin42 systemd[1]: Started OpenBSD Secure Shell server.
root@gemartin42:/home/gemartin#

```

[Previous](#)

[Installing & configuring SSH](#)

[Next](#)

[Connecting via SSH](#)

Last updated 1 year ago