



Born2BeRoot G

Do not lose your Born2BeRoot : get a ...

[Installing Debian](#) > [BONUS: Partition Disks](#)[Copy](#)

BONUS: encrypt logical partition

1. We will select `configure encrypted volumes`. This way we can encrypt our partition.

```
[[!]] Partition disks

This is an overview of your currently configured partitions and mount points. Select a
partition to modify its settings (file system, mount point, etc.), a free space to create
partitions, or a device to initialize its partition table.

    Guided partitioning
    Configure software RAID
    Configure the Logical Volume Manager
    Configure encrypted volumes
    Configure iSCSI volumes

SCSI3 (0,0,0) (sda) - 32.2 GB ATA VBOX HARDDISK
  #1 primary 499.1 MB  f  ext4  /boot
  #5 logical  31.7 GB   f  ext4

Undo changes to partitions
Finish partitioning and write changes to disk

<Go Back>
```

Partition disks configuration on Debian

2. We accept the confirmation message.

```
[[!]] Partition disks

Before encrypted volumes can be configured, the current partitioning scheme has to be
written to disk. These changes cannot be undone.

After the encrypted volumes have been configured, no additional changes to the partitions
on the disks containing encrypted volumes are allowed. Please decide if you are satisfied
with the current partitioning scheme for these disks before continuing.

The partition tables of the following devices are changed:
    SCSI3 (0,0,0) (sda)


The following partitions are going to be formatted:
    partition #1 of SCSI3 (0,0,0) (sda) as ext4
    partition #5 of SCSI3 (0,0,0) (sda) as ext4

Write the changes to disk and configure encrypted volumes?

    <Yes>                                     <No>
```


Partition disks configuration on Debian

3. We create the encrypted volumes.

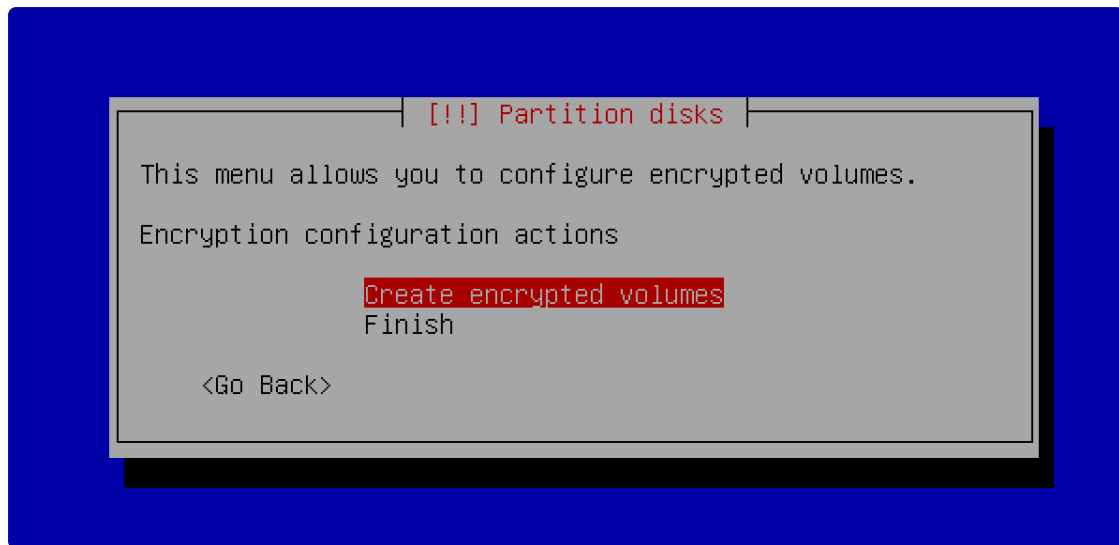


Partition disks configuration on Debian

4. We select which partition we want to encrypt.

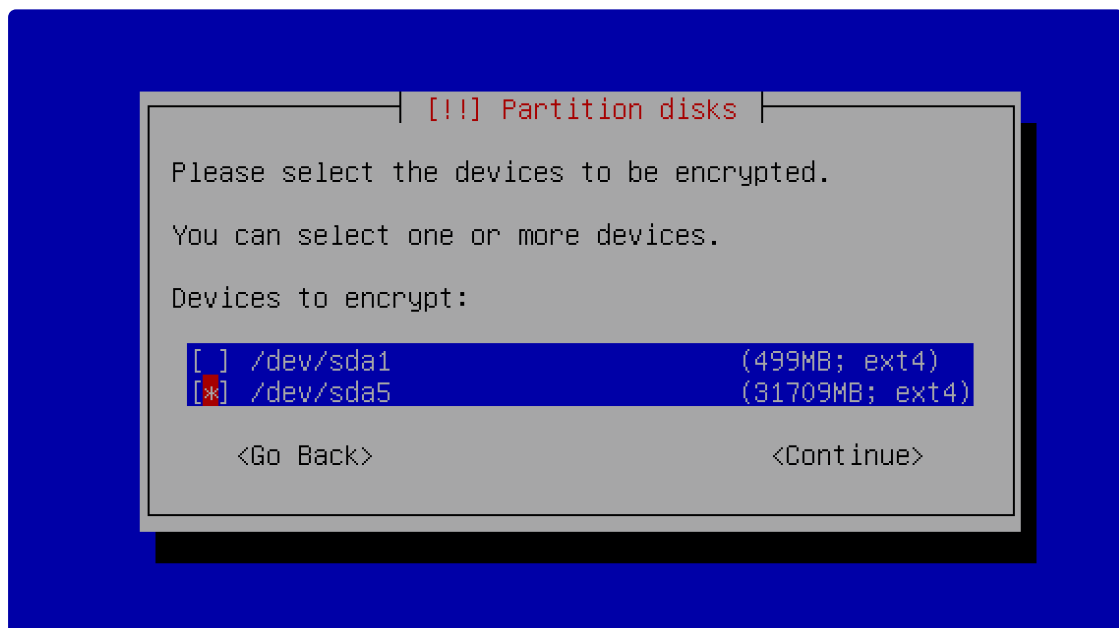


Partition disks configuration on Debian

5. We finish configuring the current partition.

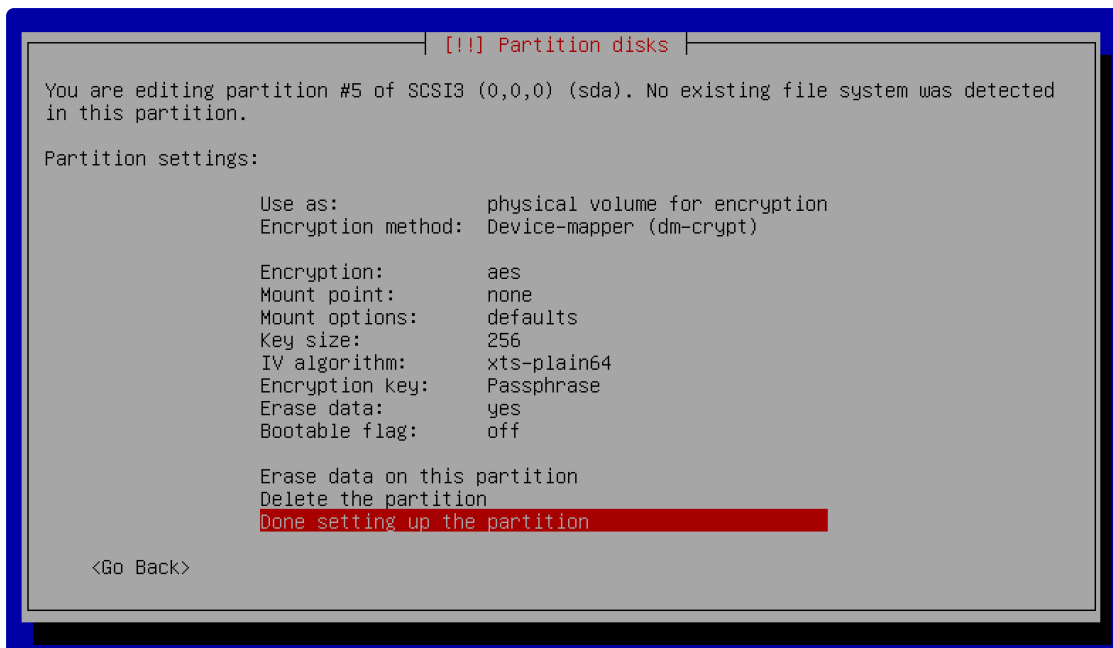


Partition disks configuration on Debian

6. We finish because we don't want to create more encrypted volumes.

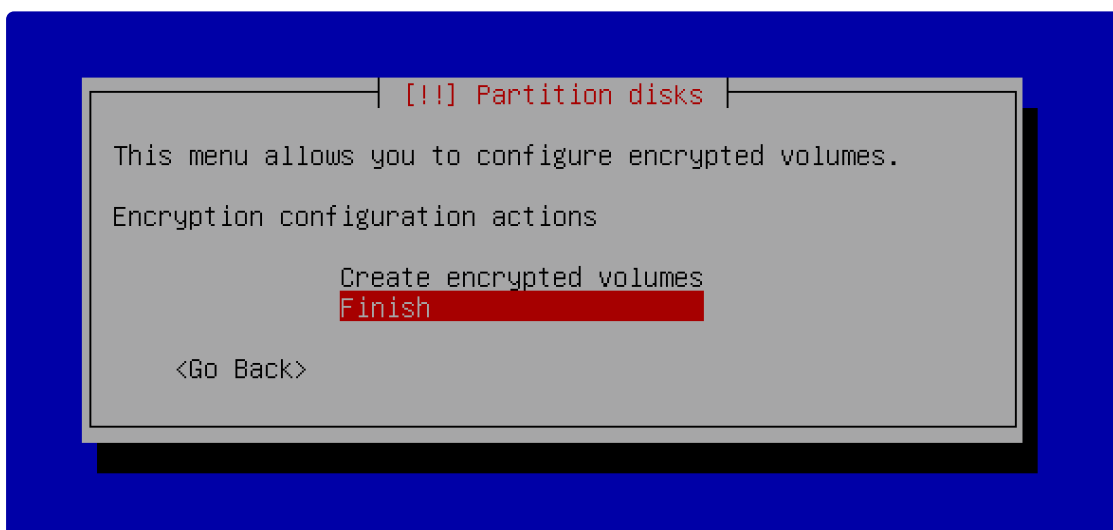


Partition disks configuration on Debian

7. We accept the confirmation message. It tells us that everything inside the partition will be encrypted and it should not take long to finish.

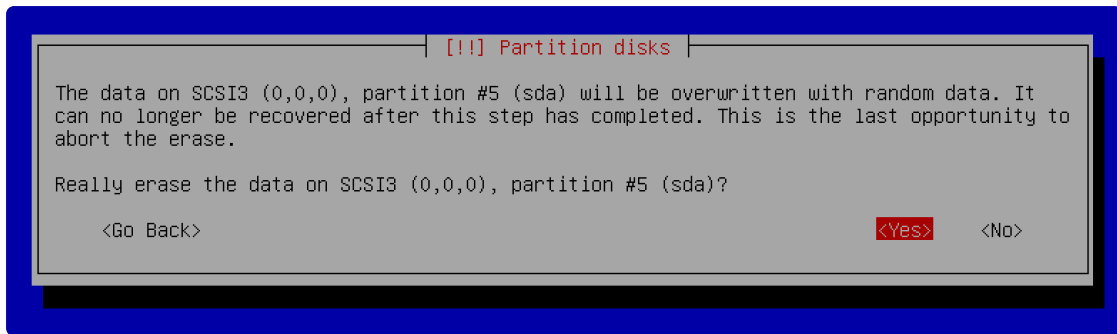


Partition disks configuration on Debian

8. We don't care if it takes a long time or not, we cancel it because there is nothing to encrypt since the partition is empty.

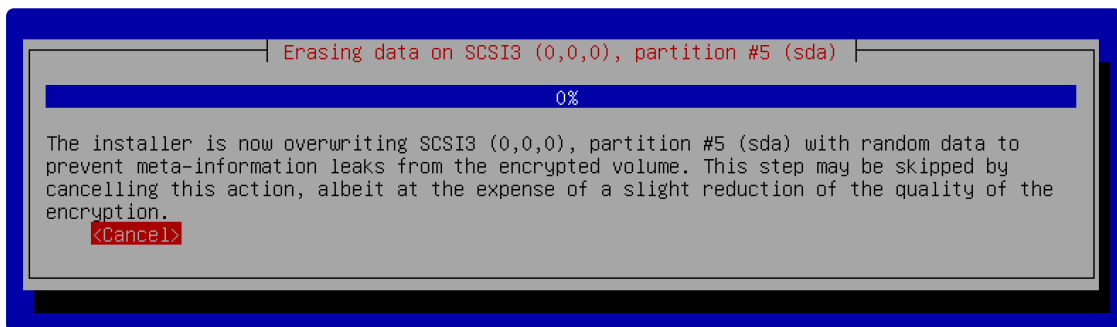


Partition disks configuration on Debian

9. Again we must enter a password, this time it will be the encryption phrase. As I previously mentioned, you must repeat the process and write it down as it will be important in the future.

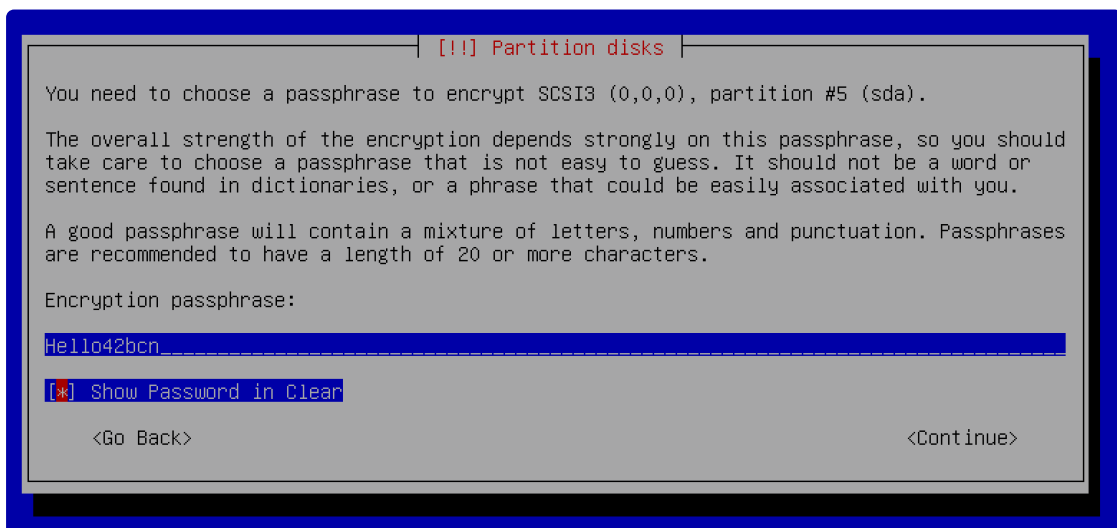

Partition disks configuration on Debian

10. We repeat the encryption phrase.

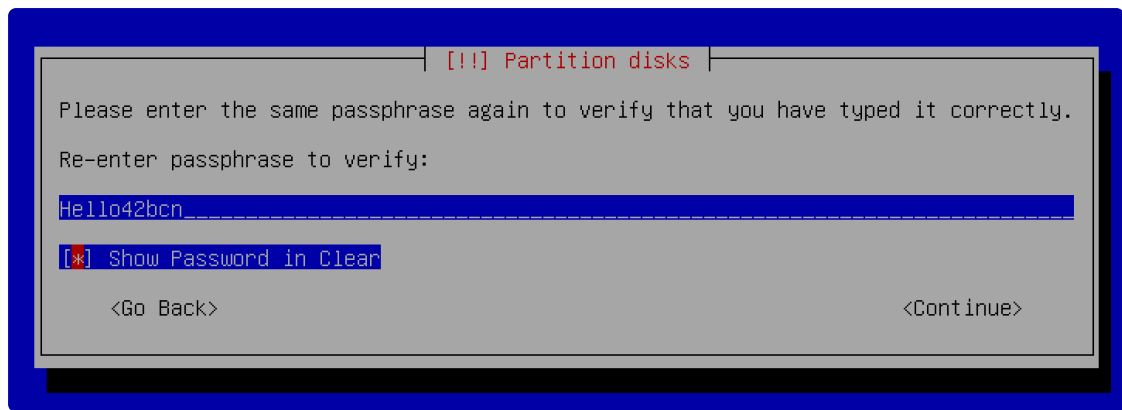

Partition disks configuration on Debian

[Previous](#)
BONUS: logical partition

[Next](#)
BONUS: logical volume manager

Last updated 2 years ago