


1. Archivo de usuarios del sistema


Pantallazo mostrando el contenido de `/etc/passwd`.

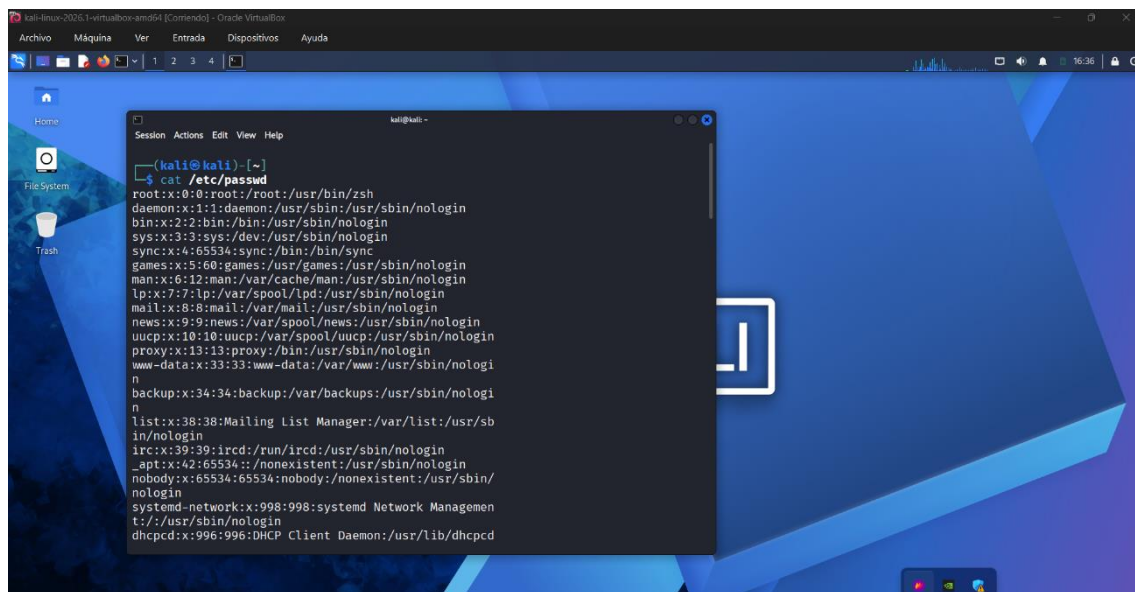

```
kali@kali:~$ cat /etc/passwd
root:x:0:0:root:/root:/usr/bin/zsh
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/run/ircd:/usr/sbin/nologin
_apt:x:42:65534::nonexistent:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
systemd-networkd:x:998:998:systemd Network Management:/usr/sbin/nologin
dhcpcd:x:996:996:DHCP Client Daemon:/usr/lib/dhcpcd
```

2. Servicios en ejecución


Captura de pantalla de los procesos/servicios activos en el sistema.

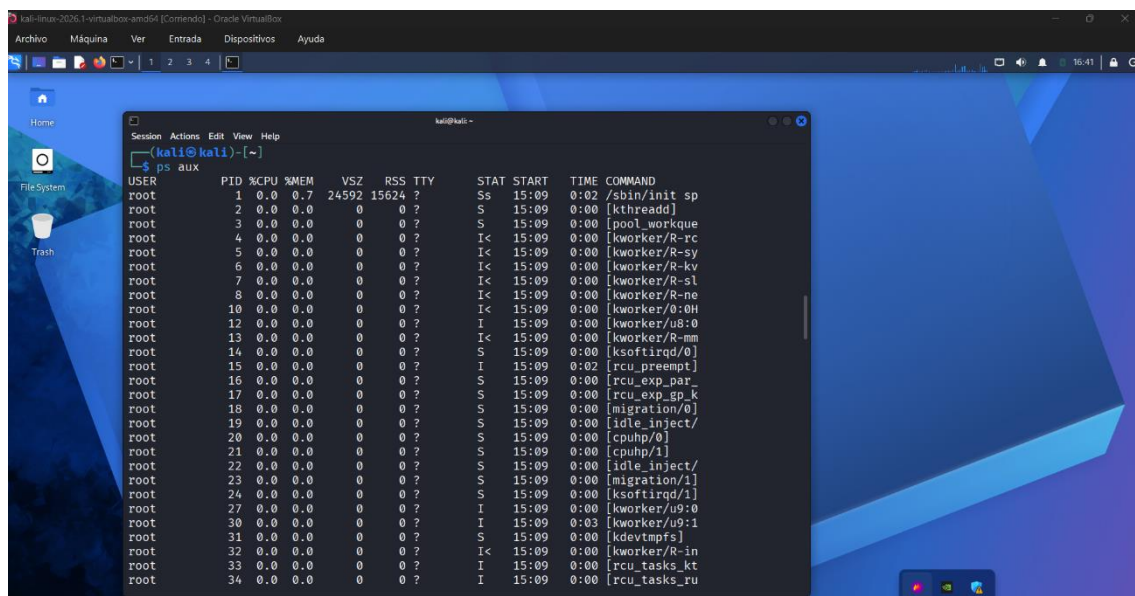

```
kali@kali:~$ ps aux
USER          PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root           1  0.0  0.7 24592 15624 ?        Ss   15:09   0:02 /sbin/init sp
root           2  0.0  0.0      0     0 ?        S    15:09   0:00 [kthreadd]
root           3  0.0  0.0      0     0 ?        S    15:09   0:00 pool_workque
root           4  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-rc
root           5  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-sy
root           6  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-kv
root           7  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-sl
root           8  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-ne
root          10  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R:OH
root          12  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/u8:0
root          13  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-mm
root          14  0.0  0.0      0     0 ?        S    15:09   0:00 [ksfirtqd/0]
root          15  0.0  0.0      0     0 ?        I    15:09   0:02 [rcu_preempt]
root          16  0.0  0.0      0     0 ?        S    15:09   0:00 [rcu_exp_par
root          17  0.0  0.0      0     0 ?        S    15:09   0:00 [rcu_exp_gp_k
root          18  0.0  0.0      0     0 ?        S    15:09   0:00 [migration/0]
root          19  0.0  0.0      0     0 ?        S    15:09   0:00 [idle_inject/
root          20  0.0  0.0      0     0 ?        S    15:09   0:00 [cpuhp/0]
root          21  0.0  0.0      0     0 ?        S    15:09   0:00 [cpuhp/1]
root          22  0.0  0.0      0     0 ?        S    15:09   0:00 [idle_inject/
root          23  0.0  0.0      0     0 ?        S    15:09   0:00 [migration/1]
root          24  0.0  0.0      0     0 ?        S    15:09   0:00 [ksfirtqd/1]
root          27  0.0  0.0      0     0 ?        I    15:09   0:00 [kworker/u9:0
root          30  0.0  0.0      0     0 ?        I    15:09   0:03 [kworker/u9:1
root          31  0.0  0.0      0     0 ?        S    15:09   0:00 [kdevtmpfs]
root          32  0.0  0.0      0     0 ?        I<   15:09   0:00 [kworker/R-in
root          33  0.0  0.0      0     0 ?        I    15:09   0:00 [rcu_tasks_kt
root          34  0.0  0.0      0     0 ?        I    15:09   0:00 [rcu_tasks_ru
```

3. Prueba de conectividad

Pantallazo de un ping con **10 paquetes** hacia [cisco.com](https://www.cisco.com).

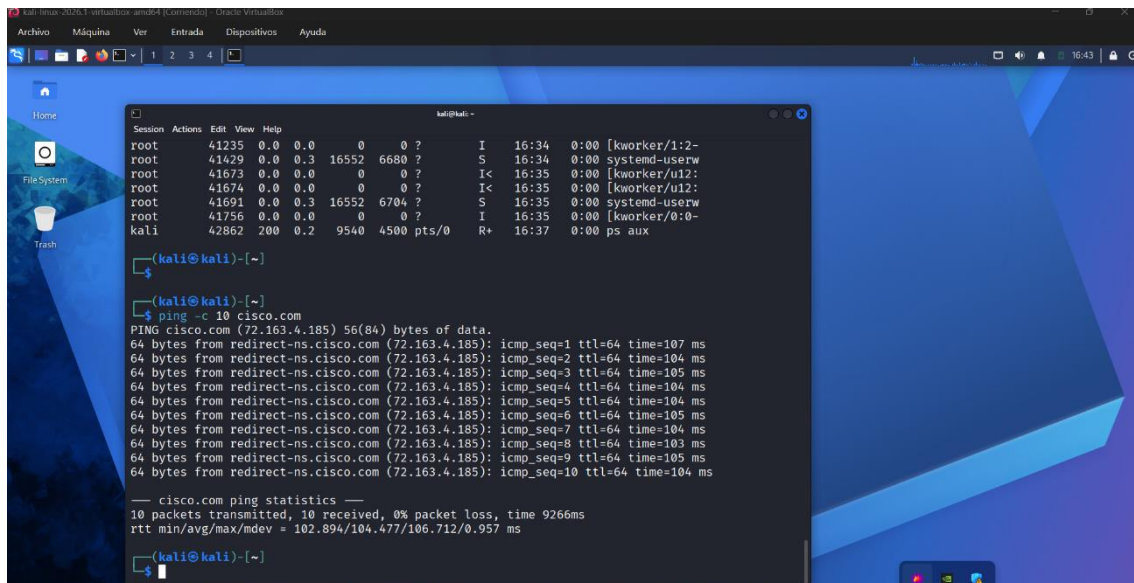

```
kali@kali:~$ ps aux
Session Actions Edit View Help
root 41235 0.0 0.0 0 0 ? I 16:34 0:00 [kworker/1:2-
root 41429 0.0 0.3 16552 6680 ? S 16:34 0:00 systemd-userw
root 41673 0.0 0.0 0 0 ? I< 16:35 0:00 [kworker/u12:
root 41674 0.0 0.0 0 0 ? I< 16:35 0:00 [kworker/u12:
root 41691 0.0 0.3 16552 6704 ? S 16:35 0:00 systemd-userw
root 41756 0.0 0.0 0 0 ? I 16:35 0:00 [kworker/0:0-
kali 42862 200 0.2 9540 4500 pts/0 R+ 16:37 0:00 ps aux


(kali@kali)-[~]
$ ping -c 10 cisco.com
PING cisco.com (72.163.4.185) 56(84) bytes of data:
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=1 ttl=64 time=107 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=2 ttl=64 time=104 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=3 ttl=64 time=105 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=4 ttl=64 time=104 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=5 ttl=64 time=104 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=6 ttl=64 time=105 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=7 ttl=64 time=104 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=8 ttl=64 time=103 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=9 ttl=64 time=105 ms
64 bytes from redirect-ns.cisco.com (72.163.4.185): icmp_seq=10 ttl=64 time=104 ms

-- cisco.com ping statistics --
10 packets transmitted, 10 received, 0% packet loss, time 926ms
rtt min/avg/max/mdev = 102.894/104.477/106.712/0.957 ms

(kali@kali)-[~]
```

4. Información del sistema operativo

Evidencia mostrando detalles del kernel y arquitectura del sistema.

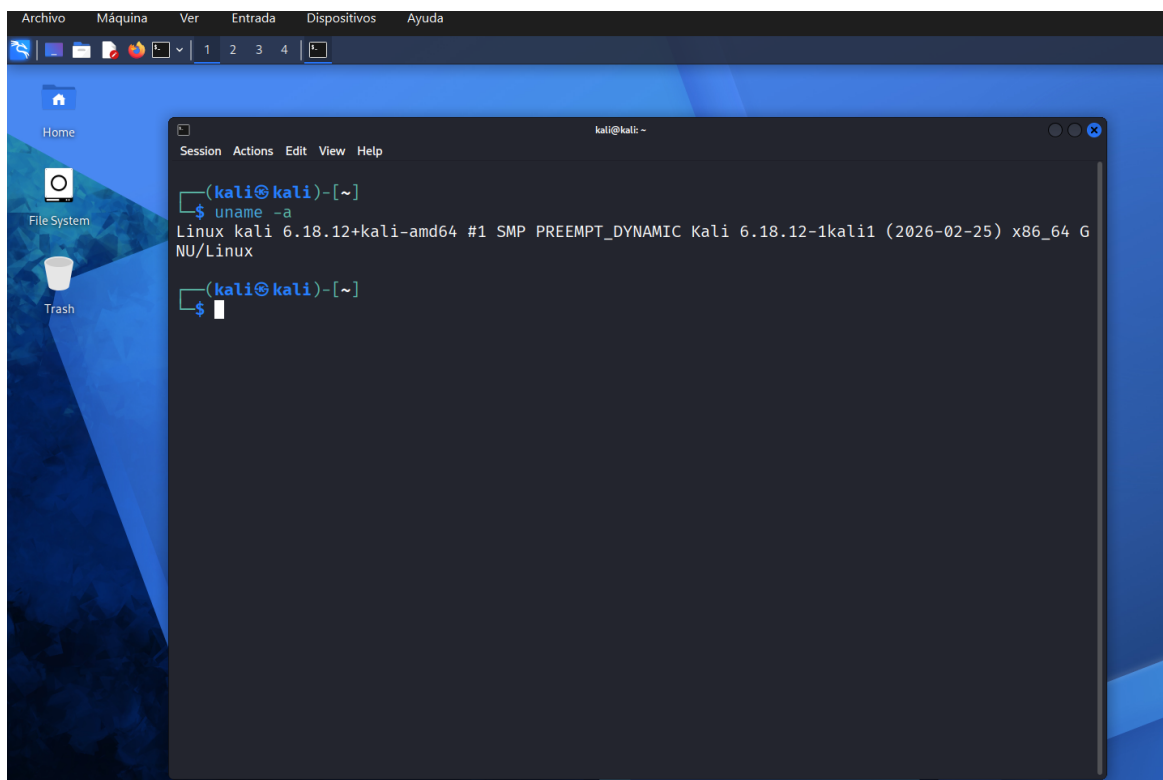

```
(kali@kali)-[~]
$ uname -a
Linux kali 6.18.12+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.18.12-1kali1 (2026-02-25) x86_64 G
NU/Linux

(kali@kali)-[~]
$
```

5. Usuarios conectados actualmente

Pantallazo con la lista de usuarios activos en la sesión.

```
NO/ Linux
(kali@kali)-[~]
$ who
kali    seat0      2026-04-22 15:10 (:0)
(kali@kali)-[~]
$
```

6. Permisos de un archivo

Crear un archivo de prueba y mostrar sus permisos en pantalla.

```
(kali@kali)-[~]
$ touch prueba.txt
(kali@kali)-[~]
$ ls -l prueba.txt
-rw-rw-r-- 1 kali kali 0 Apr 22 16:46 prueba.txt
(kali@kali)-[~]
$
```


7. Búsqueda de un archivo en el sistema

Captura de pantalla mostrando cómo localizar un archivo específico.

```
(kali@kali)-[~]
$ find / -name "prueba.txt" 2>/dev/null
/home/kali/prueba.txt
$
```

8. Interfaces de red

Pantallazo con la configuración de las interfaces de red del sistema.

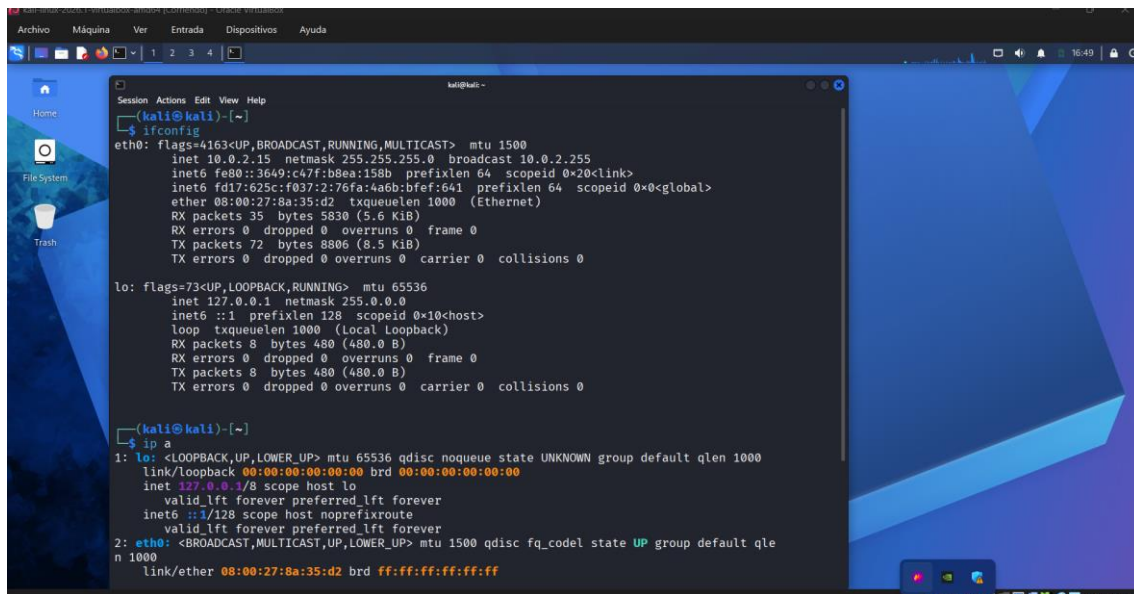


```
(kali@kali)-[~]
$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::3649:c47f:b8ea:150b prefixlen 64 scopeid 0x20<link>
    inet6 fd17:625c:f037:2:76fa:4a6b:bfe6:641 prefixlen 64 scopeid 0x0<global>
    ether 08:00:27:8a:35:d2 txqueuelen 1000 (Ethernet)
    RX packets 35 bytes 5830 (5.6 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 72 bytes 8806 (8.5 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 8 bytes 480 (480.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 8 bytes 480 (480.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

(kali@kali)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:8a:35:d2 brd ff:ff:ff:ff:ff:ff
```

9. Puertos y conexiones abiertas

Evidencia mostrando qué puertos están escuchando y qué servicios los usan.

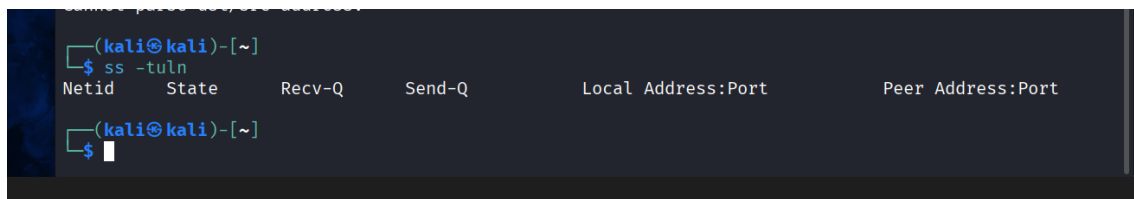

```
(kali@kali)-[~]
$ ss -tuln
Netid      State      Recv-Q     Send-Q     Local Address:Port     Peer Address:Port
(kali@kali)-[~]
$
```

10. Fecha y hora del sistema

Pantallazo mostrando la fecha y hora actual del sistema.



```
(kali@kali)-[~]
$ date
Wed Apr 22 04:49:59 PM EDT 2026
(kali@kali)-[~]
$
```