

run

Run MATLAB script

Syntax

```
run(scriptname)
```

Description

`run(scriptname)` runs the MATLAB® script specified by `scriptname`.

[example](#)

Examples

[collapse all](#)

Run Script Not on Current Path

Create a temporary folder that is not on your current path.

[Open in MATLAB Online](#)

[Copy Command](#)

```
tmp = tempname;  
mkdir(tmp)
```

[Get](#) ▼

Write MATLAB code to a file in the folder.


```
newFile = fullfile(tmp, 'ANewFile.m');  
fid = fopen(newFile, 'w');  
fprintf(fid, 'Z = magic(5);\n');  
fprintf(fid, 'b = bar3(Z);\n');  
fclose(fid);
```

[Get](#) ▼

Run the script.

```
run(newFile)
```

[Get](#) ▼

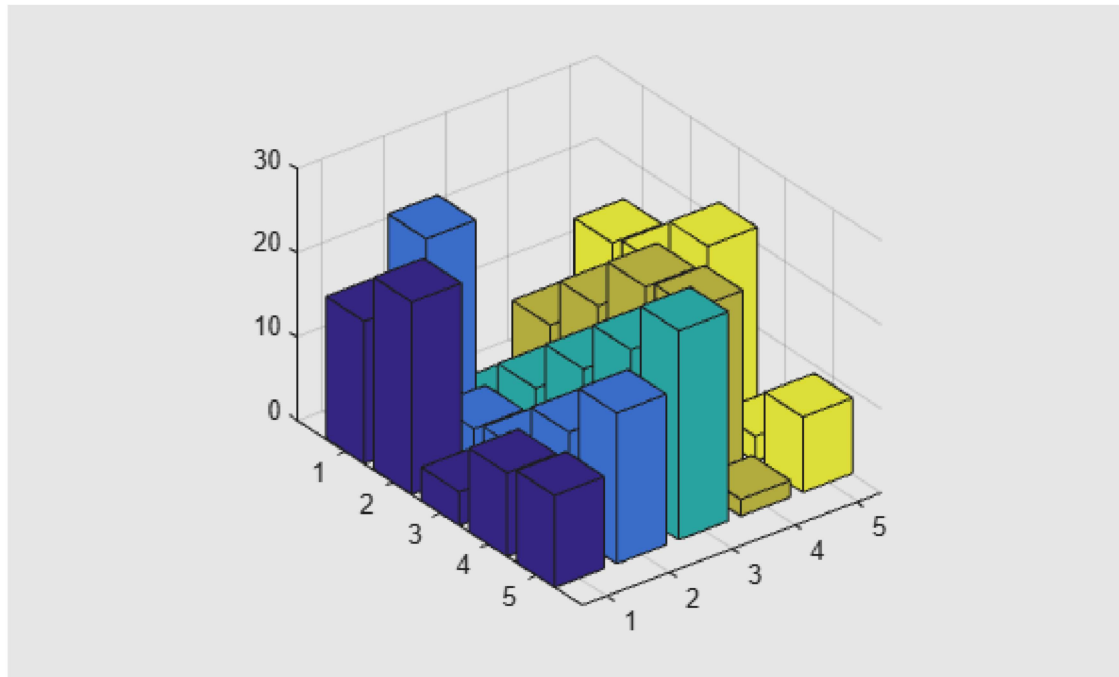

Input Arguments

[collapse all](#)

scriptname — Name of MATLAB script
string scalar | character vector

Name of MATLAB script, specified as a string scalar or character vector. `scriptname` can be any file type that MATLAB can execute, such as a MATLAB script file, Simulink® model, or MEX-file. `scriptname` can access any variables in the current workspace.

If `scriptname` is in the current folder or in a folder on the MATLAB path, specify just the name of the file.

If `scriptname` is not in the current folder or in a folder on the MATLAB path, specify the full or relative path of the file. Alternatively, you can use `cd` to change the current folder to the folder that contains the file, or use `addpath` to add the containing folder to the MATLAB path. Then, you can specify just the name of the file.



Note

If `scriptname` corresponds to both a `.m` file and a P-file residing in the same folder, then `run` executes the P-file. This occurs even if you specify `scriptname` with a `.m` extension.

Example: `run("myScript")`

Example: `run("anotherScript.mlx")`

Example: `run("C:\myFolder\myScript.m")`

Example: `run("myFolder\anotherScript.mlx")`

Tips

- To update the output when running live scripts, use the **Run** button in the **Live Editor** tab instead of the `run` function. The `run` function does not update live scripts with new output.

- run changes to the folder that contains the script, executes it, and resets back to the original folder. If the script itself changes folders, then run does not revert to the original folder, unless scriptname changes to the folder in which this script resides.

Version History

Introduced before R2006a

See Also

[cd](#) | [path](#) | [addpath](#) | [pwd](#)

Topics

[Files and Folders That MATLAB Accesses](#)