



SmartVista Instant Payment System

Specification – Payments

**PRODUCT
DOCUMENTATION**

20 August 2024



bpcbt.com

Confidential © 2024 BPC Banking Technologies

Notice

All information contained in this documentation, as well as the software described in it, is proprietary to BPC Group and its affiliates. BPC Group reserves any and all intellectual property rights in respect of this document.

The Customer is granted the right to use this document in accordance with the relevant agreement entered into with authorized SmartVista distributors within BPC Group. Except as permitted by the relevant license agreement, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of BPC Group.

The limited warranties provided in respect of this document are described in the relevant legal agreement entered into with BPC Group. BPC Group provides no other warranties, explicit or implied.

This document is confidential and proprietary and is not intended for use by any person other than a named Customer.

SmartVista is the registered trademark of BPC Group entities. Other company, product or service names mentioned herein may be trademarks or service marks of their respective owners.

For information regarding permissions, write to:

BPC Group HQ
Neuhofstrasse 5a
6340 Baar
Switzerland

Phone: +41 43 508 4024

Email: info@bpcbt.com

Web: www.bpcbt.com

File: sv_ip__specification_payment_en_core_20230622

Applicable to: Instant Payment

Permitted distribution: Under NDA only

Contents

Specification Update and Version History	4
1 Scope and functionality.....	6
1.1 Background.....	6
1.2 Scope	6
1.3 Document purpose	6
1.4 Introduction	7
1.5 Common flow.....	8
1.5.1 Recommendations for a payer's financial institution regarding funds holding 9	
1.6 SAF Mechanism	10
1.7 Logic For Static Data.....	11
2 Payee verification process flow	11
2.1 Exception flow.....	12
2.2 Example — Payee verification API call	12
2.2.1 Description of the main fields	12
2.2.2 Example of API verification request(acmt.023).....	13
2.2.3 Response message with PAM and ClearingID(acmt.024).....	16
2.2.4 Negative response message(acmt.024) on verification request.....	19
3 Payment (Credit transfer)	21
3.1 Payment (Credit Transfer Advice mode)	22
3.2 Exception flows	24
3.2.1 Decline by Buisness validation failed	24
3.2.2 Decline by fraud prevention check	27
3.2.3 Timeout from Creditor FI	28
3.2.4 Timeout from IPS to Debtor FI	30
3.2.5 Timeout from IPS to Creditor FI	31
3.2.6 Return payment request for a successful credit transfer	33
4 Business examples	40
4.1 Example of a payment	40
4.1.1 Description of the main fields	40
4.1.2 Credit Transfer Request/Advice (pacs.008.001.10).....	42

4.1.3	Positive response message from IPS to payer's participant (pacs.002.001.12)	51
4.1.4	Negative response message from IPS to payer's participant (pacs.002.001.12)	58
4.1.5	Example of an API call during a payment status request (pacs.028.001.05) 66	
4.1.6	Example of return payment call (pacs.004.001.11)	67
5	FIToFICustomerCreditTransfer/Advice (pacs.008.001.10)	77
5.1	Message structure (FIToFICustomerCreditTransfer pacs.008.001.10)	77
5.2	Message building blocks	83
5.2.1	GroupHeader <GrpHdr>	83
5.2.2	CreditTransferTransactionInformation <CdtTrfTxInf>	88
6	FIToFIPaymentStatusReport (pacs.002.001.12) — Response message	119
6.1	Message structure (FIToFIPaymentStatusReport pacs. 002.001.12)	119
6.2	Message building blocks	119
6.2.1	GroupHeader <GrpHdr>	124
6.2.2	TransactionInformationAndStatus <TxInfAndSts>	126
7	FIToFIPaymentStatusRequest (pacs.028.001.05)	156
7.1	Message structure (FIToFIPaymentStatusRequest pacs.028.001.05)	156
7.2	Message building blocks	156
7.2.1	GroupHeader <GrpHdr>	156
7.2.2	TransactionInformation <TxInf>	157
8	PaymentReturn (pacs.004.001.11)	158
8.1	Message structure (PaymentReturn pacs.004.001.11)	158
8.2	Message building blocks	160
8.2.1	GroupHeader <GrpHdr>	160
8.2.2	TransactionInformation <TxInf>	165
9	Requests from the payee's bank and verification request (acmt.023.001.03 IdentificationVerificationRequestV02)	169
9.1	Message structure	169
9.2	Description of the message items	170
9.2.1	Assignment <Assgnmt>	170
9.2.2	Verification <Vrfctn>	175

- 10 Response message (acmt.024.001.03 IdentificationVerificationRequestV02)..... 177
 - 10.1 Message structure 177
 - 10.2 Description of the message items..... 180
 - 10.2.1 Assignment <Assgnmt> 180
 - 10.2.2 OriginalAssignment <OrgnlAssgnmt> 185
 - 10.2.3 Report <Rpt> 186

Specification Update and Version History

Version	Release Type	Release Date	Summary Of Changes	Impact Analysis
1.0.0	Initial Release	-	Initial Release	Initial draft
1.0.1	minor non-Breaking	10-11-2023	Added Error Codes. Corrected Return Payment Message Flow Diagram and description (section 3.1.5)	
1.1.1	Minor non-breaking	23-11-2023	Updated credit advice chapters and section as below. chapter 3 section 3.1 Chapter 1 section 1.6 added chapter 4 section 4.1.2 to 4.1.5 chapter 5 updated chapter 6 updated chapter 7 updated	
1.1.2	minor non-Breaking	08-03-2024	Mark mandatory fields	
1.1.3	minor non-Breaking	17-04-2024	Correct pmttpinfo position in pacs008,pacs002 and exclude from pacs004. New error codes defined Some logical corrections.	
1.1.4	minor non-Breaking	27-05-2024	Merged the QR related changes to	

			Specs and added <tax> tag	
1.1.4	minor non-Breaking	15-07-2024	Category purpose updated and some discrepancies resolved	
1.1.5	minor non-Breaking	20-08-2024	Tags added and reason codes updated	

1 Scope and functionality

1.1 Background

This document covers messages that comply with the ISO 20022 financial messaging standard (Financial services – Universal financial industry message scheme). It specifically describes only those messages that are intended to be implemented for the Instant Payment System.

The terms used in this document are reserved words defined in the ISO 20022 Edition 2021. When these terms are utilized in this document, they will be presented in the UpperCamelCase notation (for example, TxId or MsgId).

The set of specifications includes the following documents:

1. sv_ip__how-to_specification_en_core (general instructions for all IPS specifications)
2. sv_ip__specification_bah_en_core (specification).
3. sv_ip__specification_payment_en_core (payment specification).
4. sv_ip_specification_rtp_en_core (specification related to Request to pay transactions).
5. sv_ip_specification_payment_cancellation_en_core(payment cancellation specification).

1.2 Scope

To facilitate the initiation, execution, and management of payments, as well as the monitoring of their statuses, this document outlines a set of messages exchanged between a payer and their participant (or a payee and their participant) through the Instant Payment System. All message flows detailed in this document pertain to the credit transfer payment (referred to as "payments" hereafter), which involve the transfer of funds initiated by the sender.

1.3 Document purpose

The main purpose of this document is as follows:


- To describe the message flows related to payments
- To provide business examples
- To outline the message formats and respective field values

1.4 Introduction

The purpose of a payment operation is to transfer funds from the initiator participant to the receiving participant. This operation consists of two independent parts: optional account verification (verification request) of the payee's account and authorization of the credit transfer payment (payment request). The verification request is not time-bound to the payment request.

1.5 Common flow

A standard sequence of messages necessary to successfully complete a credit transfer is presented in the diagram below. The diagram also includes optional steps such as requesting the status of the message and returning the payment. Refer to the following sections for a detailed description of all the flows.

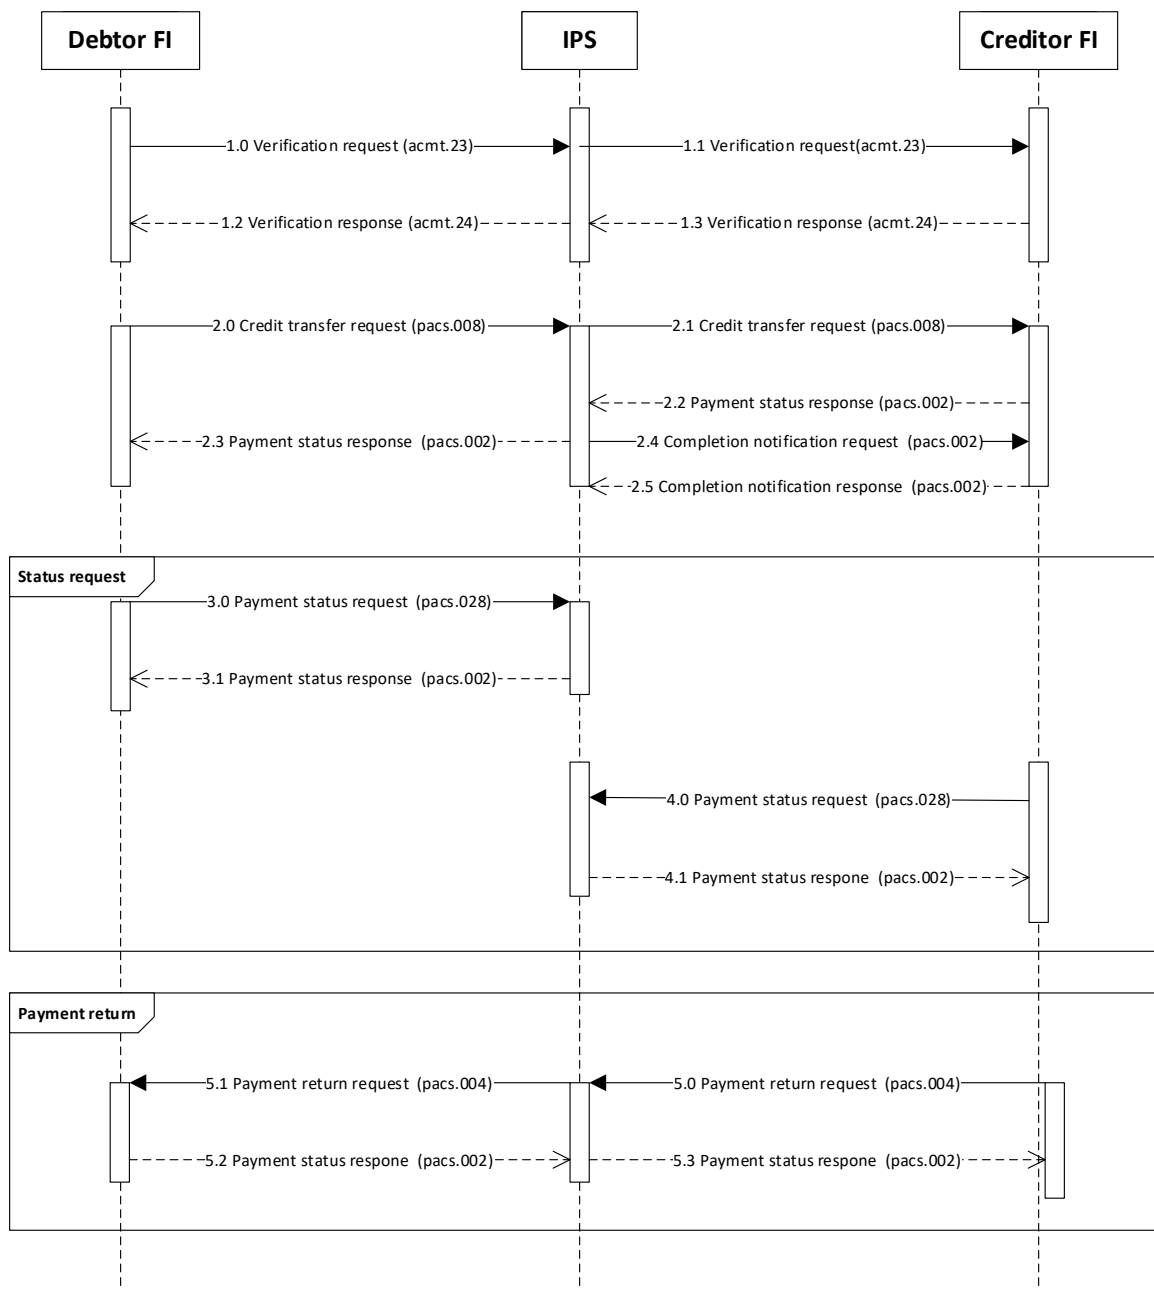

Steps 1.0 – 1.3 represent the payee verification flow

Steps 2.0 – 2.5 depict the credit transfer flow, which is a critical component of the payment process

Steps 3.0 – 4.1 involve payment status requests which are initiated in case of a timeout or to retrieve the current status of the operation.

Steps 5.0 - 5.3 involve an exception flow for a payment return initiated by a payee participant.

Upon completion the online sequence flow, IPS will distribute a transaction registry file to each participant, that contains all completed operations.

1.5.1 Recommendations for a payer's financial institution regarding funds holding

The payment amount must be held on a payer's account until the payer's participant (Creditor) receives information regarding the final payment status from IPS in one of the following objects:

- 1) Response to the 2.0 request from IPS.
- 2) Response to the 3.0 request (payment status request) from IPS.
- 3) Transaction registry file.

Incoming message type defines the flow (business process) to be initiated.

1.6 SAF Mechanism

The Store and Forward (SAF) mechanism is a crucial feature in payment systems designed to ensure transaction continuity and integrity, especially during periods of connectivity issues or system failures.

It minimizes disruptions from the customer's perspective, providing a seamless payment experience.

SAF is a backup process that temporarily stores electronic payment transactions when they cannot be processed in real time due to network disruptions or system outages. This mechanism ensures that transactions are not lost and can be processed once normal operations resume.

SAF Mechanism:

Transactions are stored when there is a disruption in the network connection or in case of a failure or downtime in the payment processor's system, transactions can't be processed in real time and are thus stored.

The primary purpose of storing transactions is to prevent data loss during connectivity or system issues. This ensures that every transaction initiated by a customer is captured and not lost, by storing transactions, payment systems can maintain continuous service.

SAF is configured within the payment system, defining how the data is captured, the format it's stored in, and how long it is retained before being processed or discarded. When a transaction is initiated, the SAF mechanism captures all details like the amount, date, time, payment information, and merchant details etc. The system is programmed to periodically retry sending the stored transactions to the payment processor once connectivity is restored or the system issue is resolved.

Settlement Process:

Involves periodic retries of these advice messages (e.g., every 15 minutes) until the next settlement period closure or a predetermined number of attempts (such as 10) is exceeded.

Upon the closure of the settlement period, reconciliation files are sent to the involved parties.

This marks the end of the SAF retries, concluding the transaction process for that settlement period.

1.7 Logic For Static Data

SV IPS stores and transmits all data contained within the sub-tags of the specified upper-level tags listed below to the receiver if the incoming message successfully passes XSD validation for the specified upper-level tags.

pacs.002 message will also contain all the same data point under the **OriginalTransactionReference<OrgnlTxRef>**, with the exception of the <Tax> tag. As <Tax> tag is not included into <OrgnlTxRef> as per the iso20022 standard.


These upper-level tags are from iso20022 standard documentation and part of pacs.008.01.10 and pacs002.01.12 versions.

The upper-level tags are as below:

<Cdtr>
 <CdtrAcct>
 <Dbtr>
 <DbtrAcct>
 <UltmtCdtr>
 <UltmtDbtr>
 <InstdAgt>
 <InstgAgt>
 <Tax>

2 Payee verification process flow

The message is sent either between financial institutions or from a financial institution to a non-financial institution. It is sent prior sending a payment request in order to verify the party and/or account identification information.

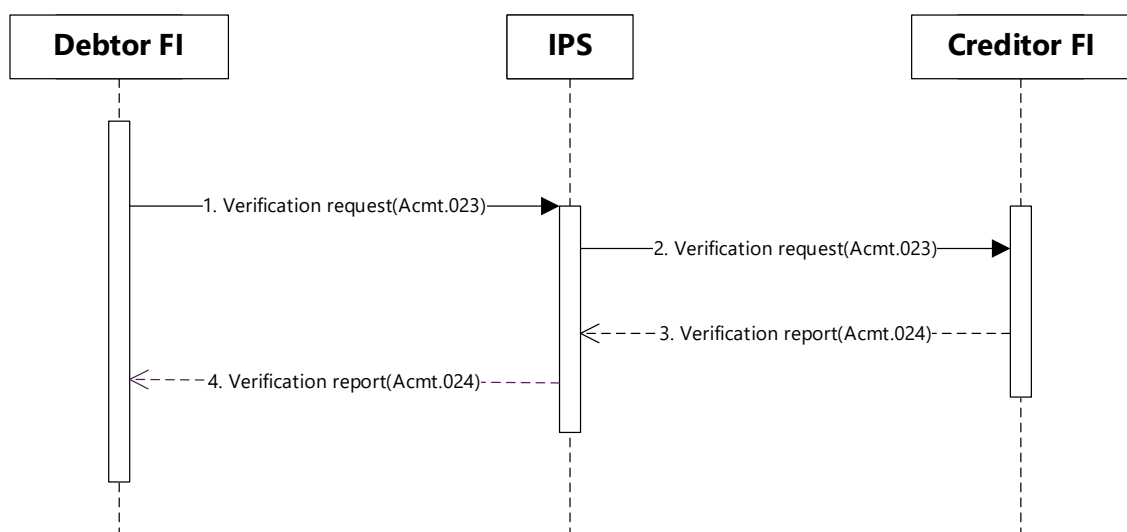

The steps and related information are listed in the table below.

Nº	Directions	Description	Format
1	Debtor FI->IPS	Verification request	Acmt.023.001.03
2	IPS->Creditor FI	Verification request	Acmt.023.001.03
3	Creditor FI->IPS	Verification report	Acmt.024.001.03
4	IPS->Debtor FI	Verification report	Acmt.024.001.03

2.1 Exception flow

The following exceptions may occur:

- If Creditor FI does not receive a response to IPS, IPS sends acmt.024 with verification flag equal to False and with time-out reason response to Debtor FI.
- If the Debtor FI does not receive response from IPS, Debtor FI must send a new verification request. In such cases, IPS assigns a new unique transaction identifier to the account verification request (see specifications how-to guide for details).

2.2 Example — Payee verification API call

An example of a payee verification API call is provided below.

A detailed description of the verification flow is provided in the document [3].

2.2.1 Description of the main fields

Name	Description
Transaction ID (id)	Unique transaction identifier that is generated by IPS. A payer's participant must specify this identifier when requesting authorization of the payment transaction.
Message id (MsgId)	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
BIC	Participant identifier.

Name	Description
ClearingID	Unique identifier that determines the account at the payee's participant to which the funds must be credited. A payer's participant must specify ClearingID when requesting authorization of the payment transaction. Using ClearingID, the payee's participant accurately identifies the account to be credited.
ClearingType	Clearing ID type: • MSIS — mobile phone number • ACCT — account number • EWLT — e-wallet identifier • ALIS — alias identifier
RecipientPAM	Payee's PAM.
Status	Verification request processing status in IPS or the participant.

2.2.2 Example of API verification request(acmt.023)

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document> <FIToFICstmrCdtTrf>		
GroupHeader	<GrpHdr>		

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
MessageIdentification	<MsgId>	123456789	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
CreationDateTime	<CreDtTm>	2022-11-16 19:44:55	The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
NumberOfTransactions	<NbOfTxes>	1	
SettlementMethod	<SttlmInf>/<SttlmMtd>	CLRG	
Message root	<Document> <IdVrfctnReq>		
Assignment	<Assgnmt>		
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Assigner	<Assgnr>/<Agt>/<Fin InstnId>/<Othr>/<Id>	044525700	BIC (participant that is requesting PAM).
Assignee	<Assgne>/<Agt>/<Fin InstnId>/<Othr>/<Id>	044525974	BIC (participant that is generating PAM).
Verification	<Vrfctn>		Vrfctn as the first tag in next three rows. Only one PAM is requested.
Identification	<Id>	044525700810012 1234567891236	Unique transaction identifier assigned in IPS. It must be empty in the initial request from the payer's participant. IPS generates the ID and populates the field in the message to the payee's participant.
PartyAndAccountIdentification/Identification	<PtyAndAcctId>/<Pty>/<Acct>/<Othr>/<Id>	1234567890	ClearingID.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
PartyAndAccountIdentification / SchemeName	<PtyAndAcctId>/<Pty>/<Acct>/<Othr>/<SchemeNm>/<Prtry>	ACCT	ClearingType.

2.2.3 Response message with PAM and ClearingID(acmt.024)

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document> <IdVrfctnRpt >		
Assignment	<Assgnmt>		
MessageIdentification	<MsgId>	987654321	Unique ID for message check.
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
Assigner	<Assgnr>/<Agt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Assignee	<Assgne>/<Agt> /<FinInstnId>/ <Othr>/<Id>	044525700	BIC.
OriginalAssignment	<OrgnlAssgnmt>		
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
Report	<Rpt>		The response always contains only one report.
OriginalIdentification	<OrgnlId>	044525700810012123	Unique transaction identifier that is the same as the ID from the request.
Verification	<Vrfctn>	True	Indicator: • true — correctly identified. • false — incorrectly identified.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Reason	<Rsn>/<Prtry>	MISS	Reason that the verified identification information is incorrect. Absent in successful verification response
OriginalPartyAndAccountIdentification/Identification	<OrgnlPtyAndAcctId>/<Pty>/<Acct>/<Othr>/<Id>	1234567890	Original ClearingID.
OriginalPartyAndAccountIdentification/SchemeName	<OrgnlPtyAndAcctId>/<Pty>/<Acct>/<Othr>/<SchemeNm>/<Prtry>	ACCT	Original ClearingType.
UpdatedPartyAndAccountIdentification/Name	<UpdtdPtyAndAcctId>/<Pty>/<Nm>	Mylah D.	Provided payee's PAM.
UpdatedPartyAndAccountIdentification/Account	<UpdtdPtyAndAcctId>/<Acct>/<Id>/<Othr>/<Id>	R123456789111	Provided ClearingID. It can be the same as the original.
UpdatedPartyAndAccountIdentification/SchemeName	<UpdtdPtyAndAcctId>/<Acct>/<Id>/<Othr>/<SchemeNm>/<Prtry>	EWLT	Provided ClearingType. It can be the same as the original.


2.2.4 Negative response message(acmt.024) on verification request

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document> <IdVrfctnRpt >		
Assignment	<Assgnmt>		
MessageIdentification	<MsgId>	CBETETAAXXX324 214266346349077 057	Unique ID for message check.
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
Assigner	<Assgnr>/<Agt>/<FinInstnId>/<Othr>/<Id>	CBETETAAXXX	BIC.
Assignee	<Assgne>/<Agt>/<FinInstnId>/<Othr>/<Id>	ABYSETAAXXX	BIC.
OriginalAssignment	<OrgnlAssgnmt>		
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
MessageIdentification	<MsgId>	CBETETAAXXX2023083002275658275250	Unique ID or original message acmt.023
Report	<Rpt>		The response always contains only one report.
OriginalIdentification	<OrgnlId>	CBETETAAXXX324214100000018328	Unique transaction identifier that is the same as the ID from the request.
Verification	<Vrfctn>	False	Indicator: • true — correctly identified. • false — incorrectly identified.

3 Payment (Credit transfer)

For payment transfers, the customer initiates the request through the FI channel. Payee verification is carried out in the preceding step of transaction, in other words, the payee details associated with the user identifier are provided to the payer customer, who then proceeds to initiate the payment request.

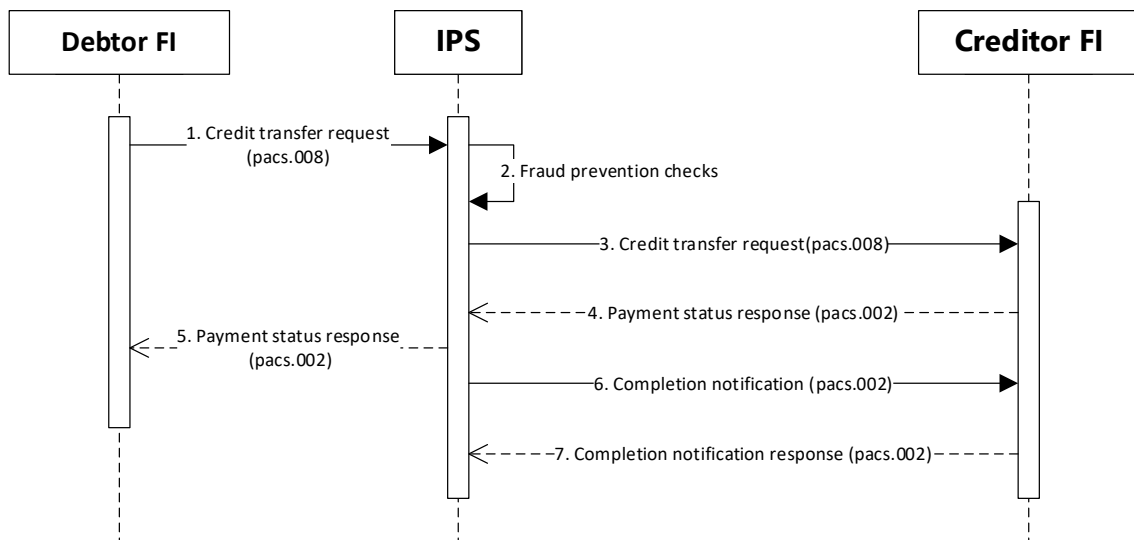


The steps and related information are listed in the table below.

Nº	Directions	Description	Format
1	Debtor FI->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Fraud prevention checks	
3	IPS->Creditor FI	Credit transfer request	pacs.008.001.10
4	Creditor FI ->IPS	Payment status response	pacs.002.001.12
5	IPS-> Debtor FI	Payment status response	pacs.002.001.12

Nº	Directions	Description	Format
6	IPS-> Creditor FI	Completion notification	pacs.002.001.12
7	Creditor FI ->IPS	Completion notification response	pacs.002.001.12

3.1 Payment (Credit Transfer Advice mode)

In the Request to Pay payment scenario, once the **pacs.008** credit payment request has been validated, assurance is provided according to IPS schema rules. To streamline the credit transfer process, a Credit payment Advice is used instead of the payer account authorization procedure, with the **SAF** mechanism ensuring the reliable delivery of the advice message.

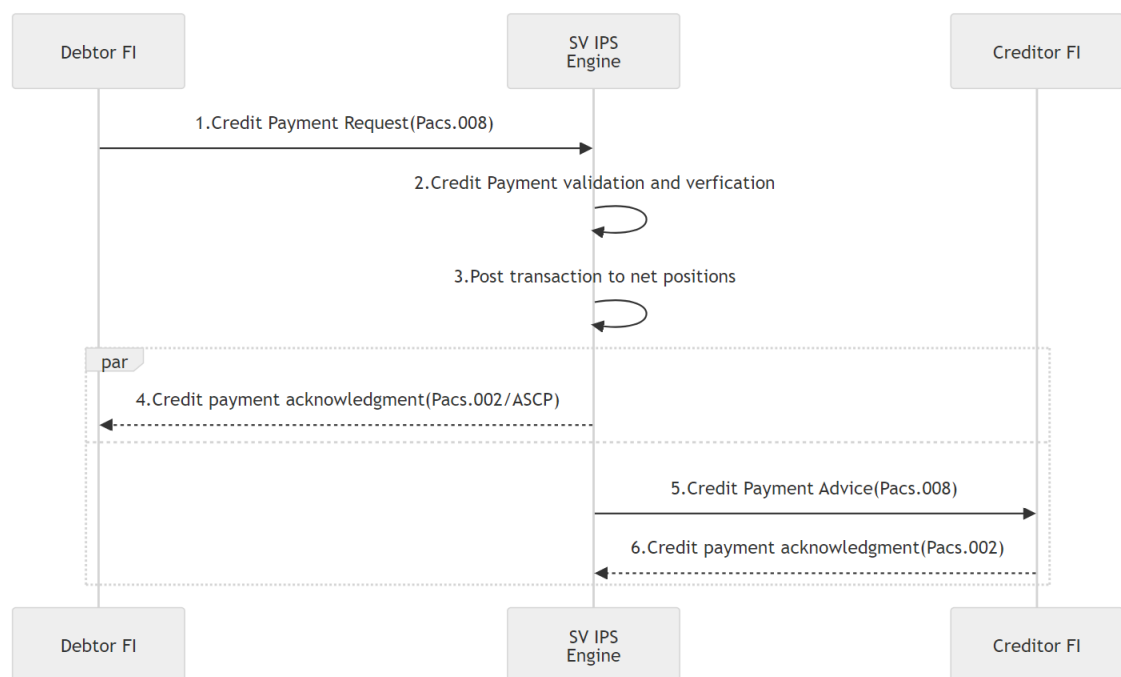

Note that 4. Credit Payment Acknowledgment and 5. Credit Payment Advice work concurrently and independently of the response to the Debtor. It is crucial to highlight that, in the event of a successful completion of step 2, IPS promptly proceeds to post the operation to participants' balances.


Nº	Directions	Description	Format
1	Debtor FI->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Incoming pacs008 is validated and verified successfully. IPS will prompt to Debtor FI with pacs.002/ASCP acknowledgment.	Pacs.002.001.12
3	IPS	In the event of a successful completion of step 2, IPS promptly proceeds to post the operation to participants' balances.	
4	IPS-> Debtor FI	Credit payment acknowledgement	pacs.002.001.12
5	IPS-> Creditor FI	Credit Payment Advice	pacs.008.001.10
6	Creditor FI ->IPS	Credit payment advice acknowledgement	pacs.002.001.12

Validation rules:

- Transaction ID must be unique, it should not be duplicated.
- Limit of "initiating" participant enough to perform credit transfers.
- Validate Debtor and Creditor.
- Validate permissions (incoming/outgoing) for both transferred participants.
- Validate accounts.
- Validate transaction currency.

3.2 Exception flows

3.2.1 Decline by Business validation failed

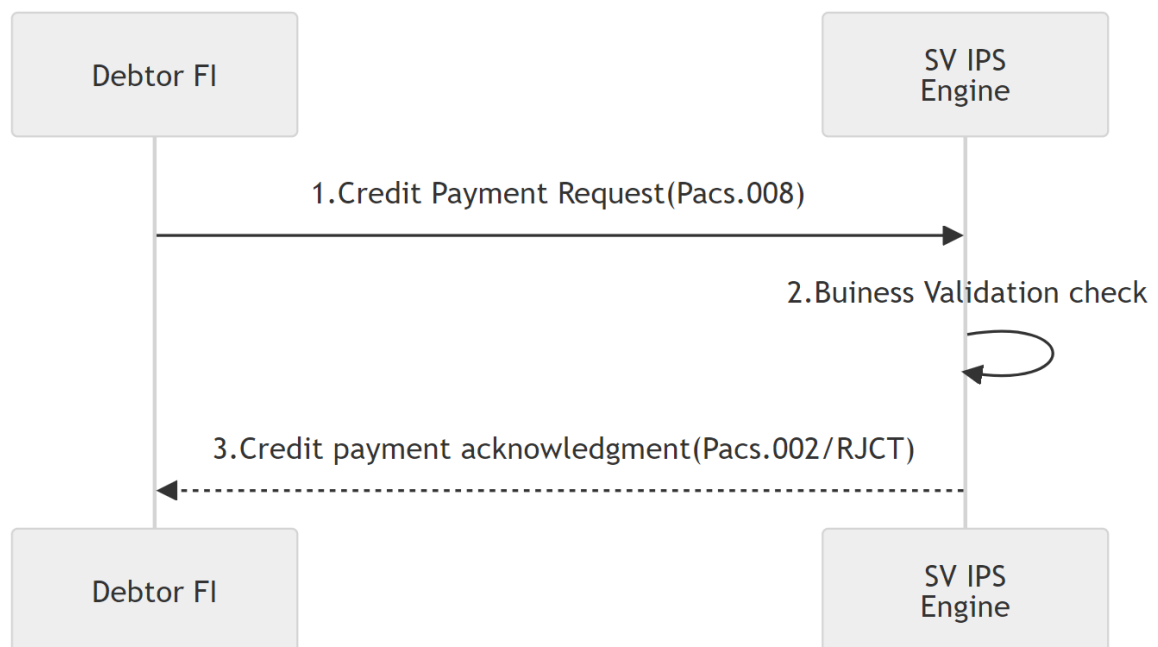

The steps and related information are listed in the table below.


Nº	Directions	Description	Format
1	Debtor FI ->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Business validation checks	
3	IPS-> Debtor FI	Payment status response with the decline status	pacs.002.001.12

Error codes associated with above rejection are:

Reason	Reason tag	AdditionalInformation tag
LimitExceeded	LTXD	Limit Exceeded in IPS.
SettlementAccountNotFound	SANF	Participant's Settlement account missing.
WrongBIC	WBIC	Participant's BIC was not found in IPS.
DuplicateTransactionID	DTID	TxID duplicate in IPS.
IncorrectTransactionId	ITID	Request from a participant contains the incorrect TxID.
IncorrectTransactionAmount	INVC	payment transaction amount or currency is invalid
RqstTypFrbdnSenPart	RFSP	Request type is forbidden for sending participant
RqstTypFrbdnRecPart	RFRP	Request type is forbidden for receiving participant
InvldDebtBIC	IVDT	Debitor BIC indetifier is invalid or missing
InvldCrdtBIC	IVCT	Debitor BIC indetifier is invalid or missing
OrgRtpExpd	ORXP	Original RTP is already expired.

OrgRtpPaid	ORPD	Original RTP is already paid.
OrgRtpCncld	ORCD	Original RTP is already Canceled.
OrgRtpDecline	ORDC	Original RTP is already declined
OrgRtpExpired	ORXP	RTP expiration date cannot be in the past/RTP is over maximum allowed expiration date
Invalidrtppayment	IVRP	Amount does not match the original RTP

3.2.2 Decline by fraud prevention check

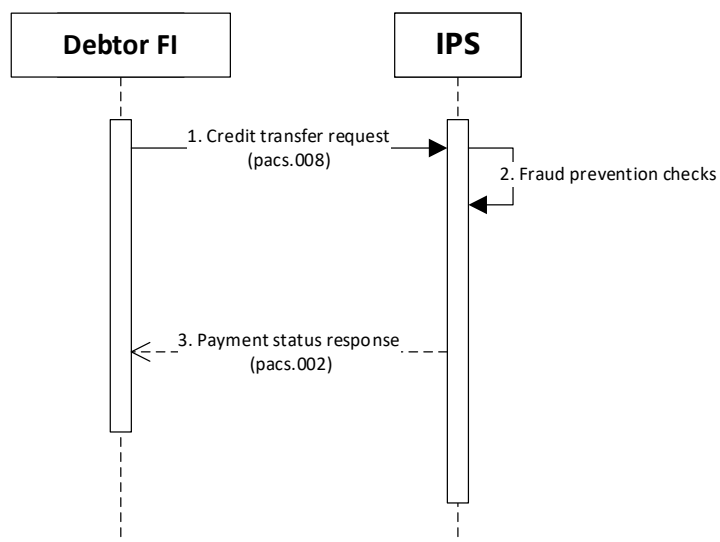

The steps and related information are listed in the table below.


Nº	Directions	Description	Format
1	Debtor FI ->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Fraud prevention checks	
3	IPS-> Debtor FI	Payment status response with the decline status	pacs.002.001.12

The same sequence of actions is used in the case of insufficient funds in the participant's account.

The error codes for rejections are provided in the table below.

Reason	Reason tag	AdditionalInformation tag
Insufficient funds to proceed with the operation.	LTXD	Limit exceeded
Negative response while fraud check	FRAD	Fraud operation

3.2.3 Timeout from Creditor FI

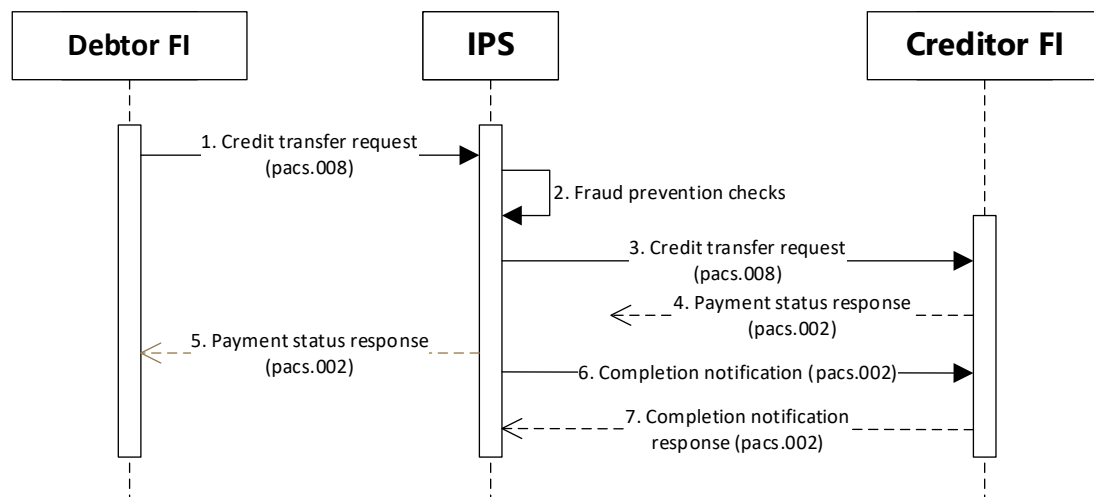


The steps and related information are provided in the table below.

Nº	Directions	Description	Format
1	Debtor FI ->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Fraud prevention checks	
3	IPS->Creditor FI	Credit transfer request	pacs.008.001.10
4	Creditor FI ->IPS	Payment status response is not delivered	pacs.002.001.12(ACSC)
5	IPS-> Debtor FI	After timeout IPS sends and authorization response with the decline status	pacs.002.001.12(RJCT)
6	IPS-> Creditor FI	Completion notification with the decline status	pacs.002.001.12(RJCT)
7	Creditor FI ->IPS	Completion notification response	pacs.002.001.12(RJCT)

The error codes for rejections are provided in the table below.

Reason	Reason tag	AdditionalInformation tag
Timeout from destination participant	TXTO	Transaction Timeout
Invalid signature on the receiving end	ISRE	InvalidSigRecv.


3.2.4 Timeout from IPS to Debtor FI

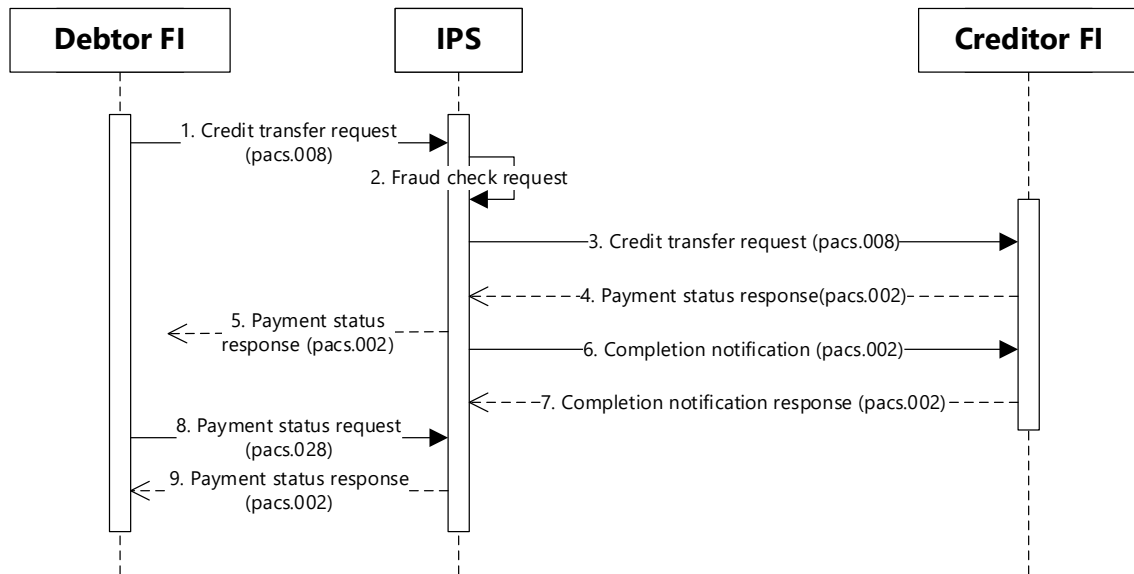

The steps and related information are provided in the table below.

Nº	Directions	Description	Format
1	Debtor FI ->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Fraud prevention check	
3	IPS-> Creditor FI	Credit transfer request	pacs.008.001.10
4	Creditor FI ->IPS	Payment status response	pacs.002.001.12
5	IPS-> Debtor FI	Payment status response is not delivered to Debtor FI	pacs.002.001.12
6	IPS-> Creditor FI	Completion notification	pacs.002.001.12
7	Creditor FI ->IPS	Completion notification response	pacs.002.001.12
8	Debtor FI ->IPS	Payment status request	pacs.028.001.05
9	IPS-> Debtor FI	Payment status response	pacs.002.001.12

3.2.5 Timeout from IPS to Creditor FI

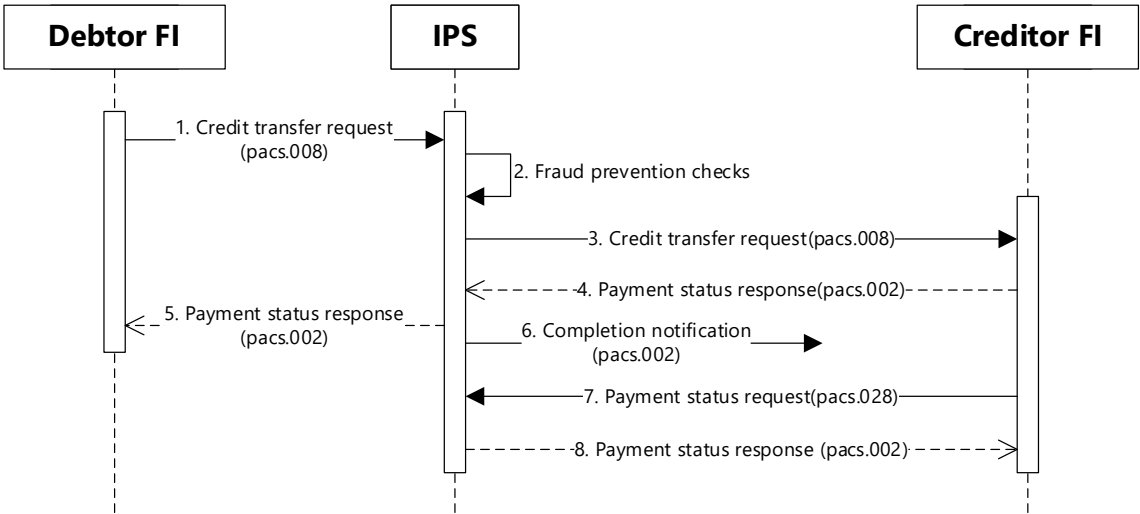


The steps and related information are provided in the table below.

Nº	Directions	Description	Format
1	Debtor FI ->IPS	Credit transfer request	pacs.008.001.10
2	IPS	Fraud prevention checks	
3	IPS->Creditor FI	Credit transfer request	pacs.008.001.10
4	Creditor FI ->IPS	Payment status response	pacs.002.001.12
5	IPS->Debtor FI	Payment status response	pacs.002.001.12
6	IPS->Creditor FI	Completion notification is not delivered to Participant 2	pacs.002.001.12
7	Creditor FI->IPS	Transaction status request	pacs.028.001.05
8	IPS->Creditor FI	Transaction status response	pacs.002.001.12

3.2.6 Return payment request for a successful credit transfer

Return payment is used to make a full return payment operation after a payment operation. The initiator of the return payment is the recipient of funds (Creditor) in the original payment. It is possible to initiate a return payment within the current day or next calendar day.

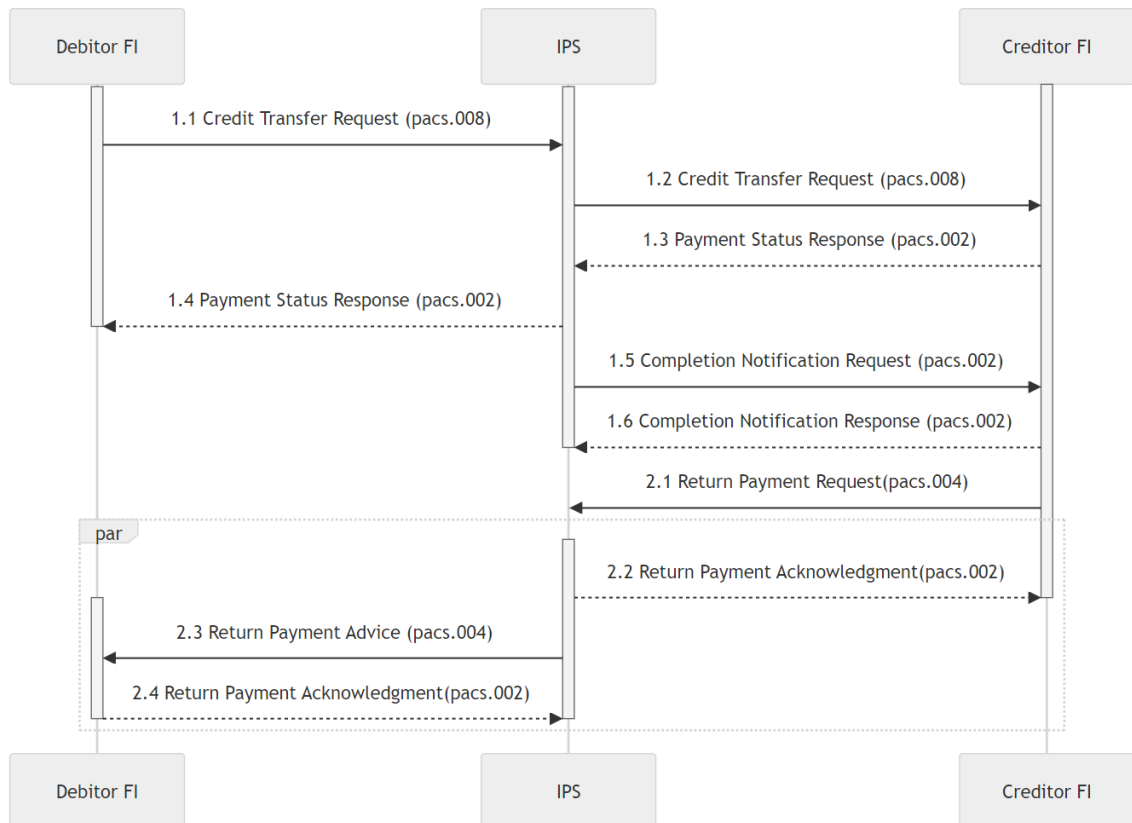


Return payment (pacs.004) is used to return an incoming payment (pacs.008 ISO 2022 message) from the Debtor FI participant to the recipient – creditor FI participant.

In the return payment scenario, once the **pacs.004** return payment request has been validated, assurance is provided according to IPS schema rules. To streamline the credit return process, a Credit Return Advice is used instead of the payee account authorization procedure, with the **SAF** mechanism ensuring the reliable delivery of the advice message.

Note that 2.2 Payment Return Acknowledgment and 2.3 Return Payment Advice works concurrently and independently of the response to Creditor.

3.2.6.1 Success flow

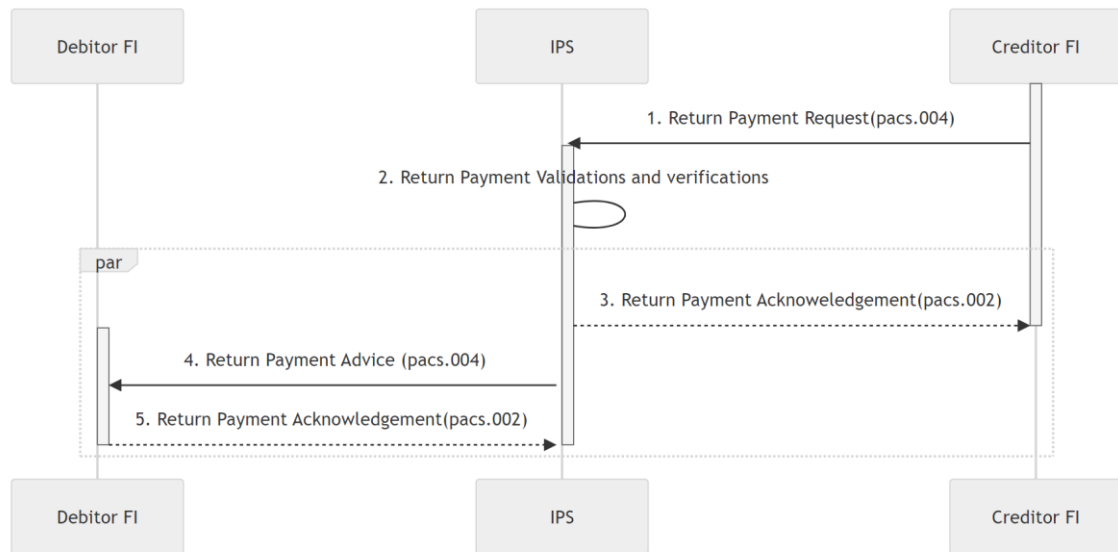

The steps and related information are provided in the table below.


Nº	Directions	Description	Format
1	Original Creditor->IPS	Return payment request	pacs.004.001.11
2	IPS	Validate payment return message, search original operation, check participant limits	
3	IPS->Original Creditor	Return payment Acknowledgment	pacs.002.001.12/ACSC
4	IPS ->Original Debtor	Return payment Advice message. To be noted that return payment ack. And Advice message are concurrent activity and independent of response to creditor FI	pacs.004.001.11
5	Original Debtor -> IPS	Return payment Advice Acknowledgement	pacs.002.001.12/ACSC

Validation rules:

- Original operation present in the system
- There is no return payment for original operation
- Currency of original operation equal to payment return
- Amount of the return operation exactly equals the amount of the original operation
- Original payment operation was done in current calendar day or current day -1
- Limit of "original creditor" participant enough for perform payment return

At the EOD IPS will send reconciliation data of return payment to Original creditor and original debtor participants.

3.2.6.2 Exception flow: Original Debtor Timeout/Error

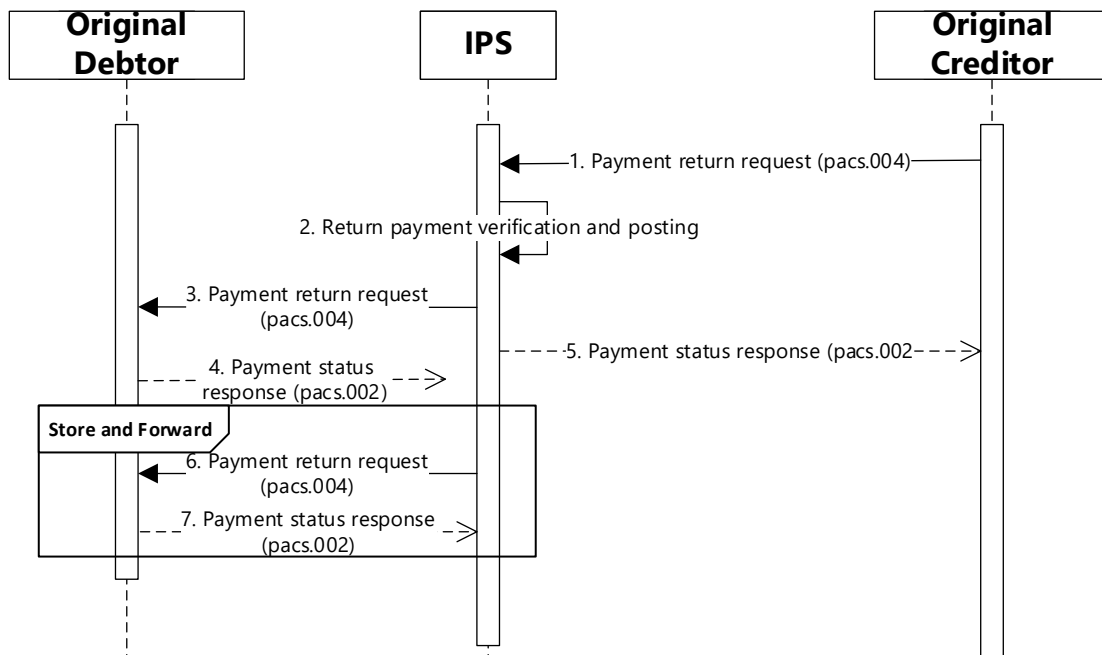


The steps and related information are provided in the table below.

Nº	Directions	Description	Format
1	Original Creditor->IPS	Return payment request	pacs.004.001.11
2	IPS	Validate payment return message and posting balance	
3	IPS-> Original Debtor	Return payment request	pacs.004.001.11

Nº	Directions	Description	Format
4	Original Debtor->IPS	Return payment response (Timeout) or resp code related to timeout (http status code 500 for example)	pacs.002.001.12/ACSC
5	IPS-> Original Creditor	Return payment response	pacs.002.001.12/ACSC
6	IPS-> Original Debtor	Payment Return request with Store and forward mechanism. Attempts to send message will be till the end of current settlement period or response from Original debtor.	pacs.004.001.11
7	Original Debtor->IPS	Successful return payment status response (ACSC) or duplicate of request (in case of step 3 was received)	pacs.002.001.12/ACSC

At the EOD IPS will send reconciliation data of return payment to Original creditor and original debtor participants even if message for Original Debit was not delivered.

3.2.6.3 Exception flow: IPS response timeout

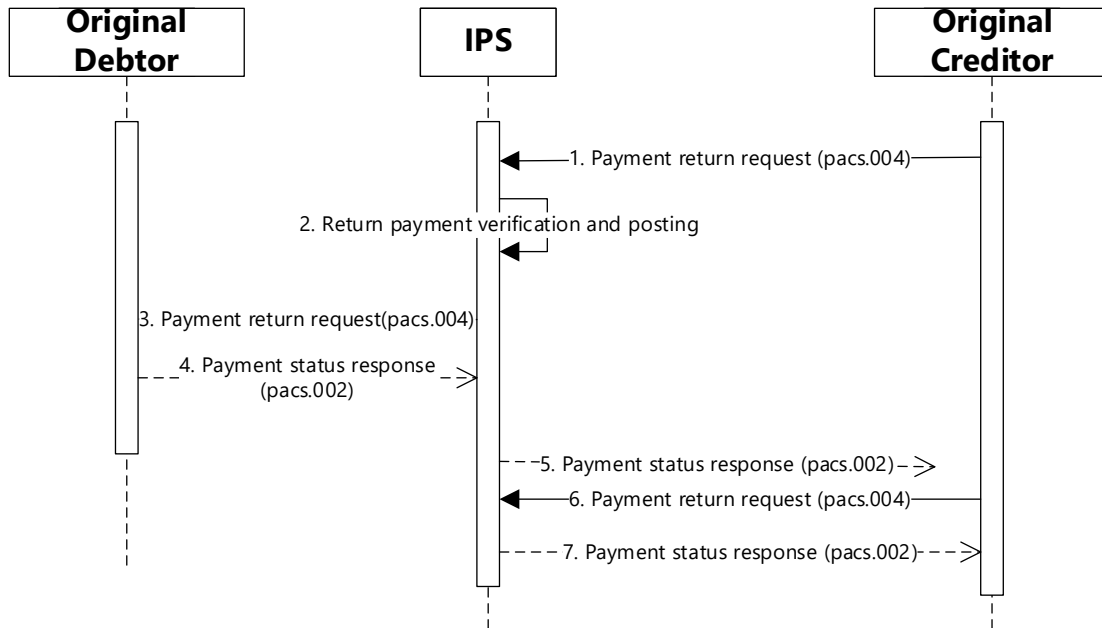


The steps and related information are provided in the table below.

Nº	Directions	Description	Format
1	Original Creditor->IPS	Return payment request	pacs.004.001.11
2	IPS	Validate payment return message and post the balance	
3	IPS-> Original Debtor	Return payment request	pacs.004.001.11
4	Original Debtor->IPS	Return payment response	pacs.002.001.12/ACSC
5	IPS->Original Creditor	Return payment response (Timeout)	pacs.002.001.12/ACSC
6	Original Creditor->IPS	Return payment request	Pacs.004.001.11
7	IPS->Original Creditor	Return payment status response with reject status and reason duplicate	pacs.002.001.12/RJCT

At the EOD IPS will send reconciliation data of return payment to Original creditor and Original debtor participants.

3.2.6.4 Exception flow: Validation on IPS side failed

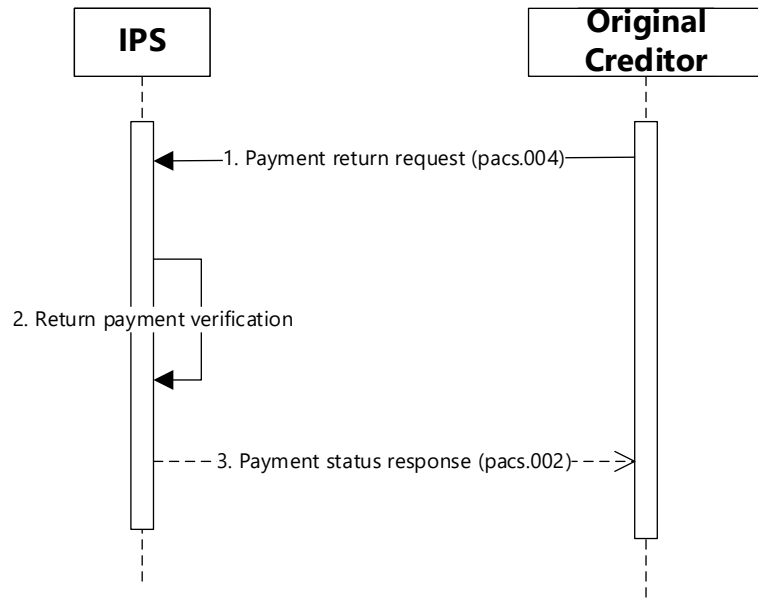

The steps and related information are listed in the table below.

Nº	Directions	Description	Format
1	Original Creditor->IPS	Return payment request	pacs.004.001.11
2	IPS	Validate payment return message and check participant limits Result of activity – negative response	
3	IPS-> Original Creditor	Return payment negative response	pacs.002.001.12/RJCT

Validation rules with negative result:

- Original operation present in the system – original operation was not found (OTNF)
- There is no return payment for original operation – original operation already has return payment (INSR)
- Currency of original operation equal to payment return – currencies are different (INVT)
- Amount of the return exactly equals the amount of the original operation – amount to be returned does not equal amount of the original operation (INVT)
- Original payment operation was processed in current calendar day or current day -1. – Original operation was processed earlier than current day -1 (INVD)
- Limit of the “original creditor participant” covers the payment return amount – Not enough funds to process the return (LTXD)

4 Business examples

4.1 Example of a payment

4.1.1 Description of the main fields

Name	Definition
Transaction ID (TxId)	Unique business transaction identifier that is generated by initiator participant. Used for operation status request.
Message id (MsgId)	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
End to End ID (EndToEndId)	Operation ID generated by the initiating side. It is used for investigation purposes. EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
UETR	Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.
ClearingID	Unique identifier that determines the account at the payee's participant to which the funds must be credited. The payer's participant can obtain this identifier from the following: • Invoice • During the verification procedure • Transfer or invoice initiated by an IPS partner Using ClearingID, the payee's participant accurately identifies an account to be credited.

Name	Definition
ClearingType	Clearing ID type: • MSIS — mobile phone number • ACCT — account number • EWLTL — e-wallet identifier • ALIS — alias identifier
BIC	Participant identifier.
Amount	Transfer amount.
Currency	Transfer currency.
Comment	Comments to the transfer.
Status	Transaction status in IPS or the participant
Payer name	Name of a payer. This is an optional field.
Payer account	Account of a payer from which the transfer has been made. This is an optional field.
Payer postal address	Payer's postal address. This is an optional field for additional authentication.
Purpose	Details about the payments concerning the nature of the payment.

The following examples are provided:

- Credit transfer request call during a payment request (pacs.008.001.10)
- Positive response message from IPS to payer's participant (pacs.002.001.12)
- FNegative response message from IPS to payer's participant (pacs.002.001.12)
- API call during a payment status request (pacs.028.001.05)
- Return payment call (pacs.004.001.11)

4.1.2 Credit Transfer Request/Advice (pacs.008.001.10)

Below is the explanation of message elements with examples for credit transfer request from debtor participant and advice mode from IPS to Creditor.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document> <FIToFICstmrCd tTrf>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	123456789	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
CreationDateTime	<CreDtTm>	2022-11-16 19:44:55	The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
NumberOfTransactions	<NbOfTxS>	1	Number of the transaction instruction in the message.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
SettlementMethod	<SttlmInf>/<SttlmMtd>	CLRG	Method used to settle the (batch of) payment instructions. CLRG specifies that settlement is performed through a payment clearing system.
ClearingSystem	<SttlmInf>/<ClrSys>/<Prtry>	FP	Channel through which the payment instruction is processed.
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC.
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC.
CreditTransferTransactionInformation	<CdtTrfTxInf>		

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
EndToEndIdentification	<PmtId>/<EndToEndId>	123456321654	Operation ID generated by the initiating side. It is used for investigation purposes. EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
TransactionIdentification	<PmtId>/<TxId>	044525700810012 1234567891234	Mandatory unique ID. It is generated by the initiated side and used for transaction status requests.
UETR	<CdtTrfTx>/<PmtId>/<UETR>	9f9733fd-160a-4214-9644-105e627d008c	Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.
PaymentTypeInformation/LocalInstrument	<PmtTpInf>/<LocalInstrument>/<Prtry>	CRTRM	Defines internal transaction processing mechanisms.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
PaymentTypeInformation/CategoryPurpose	<PmtTpInf>/<CategoryPurp>/<Prtry>	C2CCRT	Defines transaction channels and high-level category.
InterbankSettlementAmount	<IntrBkSttlmAmt>	USD 14.970	Currency/Amount. It is determined by IPS based on the instructed amount and charges rules defined by the payments network.
AcceptanceDateTime	<AcceptncDtTm>	2022-11-16 19:44:55	Date and time when debtor participant accepted the instruction from the payer and completed performing the necessary checks such as authorization, available balance check, limits check, and so on.
InstructedAmount	<InstdAmt>	USD 14.970	Currency/Amount. It is the transfer amount without any charges defined by the debtor. <InstdAmt Ccy="USD">14.97</InstdAmt>

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
ChargeBearer	<ChrgBr>	SLEV	Charge bearer is defined by IPS rules
Debtor	<Dbtr>/<Nm>	John	This name can be in Arabic but must be in UTF-8 encoding.
Email Address	<Dbtr>/<CtctDtls>/<EmailAdr>		Optional tag. Format details are in the message structure section of this document.
Mobile Number	<Dbtr>/<CtctDtls>/<MobNb>		Optional tag. Format details are in the message structure section of this document.
Street Name	<Dbtr>/<PstlAdr>/<StrtNm>		Optional tag. Format details are in the message structure section of this document.
Private ID	<Dbtr>/<Id>/<PrvtId>/<Othr><SchmeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.
PostalAddress	<Dbtr>/<PstlAdr>/<AdrLine>	London	Debtor's address.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
DebtorAccount	<DbtrAcct>/<Id>/<Othr>/<Id>	408178105111112 923438	Debtor's ClearingID.
SchemeName	<DbtrAcct>/<Id>/<Othr>/<SchemeNm>/<Prtry>	ACCT	Debtor's ClearingType.
DebtorAgent	<DbtrAgt>/<FinInstnId>/<Othr>/<Id>	044525700	Debtor's BIC.
CreditorAgent	<CdtrAgt>/<FinInstnId>/<Othr>/<Id>	044525974	Creditor's BIC.
Creditor	<Cdtr>/<Nm>	Bill	Name of the creditor Party. This name can be in Arabic but must be in UTF-8 encoding.
Country of residence	<Cdtr>/<CtryOfRes>		Optional tag. Format details are in the message structure section of this document.
Town Name	<Cdtr>/<PstlAdr>/<TwnNm>		Optional tag. Format details are in the message structure section of this document.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Sub Department	<Cdtr>/<PstlAdr>/<TwnNm>/<SubDept>		Optional tag. Format details are in the message structure section of this document.
Name	<Cdtr>/<CtctDtls>/<Nm>		Optional tag. Format details are in the message structure section of this document
Department	<Cdtr>/<CtctDtls>/<Dept>		Optional tag. Format details are in the message structure section of this document.
Channel Type	<Cdtr>/<CtctDtls>/<Othr>/<IdChanlTp>		Optional tag. Format details are in the message structure section of this document.
Channel ID	<Cdtr>/<CtctDtls>/<Othr>/<Id>		Optional tag. Format details are in the message structure section of this document.
CreditorAccount	<CdtrAcct>/<Id>/<Othr>/<Id>	R123456789111	Creditor's ClearingID.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
SchemeName	<CdtrAcct>/<Id>/<Othr>/<SchemeNm>/<Prtry>	EWLT	Creditor's ClearingType.
Ultimate Creditor	<UltmtCdtr>/<Id>/<PrvtId>/<Othr>/<SchemeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.
InstructionForNextAgent	<InstrForNxtAgnt>/<InstrInf>	0445257777	It is a conditional field, however it is mandatory if PaymentTypeInformation = C2BBPT. For bill payments it is the BIC of the biller.
Purpose	<Purp>	ONLPUR	Defines operation purpose (gambling, flight tickets, online purchase, etc.)
RegulatoryReporting	<RgltryRptg>		Optional tag. Format details are in the message structure section of this document.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Tax	<Tax>		Optional tag. Format details are in the message structure section of this document.
RemittanceInformation /Structured/RefredDoc Info	<RmtInf>/<Strd>/<RfrdDocInf>		Optional tag. Format details are in the message structure section of this document.
RemittanceInformation /Structured/Type	<RmtInf>/<Strd>/<Tp>/<CdOrPrtry>/<Prtry>	BILL	Identification of bill payment type information.
RemittanceInformation /Structured/Number	<RmtInf>/<Strd>/<Nb>	GG123456789	Identifier of the bill. It is a conditional field; however it is mandatory if PaymentTypeInformation = C2BBPT .
ReferredDocumentAmount	<RmtInf>/<Strd>/<RfrdDocAmt>		Optional tag. Format details are in the message structure section of this document
RemittanceInformation / Unstructured	<RmtInf>/<Ustrd>	Transferring my funds	Comment.

4.1.3 Positive response message from IPS to payer's participant (pacs.002.001.12)

When receiving a positive response from a payee's participant (044525974), IPS sends a positive response to a payer's participant (044525700) to notify it about the successfully completed funds transfer.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<FI ToFIPmtStsRpt>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	348729758	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC.
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
TransactionInformationAndStatus	<TxInfAndSts>		
OriginalEndToEndIdentification	<OrgnlEndToEndId>	123456321654	Operation ID generated by the initiating side. It is used for investigation purposes. EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
OriginalMessageNameIdentification	<OrgnlGrpInf><OrgnlMsgNmId>	pacs.008.001.10	Type of the original message.
OriginalMessageIdentification	<OrgnlGrpInf><OrgnlMsgId>	123456789	Reference on MsgId from the original message.
OriginalTransactionIdentification	<OrgnlTxId>	044525700810012 1234567891234	Reference on TxId from the original message.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalInstructionIdentification	<OrgnlInstrId>	044525700810012 1234567891234	Reference on Instructionid from the original message. In Payment return it will be reference to original credit transfer message instruction.
OriginalUETR	<OrgnlUETR>	9f9733fd-160a-4214-9644-105e627d008c	Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.
TransactionStatus	<TxSts>	ACSC	Status.
AcceptanceDateTime	<AcceptncDtTm>		Date and time when debtor participant accepted the instruction from the payer and completed performing the necessary authorization checks.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/InterbankSettlementAmount	<OrgnlTxRef>/<IntrBkSttlmAmt>	USD 14.970	Currency/Amount. It is determined by IPS based on the instructed amount and any charges rules defined by the payments network.
OriginalTransactionReference/InstructedAmount	<OrgnlTxRef>/<Amt>/<InstdAmt>	USD 14.970	Currency/Amount. The original transfer amount as defined by the debtor.<InstdAmt Ccy="USD">14.97</InstdAmt>
PaymentTypeInfoInformation/LocalInstrument	<PmtTpInf>/<LclInstrm>/<Prtry>	CRTRM	Defines internal transaction processing mechanisms.
PaymentTypeInfoInformation/CategoryPurpose	<PmtTpInf>/<CtgyPurp>/<Prtry>	C2CCRT	Defines transaction channels and high-level category.for e.g (C2CCRT refers to regular payment).
OriginalTransactionReference/Debtor	<OrgnlTxRef>/<Dbtr>/<Nm>	John	Payer name, this name can be in Arabic but must be in UTF-8 encoding.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Email address	<OrgnlTxRef>/<Dbtr>/<CtctDtls>/<EmailAdr>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Mobile Number	<OrgnlTxRef>/<Dbtr>/<CtctDtls>/<MobNb>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Street number	<OrgnlTxRef>/<Dbtr>/<PstlAdr>/<StrtNm>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Private ID	<OrgnlTxRef>/<Dbtr>/<Id>/<PrvtId>/<Othr>/<SchmeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Debtor postal address	<OrgnlTxRef>/<Dbtr>/<PstlAdr>/<AdrLine>	London	Payer postal address.
OriginalTransactionReference/DebtorAccountID	<OrgnlTxRef>/<DbtrAcct><Id>/<Othr>/<Id>	408178105111112 923438	Payer's ClearingID.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/DebtorAccount	<OrgnlTxRef>/<DbtrAcct>/<Id>/<Othr>/<SchmeNm>/<Prtry>	ACCT	Payer's ClearingType.
OriginalTransactionReference/Creditor Postal address	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<AdrLine>	London	Payee's postal address.
OriginalTransactionReference/Creditor name	<OrgnlTxRef>/<Cdtr>/<Nm>	Smith	Payee's name.
OriginalTransactionReference/Country of residence	<OrgnlTxRef>/<Cdtr>/<CtryOfRes>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Town name	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<TwnNm>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Sub Department	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<TwnNm>/<SubDept>		Optional tag. Format details are in the message structure section of this document.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Name	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Nm>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Department	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Dept>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/ChnlTp	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<ChnlTp>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/ID	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Othr>/<Id>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/CreditorAccount	<OrgnlTxRef>/<CdtrAcct>/<Id>/<Othr>/<SchmeNm>/<Prtry>	ACCT	Payee's ClearingType.
OriginalTransactionReference/Ultimate Creditor	<OrgnlTxRef>/<UltmtCdtr>/<Id>/<PrvtId>/<Othr>/<SchmeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Purpose	<Orgn1TxRef>/<Purp>	ONLPUR	Defines operation purpose (gambling, flight tickets, online purchase, etc.)

4.1.4 Negative response message from IPS to payer's participant (pacs.002.001.12)

When receiving a negative response from a payee's participant (044525974), IPS sends a response message with a corresponding response code to a payer's participant (044525700).

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<FI ToFIPmtStsRpt>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	348729758	Unique ID for the message check. It is generated by initiating side and routed to the destination side as is.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC.
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC.
<u>TransactionInformation AndStatus</u>	<TxInfAndSts>		
OriginalEndToEndIdentification	<OrgnlEndToEndId>	123456321654	Operation ID generated by the initiating side. It is used for investigation purposes. EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
OriginalMessageNameIdentification	<OrgnlGrpInf><OrgnlMsgNmId>	pacs.008.001.10	Type of the original message.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalMessageIdentification	<OrgnlGrpInf><OrgnlMsgId>	123456789	Reference on MsgId from the original message.
OriginalTransactionIdentification	<OrgnlTxId>	044525700810012 1234567891234	Reference on TxId from the original message.
OriginalInstructionIdentification	<OrgnlInstrId>	044525700810012 1234567891234	Reference on Instructionid from the original message. In Payment return it will be reference to original credit transfer message instruction.
OriginalUETR	<OrgnlUETR>	9f9733fd-160a-4214-9644-105e627d008c	Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.
TransactionStatus	<TxSts >	RJCT	Status.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Originator	<StsRsnInf>/<Orgtr>/<Id>/<OrgId>/<Othr>/<Id>	FP	Party that issues the status: - FP — if the rejection initiator is IPS. - BIC — if the rejection initiator is a participant.
Reason	<StsRsnInf>/<Rsn>/<Prtry>	MISS	Error.
AdditionalInformation	<StsRsnInf>/<AddtlInf>	Missing	Error description.
AcceptanceDateTime	<AcptncDtTm>		Date and time when Debtor participant accepted the instruction from the payer and completed performing the necessary authorization checks.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/InterbankSettlementAmount	<OrgnlTxRef>/<IntrBkSttlmAmt>	USD 14.970	Currency/Amount. It is determined by IPS based on the instructed amount and any charges rules defined by the payments network. <IntrBkSttlmAmt Ccy="USD">14.97</IntrBkSttlmAmt>
OriginalTransactionReference/InstructedAmount	<OrgnlTxRef>/<InstdAmt>	USD 14.970	Currency/Amount. It is the original transfer amount.
PaymentTypeInformation/LocalInstrument	<PmtTpInf>/<LclInstrm>/<Prtry>	CRTRM	Defines internal transaction processing mechanisms.
PaymentTypeInformation/CategoryPurpose	<PmtTpInf>/<CtgyPurp>/<Prtry>	C2CCRT	Defines transaction channels and high-level category. for e.g (C2CCRT refers to regular payment transfer).
OriginalTransactionReference/Debtor	<OrgnlTxRef>/<Dbtr>/<Nm>	John	Payer name. This name can be in Arabic but must be in UTF-8 encoding.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Email address	<OrgnlTxRef>/<Dbtr>/<CtctDtls>/<EmailAdr>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Mobile Number	<OrgnlTxRef>/<Dbtr>/<CtctDtls>/<MobNb>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Street number	<OrgnlTxRef>/<Dbtr>/<PstlAdr>/<StrtNm>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Private ID	<OrgnlTxRef>/<Dbtr>/<Id>/<PrvtId>/<Othr>/<SchmeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/DebtorAccount	<OrgnlTxRef>/<DbtrAcct>/<Id>/<Othr>/<Id>	408178105111112 923438	Payer's ClearingID.
OriginalTransactionReference/DebtorAccount	<OrgnlTxRef>/<DbtrAcct>/<Id>/<Othr>/<SchmeNm>/<Prtry>	ACCT	Payer's ClearingType.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Creditor postal address	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<AdrLine>	London	Payee's postal address.
OriginalTransactionReference/Creditor name	<OrgnlTxRef>/<Cdtr>/<Nm>	Smith	Payee's name.
OriginalTransactionReference/Country of residence	<OrgnlTxRef>/<Cdtr>/<CtryOfRes>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Town name	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<TwnNm>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Sub Department	<OrgnlTxRef>/<Cdtr>/<PstlAdr>/<TwnNm>/<SubDept>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Name	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Nm>		Optional tag. Format details are in the message structure section of this document.

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransactionReference/Department	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Dept>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Channel Type	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<ChnlTp>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/ID	<OrgnlTxRef>/<Cdtr>/<CtctDtls>/<Othr>/<Id>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/CreditorAccount	<OrgnlTxRef>/<CdtrAcct>/<Id>/<Othr>/<SchmeNm>/<Prtry>	ACCT	Payee's ClearingType.
OriginalTransactionReference/Ultimate Creditor	<OrgnlTxRef>/<UltmtCdtr>/<Id>/<PrvtId>/<Othr>/<SchmeNm>/<Prtry>		Optional tag. Format details are in the message structure section of this document.
OriginalTransactionReference/Purpose	<OrgnlTxRef>/<Purp>	ONLPUR	Defines operation purpose (gambling, flight tickets, online purchase, etc.)

4.1.5 Example of an API call during a payment status request (pacs.028.001.05)

The Debtor participant (044525700) sends a request to IPS to authorize the payment transaction (pacs.008.001.10) to perform credit transfer to the Creditor participant (044525974).

If the Debtor participant does not receive a response from IPS within the specified timeout period. Debtor participant sends the payment status request (pacs.028.001.05) to IPS. In turn IPS responds with the payment status report (pacs.002.001.12).

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<FIToFIPmtStsReq>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	123456790	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
CreationDateTime	<CreDtTm>		The following UTC offset format is used: <i>YYYY-MM-DDThh:mm:ss.sss+/-hh:mm</i>
TransactionInformation	<TxInf>		

ISO 2022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
OriginalTransaction Identification	<OrgnlTxId>	04452570081001 21234567891234	Transaction identifier. It is the same as the value sent in the TxId tag. For identify original operation used this tag or OrgnlEndToEndId
OriginalEndToEndIdentification	<OrgnlEndToEndId>	234567890	End to end identifier. It is the same as the value sent in the EndToEndId tag. For identify original operation used this tag or OrgnlTxId. EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
OriginalUETR	<OrgnlUETR>	9f9733fd-160a-4214-9644-105e627d008c	Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.

4.1.6 Example of return payment call (pacs.004.001.11)

An Original creditor participant (BIC 044525700) sends a request to return funds to an Original debtor participant (BIC 044525974) via IPS.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<PmtRtr>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	123456789	
CreationDateTime	<CreDtTm>	UTC offset format (YYYY-MM-DDThh:mm:ss.ss+/-hh:mm)	
NumberOfTransactions	<NbOfTx>	1	
SettlementMethod	<SttlmInf>/<SttlmMtd>	CLRG	
ClearingSystem	<SttlmInf>/<ClrSys>/<Prtry>	FP	
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
TransactionInformation	<TxInf>		
ReturnIdentification	<RtrId>	044525700810 012123456789 1234	
OriginalEndToEndIdentification	<OrgnlEndToEndId>	123456789345 678	EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.
OriginalTransactionIdentification	<OrgnlTxId>	987654322345 6789	Reference to the original pacs.008 transaction identification id
OriginalInstructionIdentification	<OrgnlInstrId>	044525700810 012123456789 1234	Reference to the camt.056 instruction identification id. In Payment return it will be

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
			reference to original credit transfer message instruction.
ReturnedInterbank SettlementAmount	<RtrdIntrBkSttlmAmt>	USD 14.970	Currency/Amount Amount of money to be moved between the instructing agent and the instructed agent in the returned instruction
ReturnReasonInformation	<RtrRsnInf>/<Rsn>/<Prtry>	CHCK	Provides detailed information on the return reason.
AdditionalInformation	<RtrRsnInf>/<AddtlInf>	«Maximum account balance exceeded»	Further details on the reversal reason

4.1.6.1 Example of a positive response message from Original Debtor participant to IPS (pacs.002.001.12)

If all return payment validations are successfully passed at IPS, IPS will transmit a positive response to the Original Creditor Participant (044525700) to inform them of the successful completion of the requested funds transfer. IPS will also send an identical message to the Original Debtor Participant (044525974) as advice to facilitate the participant's account refund to the original customer.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<FIToFIPmtStsRpt>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	348729758	
CreationDateTIme	<CreDtTm>	UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm)	
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC
TransactionInformationAndStatus	<TxInfAndSts>		

OriginalMessageNameIdentification	<OrgnlGrpInf><OrgnlMsgNmId>	pac.004.001.11	
OriginalMessageIdentification	<OrgnlGrpInf><OrgnlMsgId>	123456789	
OriginalTransactionIdentification	<OrgnlTxId>	0445257008100121234567891234	Reference to the original pac.008 transaction identification id
OriginalInstructionIdentification	<OrgnlInstrId>	0445257008100121234567891234	Reference to the camt.056 instruction identification id. In Payment return it will be reference to original credit transfer message instruction.
TransactionStatus	<TxSts>	ACSC	Status ACSC (AcceptedSettlementCompleted) RJCT (Rejected)
AcceptanceDateTime	<AcptncDtTm>		Date and time when participant accepted the instruction and completed performing the necessary

			authorization checks.
OriginalTransactionReference/InstructedAmount	<OrgnlTxRef>/<amt>/<InstdAmt>	USD 14.970	Currency/Amount original operation
Reference TxId	<SplmtryData>/<Envlp>/<ReferenceTxId>	9876543223456789	TrxId of payment operation pacs.008
Reference EndToEndId	<SplmtryData>/<Envlp>/<ReferenceEndToEndId>	123456789345678	EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

4.1.6.2 Example of a negative response message from IPS to original creditor participant (pacs.002.001.12)

If validation fails at IPS, IPS will send a negative response message to the Original Creditor Participant (044525700) along with a response code that provides details regarding the outcome of the validation process. No messages will be sent to the Original Debtor Participant.

ISO 20022 References		Example value	Details
Message Element/Building Block	<XML Tag>		
Message root	<Document>/<FIToFIPmtStsRpt>		
GroupHeader	<GrpHdr>		
MessageIdentification	<MsgId>	348729758	
CreationDateTime	<CreDtTm>	UTC offset format (YYYY-MM-DDThh:mm:ss.sss+/-hh:mm)	
InstructingAgent	<InstgAgt>/<FinInstnId>/<Othr>/<Id>	044525974	BIC
InstructedAgent	<InstdAgt>/<FinInstnId>/<Othr>/<Id>	044525700	BIC
TransactionInformationAndStatus	<TxInfAndSts>		
OriginalMessageNameIdentification	<OrgnlGrpInf><OrgnlMsgNmId>	pac.004.001.11	

OriginalMessageIdentification	<OrgnlGrpInf><OrgnlMsgId>	123456789	
OriginalTransactionIdentification	<OrgnlTxId>	0445257008 1001212345 67891234	Reference to the original pacs.008 transaction identification id
OriginalInstructionIdentification	<OrgnlInstrId>	0445257008 1001212345 67891234	Reference to the camt.056 instruction identification id. In Payment return it will be reference to original credit transfer message instruction.
TransactionStatus	<TxSts>	RJCT	Status ACSC (AcceptedSettlementCompleted) RJCT (Rejected)
Originator	<StsRsnInf>/<Orgtr>/<Id> /<OrgId>/<Othr>/<Id>	FP	
Reason	<StsRsnInf>/<Rsn>/<Prtry>	MISS	Error
AdditionalInformation	<StsRsnInf>/<AddtlInf>	Missing	Error description
AcceptanceDateTime	<AcptncDtTm>		Date and time when participant accepted the instruction and completed performing

			the necessary authorization checks.
OriginalTransactionReference/InstructedAmount	<OrgnlTxRef>/<amt>/<InstdAmt>	USD 14.970	Currency/Amount original operation
Reference TxId	<SplmtryData>/<Envlp>/<ReferenceTxId>	9876543223456789	TrxId of payment operation pacs.008
Reference EndToEndId	<SplmtryData>/<Envlp>/<ReferenceEndToEndId>	123456789345678	EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

5 FIToFICustomerCreditTransfer/Advice (pacs.008.001.10)

5.1 Message structure

(FIToFICustomerCreditTransfer pacs.008.001.10)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document>/<FIToFICst mrCdtTrf>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
NumberOfTransactions	<NbOfTxs>	[1..1]	Text	Yes
SettlementInformation	<SttlmInf>	[1..1]		Yes
SettlementMethod	<SttlmMtd>	[1..1]		Yes
ClearingSystem	<ClrSys>	[0..1]		Yes
Proprietary	Prtry>	[1..1]	Max35Text	Yes
InstructingAgent	<InstgAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
InstructedAgent	<InstdAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditTransferTransactionInformation	<CdtTrfTxInf>	[1..*]		Yes
PaymentIdentification	<PmtId>	[1..1]	±	Yes
EndToEndIdentification	<EndToEndId>	[1..1]	Max35Text	Yes
TransactionIdentification	<TxId>	[0..1]	Max35Text	Yes
UETR	<UETR>	[0..1]		Mandatory
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	Yes
LocalInstrument	<LclInstrm>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Max35Text	Yes
CategoryPurpose	<CtgyPurp>	[1..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
AcceptanceDateTime	<AcptncDtTm>	[0..1]	DateTime	Yes
InstructedAmount	<InstdAmt>	[0..1]	Amount	Yes
ChargeBearer	<ChrgBr>	[1..1]	CodeSet	Yes
Debtor	<Dbtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..1]	Text	Yes
Street Name	<StrtNm>	[0..1]	Text	Yes
Contact Details	<CtctDtls>	[0..1]		Yes
Email Address	<EmailAdr>	[0..1]	Text	Yes
Mobile Number	<MobNb>	[0..1]	Text	Yes
ID	<ID>	[0..1]		Yes
Private ID	<PrvtId>	[1..1]		Yes
Other	<Othr>	[0..1]		Yes
Scheme Name	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes
DebtorAccount	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[0..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
DebtorAgent	<DbtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditorAgent	<CdtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
Creditor	<Cdtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
Country of residence	<CtryOfRes>	[0..1]	Text	Yes
Postal Address	<PstlAdr>	[0..1]		Yes
Address Line	<AdrLine>			

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Town Name	<TwnNm>	[0..1]	Text	Yes
Sub Department	<SubDept>	[0..1]	Text	Yes
Identification	<Id>	[0..1]		
OrganisationID	<OrgId>	[1..1]		
Other	<Othr>	[0.*]		
Contact Details	<CtctDtls>	[0..1]		Yes
Name	<Nm>	[0..1]		Yes
Department	<Dept>	[0..1]	Text	Yes
Other	<Othr>	[0..1]		Yes
Channel Type	<ChnlTp>	[1..1]		
ID	<Id>	[0..1]		Yes
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Ultimate Creditor	<UltmtCdtr>	[0..1]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
ID	<Id>	[0..1]		Yes
Private ID	<PrvtId>	[1..1]		Yes
Other	<Othr>	[0..*]		Yes
Scheme Name	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes
InstructionForNextAgent	<InstrForNxtAgt>	[0..*]	±	Yes
InstructionInformation	<InstrInf>	[0..1]	Text	Yes
Purpose	<Purp>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Tax	<Tax>	[0..1]		Yes
Creditor	<Cdtr>	[0..1]		Yes
TaxId	<TaxId>	[0..1]		Yes
RemittanceInformation	<RmtInf>	[0..1]		Yes
Structured	<Strd>	[0..*]	±	Yes
Refred Document Info	<RefredDocInfo>	[0..*]		Yes
Number	<Nb>	[0..1]	Text	Yes
Type	<Tp>	[0..1]	±	Yes
CodeOrProprietary	<CdOrPrtry>	[1..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Proprietary	<Prtry>	[1..1]	Text	Yes
ReferredDocumentAmount	<RfrdDocAmt>	[0..*]		
Unstructured	<Ustrd>	[0..*]	Text	Yes

5.2 Message building blocks

5.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

GroupHeader <GrpHdr> contains the following elements:

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
MessageIdentification	<MsgId>	[1..1]	Text
CreationDateTime	<CreDtTm>	[1..1]	DateTime
NumberOfTransactions	<NbOfTx>	[1..1]	Text
SettlementInformation	<SttlmInf>	[1..1]	
SettlementMethod	<SttlmMtd>	[1..1]	
ClearingSystem	<ClrSys>	[0..1]	
Proprietary	Prtry>	[1..1]	Max35Text
InstructingAgent	<InstgAgt>	[0..1]	±

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text
InstructedAgent	<InstdAgt>	[0..1]	±
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime"

NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Datatype: "Max15NumericText"

SettlementInformation <SttlmInf>

Presence: [1..1]

Definition: Specifies the details on how the settlement of the transaction(s) between the instructing agent and the instructed agent is completed.

SettlementInformation <SttlmInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
SettlementMethod <SttlmMtd>	[1..1]	CodeSet
ClearingSystem <ClrSys>	[0..1]	
Proprietary <Prtry>	[1..1]	Text

SettlementMethod <SttlmMtd>

Presence: [1..1]

Definition: Method used to settle the (batch of) payment instructions. It is always CLRG.

Datatype: "SettlementMethod2Code"

CodeName	Name	Definition
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.
CLRG	ClearingSystem	Settlement is done through a payment clearing system.

ClearingSystem <ClrSys>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

ClearingSystem <ClrSys> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Clearing system identification in a proprietary form. Currently the only value used is FP.

Datatype: "Max35Text"

InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

InstructingAgent <InstgAgt> contains the following:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

InstructedAgent <InstdAgt> contains the following elements:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

5.2.2 CreditTransferTransactionInformation <CdtTrfTxInf>

Presence: [1..*]

Definition: Set of elements providing information specific to the individual credit transfer(s).

CreditTransferTransactionInformation <CdtTrfTxInf> contains the following elements:

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
PaymentIdentification	<PmtId>	[1..1]	±	Yes
EndToEndIdentification	<EndToEndId>	[1..1]	Max35Text	Yes
TransactionIdentification	<TxId>	[0..1]	Max35Text	Yes
UETR	<UETR>	[0..1]		Mandatory
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
LocalInstrument	<LclInstrm>	[1..1]		
Proprietary	<Prtry>	[1..1]	Max35Tex	
CategoryPurpose	<CtgyPurp>	[1..1]	±	
Proprietary	<Prtry>	[1..1]	Text	
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes
AcceptanceDateTime	<AcceptncDtTm>	[0..1]	DateTime	Yes
InstructedAmount	<InstdAmt>	[0..1]	Amount	Yes
ChargeBearer	<ChrgBr>	[1..1]	CodeSet	Yes
Debtor	<Dbtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..1]	Text	Yes
Street Name	<StrtNm>	[0..1]	Text	Yes
Contact Details	<CtctDtls>	[0..1]		Yes
Email Address	<EmailAdr>	[0..1]	Text	Yes
Mobile Number	<MobNb>	[0..1]	Text	Yes
ID	<ID>	[0..1]		Yes
Private ID	<PrvtId>	[1..1]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Other	<Othr>	[0..1]		Yes
Scheme Name	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
DebtorAccount	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
DebtorAgent	<DbtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditorAgent	<CdtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Creditor	<Cdtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
Country of residence	<CtryOfRes>	[0..1]	Text	Yes
Postal Address	<PstlAdr>	[0..1]		Yes
Address Line	<AdrLine>			
Town Name	<TwnNm>	[0..1]	Text	Yes
Sub Department	<SubDept>	[0..1]	Text	Yes
ID	<Id>	[1..1]		
OrganisationID	<OrgId>	[1..1]		
Other	<Othr>	[0..*]		
Contact Details	<CtctDtls>	[0..1]		Yes
Name	<Nm>	[0..1]		Yes
Department	<Dept>	[0..1]	Text	Yes
Other	<Othr>	[0..1]		Yes
Channel Type	<ChnlTp>	[1..1]		Yes
ID	<Id>	[0..1]		Yes
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Ultimate Creditor	<UltmtCdtr>	[0..1]		Yes
ID	<Id>	[0..1]		Yes
Private ID	<PrvtId>	[1..1]		Yes
Other	<Othr>	[0..*]		Yes
Scheme Name	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
InstructionForNextAgent	<InstrForNxtAgt>	[0..*]		Yes
InstructionInformation	<InstrInf>	[0..1]	Text	Yes
Purpose	<Purp>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Regulatory Reporting	<RgltryRptg>	[0..10]		
Details	<Dtls>	[0..1]		
Information	<Inf>	[0..*]		
Tax	<Tax>	[0..1]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Creditor	<Cdtr>	[0..1]		Yes
TaxId	<TaxId>	[0..1]		Yes
RemittanceInformation	<RmtInf>	[0..1]		Yes
Structured	<Strd>	[0..*]		Yes
Referred Document Information	<RefredDocInfo>	[0..*]		Yes
Number	<Nb>	[0..1]	Text	Yes
Type	<Tp>	[0..1]		Yes
CodeOrProprietary	<CdOrPrtry>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
ReferredDocumentAmount	<RfrdDocAmt>	[0..*]		
Unstructured	<Ustrd>	[0..*]	Text	Yes

PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to reference a payment instruction.

PaymentIdentification <PmtId> contains the following elements:

MessageElement<XML Tag>	Mult.	Type
EndToEndIdentification <EndToEndId>	[1..1]	Text

TransactionIdentification <TxId>	[0..1]	Text
UETR <UETR>	[0..1]	Text

EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique identification, as assigned by the initiating party, to unambiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Datatype: "Max35Text"

Note: EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

TransactionIdentification <TxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the first instructing agent, to unambiguously identify the transaction that is passed on, unchanged, throughout the entire interbank chain.

Datatype: "Max35Text"

UETR<UETR>

Presence: [0..1]

Definition: Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.

Note: In request to Pay transfer mode. This is a mandatory tag.

PaymentTypeInformation<PmtTpInf>

Presence: [0..1]

Definition: Set of elements used\ to further specify the type of transaction.

PaymentTypeInformation <PmtTpInf> contains the following element:

MessageElement<XML Tag>	Mult.	Type
CategoryPurpose <CtgyPurp>	[1..1]	

LocalInstrument <LclInstrm>	[1..1]	
--	--------	--

CategoryPurpose <CtgyPurp>

Presence: [1..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.

Usage: This field is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.

CategoryPurpose <CtgyPurp> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	

Proprietary <Prtry>

Presence: [1..1]

Definition: Defines transaction channels and high-level category (Customer to Merchant payment, Mobile payment, Regular credit transfer, Request to pay etc.) in proprietary form.

Datatype: "Max35Text"

Possible values:

CodeName	Name	Definition
C2CCRT	C2C credit transfer	Regular Credit transfer transaction.
C2CRTP	C2C RequestToPay	Credit transfer with a reference to the Request to Pay operation that initiated this credit transfer.
C2BBPT	C2B Bill Payment	Bill payments.
C2BSQR	C2B Static QR Payment	Credit transfer from Person to Merchant using Static QR.
C2BDQR	C2B Dynamic QR Payment	Credit transfer from Person to Merchant using Dynamic QR.
C2BRTP	C2B RequestToPay	Credit transfer with reference when Business/merchant is requesting money from the consumer.

In case the field is not present in the message the default value will be set as C2CCRT.

LocalInstrument <LclInstrm>

Presence: [1..1]

Definition: User community specific instrument.

LocalInstrument <LclInstrm> contains the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Datatype: "Max35Text"

Definition: Defines internal transaction processing mechanisms. This element will be used to identify the mode of transaction. as a proprietary code. Possible values:

CodeName	Name	Definition
CRTAM	CreditTransferAdviceMode	Payment initiated is in advice mode.
CRTRM	CreditTransferRegularMode	Payment initiated is in regular mode.

In case the field is not present in the message the default value will be set as CRTRM.

InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [1..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Datatype: "ActiveCurrencyAndAmount"

AcceptanceDateTime <AcptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent. This means that the account servicing agent has received the payment order and has applied checks such as authorization, availability of funds.

Datatype: "ISODatetime"

InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Usage: This amount has to be transported unchanged through the transaction chain.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Datatype: "ChargeBearerType1Code"

CodeName	Name	Definition
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

Debtor <Dbtr>

Presence: [1..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Debtor <Dbtr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

PostalAddress <PstlAdr> contains the following elements:

Message Element <XML Tag>	Mul.	Type
AddressLine <AdrLine>	[0..1]	Text
Street Name <StrtNm>	[0..1]	Text

AddressLine <AdrLine>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Datatype: "Max70Text"

ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

ContactDetails contains the following elements

Message Element <XML Tag>	Mul.	Type
Mobile Number <MobNb>	[0..1]	Text
Email Address <EmailAdr>	[0..1]	Text

MobileNumber<MobNb>

Presence: [0..1]

Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.

Datatype: "PhoneNumber"

EmailAddress<EmailAdr>

Presence: [0..1]

Definition: Address for electronic mail (e-mail).

Datatype: "Max2048Text"

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party. Identification contains following elements

Message Element <XML Tag>	Mul.	Type
Private Identification <PrvtId>	[1..1]	Text

PrivateIdentification<PrvtId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person, for example a passport.

PrivateIdentification contains the following elements

Message Element <XML Tag>	Mul.	Type
Other <Othr>	[0..*]	Text

Other<Othr>

Presence: [0..*]

Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.

Other contains the following GenericPersonIdentification1 elements

Message Element <XML Tag>	Mul.	Type
Scheme Name <SchmeNm>	[0..1]	Text

SchemeName<SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName contains one of the following elements

Message Element <XML Tag>	Mul.	Type
Proprietary<Prtry>	[1..1]	Text

Proprietary<Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

DebtorAccount <DbtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

DebtorAccount <DbtrAcct> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

DebtorAgent <DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

DebtorAgent <DbtrAgt> contains the following elements:

MessageElement<XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally 103ecognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

CreditorAgent <CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the creditor.

CreditorAgent <CdtrAgt> contains the following element:

MessageElement<XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Creditor <Cdtr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text
Country Of Residence<CtryOfRes>	[0..1]	
Postal Address<PstlAdr>	[0..1]	
Identification<ID>		
Contact Detail<CtctDtls>	[0..1]	

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

CountryOfResidence<CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Datatype: "CountryCode"

Constraints • Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

PostalAddress<PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

MessageElement<XML Tag>	Mult.	Type
Town Name <TwnNm>	[0..1]	±
Sub Department<SubDept>	[0..1]	
Address Line<AdrLine>		

TownName<TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

SubDepartment<SubDept>

Presence: [0..1]

Definition: Identification of a sub-division of a large organisation or building.

Datatype: "Max70Text"

AddressLine <AdrLine>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Identification contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
OrganisationIdentification<OrgId>	[1..1]	±

OrganisationIdentification<OrgId>

Presence: [1..1]

Definition: Unique and unambiguous way to identify an organisation.

OrganisationIdentification contains the following elements

MessageElement<XML Tag>	Mult.	Type
Othr<Othr>	[0..*]	±

Other<Othr>

Presence: [0..*]

Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme

ContactDetails<CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

ContactDetails contains the following elements

MessageElement<XML Tag>	Mult.	Type
Name<Nm>	[0..1]	
Department<Dept>	[0..1]	±
Other<Othr>	[0..*]	

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

Department<Dept>

Presence: [0..1]

Definition: Identification of a division of a large organisation or building.

Datatype: "Max70Text"

Other<Othr>

Presence: [0..*]

Definition: Contact details in another form.

MessageElement<XML Tag>	Mult.	Type
Channel Type	[1..1]	
ID<Id>	[0..1]	±

ChannelType<ChnlTp>

Presence: [1..1]

Definition: Method used to contact the financial institution's contact for the specific tax region.

Datatype: "Max4Text"

Identification<Id>

Presence: [0..1]

Definition: Communication value such as phone number or email address.

Datatype: "Max128Text"

CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

CreditorAccount <CdtrAcct> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

UltimateCreditor<UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

UltimateCreditor contains the following elements

MessageElement<XML Tag>	Mult.	Type
ID <ID>	[0..1]	Text

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Identification contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
Private ID <PrvtId>	[1..1]	Text

PrivateIdentification<PrvtId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person, for example a passport.

PrivateIdentification contains the following elements

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..*]	Text

Other<Othr>

Presence: [0..*]

Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.

Other contains the following elements

MessageElement<XML Tag>	Mult.	Type
Scheme Name <SchmeNm>	[1..1]	Text

SchemeName<SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName contains following

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary<Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

InstructionForNextAgent <InstrForNxtAgt>

Presence: [0..*]

Definition: Further information related to the processing of the payment instruction that may need to be acted upon by the next agent.

Note: This element is mandatory for bill payments and government payment. This tag contains the BIC of the biller participant or the government participant, which must be notified after payment completion.

InstructionForNextAgent <InstrForNxtAgt> contains the following element:

Message Element <XML Tag>	Mult.	Type
InstructionInformation <InstrInf>	[0..1]	Text

InstructionInformation <InstrInf>

Presence: [0..1]

Definition: Further information complementing the coded instruction or instruction to the next agent that is bilaterally agreed or specific to a user community.

Datatype: "Max140Text"

Purpose<Purp>

Presence: [1..1]

Definition: Underlying reason for the payment transaction. Usage: Purpose is used by the end-customers, that is initiating party, (ultimate) debtor, It has information concerning the nature of the payment. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Purpose contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Purpose, in a free text form.

Datatype: "Max35Text"

Possible Values:

The purpose value is intended to be retrieved from the REST API service using the "Get Dictionaries" method

Document reference: SVIPS_Specifications_sv_ip__how-to_specification_en_core

RegulatoryReporting <RgltryRptg>

Presence: [0..10]

Definition: Information needed due to regulatory and statutory requirements.

RegulatoryReporting contains the following elements

Details	<Dtls>	[0..1]
---------	--------	--------

Details<Dtls>

Presence: [0..*]

Definition: Set of elements used to provide details on the regulatory reporting information

Details contains the following elements

Information	<Inf>	[0..*]
--------------------	-------	--------

Information<Inf>

Presence: [0..*]

Definition: Additional details that cater for specific domestic regulatory requirements.

Datatype: "Max35Text"

Tax <Tax>

Presence: [0..1]

Definition: Provides details on the tax.

Tax contains following element

MessageElement<XML Tag>	Mult.	Type
Creditor <Cdtr>	[0..1]	Text

Creditor<Cdtr>

Presence: [0..1]

Definition: Party on the credit side of the transaction to which the tax applies.

Creditor contains the following elements

MessageElement<XML Tag>	Mult.	Type
TaxId <TaxId>	[0..1]	Text

TaxIdentification<TaxId>

Presence: [0..1]

Definition: Tax identification number of the creditor.

Datatype: "Max35Text"

RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system.

RemittanceInformation <RmtInf> contains the following element:

Message Element <XML Tag>	Mult.	Type
Structured <Strd>	[0..*]	
Unstructured <Ustrd>	[0..*]	Text

Structured <Strd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in a structured form.

Note: This element is mandatory for bill payments. This structure contains references to the bill number and bill type.

Structured <Strd> contains the following elements:

ReferredDocumentInformation

Presence: [0..*]

Definition: Provides the identification and the content of the referred document

RefredDocInfo<RefredDocInfo> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Number <Nb>	[0..1]	Text
Type <Tp>	[0..1]	Text

Number <Nb>

Presence: [0..1]

Definition: Unique and unambiguous identification of the referred document.

Datatype: "Max35Text"

Type <Tp>

Presence: [0..1]

Definition: Specifies the type of referred document.

Type <Tp> contains the following element:

Message Element <XML Tag>	Mult.	Type
CodeOrProprietary <CdOrPrtry>	[1..1]	

CodeOrProprietary <CdOrPrtry>

Presence: [1..1]

Definition: Provides the type details of the referred document.

CodeOrProprietary <CdOrPrtry> contains one of the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Proprietary identification of the type of the remittance document. This field can be used to further detail about bill payment and government payment.

Datatype: "Max35Text"

It is a conditional field; however it is mandatory if PaymentCategory = C2BBPT. In payment category we will just state this is bill payment. Here we specify what type of bill payment.

Possible values:

BILL — for bill payments and government payments referenced by bill number.

CUST — for customer related bill payments referenced by customer number.

ReferredDocumentAmount<RfrdDocAmt>

Presence: [0..1]

Definition: Provides details on the amounts of the referred document.

ReferredDocumentAmount contains the following elements:

Message Element <XML Tag>	Mult.	Type
Due Payable Amount<DuePyblAmt>	[0..1]	
Adjustment Amount And Reason<AdjstmntAmtAndRsn>	[0..*]	

DuePayableAmount<DuePyblAmt>

Presence: [0..1]

Definition: Amount specified is the exact amount due and payable to the creditor.

AdjustmentAmountAndReason<AdjstmntAmtAndRsn>

Presence: [0..*]

Definition: Specifies detailed information on the amount and reason of the document adjustment.

AdjustmentAmountAndReason contains the following elements

Message Element <XML Tag>	Mult.	Type
Amount<Amt>	[1..1]	
DebitCreditIndicator<CdtDbtInd>	[0..1]	
Reason<Rsn>	[0..1]	

Amount<Amt>

Presence: [1..1]

Definition: Amount of money of the document adjustment

CreditDebitIndicator<CdtDbtInd>

Presence: [0..1]

Definition: Specifies whether the adjustment must be subtracted or added to the total amount

Possible values:

CRDT and DBIT

Reason<Rsn>

Presence: [0..1]

Definition: Specifies the reason for the adjustmen

Unstructured <Ustrd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in an unstructured form.

Datatype: "Max140Text"

6 FIToFIPaymentStatusReport (pacs.002.001.12) — Response message

Both the positive and negative response messages have an identical structure.

6.1 Message structure (FIToFIPaymentStatusReport pacs. 002.001.12)

6.2 Message building blocks

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
Message root	<Document>/<FIToFIPmtStsRpt>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
InstructingAgent	<InstgAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
InstructedAgent	<InstdAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
TransactionInformation AndStatus	<TxInfAndSts>	[0..*]		Yes
OriginalEndToEndIdenti fication	<OrgnlEndToEndId>	[0..1]	Text	Yes
OriginalMessageNameI dentification	<OrgnlGrpInf>	[0..1]	±	Yes
OriginalMessageNameI dentification	<OrgnlMsgNmId>	[1..1]	Text	Yes
OriginalMessageIdentifi cation	<OrgnlMsgId>	[1..1]	Text	Yes
OriginalTransactionIden tification	<OrgnlTxId>	[0..1]	Text	Yes
OriginalInstructionIden tification	<OrgnlInstrId>	[0..1]	Text	Yes
OrignalUETR	<OrgnlUETR>	[0..1]	Text	Yes
TransactionStatus	<TxSts>	[0..1]	CodeSet	Yes
StatusReasonInformati on	<StsRsnInf>	[0..*]	±	Yes
Originator	<Orgtr>	[0..1]	±	Yes
Reason	<Rsn>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
AcceptanceDateTime	<AcptncDtTm>	[0..1]	DateTime	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
OriginalTransactionReference	<OrgnlTxRef>	[0..1]		Yes
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes
Amount	<Amt>	[0..1]	±	Yes
InstructedAmount	<InstdAmt>	[1..1]	Amount	Yes
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	Yes
LocalInstrument	<LclInstrm>	[1..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
CategoryPurpose	<CtgyPurp>	[1..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Debtor	<Dbtr>	[0..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..1]	Text	Yes
Street Name	<StrtNm>	[0..1]	Text	Yes
Contact Details	<CtctDtls>			
Email Address	<EmailAdr>			
Mobile Number	<MobNb>			

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
ID	<ID>			
Private ID	<PrvtId>			
Other	<Othr>			
Scheme Name	<SchmeNm>			
Proprietary	<Prtry>			
DebitorAccount	<DbtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Creditor	<Cdtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
Country of residence	<CtryOfRes>			
Postal Address	<PstlAdr>			
Town Name	<TwnNm>			
Sub Department	<SubDept>			
Address Line	<AdrLine>			

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
ID	<Id>	[1..1]		
OrganisationID	<OrgId>	[1..1]		
Other	<Othr>	[0..*]		
Contact Details	<CtctDtls>			
Name	<Nm>			
Department	<Dept>			
Other	<Othr>			
Channel Type	<ChnlTp>	[1..1]		
ID	<Id>			
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Ultimate Creditor	<UltmtCdtr>	[0..1]		
ID	<Id>	[0..1]		
Private ID	<PrvtId>	[1..1]		

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used ?
Other	<Othr>	[0..*]		
Scheme Name	<SchmeNm>			
Proprietary	<Prtry>			
Purpose	<Purp>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
SupplementaryData	<SplmtryData>	[0..*]	±	Yes
Envelope	<Envlp>	[1..1]	±	Yes
Reference TxId	<ReferenceTxId>	[1..1]	Text	Yes
Reference EndToEndId	<ReferenceEndToEndId>	[1..1]	Text	Yes

6.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the status report message.

GroupHeader <GrpHdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
MessageIdentification <MsgId>	[1..1]	DateTime
CreationDateTime <CreDtTm>	[0..1]	±
InstructingAgent <InstgAgt>	[0..1]	±

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODateTime"

InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

InstructingAgent <InstgAgt> contains the following:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

6.2.2 TransactionInformationAndStatus <TxInfAndSts>

Presence: [0..*]

Definition: Information concerning the original transactions, to which the status report message refers.

TransactionInformationAndStatus <TxInfAndSts> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalEndToEndIdentification <OrgnlEndToEndId>	[0..1]	Text
OriginalMessageNameIdentification <OrgnlGrpInf>	[0..1]	±
OriginalMessageNameIdentification <OrgnlMsgNmId>	[1..1]	Text
OriginalMessageIdentification <OrgnlMsgId>	[1..1]	Text
OriginalTransactionIdentification <OrgnlTxId>	[0..1]	Text
OriginalInstructionIdentification <OrgnlInstrId>	[0..1]	Text

Message Element <XML Tag>	Mult.	Type
OriginalUETR<OrgnlUETR>	[0..1]	
TransactionStatus <TxSts>	[0..1]	CodeSet
AcceptanceDateTime <AcptncDtTm>	[0..1]	DateTime
OriginalTransactionReference <OrgnlTxRef>	[0..1]	
InterbankSettlementAmount <IntrBkSttlmAmt>	[0..1]	Amount
Amount <Amt>	[0..1]	±
InstructedAmount <InstdAmt>	[1..1]	Amount
PaymentTypeInformation <PmtTpInf>	[0..1]	±
LocalInstrument <LclInstrm>	[1..1]	±
Proprietary <Prtry>	[1..1]	Text
CategoryPurpose <CtgyPurp>	[1..1]	±
Proprietary <Prtry>	[1..1]	Text
Debtor <Dbtr>	[0..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..1]	Text
Street Name <StrtNm>	[0..1]	Text
Contact Details<CtctDtls>	[0..1]	

Message Element <XML Tag>	Mult.	Type
Email Address <EmailAdr>	[0..1]	Text
Mobile Number <MobNb>	[0..1]	Text
ID <ID>	[0..1]	
Private ID <PrvtId>	[1..1]	
Other <Othr>	[0..1]	
Scheme Name <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	
DebtorAccount <DbtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
Creditor<Cdtr>	[1..1]	
Name <Nm>	[0..1]	Text
Country Of Residence <CtryOfRes>	[0..1]	Text
Postal Address<PstlAdr>	[0..1]	
Address Line<AdrLine>		
Town Name <TwnNm>	[0..1]	Text

Message Element <XML Tag>	Mult.	Type
Sub Department <SubDept>	[0..1]	Text
ID <Id>	[1..1]	
OrganisationID <OrgId>	[1..1]	
Other <Othr>	[0.*]	
Contact Details <CtctDtls>	[0..1]	
Name <Nm>	[0..1]	Text
Department <Dept>	[0..1]	Text
Other <Othr>	[0..1]	
Channel Type <ChnlTp>	[1..1]	Text
Identification <Id>	[0..1]	
CreditorAccount <CdtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
Ultimate Creditor <UltmtCdtr>	[0..1]	
Identification <Id>	[0..1]	
Private Identification <PrvtId>	[1..1]	

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..*]	
Scheme Name <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	
Purpose <Purp>	[1..1]	
Proprietary <Prtry>	[1..1]	Text
SupplementaryData <SplmtryData>	[0..*]	±
Envelope <Envlp>	[1..1]	±
Reference TxId <ReferenceTxId>	[1..1]	Text
Reference EndToEndId <ReferenceEndToEndId>	[1..1]	Text

OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

Note: EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

OriginalGroupInformation <OrgnlGrpInf>

Presence: [0..1]

Definition: Point to point reference, as assigned by the original instructing party, to unambiguously identify the original message.

OriginalGroupInformation <OrgnlGrpInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalMessageIdentification <OrgnlMsgId>	[1..1]	Text
OriginalMessageNameIdentification <OrgnlMsgNmId>	[1..1]	Text

OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original message.

Datatype: "Max35Text"

OriginalMessageNameIdentification <OrgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers, for example, pacs.003.001.01 or MT103.

Datatype: "Max35Text"

OriginalTransactionIdentification <OrgnlTxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction.

Datatype: "Max35Text"

Note: Reference to the original pacs.008 transaction identification id.

OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction.

Datatype: "Max35Text"

Note: Reference to the camt.056 instruction identification id in payment cancellation. In Payment return it will be reference to original credit transfer message instruction.

Original UETR<OrgnlUETR>

Presence: [0..1]

Definition: Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.

Datatype: "UUIDv4Identifier"

TransactionStatus <TxSts>

Presence: [0..1]

Definition: Specifies the status of a transaction, in a coded form.

Datatype: "ExternalPaymentTransactionStatus1Code"

StatusReasonInformation <StsRsnInf>

presence: [0..*]

Definition: Provides detailed information on the status reason.

StatusReasonInformation <StsRsnInf> consists of the following elements:

Message Element <XML Tag>	Mult.	Type
Originator <Orgtr>	[0..1]	±
Reason <Rsn>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
AdditionalInformation <AddtlInf>	[0..*]	Max105Text

Originator <Orgtr>

Presence: [0..1]

Definition: Party that issues the status (a participant or IPS).

Originator <Orgtr> consists of the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[0..1]	
OrganisationIdentification <OrgId>	[1..1]	
Other <Othr>	[0..*]	

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Max140Text

Reason <Rsn>

Presence: [0..1]

Definition: Specifies the reason for the status report.

Reason <Rsn> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Reason <Rsn>	[0..1]	
Proprietary <Prtry>	[1..1]	Text

Proprietary<Prtry>

Presence: [1..1]

Format:

- maxLength: 4
- minLength: 1

The list of possible values is provided in the table below.

Name	Code	Definition
Missing	MISS	IPS did not receive a response from the payee's participant.
NotPerformed	NOVF	IPS failed to send a request to the payee's participant.
TechnicalError	ERRR	Technical error for example, an invalid XSD.
WrongBIC	WBIC	Participant's BIC was not found in IPS.

Name	Code	Definition
LimitExceed	LTXD	Limit exceeded in IPS.
DuplicateTransactionID	DTID	TxID duplicate in IPS.
TransactionNotFound	TNFN	TxID was not found in IPS.
IncorrectTransactionId	ITID	Request from a participant contains the incorrect TxID.
IncorrectTransactionAmount	INVT	Return payment transaction amount or currency is invalid
OperationTooOld	INVD	Return payment transaction could not be later than 1 day of original trx
OriginalTrNotFound	OTNF	Original transaction not found
InvalidStOrgTrx	INSR	Invalid status original operation for perform return operation
TransactionTimedOut	TXTO	Debtor response not within specified time.
Fraudoperation	FRAD	Negative response while fraud check
InvalidSigRecv	ISRE	Invalid signature on the receiving end
RqstTypFrbdnSenPart	RFSP	Request type is forbidden for sending participant
RqstTypFrbdnRecPart	RFRP	Request type is forbidden for receiving participant
RqstNtFound	RQNF	Request Not found

AcceptanceDateTime <AccptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent. This means that the account servicing agent has received the payment order and has applied checks such as authorization, availability of funds.

Datatype: "ISODatetime"

OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]

Definition: Key elements used to identify the original transaction that is being referred to.

OriginalTransactionReference <OrgnlTxRef> contains the following elements:

Message Element <XML Tag>	Mul.	Type
InterbankSettlementAmount <IntrBkSttlmAmt>	[0..1]	Amount
Amount <Amt>	[0..1]	±
InstructedAmount <InstdAmt>	[1..1]	Amount
PaymentTypeInformation <PmtTpInf>	[0..1]	±
LocalInstrument <LclInstrm>	[1..1]	±
Proprietary <Prtry>	[1..1]	Text
CategoryPurpose <CtgyPurp>	[1..1]	±
Proprietary <Prtry>	[1..1]	Text
Debtor <Dbtr>	[0..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..1]	Text

Message Element <XML Tag>	Mul.	Type
Street Name <StrtNm>	[0..1]	Text
Contact Details<CtctDtls>	[0..1]	
Email Adress <EmailAdr>	[0..1]	Text
Mobile Number <MobNb>	[0..1]	Text
ID <ID>	[0..1]	
Private ID <PrvtId>	[1..1]	
Other <Othr>	[0..1]	
Scheme Name <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	
DebtorAccount <DbtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
Creditor<Cdtr>	[0..1]	
Name <Nm>	[0..1]	Text
Country Of Residence <CtryOfRes>	[0..1]	Text
Postal Address<PstlAdr>	[0..1]	

Message Element <XML Tag>	Mul.	Type
Address Line<AdrLine>		
Town Name <TwnNm>	[0..1]	Text
Sub Department <SubDept>	[0..1]	Text
Identification<Id>	[1..1]	
OrganisationId<OrgId>	[1..1]	
Other<Othr>	[0.*]	
Contact Details<CtctDtls>	[0..1]	
Name <Nm>	[0..1]	Text
Department <Dept>	[0..1]	Text
Other <Othr>	[0..1]	
Channel Type <ChnlTp>	[1..1]	Text
Identification <Id>	[0..1]	
CreditorAccount <CdtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
Ultimate Creditor<UltmtCdtr>	[0..1]	

Message Element <XML Tag>	Mul.	Type
Identification<Id>	[0..1]	
Private Identification<PrvtId>	[1..1]	
Other <Othr>	[0..*]	
Scheme Name <SchmeNm>	[0..1]	
Proprietary <Prtry>	[1..1]	
Purpose<Purp>	[1..1]	
Proprietary <Prtry>	[1..1]	Text
SupplementaryData<SplmtryData>	[0..*]	±
Envelope<Envlp>	[1..1]	±
Reference TxId<ReferenceTxId>	[1..1]	Text
Reference EndToEndId<ReferenceEndToEndId>	[1..1]	Text

InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Amount <Amt> contains the following element:

Message Element <XML Tag>	Mul.	Type
InstructedAmount <InstdAmt>	[1..1]	Amount

InstructedAmount <InstdAmt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

PaymentTypeInformation<PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

PaymentTypeInformation <PmtTpInf> contains the following element:

MessageElement<XML Tag>	Mult.	Type
CategoryPurpose <CtgyPurp>	[1..1]	
LocalInstrument <LclInstrm>	[1..1]	

CategoryPurpose <CtgyPurp>

Presence: [1..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.

Usage: This field is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.

CategoryPurpose <CtgyPurp> contains one of the following elements:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	

Proprietary <Prtry>

Presence: [1..1]

Definition: Defines transaction channels and high-level category (Customer to Merchant payment, Mobile payment, Regular credit transfer, Request to pay etc.) in proprietary form.

Datatype: "Max35Text"

Possible values:

CodeName	Name	Definition
C2CCRT	C2C credit transfer	Regular Credit transfer transaction.
C2CRTP	C2C RequestToPay	Credit transfer with a reference to the Request to Pay operation that initiated this credit transfer.
C2BBPT	C2B Bill Payment	Bill payments.
C2BSQR	C2B Static QR Payment	Credit transfer from Person to Merchant using Static QR.
C2BDQR	C2B Dynamic QR Payment	Credit transfer from Person to Merchant using Dynamic QR.
C2BRTP	C2B RequestToPay	Credit transfer with reference when Business/merchant is requesting money from the consumer.

In case the field is not present in the message the default value will be set as C2CCRT.

LocalInstrument <LclInstrm>

Presence: [1..1]

Definition: User community specific instrument.

LocalInstrument <LclInstrm> contains the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Datatype: "Max35Text"

Definition: Defines internal transaction processing mechanisms. This element will used to identify the mode of transaction. as a proprietary code. Possible values:

CodeName	Name	Definition
CRTAM	CreditTransferAdviceMode	Payment initiated is in advice mode.
CRTRM	CreditTransferRegularMode	Payment initiated is in regular mode.

In case the field is not present in the message the default value will be set as CRTRM.

Debtor <Dbtr>

Presence: [0..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Debtor <Dbtr> contains the following elements:

Message Element <XML Tag>	Mul.	Type
---------------------------	------	------

Party<Pty>	[1..1]	±
-------------------------	--------	---

Party <Pty>

Presence: [1..1]

Definition: Identification of a person or an organization.

Party <Pty> contains the following element:

Message Element <XML Tag>	Mult.	Type
Name<Nm>	[0..1]	Text
Postal Address<PstlAdr>	[0..1]	±

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

PostalAddress <PstlAdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
AddressLine <AdrLine>	[0..1]	Text
Street Name <StrtNm>	[0..1]	Text

AddressLine <AdrLine>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

StreetName <StrtNm>

Presence: [0..1]

Definition: Name of a street or thoroughfare.

Datatype: "Max70Text"

ContactDetails <CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

ContactDetails contains the following elements

Message Element <XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text
Mobile Number <MobNb>	[0..1]	Text
Email Address <EmailAdr>	[0..1]	Text

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

MobileNumber<MobNb>

Presence: [0..1]

Definition: Collection of information that identifies a mobile phone number, as defined by telecom services.

Datatype: "PhoneNumber"

EmailAddress<EmailAdr>

Presence: [0..1]

Definition: Address for electronic mail (e-mail).

Datatype: "Max2048Text"

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party. Identification contains following elements

Message Element <XML Tag>	Mult.	Type
Private Identification <PrvtId>	[1..1]	Text

PrivateIdentification<PrvtId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person, for example a passport.

PrivateIdentification contains the following elements

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..*]	Text

Other<Othr>

Presence: [0..*]

Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.

Other contains the following GenericPersonIdentification1 elements

Message Element <XML Tag>	Mult.	Type
Scheme Name <SchmeNm>	[0..1]	Text

SchemeName<SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName contains one of the following elements

Message Element <XML Tag>	Mult.	Type
Proprietary<Prtry>	[1..1]	Text

Proprietary<Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

DebtorAccount <DbtrAcct> contains the following elements:

Message Element <XML Tag>	Mult.	Type
ID<Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Other<Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
ID<Id>	[1..1]	Text
Scheme Name<SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

Message Element <XML Tag>	Mult.	Type
proprietary<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Creditor <Cdtr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text

Country Of Residence<CtryOfRes>	[0..1]	
Postal Address<PstlAdr>	[0..1]	
Contact Detail<CtctDtls>	[0..1]	

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

CountryOfResidence<CtryOfRes>

Presence: [0..1]

Definition: Country in which a person resides (the place of a person's home). In the case of a company, it is the country from which the affairs of that company are directed.

Datatype: "CountryCode"

Constraints • Country The code is checked against the list of country names obtained from the United Nations (ISO 3166, Alpha-2 code).

PostalAddress<PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

MessageElement<XML Tag>	Mult.	Type
Town Name <TwnNm>	[0..1]	±
Sub Department<SubDept>	[0..1]	
Address Line<AdrLine>		

TownName<TwnNm>

Presence: [0..1]

Definition: Name of a built-up area, with defined boundaries, and a local government.

SubDepartment<SubDept>

Presence: [0..1]

Definition: Identification of a sub-division of a large organisation or building.

Datatype: "Max70Text"

AddressLine <AdrLine>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Identification contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
OrganisationIdentification<OrgId>	[1..1]	±

OrganisationIdentification<OrgId>

Presence: [1..1]

Definition: Unique and unambiguous way to identify an organisation.

OrganisationIdentification contains the following elements

MessageElement<XML Tag>	Mult.	Type
Othr<Othr>	[0..*]	±

Other<Othr>

Presence: [0..*]

Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme

ContactDetails<CtctDtls>

Presence: [0..1]

Definition: Set of elements used to indicate how to contact the party.

ContactDetails contains the following elements

MessageElement<XML Tag>	Mult.	Type
Department<Dept>	[0..1]	±
Other<Othr>	[0..*]	

Department<Dept>

Presence: [0..1]

Definition: Identification of a division of a large organisation or building.

Datatype: "Max70Text"

Other<Othr>

Presence: [0..*]

Definition: Contact details in another form.

ChannelType<ChnlTp>

Presence: [1..1]

Definition: Method used to contact the financial institution's contact for the specific tax region.

Datatype: "Max4Text"

MessageElement<XML Tag>	Mult.	Type
ID<Id>	[0..1]	±

Identification<Id>

Presence: [0..1]

Definition: Communication value such as phone number or email address.

Datatype: "Max128Text"

CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

CreditorAccount <CdtrAcct> contains the following elements:

Message Element <XML Tag>	Mult.	Type
identification<Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Other<Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
ID<Id>	[1..1]	Text
Scheme Name<SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

UltimateCreditor<UltmtCdtr>

Presence: [0..1]

Definition: Ultimate party to which an amount of money is due.

UltimateCreditor contains the following elements

MessageElement<XML Tag>	Mult.	Type
ID <Id>	[0..1]	Text

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

Identification contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
Private ID <PrvtId>	[1..1]	Text

PrivateIdentification<PrvtId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person, for example a passport.

PrivateIdentification contains the following elements

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..*]	Text

Other<Othr>

Presence: [0..*]

Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.

Other contains the following elements

MessageElement<XML Tag>	Mult.	Type
Scheme Name <SchmeNm>	[1..1]	Text

SchemeName<SchmeName>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName contains following

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary<Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

Purpose<Purp>

Presence: [1..1]

Definition: Underlying reason for the payment transaction. Usage: Purpose is used by the end-customers, that is initiating party, (ultimate) debtor, It has information concerning the nature of the payment. Purpose is a content element, which is not used for processing by any of the agents involved in the payment chain.

Purpose contains one of the following elements

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Purpose, in a free text form.

Datatype: "Max35Text"

Possible Values:

The purpose value is intended to be retrieved from the REST API service using the "Get Dictionaries" method

Document reference: sv_ip_specification_aux_rest_service_en_core.

SupplementaryData <SplmtryData>

Presence: [0..*]

Definition: Additional information that cannot be captured in the structured elements and/or any other specific block.

Message Element <XML Tag>	Mult.	Type
Envelope<Envlp>	[1..1]	Text

Envelope < Envlp>

Presence: [1..1]

Definition: Technical element wrapping the supplementary data. Used for Return payment.

Technical component that contains the validated supplementary data information. This technical envelope allows to segregate the supplementary data information from any other information

Message Element <XML Tag>	Mult.	Type
Reference TxId<ReferenceTxId>	[1..1]	Text
Reference EndToEndId<ReferenceEndToEndId>	[1..1]	Text

Reference TxId<ReferenceTxId>

Presence: [1..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction. Reference on credit transfer transaction.

Datatype: "Max35Text"

Reference EndToEndId<ReferenceEndToEndId>

Presence: [1..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction. Reference on credit transfer transaction.

Datatype: "Max35Text"

7 FIToFIPaymentStatusRequest (pacs.028.001.05)

7.1 Message structure (FIToFIPaymentStatusRequest pacs.028.001.05)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document> <FIToFIPmtStsReq>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]	±	Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
TransactionInformation	<TxInf>	[0..*]		Yes
OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	Yes
OriginalEndToEndIdentification	<OrgnlEndToEndId >	[0..1]	Text	Yes
OriginalUETR	<OrgnlUETR>	[0..1]		Yes

7.2 Message building blocks

7.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the status request message.

GroupHeader <GrpHdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
MessageIdentification <MsgId>	[1..1]	Text
CreationDateTime <CreDtTm>	[1..1]	DateTime

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODateTime"

7.2.2 TransactionInformation <TxInf>

Presence: [0..*]

Definition: Information concerning the original transaction, to which the status request message refers.

TransactionInformation <TxInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalTransactionIdentification <OrgnlTxId>	[0..1]	Text
OriginalEndToEndIdentification<OrgnlEndToEndId >	[0..1]	Text
OriginalUETR<OrgnlUETR>	[0..1]	Text

OriginalTransactionIdentification <OrgnlTxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction. The tag must contain the TxId value of the original instruction.

Datatype: "Max35Text"

OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

Note: EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

Original UETR<OrgnlUETR>

Presence: [0..1]

Definition: Universally unique identifier to provide an end-to-end reference to a Request to Pay transaction.

Datatype: "UUIDv4Identifier"

8 PaymentReturn (pacs.004.001.11)

8.1 Message structure (PaymentReturn pacs.004.001.11)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document><PmtRtr>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
NumberOfTransactions	<NbOfTxS>	[1..1]	Text	Yes
SettlementInformation	<SttlmInf>	[1..1]	±	Yes
SettlementMethod	<SttlmMtd>	[1..1]	CodeSet	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
ClearingSystem	<ClrSys>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Max35Text	Yes
InstructingAgent	<InstgAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
InstructedAgent	<InstdAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
TransactionInformation	<TxInf>	[0..*]		Yes
ReturnIdentification	<RtrId>	[0..1]	Max35Text	Yes
OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Max35Text	Yes
OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	Yes
OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]	Text	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
ReturnedInterbankSettlementAmount	<RtrdIntrBkSttlmAmt>	[1..1]	Amount	Yes
ReturnReasonInformation	<RtrRsnInf>	[0..*]	±	Yes
Reason	<Rsn>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
AdditionalInformation	<AddtlInf>	[0..*]	Text	Yes

8.2 Message building blocks

8.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the status report message.

GroupHeader <GrpHdr> contains the following elements:

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
MessageIdentification	<MsgId>	[1..1]	Text
CreationDateTime	<CreDtTm>	[1..1]	DateTime
NumberOfTransactions	<NbOfTxs>	[1..1]	Text
SettlementInformation	<SttlmInf>	[1..1]	
SettlementMethod	<SttlmMtd>	[1..1]	

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
ClearingSystem	<ClrSys>	[0..1]	
Proprietary	Prtry>	[1..1]	Max35Text
InstructingAgent	<InstgAgt>	[0..1]	±
FinancialInstitutionIdentif ication	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text
InstructedAgent	<InstdAgt>	[0..1]	±
FinancialInstitutionIdentif ication	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime"

NumberOfTransactions <NbOfTx>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Datatype: "Max15NumericText"

SettlementInformation <SttlmInf>

Presence: [1..1]

Definition: Specifies the details on how the settlement of the transaction(s) between the instructing agent and the instructed agent is completed.

SettlementInformation <SttlmInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
SettlementMethod <SttlmMtd>	[1..1]	CodeSet
ClearingSystem <ClrSys>	[0..1]	
Proprietary <Prtry>	[1..1]	Text

SettlementMethod <SttlmMtd>

Presence: [1..1]

Definition: Method used to settle the (batch of) payment instructions. It is always CLRG.

Datatype: "SettlementMethod2Code"

CodeName	Name	Definition
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.
CLRG	ClearingSystem	Settlement is done through a payment clearing system.

ClearingSystem <ClrSys>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

ClearingSystem <ClrSys> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Clearing system identification in a proprietary form. Currently the only value used is FP.

Datatype: "Max35Text"

InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

InstructingAgent <InstgAgt> contains the following:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

InstructedAgent <InstdAgt> contains the following elements:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

8.2.2 TransactionInformation <TxInf>

Presence: [0..*]

Definition: Information concerning the original transactions, to which the return message refers.

TransactionInformation <TxInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
ReturnIdentification	<RtrId>	[0..1]
OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]
OriginalTransactionIdentification	<OrgnlTxId>	[0..1]

Message Element <XML Tag>	Mult.	Type
OriginalInstructionIdentification	<OrgnlInstrId>	[0..1]
ReturnedInterbankSettlementAmount	<RtrdIntrBkSttlmAmt>	[1..1]
ReturnReasonInformation	<RtrRsnInf>	[0..*]
Reason	<Rsn>	[0..1]
Proprietary	<Prtry>	[1..1]
AdditionalInformation	<AddtlInf>	[0..*]

ReturnIdentification <RtrId>

Presence: [0..1]

Definition: Unique identification, as assigned by an instructing party for an instructed party, to unambiguously identify the returned transaction

Datatype: "Max35Text"

OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

Note: EndToEndIdentification should be common for the pacs.008, pacs.004, camt.056, camt.029etc.

OriginalTransactionIdentification <OrgnlTxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction.

Datatype: "Max35Text"

Note: Reference to the original pacs.008 transaction identification id.

OriginalInstructionIdentification <OrgnlInstrId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction.

Datatype: "Max35Text"

Note: Reference to the camt.056 instruction identification id.

In Payment return it will be reference to original credit transfer message instruction.

ReturnedInterbankSettlementAmount<RtrdIntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and the creditor, before deduction of charges, in the returned transaction.

Datatype: "ActiveCurrencyAndAmount"

Example: <RtrdIntrBkSttlmAmt Ccy="USD">123.45</RtrdIntrBkSttlmAmt>

ReturnReasonInformation <RtrRsnInf>

Presence: [0..*]

Definition: Provides detailed information on the return reason.

ReturnReasonInformation <RtrRsnInf> consists of the following elements:

Message Element <XML Tag>	Mult.	Type
Reason <Rsn>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
AdditionalInformation <AddtlInf>	[0..*]	Max105Text

Reason <Rsn>

Presence: [0..1]

Definition: Specifies the reason for the return.

Reason <Rsn> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Reason for the return, in a proprietary form

Format:

- maxLength: 4
- minLength: 1

Possible values:

- AC01 IncorrectAccountNumber – Format of the account number specified is not correct
- AC04 ClosedAccountNumber – Account number specified has been closed on the bank of account's books
- AC06 BlockedAccount – Account specified is blocked, prohibiting posting of transactions against it.
- AG01 TransactionForbidden – Transaction forbidden on this type of account (formerly NoAgreement)
- DS28 ReturnForTechnicalReason – Return following technical problems resulting in erroneous transaction.
- FR01 Fraud – Returned as a result of fraud.
- UC01 UltimeCreditorRequest – A request to return from an Ultimate Creditor

AdditionalInformation <AddtlInf>

Presence: [0..*]

Definition: Further details on the return reason

9 Requests from the payee's bank and verification request (acmt.023.001.03 IdentificationVerificationRequestV02)

9.1 Message structure

The table below contains all elements of acmt.023.001.03 as per the ISO20022 standard. Only mandatory fields are present.

Message Element	<XML Tag>	Mult.	Type	Used?
Message root	<IdVrfctnReq>	[1..1]		Yes
Assignment	<Assgnmt>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
Assigner	<Assgnr>	[1..1]		Yes. It identifies the bank that sent the message (bank that is requesting the PAM).
Agent	<Agt>	[1..1]	±	Yes
Assignee	<Assgne>	[1..1]		Yes. It identifies the bank to which the request will be sent and that will generate the PAM.
Agent	<Agt>	[1..1]	±	Yes

Message Element	<XML Tag>	Mult.	Type	Used?
Verification	<Vrfctn>	[1..*]		Yes. Only one PAM is requested.
Identification	<Id>	[1..1]	Text	Unique transaction identifier that is assigned by IPS.
PartyAndAccountId entification	<PtyAndAcctId>	[1..1]		Yes
Account	<Acct>	[0..1]	±	Yes

9.2 Description of the message items

This section covers only those message elements that are used in the protocol.

9.2.1 Assignment <Assgnmt>

Presence: [1..1]

Definition: Identifies the identification assignment.

Type: The Assignment block is composed of the following IdentificationAssignment2 element(s):

Message Element	<XML Tag>	Mult.	Type
MessageIdentification	<MsgId>	[1..1]	Text
CreationDateTime	<CreDtTm>	[1..1]	DateTime
Assigner	<Assgnr>	[1..1]	
Assignee	<Assgne>	[1..1]	

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the assigner, and sent to the next party in the chain to unambiguously identify the message.

Usage: The assigner has to make sure that MessageIdentification is unique per assignee for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

Max. length is 35 characters. Rules for filling in this field are determined by an initiator. It is allowed to transfer a value that is shorter than 35 characters.

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the identification assignment was created.

Data Type: ISODateTime

Time format: UTC offset format (*YYYY-MM-DDThh:mm:ss.sss+/-hh:mm*)

Assigner <Assgnr>

Presence: [1..1]

Definition: Party that assigns the identification assignment to another party. This is also the sender of the message.

Type: This message item is composed of one of the following Party12Choice element(s):

Message Element	<XML Tag>	Mult.	Type
Agent	<Agt>	[1..1]	±

Agent <Agt>

Presence: [1..1]

This message item is part of choice 1.7 Assigner.

Definition: Identification of a financial institution.

Type: This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):

Message Element	<XML Tag>	Mult.	Type
FinancialInstitutionIdentification	<FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

Type: This message item is composed of the following

FinancialInstitutionIdentification8 element(s):

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: This message item is composed of the following

GenericFinancialIdentification1 element(s):

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: This message item is composed of one of the following

FinancialIdentificationSchemeName1Choice element(s):

Message Element	<XML Tag>	Mult.	Type
Proprietary	<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice 2.1.21 SchemeName.

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

Assignee <Assgne>

Presence: [1..1]

Definition: Party that the identification assignment is assigned to. This is also the recipient of the message.

Type: This message item is composed of one of the following **Party12Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Agent	<Agt>	[1..1]	±

Agent <Agt>

Presence: [1..1]

This message item is part of choice 1.10 Assignee.

Definition: Identification of a financial institution.

Type: This message item is composed of the following
BranchAndFinancialInstitutionIdentification5 element(s):

Message Element	<XML Tag>	Mult.	Type
FinancialInstitutionIdentification	<FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

Type: This message item is composed of the following
FinancialInstitutionIdentification8 element(s):

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: This message item is composed of the following
GenericFinancialIdentification1 element(s):

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: This message item is composed of one of the following **FinancialIdentificationSchemeName1Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Proprietary	<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice 2.1.21 SchemeName.

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

9.2.2 Verification <Vrfctn>

Presence: [1..*]

Definition: Identification data that is requested to be verified.

Type: The Verification block is composed of the following **IdentificationVerification2** element(s):

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	Text
PartyAndAccountIdentification	<PtyAndAcctId>	[1..1]	

Identification <Id>

Presence: [1..1]

Definition: Unique identification, as assigned by a sending party, to unambiguously identify the party and account identification information group within the message.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

Indicator generation rules (the indicator is always generated by IPS):

Identifier format: *BBBBBBB**BY**DDD**HH**SSSSSSSSSSSS*, where

- *BBBBBBB* — bank’s BIC
- *Y* — last digit of the year
- *DDD* — number of the current day in the year
- *HH* — hours (UTC server time)
- *SSSSSSSSSSSS* — sequence (12 characters)

The initiating bank must populate this field following the rules below:

Request	Rules
Payee Verification	If the initiating bank does not have the unique transaction identifier, it must populate this field with a mock value as this field is mandatory. In this case, IPS will generate unique transaction identifier once it receives the verification request. The request that contains the unique transaction identifier is then sent to the payee’s bank.

PartyAndAccountIdentification <PtyAndAcctId>

Presence: [1..1]

Definition: Party and/or account identification information for which verification is requested.

Type: This message item is composed of the following **IdentificationInformation2** element(s):

Message Element	<XML Tag>	Mult.	Type
Account	<Acct>	[0..1]	±

Account <Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of a party.

Account <Acct> contains one of the following elements:

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	±
Other	<Othr>	[1..1]	±
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±
Proprietary	<Prtry>	[1..1]	Text

This block is used to transfer **clearingID**. The ID field contains the identifier. The **Prtry** field contains the **clearingType**. Possible values for **clearingType**:

- MSIS — mobile phone number (ID = "PhoneNumber")
- ACCT — account number (ID = "AccountID")
- EWL — e-wallet identifier (ID = "EwalletID")

It is used in a response message to the verification request.

10 Response message (acmt.024.001.03 IdentificationVerificationRequestV02)

10.1 Message structure

The table below contains all elements of acmt.023.001.03 as per the ISO20022 standard. Message elements that are not used in the protocol and so must be deleted from the message are highlighted in gray.

Message Element	<XML Tag>	Mult.	Type	Used?
Message root	<IdVrfctnRpt>	[1..1]	±	Yes
Assignment	<Assgnmt>	[1..1]	±	Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
Assigner	<Assgnr>	[1..1]	±	Yes. Identifies the bank that sent the message (bank that generated the PAM).
Agent	<Agt>	[1..1]	±	Yes
Assignee	<Assgne>	[1..1]	±	Yes. Identifies the bank that requested the PAM.
Agent	<Agt>	[1..1]	±	Yes
OriginalAssignment	<OrgnlAssgnmt>	[0..1]	±	Yes
MessageIdentification	<MsgId>	[0..1]	Text	Yes
CreationDateTime	<CreDtTm>	[0..1]	DateTime	Yes

Message Element	<XML Tag>	Mult.	Type	Used?
Report	<Rpt>	[1..*]	±	Yes. Response always contains only one report.
OriginalIdentification	<OrgnlId>	[1..1]	Text	Yes
Verification	<Vrfctn>	[1..1]	Indicator	Yes
Reason	<Rsn>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
OriginalParty AndAccountIdentification	<OrgnlPtyAndAc ctId>	[0..1]	±	Yes
Account	<Acct>	[0..1]	±	
UpdatedParty AndAccountIdentification	<UpdtdPtyAndAc ctId>	[0..1]	±	
Party	<Pty>	[0..1]	±	Yes. According to the current PAM message- building logic, this tag contains the payee's masked full name.

Message Element	<XML Tag>	Mult.	Type	Used?
Account	<Acct>	[0..1]	±	This tag contains ClearingID for the given verification request.

10.2 Description of the message items

This section covers only those message elements that are used in the protocol.

10.2.1 Assignment <Assgnmt>

Presence: [1..1]

Definition: Identifies the identification assignment.

Type: The Assignment block is composed of the following **IdentificationAssignment2** element(s):

Message Element	<XML Tag>	Mult.	Represent./Type
MessageIdentification	<MsgId>	[1..1]	Text
CreationDateTime	<CreDtTm>	[1..1]	DateTime
Assigner	<Assgnr>	[1..1]	±
Assignee	<Assgne>	[1..1]	±

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the assigner, and sent to the next party in the chain to unambiguously identify the message.

Usage: The assigner has to make sure that MessageIdentification is unique per assignee for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

Max. length is 35 characters. Rules for filling in this field are determined by an initiator. A value that is shorter than 35 characters can be transferred.

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the identification assignment was created.

Data Type: ISODateTime

Format: UTC offset format (*YYYY-MM-DDThh:mm:ss.sss+/-hh:mm*)

Assigner <Assgnr>

Presence: [1..1]

Definition: Party that assigns the identification assignment to another party. This is also the sender of the message.

Type: This message item is composed of one of the following **Party12Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Agent	<Agt>	[1..1]	±

Agent <Agt>

Presence: [1..1]

This message item is part of choice 1.7 Assigner.

Definition: Identification of a financial institution.

Type: This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):

Message Element	<XML Tag>	Mult.	Type
FinancialInstitutionIdentification	<FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

Type: This message item is composed of the following **FinancialInstitutionIdentification8** element(s):

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: This message item is composed of the following **GenericFinancialIdentification1** element(s):

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

2.1.21 SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: This message item is composed of one of the following **FinancialIdentificationSchemeName1Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Proprietary	<Prtry>	[1..1]	Text

Assignee <Assgne>

Presence: [1..1]

Definition: Party that the identification assignment is assigned to. This is also the recipient of the message.

Type: This message item is composed of one of the following **Party12Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Agent	<Agt>	[1..1]	±

Agent <Agt>

Presence: [1..1]

This message item is part of choice 1.10 Assignee.

Definition: Identification of a financial institution.

Type: This message item is composed of the following **BranchAndFinancialInstitutionIdentification5** element(s):

Message Element	<XML Tag>	Mult.	Type
FinancialInstitutionIdentification	<FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

Type: This message item is composed of the following
FinancialInstitutionIdentification8 element(s):

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Type: This message item is composed of the following
GenericFinancialIdentification1 element(s):

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Type: This message item is composed of one of the following
FinancialIdentificationSchemeName1Choice element(s):

Message Element	<XML Tag>	Mult.	Type
Proprietary	<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

This message item is part of choice 2.1.21 SchemeName.

Definition: Name of the identification scheme, in a free text form.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

10.2.2 OriginalAssignment <OrgnlAssgnmt>

Presence: [0..1]

Definition: Provides for the reference to the original identification assignment.

Type: The OriginalAssignment block is composed of the following **MessageIdentification5** element(s):

Message Element	<XML Tag>	Mult.	Type
MessageIdentification	<MsgId>	[0..1]	Text
CreationDateTime	<CreDtTm>	[0..1]	DateTime

MessageIdentification <MsgId>

Presence: [0..1]

Definition: Point to point reference, as assigned by the assigner, and sent to the next party in the chain to unambiguously identify the message.

Usage: The assigner has to make sure that **MessageIdentification** is unique per assignee for a pre-agreed period.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

Max. length is 35 characters. Rules for filling in this field are determined by an initiator. It is allowed to transfer a value that is shorter than 35 characters.

CreationDateTime <CreDtTm>

Presence: [0..1]

Definition: Date and time at which the message was created.

Data Type: ISODateTime

Format: UTC offset format (*YYYY-MM-DDThh:mm:ss.sss+/-hh:mm*)

10.2.3 Report <Rpt>

Presence: [1..*]

Definition: Information concerning the verification of the identification data for which verification was requested.

Type: The Report block is composed of the following **VerificationReport2** element(s):

Message Element	<XML Tag>	Mult.	Type
OriginalIdentification	<OrgnlId>	[1..1]	Text
Verification	<Vrfctn>	[1..1]	Indicator
Reason	<Rsn>	[0..1]	±
OriginalPartyAnd AccountIdentification	<OrgnlPtyAndAcctId>	[0..1]	±
UpdatedPartyAnd AccountIdentification	<UpdtdPtyAndAcctId>	[0..1]	±

OriginalIdentification <OrgnlId>

Presence: [1..1]

Definition: Unique identification, as assigned by a sending party, to unambiguously identify the party and account identification information group within the original message.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

This field is used to transfer the transaction identifiers that are assigned by IPS for the following transactions: (1) Request to search for a payee's bank by UserID and (2) Verification request.

Verification <Vrfctn>

Presence: [1..1]

Definition: Identifies whether the party and/or account information received is correct.

Data Type: One of the following **IdentificationVerificationIndicator** values must be used:

- **true** — Indicates that the identification information received is correct.
- **false** — Indicates that the identification information received is incorrect.

Note: The "true" and "false" are in lower case.

Reason <Rsn>

Presence: [0..1]

Definition: Specifies the reason why the verified identification information is incorrect.

Type: This message item is composed of one of the following **VerificationReason1Choice** element(s):

Message Element	<XML Tag>	Mult.	Type
Proprietary	<Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

List of possible values:

Name	Code	Description
UserNotFound	UNFN	UserID was not found in the payee's bank
UserBlocked	BLCK	The given UserID is blocked in the payee's bank and cannot be used in transactions

Missing	MISS	IPS did not receive a response from the payee's bank
NotPerformed	NOVF	IPS failed to send a request to the payee's bank
TechnicalError	ERRR	Technical error (for example, invalid XSD)
WrongBIC	WBIC	Bank BIC was not found in IPS
TransactionTimeout	TXTO	Transaction Time-Out
RqstTypFrbdnSenPart	RFSP	Request type is forbidden for sending participant
RqstTypFrbdnRecPart	RFRP	Request type is forbidden for receiving participant

Data Type: Max35Text

OriginalPartyAndAccountIdentification <OrgnlPtyAndAcctId>

Presence: [0..1]

Definition: Provides party and/or account identification information as given in the original message.

Type: This message item is composed of the following **IdentificationInformation2** element(s):

Message Element	<XML Tag>	Mult.	Type
Account	<Acct>	[0..1]	±

Account <Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of a party.

Account <Acct> contains one of the following elements:

Message Element	<XML Tag>	Mult.	Type
Identification	<Id>	[1..1]	±
Other	<Othr>	[1..1]	±
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±
Proprietary	<Prtry>	[1..1]	Text

This block is used to transfer **clearingID**. The ID field contains the identifier. The **Prtry** field contains the **clearingType**. Possible values for **clearingType**:

- MSIS — mobile phone number (ID = "PhoneNumber")
- ACCT — account number (ID = "AccountID")
- EWLT — e-wallet identifier (ID = "EwalletID")

It is used in a response message to the verification request.

Identification <Id>

Presence: [1..1]

Definition: Unique identification, as assigned by a sending party, to unambiguously identify the party and account identification information group within the message.

Data Type: Max35Text

Format: maxLength: 35 minLength: 1

PartyAndAccountIdentification <PtyAndAcctId>

Presence: [1..1]

Definition: Party and/or account identification information for which verification is requested.

Type: This message item is composed of the following **IdentificationInformation2** element(s):

Message Element	<XML Tag>	Mult.	Type
Account	<Acct>	[0..1]	±

Account <Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of a party.

Account <Acct> contains one of the following elements:

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[1..1]	±
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±
Proprietary	<Prtry>	[1..1]	Text

This block is used to transfer **clearingID**. The ID field contains the identifier. The **Prtry** field contains the **clearingType**. Possible values for **clearingType**:

- MSIS — mobile phone number (ID = "PhoneNumber")
- ACCT — account number (ID = "AccountID")
- EWLTLT — e-wallet identifier (ID = "EwalletID")

It is used in a response message to the verification request.

UpdatedPartyAndAccountIdentification <UpdtdPtyAndAcctId>

Presence: [0..1]

Definition: Provides party and/or account identification information.

Usage:

Type: This message item is composed of the following **IdentificationInformation2** element(s):

Message Element	<XML Tag>	Mult.	Type
Party	<Pty>	[0..1]	±
Account	<Acct>	[0..1]	±

The **Party** and **Account** blocks are used in a response to the verification request.

Party <Pty>

Presence: [0..1]

Definition: Account owner that owes an amount of money or to whom an amount of money is due.

Type: This message item is composed of the following **PartyIdentification43** element(s):

Message Element	<XML Tag>	Mult.	Type
Name	<Nm>	[0..1]	Text

Name <Nm>

Presence: [0..1]

Datatype: Max140Text

According to the current PAM generation logic, this tag contains a masked full name.

It is used in a response message to the verification request.

Example of a masked full name: Mylah D.

The first name is fully spelled while the surname is shortened to the first letter that is followed by a full stop.

Account <Acct>

Presence: [0..1]

Definition: Unambiguous identification of the account of a party.

Account <Acct> contains one of the following elements:

Message Element	<XML Tag>	Mult.	Type
Other	<Othr>	[1..1]	±
Identification	<Id>	[1..1]	Text
SchemeName	<SchmeNm>	[0..1]	±
Proprietary	<Prtry>	[1..1]	Text

This block is used to transfer **clearingID**. The **ID** field contains the identifier. The **Prtry** field contains the **clearingType**. Possible values for **clearingType**:

- **MSIS** — mobile phone number (ID = "PhoneNumber")
- **ACCT** — account number (ID = "AccountID")
- **EWLT** — e-wallet identifier (ID = "EwalletID")

It is used in a response message to the verification request.