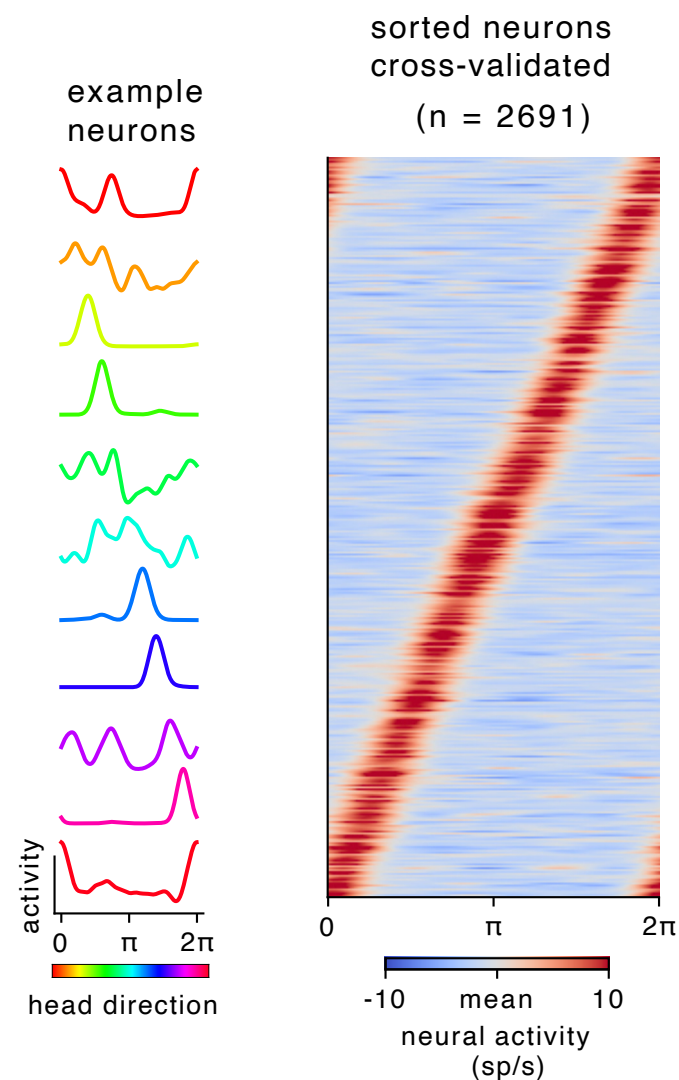
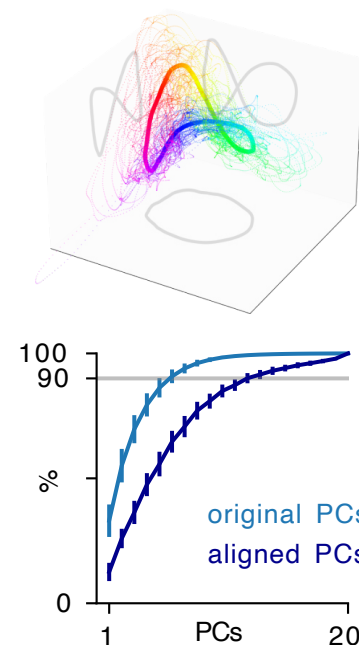


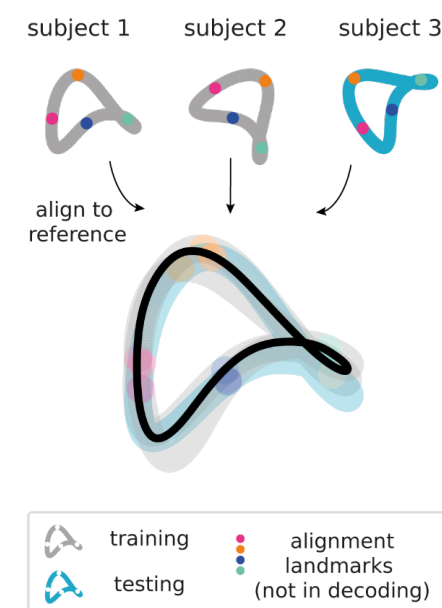
a**b**

cross-subject alignment allows for 0-shot learning

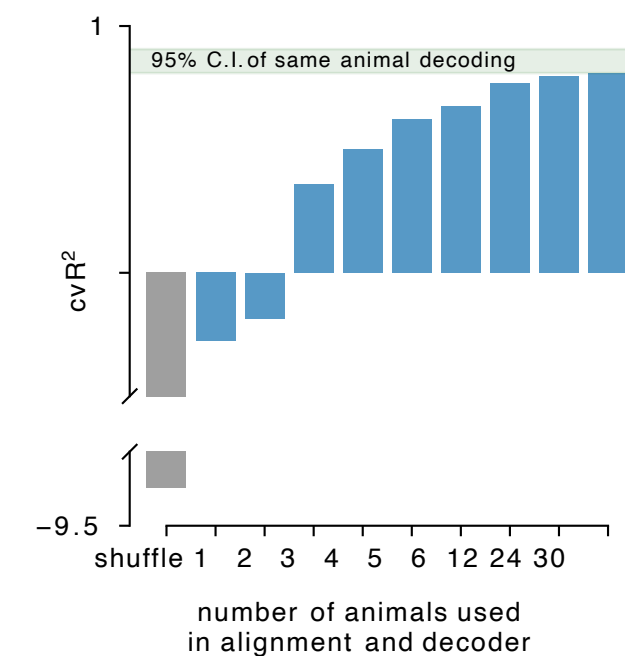
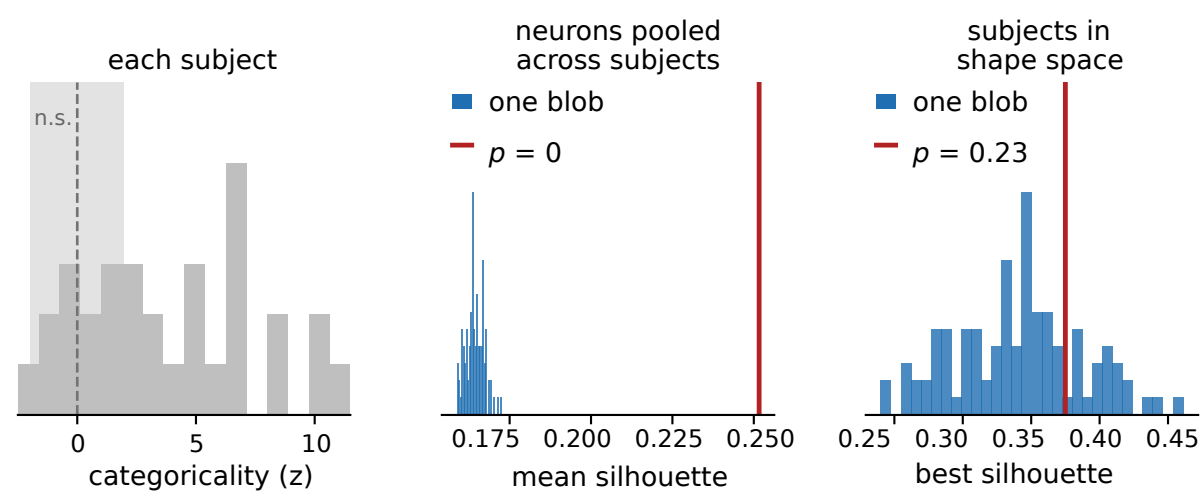
PCA of aligned subjects (n = 31)



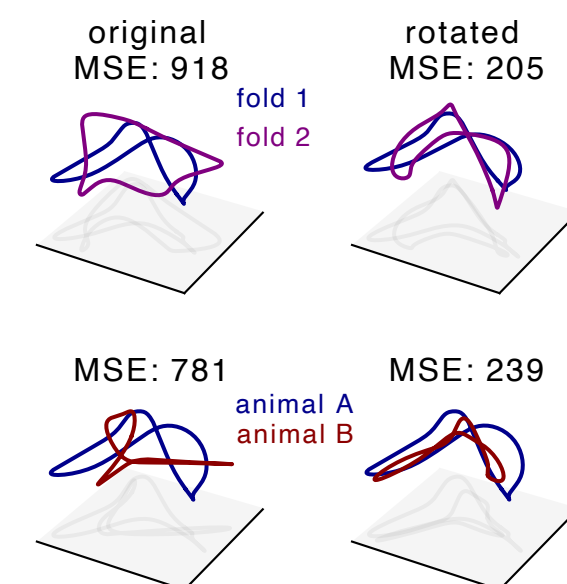
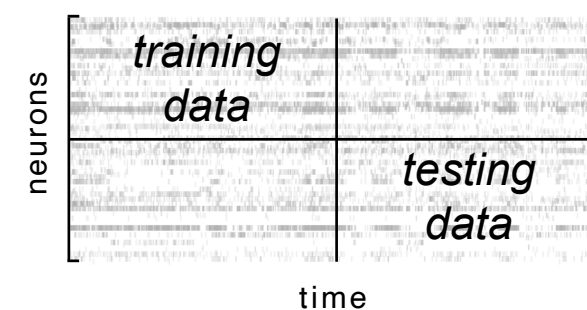
schematics of decoding procedure for 2 subjects



0-shot learning of head direction angle (leave one subject out)

**c****d**

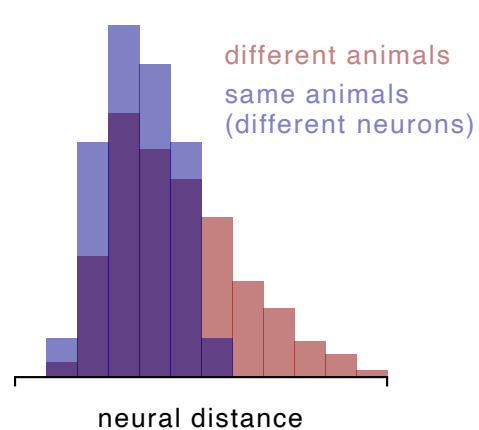
individual session partitioning for bi-cross validation

**e**

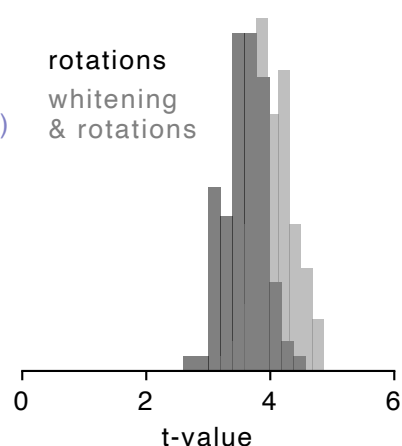
independent data (neurons and time points) from same animal are more similar than across animals

distance between manifolds (1 fold of cross validation)

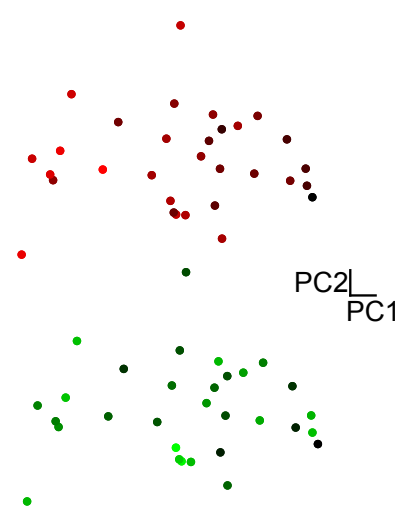
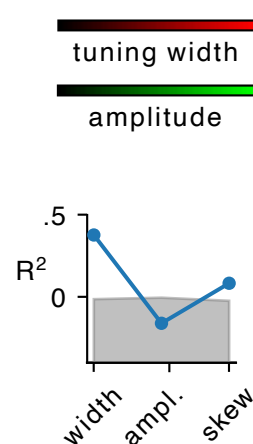
same vs different animals (all folds)



rotations whitening & rotations



representational similarities are predictive of tuning width

**f**

angle between cues is reflected in angle between representational subspaces

