

# Actor-based Large Neighborhood Search for weekly maintenance scheduling

Christian Brunbjerg Jespersen<sup>a</sup>, Kristoffer Sigsgaard Wernblad<sup>a</sup>, Thomas Jacob Riis Stidsen<sup>b</sup>, Kasper Barslund Hansen<sup>a</sup>, Jingrui Ge<sup>a</sup>, Simon Didriksen<sup>a</sup>, Niels Henrik Mortensen<sup>a</sup>

<sup>a</sup>*DTU Construct, Technical University of Denmark, Anker Egelundsvej 1, Kongens Lyngby, 2800, Hovedstaden, Denmark*

<sup>b</sup>*DTU Management, Technical University of Denmark, Anker Egelundsvej 1, Kongens Lyngby, 2800, Hovedstaden, Denmark*

---

## Abstract

Many planning problems facing the operations research field have proven difficult to solve due to their inherent uncertainty and highly dynamic nature. Stochastic Programming (Birge and Louveaux, 2011), fuzzy logic (Zadeh, 1988), robust optimization (Ben-Tal et al., 2009), and dynamic optimization (Yang et al., 2013), and human-in-loop optimization (Talbi, 2009). These are some of the methods that have been proposed to solve these issues. These methods make an implicit assumption of a static data setting and a static problem setting. Maintenance scheduling is one such problem where the best available information is continually updated and therefore the scheduling continuously needs to be updated. Maintenance scheduling is a complex process often more associated with operation management, but here we will argue that is possible to implement general maintenance scheduling approaches, if the solution approach is designed to be integrated into a business process of the kind that are usually developed by the principles of operation management (plan-do-check-act, etc.). This paper proposes a novel optimization method that is capable to optimizing a scheduling problem in the following setting: Primary data source is changing in real-time; external inputs affects the optimization process; multiple actors are making interdependent decisions whose objectives may differ significantly. The proposed solution approach is an actor-based framework based on a large neighborhood search metaheuristic implementation. The framework is tested on the real-world problem of maintaining scheduling of offshore platforms for Total Energies

in the North Sea. The approach is general and can be applied to a wide variety of other planning problems where LNS have been effective.

*Keywords:* Large Neighborhood Search, Actor Framework, Parallel Metaheuristics, Maintenance scheduling, Real-time Optimization, Human-centered Computing, Interactive Systems and Tools, Decision Support Systems, Interactive Optimization.

---

## 1. Introduction

Maintenance scheduling is part of a class of operational problems that have proven hard to solve in practice (NP-hard (Garey and Johnson, 1979)). Furthermore, for optimization to be useful in dynamic and uncertain environments where maintenance scheduling is performed requires tight integration into existing IT infrastructure to allow the tacit knowledge of decision makers to easily influence the planning process. Often a number of different decision makers at different company levels take part in the planning process. In this way the industry usually assigns responsibility for decision-making to an individual representing only a small part of the complete process. These multiple smaller planning processes are often difficult to map to a single mathematical model describing the whole system as elaborated by (Barthélemy et al., 2002). Solving operation research problems that are operational in nature have additional requirements over more typical static problems: they have to be responsive to changing parameters; able to be assimilated into the decision-makers workflow; allow for integration with dynamic data sources such as databases and APIs (Meignan et al., 2015b). Operational aspects of operation research, as opposed to higher level strategic and tactical ones, are characterized by extensive amounts coordination and negotiation on proposed schedules often in a short amount of time (Palmer, 2019).

The lack of integration into the schedulers and supervisors workflow and lack of responsiveness can lead to a situation where solutions are not directly implemented in practice but instead only provides initial suggestions (Meignan et al., 2015b). These initial suggestions are then iterated on elsewhere in the scheduling process usually through much more manual means. In (Barthélemy et al., 2002) the authors argue that many problems that operation research aim to solve are often composed of a group of individuals whose decisions are consolidated into an "epistemic subject" for which a mathematical model can be formulated and solved, with many scheduling

problems being good examples. However, often multiple actors have different views on what constitutes an optimal schedule hence resulting in multiple-objectives. Even if multi-objective optimization (Ehrgott and Gandibleux, 2002) is applied to find a Pareto Front (Pareto, 1897) a negotiating process still is needed between the actors to select the final schedule.

This paper proposes a solution method that will allow for real-time optimization based on actor/user interaction and a connection to a dynamic data source, effectively managing the changes to the parameter space as they occur. The proposed solution method will be tested on the weekly maintenance scheduling problem Palmer (2019) which closely resembles a variant of the multi-compartment multi-knapsack problem (MCMKP). It should be noted that the scientific maintenance scheduling literature can deviate significantly from its practical implementation which is also detailed in (Palmer, 2019). The solution method is based on the large neighborhood search (LNS) meta-heuristic and is in this paper describes as actor-based large neighborhood search (AbLNS). LNS was chosen due to its properties of naturally being able to work with and fix infeasible solutions and its state of the art performance on various scheduling problems (Gendreau and Potvin, 2019).

To understand the need for actor-based methods some background knowledge will be required about the maintenance scheduling process. Figure ?? illustrates the general setup of a maintenance planning and scheduling system. The system’s actors have the following responsibilities: the planner generates the work orders that are to be scheduled; the scheduler creates weekly schedules of work orders that are usually based on a knapsack formulation; based on the weekly schedule the supervisor assigns work order activities to technicians (modelled as an assignment problem); the technicians executes the work in sequential pattern (modelled as a single machine scheduling).

The idea of ownership of a work order is crucial to understand the necessity of actor-based approaches. Throughout the scheduling process a work order is always owned by a specific actor and he alone is allow to modify/execute it. This means that a single model approach is very difficult to implement in practice as a work order is modelled differently depending on the actor that currently owns it. This highlights another point in maintenance scheduling: that the stochastic nature of the maintenance scheduling process can be handled using a change of model, each with different levels of aggregation and different sets of constraints, opposed to more academic approaches such as fuzzy logic and stochastic optimization. When the inher-

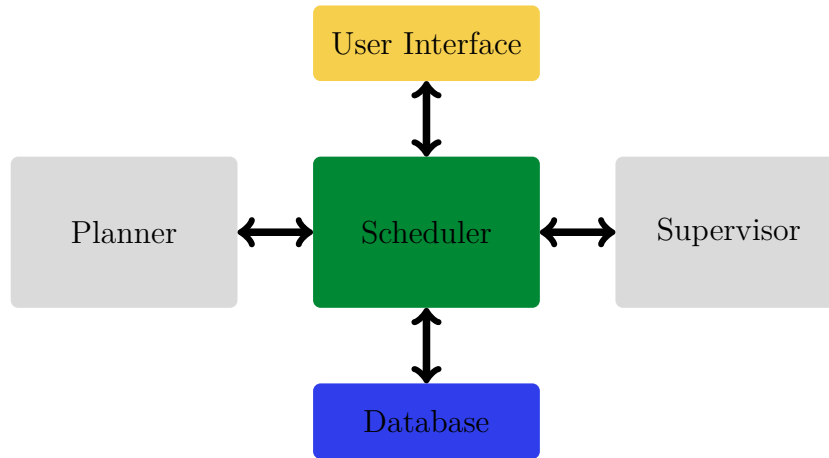


Figure 1: Simple overview of the scheduling process with its primary types of actors. The planner, the scheduler, the supervisor(s), and the technicians. The green color highlights the scheduler as it the actor in the maintenance scheduling process that is the foundation for the paper.

rent uncertainties manifest themselves during planning or execution, work orders are rescheduled by moving between the different actors, meaning that the stochastic elements of maintenance scheduling are handled by **dynamic rescheduling between the actors**.

This article has the following contribution:

- To provide a modular scalable optimization component based on a proven metaheuristic to allow business processes to be composed from smaller mathematical models, instead of larger integrated formulations.

The paper is divided into four different sections. Section 2 explains the weekly maintenance scheduling model in detail and forms the foundation of the paper. Section 3 shows the results coming from the implemented metaheuristic where it will be affected by simulated user-interaction. Section 4 will discuss the implications of the research and set a future research direction.

### *1.1. The Weekly (Period) Maintenance Scheduling Model*

The weekly maintenance scheduling model for the problem is a variant of the Multi-compartment Multi-knapsack Problem with capacity penalties MCMKP. The notation used to describe the dynamical aspects in the model is based on the notation from the dynamic metaheuristics literature as found

in Yang et al. (2013). Here the  $\tau$  is added as a time variable on all sets, parameters, and variables that are subject to change while the metaheuristic is running. This enables us to be precise in the timing on the messages that are sent to the Ab-LNS and understand how it reacts in real-time. A company performing maintenance usually creates weekly maintenance plans for the next  $p \in P(\tau)$  period. The weekly schedule is created centrally and consists of scheduling the  $w \in W(\tau)$  work orders, i.e. maintenance tasks, such that all  $w$  are scheduled into a specific period  $p$ . Each work order  $w$  requires some resources  $r \in R(\tau)$  to be carried out, e.g. man-power with different qualifications. Each of these resources are available in limited amounts given by  $resource_{pr}(\tau, \beta(\tau))$ . To correct for possible manual interventions that can make the problem infeasible a penalty ( *strategic\_penalty*) is introduced. The urgency of the different maintenance work order ( $w$ ) varies and is reflected in a "tardiness" for carrying out a maintenance work order in a certain period given by *strategic\_value<sub>wp</sub>*( $\tau$ ). The *strategic\_value<sub>wp</sub>*( $\tau$ ) also captures the tardiness of the individual work orders ( $w$ ), meaning that the value gained from scheduling work orders late is decreasing. Urgent tasks have decreasing value the further out the period  $p$  becomes. Furthermore, two sets exist which will either require work order  $w$  to be carried out in period  $p$  or not carried out in a period  $p$ . These sets are  $(w, p) \in include(\tau)$  for inclusion and  $(w, p) \in exclude(\tau)$  for exclusion.

---

**Meta variables:**

$$s \in S \tag{1}$$

$$\beta(\tau) \tag{2}$$

$$\tau \in [0, \infty] \tag{3}$$


---

**Maximize:**

$$\begin{aligned} & \sum_{w \in W(\tau)} \sum_{p \in P(\tau)} \textit{strategic\_value}_{wp}(\tau) \cdot \alpha_{wp}(\tau) \\ & - \sum_{p \in P(\tau)} \sum_{r \in R(\tau)} \textit{strategic\_penalty} \cdot \epsilon_{pr}(\tau) \\ & + \sum_{p \in P(\tau)} \sum_{w1 \in W(\tau)} \sum_{w2 \in W(\tau)} \textit{clustering\_value}_{w1,w2} \cdot \alpha_{w1p}(\tau) \cdot \alpha_{w2p}(\tau) \end{aligned} \tag{4}$$


---

**Subject to:**

$$\sum_{w \in W(\tau)} \textit{work\_order\_work}_{wr} \cdot \alpha_{wp}(\tau) \leq \textit{resource}_{pr}(\tau, \beta(\tau)) + \epsilon_{pr}(\tau) \quad \forall p \in P(\tau) \quad \forall r \in R(\tau) \tag{5}$$

$$\sum_{w \in W(\tau)} \alpha_{wp}(\tau) = 1 \quad \forall p \in P(\tau) \tag{6}$$

$$\alpha_{wp}(\tau) = 0 \quad \forall (w, p) \in \textit{exclude}(\tau) \tag{7}$$

$$\alpha_{wp}(\tau) = 1 \quad \forall (w, p) \in \textit{include}(\tau) \tag{8}$$

$$\alpha_{wp}(\tau) \in \{0, 1\} \quad \forall w \in W(\tau) \quad \forall p \in P(\tau) \tag{9}$$

$$\epsilon_{pr}(\tau) \in \mathbb{R}^+ \quad \forall p \in P(\tau) \quad \forall r \in R(\tau) \tag{10}$$


---

The meta variables defines the broader setting that the model in implemented in. Equation (1) species that the model is implemented for scheduler  $s$ . Equation (2) is the value of a decision variable coming from a different model, here the supervisor. Equation (3) is the time variable that binds the whole system together.

The objective function (4), maximizes the total weighted assignment of

all work order subtracted by the penalty *strategic\_penalty* for exceeding the resource capacity given in equation (5). The third term of the objective function handles the *clustering\_value<sub>w1,w2</sub>* which turns the model into a quadratic problem. This term optimizes the value of putting two work orders in the same period, if they have share similarity like close proximity, same piece of equipment, etc. Equation (5) ensures that all the *work<sub>wr</sub>( $\tau$ )* for each activity in a work order, given that it has been assigned, is lower than the *resource<sub>pr</sub>( $\tau, \beta(\tau)$ )* for each

period and for each resources  $r$ . *strategic\_penalty* is the amount of exceeded capacity that is needed for the current assignment of work order to be feasible. Constraint (6) makes sure that each work order is assigned to at least a single period. Constraint (8) excludes a work order from a certain period and constraint (7) forces a specific work order to be in a specific period. Constraint (9) and (10) specify the variable domain for  *$\alpha_{wp}(\tau)$*  and *strategic\_penalty* respectively. The effects of changing *include( $\tau$ )*, *exclude( $\tau$ )*, *resource<sub>pr</sub>( $\tau, \beta(\tau)$ )*, and *strategic\_value<sub>wp</sub>( $\tau$ )* in real-time will be examined to determine their effects on the weekly schedules and objective value.

## 2. Solution Method

### 2.1. Actor-based Large Neighborhood Search

A problem formulation that is affected by the end user and requires real-time feedback inherently requires an optimization approach that is able to repair infeasible solution and while also converging quickly. For this the large neighborhood search (LNS) metaheuristic has been shown satisfy these requirements in the literature Gendreau and Potvin (2019). The most general form of the LNS metaheuristic is defined for static problems, meaning that the parameters that make up the problem instance is not subject to change after the algorithm has been started. To make the LNS able adapt to changing parameters in real-time a message system have been implemented into the existing framework. This extension is shown in algorithm 1.

#### 2.1.1. Messages And Destructors

LNS in its basic form has one constructor and one destructor which repeatedly destroy and rebuild the solution. For the AbLNS we will generalize on this concept by including messages as destructors of the classic LNS implementation. This generalization can be seen as being somewhat similar to how

the adaptive LNS (ALNS) is formulated, but where the different constructors and destructors are also chosen from sources external to the algorithm.

Extending on the classic setup we define the following set of destructors,  $m \in M$ .

- $m_1$ : Inclusion destruct message
- $m_2$ : Exclusion destruct message
- $m_3$ : Capacities destruct message
- $m_4$ : Weights destruct message
- $m_5$ : Random destruct message

Each of these messages affect different parts of the weekly maintenance scheduling problem. Notice here that the first four messages destruct the solution by changing the parameter space and the last message is a random destructor.

For correct implementation it is critical that the that destruct messages are handled one by one, and are not allowed to simply write to the solution and problem instance whenever they appear. Generalizing the destructors from being static structures into messages allows the solution to change in real-time to a changing parameter space. This means that the algorithm does not need to restart to handle changes in data.



---

**Algorithm 1** Actor-based Large Neighborhood Search

---

```
1: Input  $Q$  = message queue
2: Input  $P$  = problem instance
3: Input  $X$  = initial schedule
4: Input  $S$  = shared solution
5: repeat
6:    $X^t = clone(X)$ 
7:   while  $Q.has\_message()$  do
8:      $P.update(S, m)$ 
9:      $X^t.destruct(S, m)$ 
10:  end while
11:   $X^t.repair(S)$ 
12:  if  $accept(X^t, X)$  then
13:     $X.update(X^t)$ 
14:  end if
15:  if  $c(X^t) < c(X)$  then
16:     $X.update(X^t)$ 
17:     $S.atomic\_pointer\_swap(X)$ 
18:  end if
19:   $Q.push(m)$ 
20: until
```

---

The basic LNS setup have here been extended with a ‘message queue’  $Q$ . The message queue will be read from on every iteration of the LNS’s main iteration loop. Here we notice that the incoming message is able to change both the solution  $X$  but also the problem instance  $P$  itself. Here we see the defining feature of the LNS metaheuristic, that due to its inherent property of being able to optimize a solution that have become infeasible. This is something that is going happen when you change the parameter of the problem instance  $P$  itself. Another less obvious property of the message queue is that the algorithm can run indefinitely and opposed to restarting the algorithm you instead pass messages to it to allow it be adjust both the solution space and the parameter space. This property avoid the issue of time consuming initial convergence as the algorithm will be found in an optimal state when the solution is perturbed. Notice that:

- The algorithm responds to changes very quickly, in each iteration line 7. We call this a fine-grained response algorithm

- If an improved solution is found, it is immediately being pushed to the data (base) on line 15
- That the optimization occurs in the repair function on line 11, which inserts operations in a greedy fashion.

### 3. Results

The results section will: 1. introduce the data instance from the case company; 2. show the effect of forcing work orders into specific weekly schedules  $p \in P(\tau)$ ; 3. show the effect of changing the period resource capacities  $resource_{pr}(\tau, \beta(\tau))$ , and 4. show the effect of dynamically changing the  $strategic\_value_{wp}(\tau)$  for period  $p \in P(\tau)$  and for  $w \in W(\tau)$ .

#### 3.1. Data Instance

This data instance comes from Total Energies, where data is extracted from their SAP ERP system. The data instance used in this paper is associated with a specific offshore platform that for the period that we are looking at contains 3487 outstanding work orders, have 16 different resource skill sets (e.g. mechanics, electricians, turbine specialists, etc.), and finally the scheduling horizon stretches over a 52 bi-weekly periods meaning approximately 2 years.

	$ W(\tau) $	$ R(\tau) $	$ P(\tau) $
Instance 1	3487	16	52

Table 1: specific data instances from the case company. Here  $W(\tau)$  is the set of work orders,  $R(\tau)$  is the set of resources, and  $P(\tau)$  is the set of weekly periods.

#### 3.2. Response to Inclusion of Work Orders

The  $include(\tau)$  parameter specifies whether a work order should be scheduled into a specific period. As the parameter has the time variable  $\tau$  it means that this parameter can change at any time while the metaheuristic is running. The  $include(\tau)$  parameter constrains the model in equation 7. Table 2 shows the responses that the model will be subject to while it is running for different points in time  $\tau$ .

	$\tau_1 = 60$	$\tau_2 = 120$	$\tau_3 = 180$	$\tau_4 = 240$	$\tau_5 = 300$
$\Delta include(\tau) $	50	50	50	50	50

Table 2: The perturbations of including work orders into the weekly scheduling that the AbLNS is affected by. Perturbations occur at 60 second time intervals affecting 50 randomly chosen work orders included into random periods.

In figure 2 the effects of changing the  $include(\tau)$  parameter in real-time. It shows that the model quickly converges and when the system is perturbed by an input response the objective value 4 converges again to a new solution. This can be understood as the model optimizing around the perturbation and finding a new converged solution.

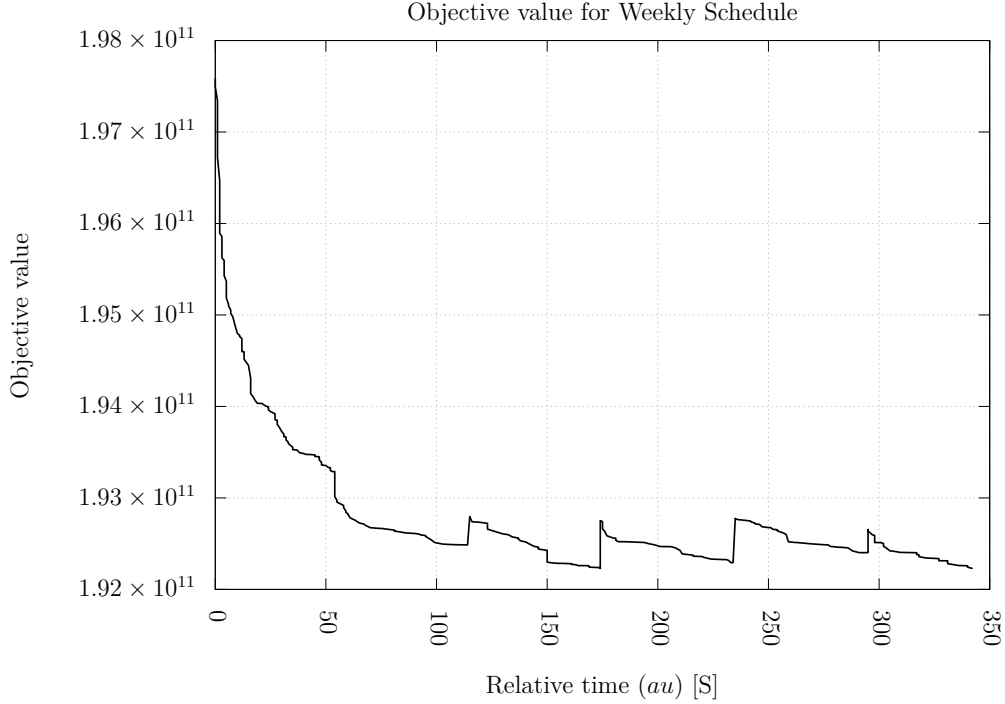


Figure 2: Figure Caption

Figure 2 show 5 perturbations with the first at time = 60s where the objective value slightly drops in response to the inclusion, the objective value drop due to the inclusion breaking previous constraints given by the  $exclude(\tau)$  parameter making the AbLNS able to find better solutions. The remaining

4 perturbations all show the same response, an increase in the objective value followed by a subsequent convergence.

### 3.3. Response to Exclusion

The response to exclusion is associated with the  $exclude(\tau)$  parameter and is found in equation 8. Here specific work orders ( $w \in W(\tau)$ ) are being excluded for specific periods ( $p \in P(\tau)$ ). The responses that the AbLNS will be perturbed with are shown in table 3 with the setup being very similar to the one in table 2. The main distinction being that the perturbation affects many more work orders.

	$\tau_1 = 60$	$\tau_2 = 120$	$\tau_3 = 180$	$\tau_4 = 240$	$\tau_5 = 300$
$\Delta exclude(\tau) $	500	500	500	500	500

Table 3: The perturbations of exclusion work order from specific periods in the weekly schedule. Perturbations occur at 60 second time intervals affecting 500 work orders each time.

In figure 3 a shows a substantial spike in the objective value to the effects of excluding work orders as given in table 3.

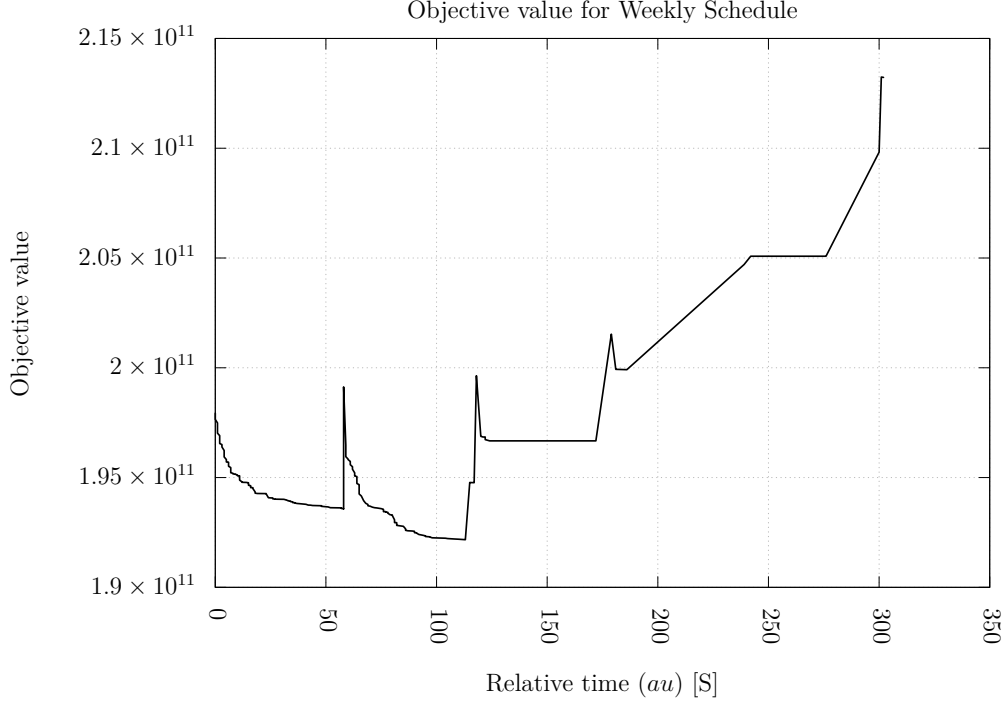


Figure 3: Figure Caption

From figure 2 and figure 3 it is now clear that the AbLNS method can handle dynamic entries of work order. The next section will discuss the effects of dynamically changing the resource capacities.

### 3.4. Response to Additional Weekly Capacity

Table 4 shows the perturbations that the AbLNS will be subject to during its 360 second execution. Pertubing the resources  $resource_{pr}(\tau, \beta(\tau))$  affects the solution significantly more than  $exclude(\tau)$  and  $include(\tau)$  and therefore 100 second intervals are specified instead of 60 second intervals.

	$\tau_1 = 100$	$\tau_2 = 200$	$\tau_3 = 300$
$\Delta P(\tau) $	52	52	52
$\Delta R(\tau) $	16	16	16
$ resource_{pr}(\tau, \beta(\tau)) $ (hours)	61816	111268	173083

Table 4:

In figure 4 the effects of progressively increasing resources is highlighted. The AbLNS starts with a base load which is then reduced at time = 100 seconds causing the objective value to increase as *strategic\_penalty* in equation 5 absorbs the exceeded capacity. At time = 200 the resources are increased to the base load again, and at time = 300 seconds the resources are increased to their maximum value.

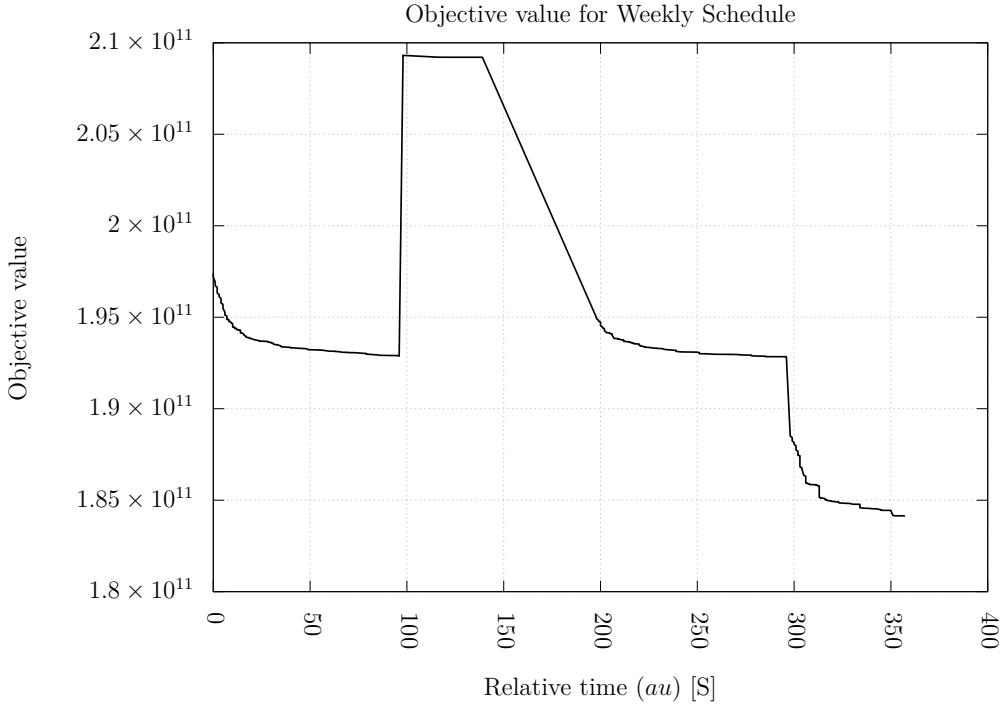


Figure 4: Figure Caption

### 3.5. Response to Reduced Weekly Capacity

Table 3.5 shows the perturbations that the AbLNS will be affected by. Starting from a base load of the amount of available resources are progressively decreased.

	$\tau_1 = 100$	$\tau_2 = 200$	$\tau_3 = 300$
$\Delta P(\tau) $	52	52	52
$\Delta R(\tau) $	16	16	16
$ resource_{pr}(\tau, \beta(\tau)) $ (hours)	173083	111268	61816

Figure 5 shows the effects of perturbing the AbLNS by starting from a base load and then progressively reducing capacity.

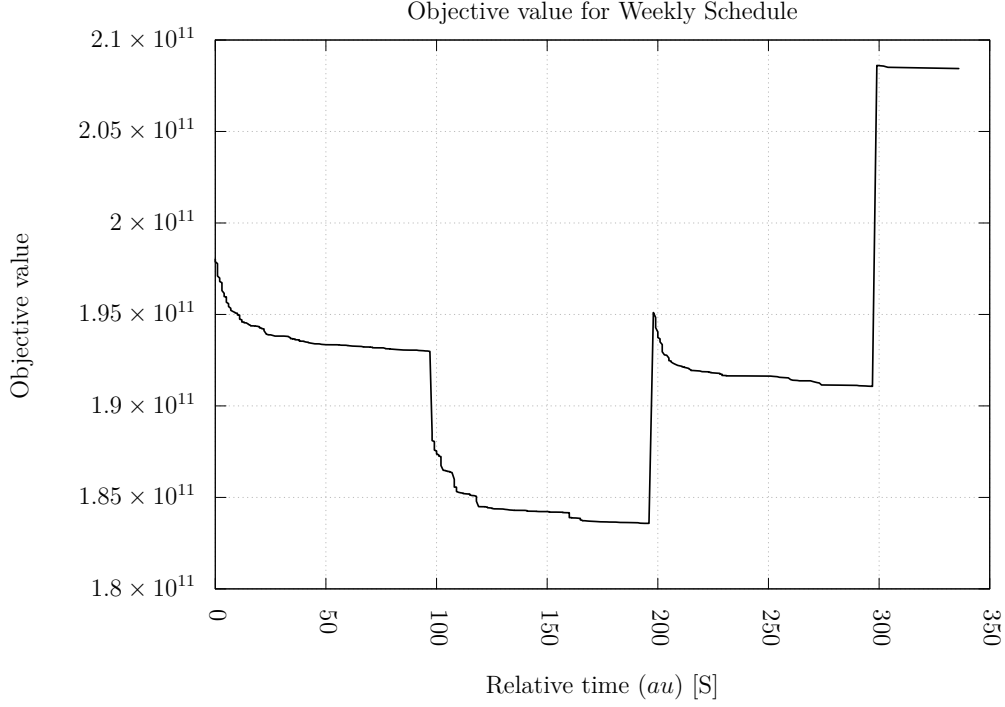


Figure 5: Figure Caption

### 3.6. Response to Changes in Item Weights

The final parameter that will be changed is the work order value  $strategic\_value_{wp}(\tau)$ . Table 3.6 shows the perturbations that the AbLNS will be affected with. On each iteration 500 work orders are having their values changed by the amount shown in the 4th row of table 3.6.

	$\tau_1 = 60$	$\tau_2 = 120$	$\tau_3 = 180$	$\tau_4 = 240$	$\tau_5 = 300$
$\Delta W(\tau_n)\Delta W(\tau_{n-1}) $	500	500	500	500	500
$\Delta P(\tau_n)\Delta P(\tau_{n-1}) $	52	52	52	52	52
$\Delta strategic\_value_{wp}(\tau_n)  -  strategic\_value_{wp}(\tau_{n-1}) $	$3.75 \cdot 10^7$	$3.75 \cdot 10^7$	$3.75 \cdot 10^7$	$3.75 \cdot 10^7$	$3.75 \cdot 10^7$

Figure 6 shows the effects of perturbing the AbLNS by changing the parameter in the objective function 4 that controls the value of assigning a work

order to a specific period.

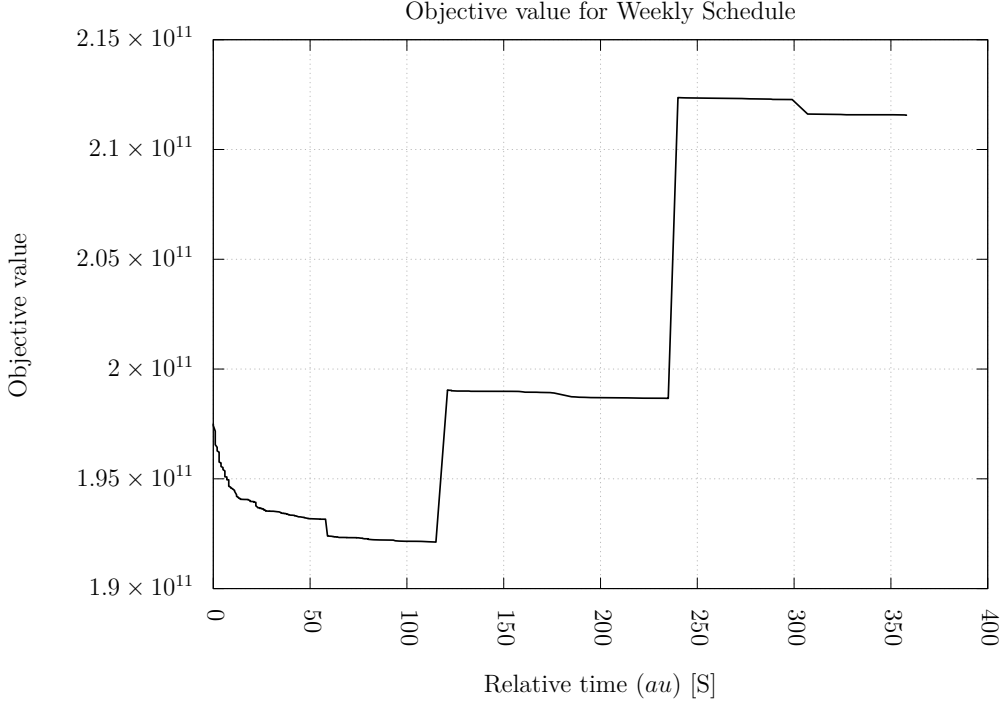


Figure 6: Figure Caption

## 4. Discussion

The maintenance scheduling effectively solves a complex scheduling problem by using multiple actors. Through the use of actors the scheduling process handles uncertainty that is difficult to reason about in a single mathematical model are easily solved through coordination. Each stakeholder in the process has his own model each with different levels of aggregation, where each actor understands how to exploit his own model. To further understand the approach the discussion will be divided into three sections: 4.1 actors and integration; 4.2 continuous optimization allows asynchronous optimization; and 4.3 future research.

### 4.1. Actors & Integration

Often in operation research the failure to reliably solve operational problems in industry are not due to the problems being computationally in-



tractable Gendreau and Potvin (2019) but a practical problem of connecting data streams so that the solution approach continually receives dynamic data to handle changes and then providing the resulting solutions to the relevant actors (stakeholders) through a relevant interface Meignan et al. (2015a). The actor-based approach proposed in this paper makes integration easier by naturally encapsulating a model with a reliable interface.

#### 4.2. Continuous Optimization

With actor-based metaheuristics, the optimization loop can run indefinitely, optimizing based on the latest available information. This may seem like a detail as you could argue that you should only ever optimize the schedule when there is an explicit need for it, but consider the case when you start adding more than two actors to a scheduling system, then there arises a need to coordinate people temporally as each will have to run their optimizing process one after another. This is depicted in figure 4.2 where the output of one model is used as the input to the next one, leading to the hierarchical model setup.

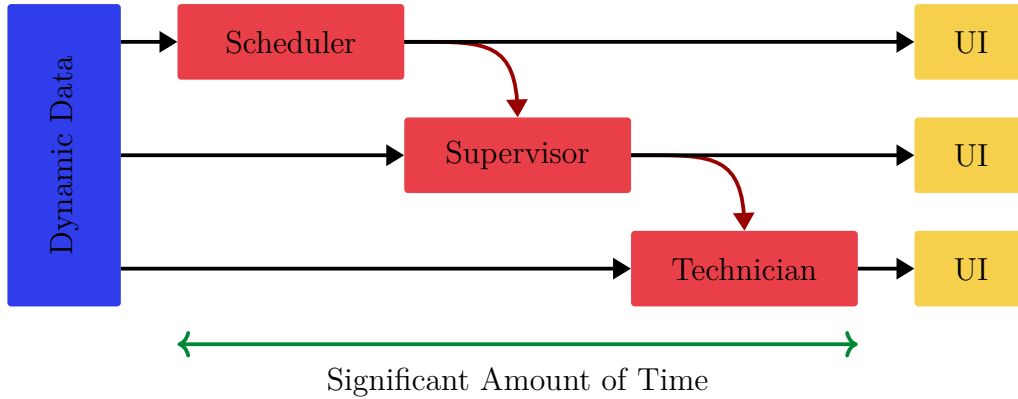


Figure 7: Effects of using hierarchical models setups in human-guided search metaheuristics. Due to the dependent nature of each metaheuristic it becomes crucial that the running of the metaheuristics are well coordinated between the metaheuristics.

In practice there are multiple problems with using a hierarchical setup. Usually the largest one is that the information and knowledge needed to perform a feasible schedule is usually found in the lower levels of the hierarchy. In maintenance scheduling the operational setting, where the technicians are

working, is usually so complex that it not feasible to centralize the knowledge that is required to create and execute a schedule. Figure 8 shows the kind of non-hierarchical setup that an actor-based approach allows for.

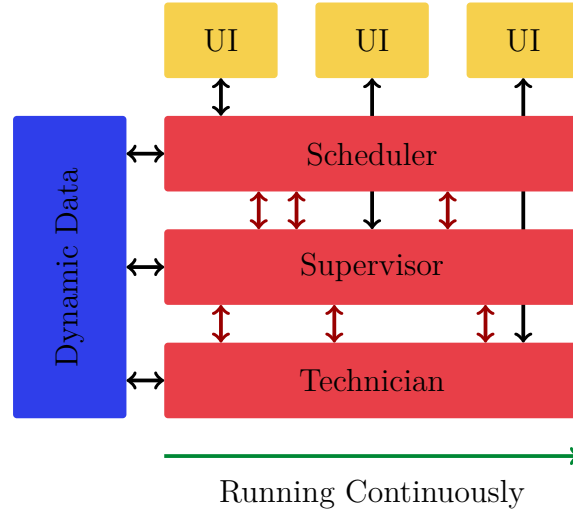


Figure 8: Asynchronous model setup where each metaheuristic runs in perpetuity. In this setup there is no need to coordinate stakeholders to run the metaheuristics. Each actor in the scheduling process will always have the solutions of the other stakeholder available to him to guide his own search.

When the optimization approaches, optimize continuously it becomes possible to enable tight integration between the different model implementations. Where instead of running models to completion you simply handle changes in model parameters, model solutions, user inputs, and in the dynamic data source as they occur instead of making restarts.

#### 4.3. Future Research

The future research of this project is to demonstrate that the actor-based approach described here can be used to model and optimize multi-actor scheduling processes. Figure 9 shows a scheduling system architecture where each of the actors run an actor-based metaheuristic and that each metaheuristic will share its solutions with the other metaheuristics through atomic pointer swapping. Communicate with the end-user through message passing, integrate with a persistence storage through mutex locks, and the lifecycle of each of the metaheuristics will be controlled by the orchestrator through message passing.

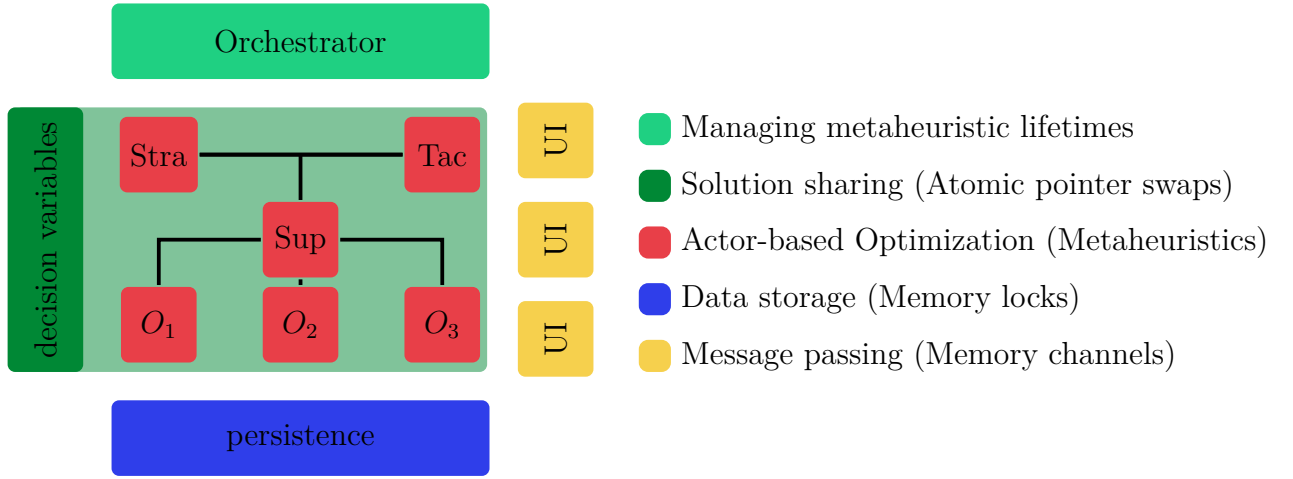


Figure 9: Overview of the scheduling process when modelled as actors. When LNS is encapsulated is an actor it becomes possible to optimize parts of a large process individually instead of optimizing the scheduling problem globally from a single model implementation.

The next step in this research direction will be to model the remaining stakeholder as their own AbLNS metaheuristics, and then make them communicate together. Each exposing solutions to each other in real-time.

## References

- Barthélemy, J.P., Bisdorff, R., Coppin, G., 2002. Human centered processes and decision support systems. *European Journal of Operational Research* 136, 233–252.
- Ben-Tal, A., Nemirovski, A., El Ghaoui, L., 2009. *Robust optimization* .
- Birge, J.R., Louveaux, F., 2011. *Introduction to stochastic programming*. Springer Science & Business Media.
- Ehrgott, M., Gandibleux, X., 2002. Multiple criteria optimization: state of the art annotated bibliographic surveys .
- Garey, M.R., Johnson, D.S., 1979. *Computers and intractability*. volume 174. freeman San Francisco.

- Gendreau, M., Potvin, J.Y. (Eds.), 2019. Handbook of Metaheuristics. volume 272 of *International Series in Operations Research & Management Science*. Springer International Publishing, Cham. doi:10.1007/978-3-319-91086-4.
- Meignan, D., Knust, S., Frayret, J.M., Pesant, G., Gaud, N., 2015a. A Review and Taxonomy of Interactive Optimization Methods in Operations Research. *ACM Transactions on Interactive Intelligent Systems* 5, 1–43. doi:10.1145/2808234.
- Meignan, D., Knust, S., Frayret, J.M., Pesant, G., Gaud, N., 2015b. A Review and Taxonomy of Interactive Optimization Methods in Operations Research. *ACM Transactions on Interactive Intelligent Systems* 5, 1–43. URL: <https://dl.acm.org/doi/10.1145/2808234>, doi:10.1145/2808234.
- Palmer, R.D., 2019. Maintenance Planning and Scheduling Handbook, 4th Edition . 4th edition ed., McGraw Hill.
- Pareto, V., 1897. The new theories of economics. *The Journal of Political Economy* 5, 485–502.
- Talbi, E.G., 2009. Metaheuristics: From Design to Implementation. John Wiley & Sons, Hoboken, N.J.
- Yang, S., Jiang, Y., Nguyen, T.T., 2013. Metaheuristics for dynamic combinatorial optimization problems. *IMA Journal of Management Mathematics* 24, 451–480. doi:10.1093/imaman/dps021.
- Zadeh, L.A., 1988. Fuzzy logic. *Computer* 21, 83–93.