Introducción a la seguridad de aplicaciones

OWASP UY



Objetivos de la jornada

- Tener un primer* acercamiento a la seguridad de aplicaciones.
- Enfoque **práctico**.
- Ser apoyados por **referentes/facilitadores**.
- Construir ambiente para futuras jornadas o uso personal.

Repaso de requerimientos

- Una computadora que se la banque*.
- Máquina virtual con Kali Linux.
- Proxy instalado: OWASP ZAP o Burp Suite Community (viene con Kali).
- Docker instalado en el ambiente de pruebas.

***Si la notebook tiene escasez de recursos, no utilizar virtualización. Instalar un proxy y Docker.**



Setup: Kali Linux

- https://www.kali.org/get-kali/
  - Máquina virtual pre-armada (**recomendado**)
  - Instalación de cero
  - Docker
  - Vagrant
- Credenciales por defecto: **kali/kali**




Setup: Proxies


- OWASP ZAP
  - https://www.zaproxy.org/download/
- Burp Suite Community:
  - https://portswigger.net/burp/communitydownload



Setup: Proxies

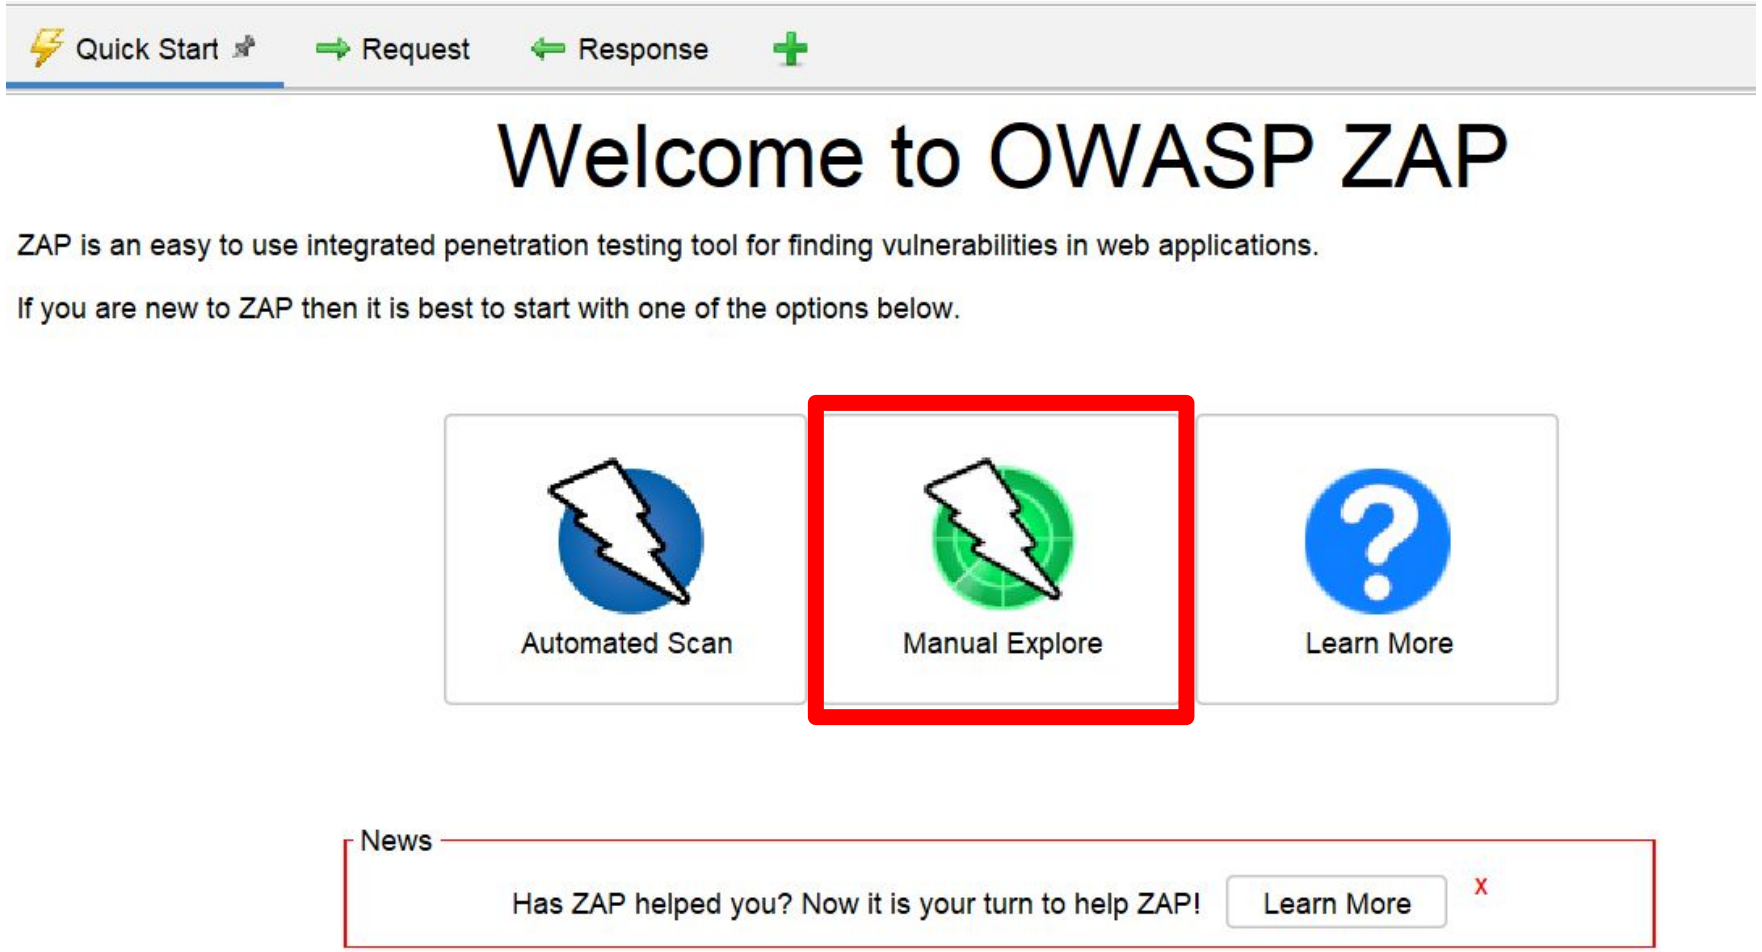


Setup: Proxies

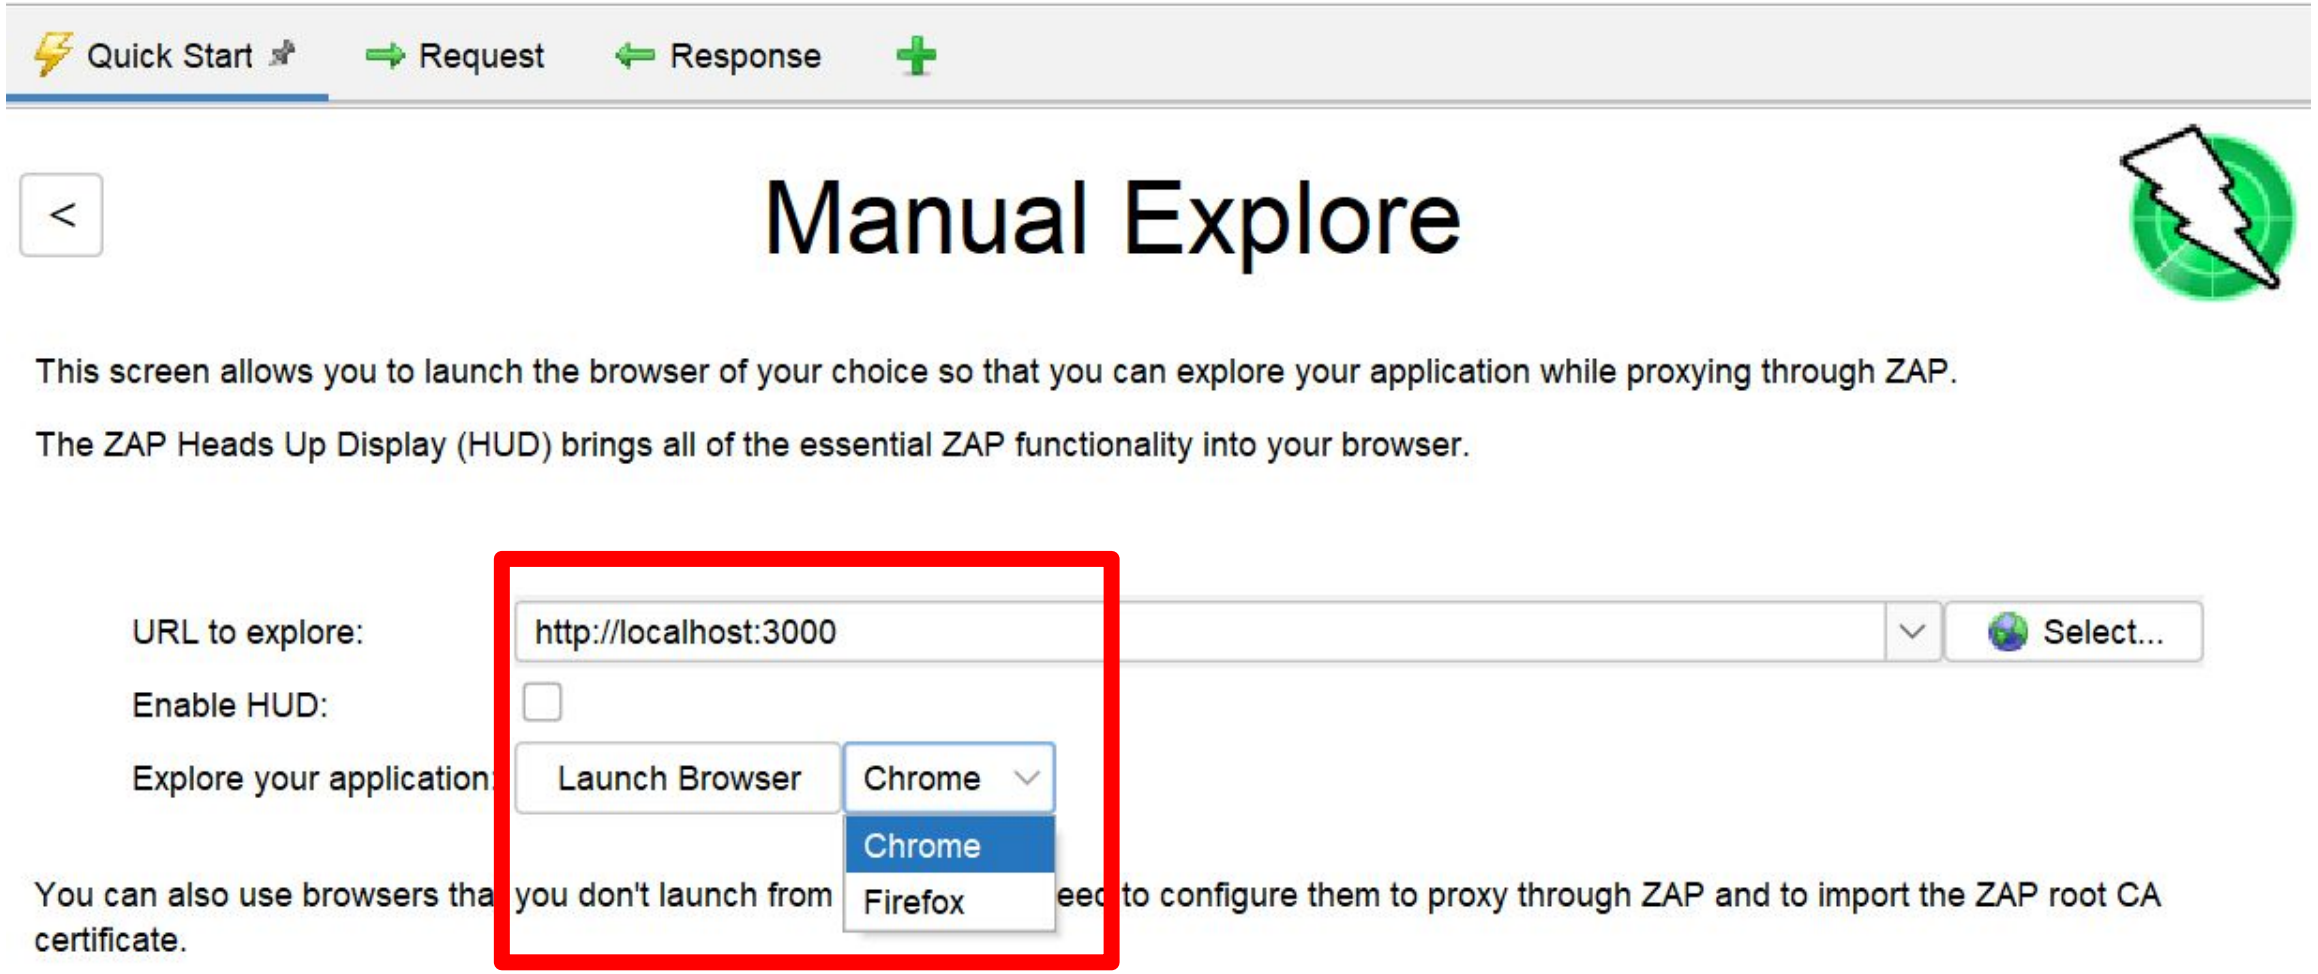

Setup: Proxies



Setup: Proxies

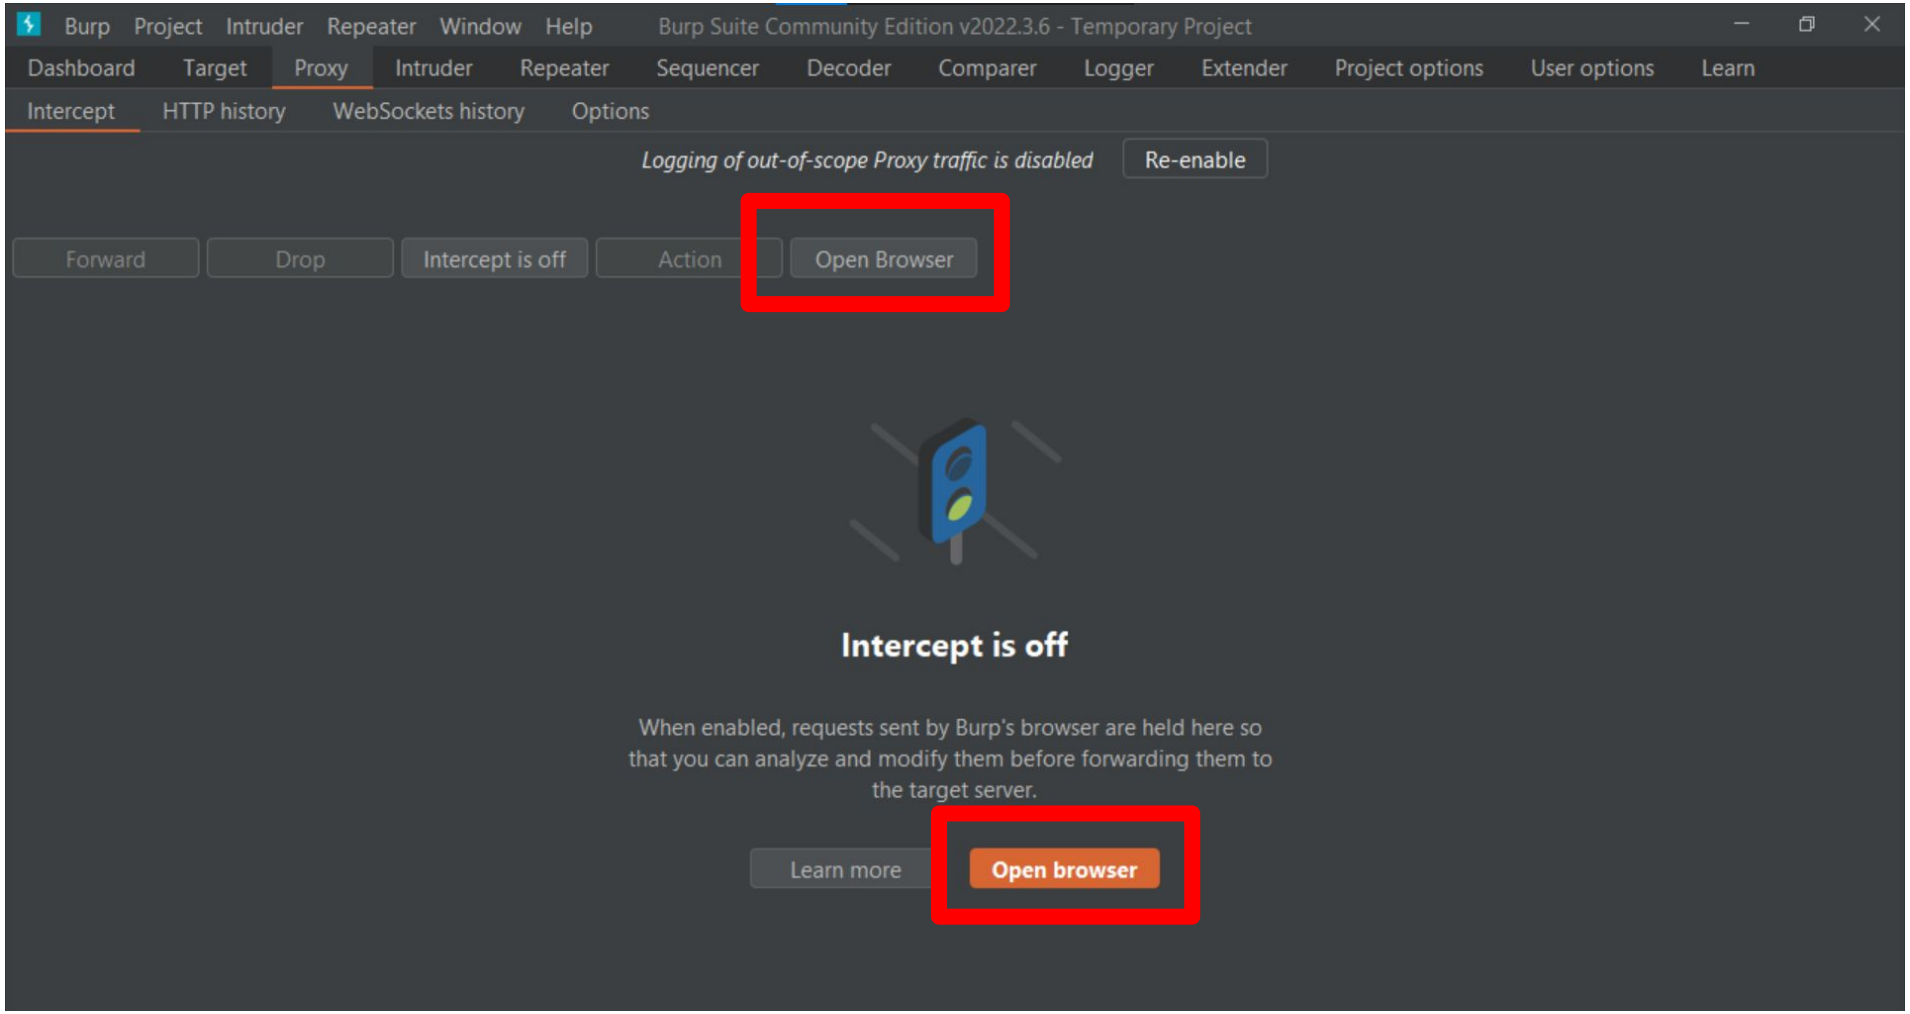

Setup: Docker

- En Kali:

  https://www.kali.org/docs/containers/installing-docker-on-kali/

```
sudo apt update

sudo apt install -y docker.io

sudo systemctl enable docker --now

# Para probar que quedó instalado

docker
```




Setup: Docker

- En Windows: https://docs.docker.com/desktop/install/windows-install/



Setup: Docker

- Otras distribuciones (ej. Ubuntu):

https://docs.docker.com/engine/install/ubuntu/#install-using-the-repository

Install using the repository

Before you install Docker Engine for the first time on a new host machine, you need to set up the Docker repository. Afterward, you can install and update Docker from the repository.

Set up the repository

1. Update the `apt` package index and install packages to allow `apt` to use a repository over HTTPS:

```
$ sudo apt-get update

$ sudo apt-get install \
    ca-certificates \
    curl \
    gnupg \
    lsb-release
```

2. Add Docker's official GPG key:

```
$ sudo mkdir -p /etc/apt/keyrings
$ curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo gpg --dearmor -o /etc/apt/keyrings/docker.gpg
```

3. Use the following command to set up the repository:





Setup: Juice Shop

- https://github.com/juice-shop/juice-shop

```
sudo docker pull bkimminich/juice-shop
sudo docker run -d -p 3000:3000 --name juice-shop bkimminich/juice-shop
```

- Acceder a **http://localhost:3000/**
- Si `docker run` ya ejecutó una vez sin errores. Con los siguientes dos comandos se puede iniciar o parar el contenedor creado:
  - **`sudo docker start juice-shop`**
  - **`sudo docker stop juice-shop`**





Juice Shop: Idea inicial

- Desafíos de nivel 2 y 3.
- Primer paso: encontrar el *score board*.
  - **TIP**: Revisar los archivos JavaScript de la aplicación en búsqueda de rutas.
- Explorar las funcionalidades.
- Quienes asistieron a jornadas anteriores: nivel 3 o más.

