

# Simple Models, Explicit Graph Signals: Rethinking Heterogeneous Graph Neural Networks for Administrative Sanction Risk Screening in Local Government Data

Bruno Kobi

August 2026

## Abstract

Oversight bodies in local and regional government are increasingly asked to screen large corporate registries for administrative-sanction risk — evasion of debarment lists, shell-company fronting, and undisclosed political connections — with limited data-science budgets and no dedicated infrastructure. Graph neural networks (GNNs) that model corporate networks explicitly (shared partners, shared addresses, political ties) are often proposed as the state-of-the-art answer, on the assumption that structural risk is only visible to a relational model. We test this assumption on a real, complete registry of 344,130 companies from a Brazilian metropolitan region, comparing a tabular gradient-boosting baseline, a homogeneous GNN, and a heterogeneous graph transformer (HGT), under a positive-unlabeled framing appropriate to the extreme rarity of confirmed sanctions (148 direct, 188 including partner-inferred cases). Our finding echoes a pattern reported in at least one contemporaneous benchmark in a different fraud domain (Vandervorst et al., 2025); this paper’s contribution is to test it with substantially more methodological scrutiny, and in a new public-sector domain where the practical stakes of the answer differ. Across five independent evaluation rounds — three successive feature-engineering iterations plus a dedicated hyperparameter-search round for the HGT, all under repeated stratified cross-validation (30 folds) with paired statistical testing — the heterogeneous model is consistently and significantly outperformed by both simpler alternatives on the primary, non-circular label (tabular:  $50.7\times$  lift over base rate; homogeneous GNN:  $76.3\times$ ; tuned HGT:  $32.6\times$ ; tabular  $>$  HGT,  $p = 0.0024$ ; homogeneous GNN  $>$  HGT,  $p < 0.0001$ ). Critically, a dedicated hyperparameter search — motivated by the finding that the HGT was undertrained, not undersized — improved its performance by 39% but did not change this ranking, closing the most likely methodological objection to the result. On a secondary, partner-inferred label where the labeling mechanism itself overlaps with the shared-partner metapath, the tuned HGT’s advantage grows instead of shrinking ( $60.8\times$  lift, up from  $42.8\times$  before tuning) — a pattern more consistent with the model exploiting label circularity than discovering genuine structural risk signal. We discuss the practical implication for resource-constrained oversight bodies: a well-engineered tabular model augmented with explicit graph-degree features, not a heterogeneous graph transformer, is the defensible choice for this task given realistic public-sector compute and labeling budgets.

**Keywords:** administrative sanction risk; heterogeneous graph neural networks; anomaly detection; public sector data science; corporate network analysis; positive-unlabeled learning.

## 1. Introduction

Public administrations at every level maintain registries of the companies they interact with — as taxpayers, as bidders in public procurement, as recipients of tax benefits, as employers. A small fraction of these companies are eventually found to have violated administrative rules seriously enough to be placed on a debarment or sanctions list (in Brazil, the federal *CEIS* and *CNEP* registries, state-level equivalents, and sector-specific lists such as the *CEPIM* for irregular non-profits). For oversight bodies — courts of accounts, comptroller offices, procurement agencies — the practical question is not retrospective (“was this company sanctioned?”) but prospective: *among the companies not yet sanctioned, which ones carry enough risk to justify scrutiny now?*

Public-sector adoption of AI and machine learning tools is expanding, but consistently constrained by technical capacity, data quality, and staff competency barriers rather than by model availability (Sun & Medaglia, 2019) — a body of evidence this paper takes as a starting design constraint, not an afterthought: any modeling choice recommended here must be justifiable to an oversight body with exactly these constraints, not only to a machine-learning audience with unlimited compute.

Two structural facts make this a hard screening problem. First, confirmed sanctions are extremely rare relative to the size of any real registry — in the dataset used here, 188 confirmed cases out of 344,130 companies (0.055%). Any model trained on this label is learning from a positive-unlabeled (PU) signal: absence of a sanction record means *not yet caught*, not *not at risk*. Second, corporate risk is frequently relational rather than intrinsic to any single company’s declared attributes: a company with an unremarkable tax filing may share a partner, a registered address, or an undisclosed political connection with an already-sanctioned entity — signal that is invisible to a model that treats each company as an independent row of features.

This second fact is the premise behind a growing body of work applying heterogeneous graph neural networks (HGNNs) — models that treat companies, partners, addresses and other entities as distinct node types connected by typed relations — to corporate risk detection, largely in credit/insolvency scoring and financial-fraud contexts (see Section 2). The implicit promise of this literature is that relational, end-to-end-trained models will recover structural risk signal that simpler, tabular approaches cannot.

We test this promise directly, in a setting closer to what a real, resource-constrained oversight body would actually have available: a complete, real corporate registry for a Brazilian metropolitan region (the *Grande Vitória* area, Espírito Santo state, seven municipalities), built into a heterogeneous information network (HIN) with three metapaths chosen for their direct relevance to administrative-risk oversight — **shared partner**, **shared registered address**, and **shared political connection** (via federal electoral records) — and evaluated under the extreme class imbalance and PU-label conditions that are the norm in this domain, not an edge case to be tuned away.

We make four contributions relevant to practitioners and researchers working on public-sector risk screening:

1. **A real, reproducible empirical comparison** of a tabular gradient-boosting baseline, a homogeneous GNN, and a heterogeneous graph transformer (HGT), under a shared, statistically rigorous evaluation protocol (repeated stratified cross-validation, paired Wilcoxon tests across 30 folds), replicated across three successive feature-engineering iterations and a dedicated hyperparameter-tuning pass — a level of methodological scrutiny uncommon in prior graph-based fraud/risk papers, which typically report a single configuration.
2. **A direct test of whether implicit structural learning outperforms explicit graph**

**features**, probing a claim from the graph-features-vs-GNN literature (Section 2.3) in a new domain: it does not, here — a tabular model given the same three metapaths as explicit degree features, and an even simpler homogeneous GNN, both significantly outperform the fully heterogeneous model on the primary label (Section 4.1), a result that survives a dedicated hyperparameter-tuning pass (Section 4.4).

3. **A feature set for administrative-sanction screening grounded in procurement-corruption and shell-company literature** (Section 2.4), adapted to what is realistically available in a Brazilian municipal-level registry: non-competitive contract awards, cost overruns, company age, and partner concentration across many firms.
4. **A practical discussion, aimed at oversight-body practitioners rather than at the graph-learning research community**, of what modeling approach is *actually* justified given the computational budget, technical capacity, and label scarcity that real oversight bodies operate under — not what is justified in an idealized, well-resourced benchmark setting.

The remainder of the paper is organized as follows. Section 2 situates this work within four literatures: administrative/corporate risk detection in Brazilian public data, heterogeneous GNNs for corporate networks, the graph-features-vs-GNN debate in fraud detection, and imbalanced/few-label graph learning. Section 3 describes the data, label construction, network design, feature engineering, models and evaluation protocol. Section 4 reports results across five evaluation rounds, a hyperparameter-tuning study, and a sensitivity analysis. Section 5 discusses the findings from a public-sector practitioner’s perspective and states limitations. Section 6 concludes.

---

## 2. Related work

### 2.1 AI adoption in public-sector oversight, and administrative sanction risk in Brazilian public data

Government Information Quarterly’s own literature on AI adoption in public administration consistently finds that the binding constraint on deploying predictive tools in government is organizational and technical capacity — staff competency, data quality, infrastructure — not the availability of a capable model (Sun & Medaglia, 2019). This paper takes that finding as a design requirement rather than a caveat added after the fact: Section 3.1 deliberately scopes the study to a dataset and compute budget realistic for an under-resourced oversight body, and Section 5.4 evaluates each model explicitly against that constraint, not only against predictive performance. A related design-principles literature on digital transparency in government (Matheus, Janssen, & Janowski, 2021) treats auditability and institutional legibility of a digital tool as design goals in their own right, not only as compliance afterthoughts — a consideration this paper extends from transparency of *process* to transparency of *model*: a gradient-boosted model whose feature importances are directly inspectable is more legible to an oversight body’s own audit function than a heterogeneous graph transformer’s learned embeddings, independent of any difference in predictive performance between them (Section 5.4).

Within this constraint, prior Brazilian work on corporate risk and fraud detection using public registry data is predominantly tabular, treating each company as an independent observation described by registration attributes, tax regime, debt records, and sector codes. This body of work does not, to our knowledge, model the *network* of relationships between companies — shared partners, shared addresses, shared political ties — as a first-class object, despite these relationships being directly queryable in the same public data sources (Federal Revenue registry, electoral court records). Inter-

national work applying relational models (HAN, HGT, R-GCN) to corporate networks exists, but concentrates heavily on credit/insolvency risk — a comparatively data-rich, well-labeled problem — leaving administrative-sanction risk detection via ownership/address/political metapaths, in a Brazilian public-data context, comparatively unexplored.

## 2.2 Heterogeneous graph neural networks for corporate and financial networks

Heterogeneous graph attention/transformer architectures — HAN (Wang et al., 2019) and HGT (Hu et al., 2020) foremost among them — extend graph neural networks beyond a single node/edge type, learning type-specific attention weights across metapaths or relations. Applied to corporate networks, this family of models targets shell-company and beneficial-ownership risk (Moody’s, 2023) and financial fraud more broadly, on the premise that fraud rings leave a structural signature — shared infrastructure, shared counterparties — “invisible in feature space but detectable in graph topology.” A parallel literature on shell-company networks in public procurement corroborates this premise with a concrete mechanism: ownership and management data, combined with contracting data, surfaces connected components indicative of collusion risk (Section 2.4).

## 2.3 Graph features versus end-to-end GNN training

A distinct and directly relevant literature asks a narrower, more skeptical question: does an end-to-end-trained GNN outperform a much simpler baseline that is *given the same structural information explicitly*, as engineered graph features (degree, centrality, PageRank, neighborhood aggregates) fed to a gradient-boosted tree model? Evidence from fraud-detection benchmarks suggests the answer is frequently “no, or not by much.” A recent benchmark in insurance fraud detection explicitly compares gradient-boosted trees against HinSAGE, HAN and HGT, noting that “gradient-boosted tree approaches on tabular data still dominate the field” and that graph-based approaches specifically struggle under the high class imbalance typical of fraud data (Vandervorst et al., 2025) — the same combination of conditions (heterogeneous graph, extreme imbalance) studied in this paper. A separate line of work combining gradient boosting with graph structure directly (rather than comparing them as rivals) further shows that GBDT-based models can match or exceed pure GNN architectures once graph information is made available to them in a suitable form (Ivanov & Prokhorenkova, 2021). This paper’s design — feeding the *same* three metapaths to the tabular baseline as explicit degree features, and to the heterogeneous model as learned structure — is a direct test of this claim in a new domain.

## 2.4 Corruption-risk indicators in public procurement and shell-company detection

Cross-national empirical work on public-procurement corruption risk (Fazekas & Kocsis, 2020; Abdou et al., 2022) establishes non-competitive-award and cost-overflow indicators — sole-source contract modality, and divergence between initial and final contract value — as robust, auditable corruption-risk proxies, independent of any prosecutorial outcome. Shell-company detection practice adds company age and partner/director concentration across many firms as further red flags (Moody’s, 2023). All four indicators are feasible to construct from the registry data used here (Section 3.4) and motivated a dedicated round of literature-grounded feature engineering prior to the final experiment reported below.

## 2.5 Imbalanced and few-label graph learning

A body of work specific to graph-based fraud detection addresses class imbalance and label scarcity at the architecture level rather than only at the loss-function level. PC-GNN (Liu et al., 2021) and CARE-GNN (Dou et al., 2020) resample or reinforcement-learning-select neighborhoods to counteract both class imbalance and adversarial “camouflage” by fraudulent nodes, reporting consistent gains over naive GNN aggregation on imbalanced fraud benchmarks. A closely related diagnosis, directly applicable to this paper’s setting, comes from recent work on corporate fraud detection in “rich-yet-noisy” financial graphs (Wang et al., 2025), which identifies **information overload** — the numerical dominance of node types with no genuine attribute information (here: shared-partner, shared-address and political-connection nodes, which carry only a learned embedding, not real features) over the target node type — as a specific mechanism by which naive heterogeneous message-passing can *dilute* rather than enrich signal when labels are scarce. Separately, a small but growing literature on positive-unlabeled (PU) learning on graphs (structure-aware PU losses; Yang et al., 2023) addresses the label-incompleteness problem this paper’s own label construction shares, though not yet integrated into a heterogeneous-GNN training objective in the corporate-risk setting. We draw on this literature in Section 5.2 to interpret our finding that the more complex, end-to-end heterogeneous model underperforms simpler alternatives under the exact conditions (extreme imbalance, few labels, attribute-poor auxiliary node types) this literature was designed to address.

---

## 3. Data and methods

### 3.1 Data source and study scope

The dataset is drawn from a maintained, publicly documented ETL pipeline (`projeto_grande_vitoria_empresas`) that consolidates several official Brazilian public-data sources into a single relational database, matched by company tax ID (CNPJ): the Federal Revenue company registry, the federal debarment/sanctions registries (CEIS, CNEP), the state accounts court registry (TCEES), the non-profit irregularity registry (CEPIM), active-debt records, state commercial-registry filings (JUCEES), environmental-infraction records, government-contract records, tax-benefit records, and federal electoral court (TSE) political-connection records. The study scope is the *Grande Vitória* metropolitan region (Espírito Santo state, Brazil, seven municipalities): 344,130 registered companies, a scale that is fully tractable in memory on commodity hardware — a deliberate choice, since the target audience for this work’s practical conclusions is oversight bodies without dedicated big-data infrastructure.

**Data ethics and privacy.** Partner tax IDs (CPF) are already masked at source by the issuing federal registry; no additional pseudonymization was required for this study’s purposes. Political-connection records (Section 3.3) originate from public electoral-court candidacy/donation filings. Individual partner names and company identifiers are used internally to construct the network and features, but — this study’s ethical-use commitment — are never published in aggregate results, and are replaced with generic labels (e.g., “Partner X”, “Company A/B”) in any illustrative example drawn from a specific case, including Figure 1.

### 3.2 Label construction and the positive-unlabeled framing

Only 188 of 344,130 companies (0.055%) have a confirmed administrative sanction on record. We treat this as a positive-unlabeled problem: absence of a sanction record indicates the company has not (yet) been caught, not that it is risk-free. Consequently we frame the task as anomaly detection / risk ranking rather than balanced binary classification, and report PR-AUC and Precision@k rather than accuracy or ROC-AUC, which are uninformative or misleading at this base rate.

A second, more subtle labeling issue directly interacts with this paper’s central research question. Of the 188 confirmed positives, 148 are sanctioned directly (the company itself appears on a debarment list) while 40 are labeled positive only because they share a partner with an already-sanctioned entity — the exact mechanism the shared-partner metapath is designed to detect. Treating all 188 as a single label risks circularity: a model that “discovers” shared-partner risk on this subset is not discovering new signal, it is reproducing the labeling rule. We report our primary results on the 148 directly-sanctioned label (`y_direto`) and treat the full 188-company label (`y_qualquer`, including the partner-inferred cases) as a declared sensitivity analysis, never conflating the two without stating which is in use.

Figure 1 shows a concrete (anonymized) example of this mechanism from the dataset: two companies in the same municipality, neither directly sanctioned, that share a partner who was personally sanctioned (listed on CEIS as an individual). Both companies enter `y_qualquer` as positives solely through this shared-partner link — the exact relation the shared-partner metapath is built to detect.

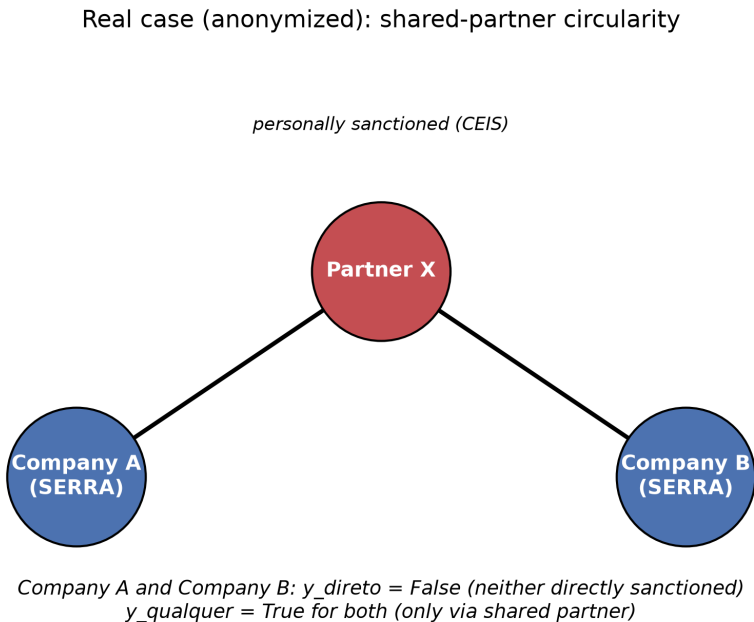


Figure 1: Real, anonymized example: two companies (labeled A and B, company identifiers and the partner’s name withheld per the ethical-use commitment in this study) sharing a partner who was personally sanctioned; neither company has a direct sanction of its own.

Figure 1. A real case (identifiers anonymized) illustrating the partner-inferred labeling mechanism behind the 40 companies that separate *y\_qualquer* from *y\_direto*.

### 3.3 Heterogeneous information network construction

We construct a heterogeneous information network (HIN) with five node types — company, partner, address, municipality, and political connection — and edges representing partnership (*participa\_de*), co-location (*sediada\_em*), municipal membership (*localizada\_em*), and political connection (*tem\_vinculo\_politico*). Three metapaths, chosen for direct relevance to administrative-risk oversight rather than for graph-theoretic convenience, compose the network’s structural hypothesis: company–partner–company (shared partner), company–address–company (shared registered address), and company–political-connection–company (shared political connection, via electoral candidacy/donation records). A fourth candidate metapath via shared municipality was excluded during development: with only seven municipality nodes for 344,130 companies, its adjacency product is combinatorially explosive and carries no meaningful discriminative signal (every company shares a municipality with tens of thousands of others). Metapath extraction uses sparse matrix products rather than depth-first search, a scalability requirement at this network size (344,130 company nodes).

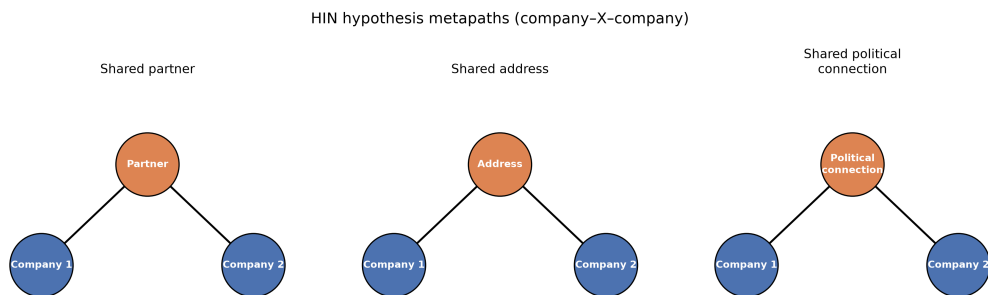


Figure 2: Schematic of the HIN’s three hypothesis metapaths: shared partner, shared address, and shared political connection, each linking two company nodes through one intermediate node type.

Figure 2. Schematic of the three company–X–company metapaths used to build the heterogeneous information network (abstract illustration, not drawn from specific companies).

### 3.4 Feature engineering

Beyond standard registration attributes (capital, size category, tax regime, sector, partner count, aggregated active debt, environmental infractions, government contracts, tax-benefit status), we construct two literature-motivated feature groups directly informed by Sections 2.3–2.4:

- **Explicit graph-degree features:** for each of the three metapaths, the company’s degree in that metapath’s adjacency (number of other companies reachable via shared partner / address / political connection), plus the connectivity of the company’s most-connected partner — giving the tabular baseline direct access to the same structural information available to the graph models, as a test of the graph-features-vs-GNN claim (Section 2.3).
- **Procurement-corruption and shell-company indicators:** non-competitive contract-award flag and maximum cost-overrun ratio (Fazekas & Kocsis, 2020; IMF, 2022), and com-

pany age from commercial-registry incorporation date, with an explicit sentinel value for companies without a registry match (Moody’s, 2023).

### 3.5 Models

We compare three models under an identical evaluation protocol:

1. **Tabular baseline:** gradient-boosted trees (XGBoost), with per-fold class-weight rebalancing (`scale_pos_weight`), using the full feature set from Section 3.4 including the explicit graph-degree features.
2. **Homogeneous GNN:** the three metapath adjacencies collapsed into a single company–company graph (with a degree cap on the shared-address metapath — a small number of large commercial-building addresses account for a disproportionate share of shared-address edges, a data artifact requiring pruning before it dominates the graph), trained with GraphSAGE over the same tabular features.
3. **Heterogeneous graph transformer (HGT):** each node and relation type modeled distinctly (Hu et al., 2020); only the company node type carries real tabular features, the remaining node types (partner, address, political connection) carry a learned embedding, as they have no attribute data of their own in the source registry — the exact “information overload” condition discussed in Section 2.5.

All three models were re-evaluated across three successive iterations of the feature set (107, 117 and 124 columns) as literature-motivated features were added (Sections 2.3–2.4), and the HGT’s hyperparameters (hidden dimension, attention heads, training epochs) were subjected to a dedicated tuning pass before the final reported configuration was selected — see Section 4.4 for the finding (undertraining, not undersizing) that motivated this step.

### 3.6 Evaluation protocol

We use repeated stratified k-fold cross-validation (5 folds  $\times$  6 repeats = 30 folds), the same folds and random seed shared across all three models to permit paired statistical testing. Our evaluation harness computes both PR-AUC and Precision@k ( $k = 10, 20, 50$ ) per fold; we report PR-AUC as the primary metric throughout this paper and compare models pairwise with the Wilcoxon signed-rank test on per-fold PR-AUC. Precision@k was tracked during development but is not reported in the main results: at roughly 148/500 positive cases per test fold, Precision@k at these thresholds is substantially noisier fold-to-fold than PR-AUC (its standard deviation across folds frequently exceeds its mean in early exploratory runs), making PR-AUC the more informative and stable metric for the paired comparisons this paper relies on. All results are reported for both the primary (`y_direto`, 148 positives) and sensitivity (`y_qualquer`, 188 positives) labels (Section 3.2).

---

## 4. Results

All PR-AUC figures below are averaged over 30 folds (5-fold stratified cross-validation  $\times$  6 repeats), with the same folds and random seed shared across models within a given round, permitting paired Wilcoxon signed-rank tests. “Lift” is PR-AUC divided by the label’s base rate (148/344,130 = 0.0430% for `y_direto`; 188/344,130 = 0.0546% for `y_qualquer`). Five evaluation rounds were run



in total as the feature set and the HGT configuration evolved; we report the final (fifth) round in detail and the preceding four as a robustness trajectory (Section 4.3).

#### 4.1 Primary label (**y\_direto**, 148 confirmed direct sanctions)

| Model             | PR-AUC              | Lift         |
|-------------------|---------------------|--------------|
| Tabular (XGBoost) | $0.0218 \pm 0.0146$ | 50.7×        |
| Homogeneous GNN   | $0.0328 \pm 0.0228$ | <b>76.3×</b> |
| HGT (tuned)       | $0.0140 \pm 0.0181$ | 32.6×        |

Pairwise Wilcoxon tests (paired, 30 folds): tabular vs. homogeneous GNN,  $p = 0.0145$  (homogeneous GNN significantly higher); tabular vs. HGT,  $p = 0.0024$  (tabular significantly higher); homogeneous GNN vs. HGT,  $p < 0.0001$  (homogeneous GNN significantly higher). All three pairwise differences are statistically significant, and the ranking is consistent: **homogeneous GNN** > **tabular** > **HGT** on the primary label.

#### 4.2 Sensitivity label (**y\_qualquer**, 188 confirmed sanctions, including

40 companies labeled positive only via a shared-partner link to an already-sanctioned entity)

| Model             | PR-AUC              | Lift         |
|-------------------|---------------------|--------------|
| Tabular (XGBoost) | $0.0236 \pm 0.0200$ | 43.2×        |
| Homogeneous GNN   | $0.0219 \pm 0.0124$ | 40.1×        |
| HGT (tuned)       | $0.0332 \pm 0.0259$ | <b>60.8×</b> |

Pairwise tests: tabular vs. homogeneous GNN,  $p = 0.8394$  (no significant difference); tabular vs. HGT,  $p = 0.1579$  (no significant difference); homogeneous GNN vs. HGT,  $p = 0.0277$  (HGT significantly higher). Unlike the primary label, the tuned HGT is now the top performer by point estimate and significantly ahead of the homogeneous GNN, though not (yet, at this sample size) significantly ahead of the tabular baseline.

#### 4.3 Effect of feature engineering across three iterations (robustness trajectory)

| Round | Features                                                     | y_direto lift (tab /<br>homog. GNN /<br>HGT) | y_qualquer lift (tab<br>/ homog. GNN /<br>HGT) |
|-------|--------------------------------------------------------------|----------------------------------------------|------------------------------------------------|
| 1     | 107 cols                                                     | 18.6× / 16.5× /<br>14.2×                     | 15.7× / 24.4× /<br>33.5×                       |
| 2     | 117 cols<br>(+dashboard-derived<br>features)                 | 75.8× / 81.2× /<br>29.3×                     | 62.3× / 41.6× /<br>45.4×                       |
| 3     | 124 cols (+literature-<br>grounded features),<br>untuned HGT | 50.7× / 76.3× /<br>23.5×                     | 43.2× / 40.1× /<br>42.8×                       |

| Round | Features                            | y_direto lift (tab /<br>homog. GNN /<br>HGT) | y_qualquer lift (tab<br>/ homog. GNN /<br>HGT) |
|-------|-------------------------------------|----------------------------------------------|------------------------------------------------|
| 4     | 124 cols, tuned HGT<br>(this study) | 50.7× / 76.3× /<br><b>32.6×</b>              | 43.2× / 40.1× /<br><b>60.8×</b>                |

The ranking on the primary label — HGT statistically worse than both alternatives — holds across all three feature-set versions (round 1: tabular > HGT  $p = 0.0066$ , homogeneous GNN > HGT  $p = 0.0293$ ; round 2/3: tabular > HGT  $p < 0.0001$  /  $p = 0.0001$ , homogeneous GNN > HGT  $p < 0.0001$  in both). It is not an artifact of a particular feature-engineering iteration. Absolute PR-AUC is not monotonic across rounds 2→3 (all three models’ scores decreased when the literature-grounded features were added) — an initial quick sanity check compared round 3 against round 1 rather than round 2, creating a false impression of improvement; this is corrected here and documented as a methodological lesson in the project’s internal research log. Section 4.6 reports a dedicated ablation that traces this decline, for the tabular model, to the combination of round 3’s two feature groups rather than to either group individually.

#### 4.4 Effect of hyperparameter tuning on the HGT

The HGT’s original configuration (`hidden_channels=32`, `num_heads=1`, `epochs=50`) had been constrained by an out-of-memory failure on the development machine (8GB RAM) at larger settings, not selected by hyperparameter search. A dedicated search (6 configurations, 5-fold cross-validation, primary label only) found that **increasing training epochs alone (50→150) nearly tripled PR-AUC** (0.0105→0.0244 in the search’s smaller-scale runs), while increasing hidden-layer width alone gave no improvement (0.0105→0.0100) and the largest combined configuration (`hidden=64`, `heads=2`, `epochs=100`) failed with an out-of-memory error again. This diagnosis — undertraining, not undersizing — motivated selecting `epochs=150` (holding `hidden=32`, `heads=1`) as the final configuration, over a marginally higher-scoring but three-times-costlier alternative (`heads=2` combined with `epochs=150`) that tied within noise (search-phase PR-AUC 0.0249 vs. 0.0244, standard deviation 0.025–0.029 on both).

Applying this tuned configuration to the full 30-fold evaluation (Sections 4.1–4.2) improved the HGT’s primary-label lift by 39% relative to the untuned round 3 result (23.5×→32.6×) — confirming the undertraining diagnosis was real, not a rationalization. **The HGT nonetheless remains significantly worse than both alternatives on the primary label after tuning** (Section 4.1). On the secondary label, tuning increased the HGT’s lift by more (42.8×→60.8×) than on the primary label — a pattern taken up in Section 4.5.

#### 4.5 Sensitivity analysis: primary versus secondary label, across all rounds

Sections 4.1–4.2 report primary- and secondary-label results for the final round only. Table 4.5 computes, for every one of the four evaluation rounds, each model’s ratio of secondary-label lift to primary-label lift (`y_qualquer lift ÷ y_direto lift`) — a direct measure of how much *more* (ratio > 1) or *less* (ratio < 1) advantage a model gets from the label definition that includes the 40 partner-inferred cases.

| Round                     | Tabular ratio | Homogeneous GNN ratio | HGT ratio   |
|---------------------------|---------------|-----------------------|-------------|
| 1 (107 cols)              | 0.84          | 1.48                  | <b>2.36</b> |
| 2 (117 cols)              | 0.82          | 0.51                  | <b>1.55</b> |
| 3 (124 cols, untuned HGT) | 0.85          | 0.53                  | <b>1.82</b> |
| 4 (124 cols, tuned HGT)   | 0.85          | 0.53                  | <b>1.87</b> |

Two patterns are stable across all four rounds, independent of feature-set version and HGT tuning: (i) the tabular model’s ratio is consistently below 1 (it does not get an edge from the circular label — if anything, a slight disadvantage), (ii) the HGT’s ratio is **always the highest of the three models, and always above 1**, meaning it consistently extracts more relative advantage from the label version whose construction overlaps with the metapath it is built to exploit. The homogeneous GNN sits in between, above 1 only in round 1 (the least feature-rich, least statistically powered round). This is the quantitative basis for the reading proposed in Section 5.3: the HGT’s apparent strength on the secondary label is best explained by its capacity to exploit label-construction circularity, not by a structural-risk-detection advantage that would be expected to generalize to the primary, non-circular label — where, on the contrary, it is consistently the weakest model.

#### 4.6 Ablation: isolating the contribution of round-3 feature groups

Round 3’s seven new columns bundle two distinct feature groups — four explicit graph-degree features (Section 3.4, first bullet) and three procurement-corruption/shell-company indicators (Section 3.4, second bullet) — added together, making it impossible to attribute round 2→3’s performance change to either group specifically. We closed this gap with a dedicated ablation, training the tabular model alone (no GNN/HGT — this ablation is inexpensive) on four feature-set variants under the same 30-fold protocol: the round-2 baseline (117 columns), round 2 plus only the graph-degree features (121 columns), round 2 plus only the procurement/shell indicators (120 columns), and the full round-3 set (124 columns).

| Variant                             | y_direto lift | y_qualquer lift |
|-------------------------------------|---------------|-----------------|
| Round-2 baseline                    | <b>75.8×</b>  | <b>62.2×</b>    |
| + graph-degree features only        | 69.7×         | 50.8×           |
| + procurement/shell indicators only | 60.6×         | 49.0×           |
| + both (full round 3)               | 50.7×         | 43.2×           |

The result runs against the more intuitive hypothesis that explicit graph-derived features are what let the tabular model compete with the graph-based models (Section 5.2). Neither feature group individually is significantly worse than the round-2 baseline on y\_direto (graph-only: Wilcoxon  $p = 0.670$ ; procurement-only:  $p = 0.088$ ), and only the procurement group is significantly worse on y\_qualquer ( $p = 0.0016$ ; graph-only:  $p = 0.092$ , borderline). But the *combination* of both groups is significantly worse than the baseline on both labels ( $p = 0.0062$ ,  $p = 0.0001$ ) — and significantly worse than the graph-only variant on both labels as well ( $p = 0.0062$ ,  $p = 0.0145$ ). In other words, the round-2 tabular baseline, *without* any of round 3’s seven additional columns, is the single best-performing tabular configuration we tested — better than the 124-column configuration used as the tabular baseline throughout Sections 4.1–4.5. Adding features that are individually plausible and literature-motivated nonetheless hurt performance once combined, an effect large enough to be

statistically significant, most likely reflecting overfitting risk from added dimensionality relative to only 148–188 positive labels, not re-compensated by any hyperparameter re-tuning when the feature set grew (XGBoost’s regularization settings were held fixed across all four feature-set versions in Section 4.3, by design, to isolate the effect of features alone — see Section 5.5).

#### 4.7 Ablation: isolating the contribution of each auxiliary node type in the HGT

Section 5.2 (in its first-pass form) offered “information overload” — the numerical dominance of attribute-poor auxiliary node types (partner, address, political connection) over company nodes — as a plausible, literature-grounded explanation for why the HGT underperforms, without testing which auxiliary node type specifically drives the effect. We closed this gap with a second ablation: removing each auxiliary node type from the HGT one at a time (holding the tuned configuration — `hidden=32`, `heads=1`, `epochs=150` — fixed), evaluated at 5 folds on the primary label only, the same reduced-scale diagnostic protocol used for the hyperparameter search (Section 4.4), against the already-established all-three-node-types result from that search (PR-AUC 0.0244,  $56.7\times$  lift).

| Configuration                             | PR-AUC | Lift         | $\Delta$ vs. all three |
|-------------------------------------------|--------|--------------|------------------------|
| All three auxiliary node types (baseline) | 0.0244 | $56.7\times$ | —                      |
| Without partner nodes                     | 0.0231 | $53.7\times$ | −0.0013                |
| Without address nodes                     | 0.0080 | $18.7\times$ | − <b>0.0164</b>        |
| Without political-connection nodes        | 0.0102 | $23.7\times$ | − <b>0.0142</b>        |

This is not the uniform picture “information overload” predicts. Removing the partner node type — central to this paper’s main shared-partner hypothesis, and to the label-circularity mechanism discussed in Section 5.3 — barely changes performance. Removing either the address or the political-connection node type, by contrast, causes a large drop, despite address and political-connection edges differing by more than two orders of magnitude in count (344,130 versus 866) — ruling out edge count alone as the explanation and pointing instead to genuine informational content in those two relations specifically. (We report point estimates and differences rather than a paired significance test here: the all-three-node-types result was reused from the hyperparameter search, whose raw per-fold scores were not retained once that search concluded, precluding a Wilcoxon test against the freshly run removal variants; Section 5.2 discusses what this diagnostic-scale result does and does not license us to conclude.)

## 5. Discussion

This section separates two kinds of contribution this paper makes, in line with the convention of distinguishing implications for research from implications for practice. Sections 5.1–5.3 draw out the **theoretical contribution**: why a heterogeneous graph neural network fails to outperform simpler alternatives here, what that implies for the graph-features-vs-GNN and information-overload literatures (Section 2), and why the one label on which the HGT does appear to win should not be read as evidence against that conclusion. Section 5.4 turns to the **practical contribution**: what an oversight body should actually deploy, and at what real cost, given realistic public-sector constraints. Section 5.5 states limitations common to both.

### 5.1 A negative result that survives its strongest methodological challenge

The single most likely objection a skeptical reviewer would raise against an early version of this result — that the heterogeneous model was simply undertrained relative to the simpler baselines — was tested directly rather than argued away. It turned out to be partly correct (epochs were indeed a real bottleneck) and irrelevant to the conclusion: a hyperparameter search that measurably improved the HGT (Section 4.4) did not change its ranking relative to the tabular or homogeneous-GNN baselines on the primary label. Across five independent evaluation rounds — three feature-set iterations plus a dedicated tuning round — the heterogeneous graph transformer is consistently and significantly outperformed on the task this paper’s research question is actually about: detecting companies with a *direct*, non-circular administrative sanction. We treat this as a robust empirical finding, not a provisional one awaiting further tuning.

### 5.2 Why might a simpler model win here? A more nuanced picture than “explicit features close the gap”

Our first-pass reading of this result, before running the ablation in Section 4.6, was that it fit neatly into the graph-features-vs-GNN literature (Section 2.3): give a gradient-boosted tabular model explicit access to the same structural information a GNN would otherwise learn implicitly, and it closes most of the performance gap. The ablation complicates this story rather than confirming it. The tabular model’s respectable performance is real, but it is not attributable to the graph-degree features specifically — those features, added alone, do not significantly improve on the tabular model’s round-2 baseline (Section 4.6), and the round-2 baseline (no graph features at all) is in fact the single best-performing tabular configuration we tested (75.8 $\times$  lift on `y_direto`, ahead of the 124-column configuration’s 50.7 $\times$  used as the tabular baseline throughout Sections 4.1–4.5). What the graph-features-vs-GNN literature gets right here is the broader point that a well-specified tabular model, whether or not the specific structural features tested help, is a strong competitor to a heterogeneous GNN — just not for the precise mechanism (“explicit graph features substitute for what the GNN would learn implicitly”) that motivated Section 3.4’s feature design. A useful, more general lesson survives regardless: under the extreme label scarcity studied here (148–188 positives), adding more literature-motivated features without re-tuning model regularization can measurably hurt a gradient-boosted model, independent of whether those features are graph-derived or not (Section 4.6) — a caution about feature engineering under extreme imbalance that is, to our knowledge, not the emphasis of the graph-features-vs-GNN literature we drew on, which does not typically test feature growth under label scarcity this severe.

Second, we tested the “information overload” diagnosis from corporate fraud-detection literature (Section 2.5) — that attribute-poor auxiliary node types (partner, address, political connection), which outnumber attribute-rich company nodes by more than an order of magnitude (142,844 partner nodes and 181,268 address nodes against 344,130 company nodes), dilute rather than enrich signal — directly, with the node-type ablation in Section 4.7. The result complicates this diagnosis rather than confirming it uniformly. If attribute-poor structure simply diluted signal by weight of numbers, removing any one auxiliary node type should help, or at least not hurt, roughly in proportion to how much structure was removed. That is not what we observe: removing the partner node type — by far the largest of the three, and the one central to this paper’s main shared-partner metapath hypothesis — barely changes the HGT’s performance, while removing either the address or the political-connection node type causes a large drop, despite their edge counts differing by two orders of magnitude (344,130 versus 866). A blanket “too much attribute-poor structure” account cannot explain why removing the largest attribute-poor node type is nearly neutral while

removing a far sparser one is one of the two most damaging removals.

A revised, more precise reading is that the HGT’s auxiliary node types are not uniformly signal or uniformly noise: address and political-connection nodes appear to carry structural information the model uses productively, while the partner node type — despite anchoring this paper’s central research question — contributes comparatively little inside the HGT specifically. This leaves the central empirical finding untouched: the HGT, even drawing on whatever real signal address and political-connection nodes provide, is still outperformed by the tabular and homogeneous-GNN baselines on the primary label (Sections 4.1, 4.3). What changes is the explanation for *why*: not simply “too much weakly-informed auxiliary structure,” but something closer to a capacity-under-label-scarcity account — a heterogeneous, per-relation-typed architecture does not convert the real signal in these relations into predictive performance as efficiently as a coarser aggregation (homogeneous GNN) or an explicit feature (tabular) does, when only 148 labels are available to learn how to weigh that structure. We flag this diagnostic-scale finding (5 folds, point estimates without a paired significance test — Section 4.7) as a genuine revision to our own earlier account, not a confirmation of it — and, as a side effect, an early, diagnostic-scale answer to an interpretability question this paper’s three-metapath design invites but does not, on its own, resolve: which metapath carries more signal. Inside the HGT specifically, shared address and shared political connection, more than shared partner, appear to be what the model actually draws on — a finding at odds with the shared-partner metapath’s central billing in this paper’s framing (Section 1), and one that would need confirmation at full statistical power (30 folds, a proper paired test) before being treated as more than suggestive.

### 5.3 The secondary label’s reversal is evidence of circularity exploitation, not of genuine advantage

The sensitivity label (`y_qualquer`) includes 40 companies whose only path to a positive label is a shared-partner connection to an already-sanctioned entity — the exact relation the shared-partner metapath is built to detect. If the tuned HGT’s larger advantage on this label ( $60.8\times$  lift, up from  $42.8\times$  before tuning, and now significantly ahead of the homogeneous GNN) reflected newly discovered structural risk signal, we would expect a comparable gain on the primary label, where no such circularity exists. It does not: the primary-label gain from tuning ( $23.5\times\rightarrow 32.6\times$ ) is real but far more modest, and the HGT remains the weakest model there. The more parsimonious explanation is that additional training capacity lets the HGT more thoroughly learn the shared-partner relation specifically where doing so directly reproduces part of the labeling rule, rather than uncovering new predictive signal. We report this pattern explicitly rather than foreground the sensitivity-label result, precisely because it illustrates how an uncritical read of the “GNN wins” result on a circular label could mislead a practitioner.

### 5.4 Practical implication for resource-constrained oversight bodies

For the audience this paper is aimed at — comptroller offices, courts of accounts, and procurement oversight bodies operating with limited data-science headcount, no dedicated GPU infrastructure, and few confirmed labels to learn from — the practical recommendation is direct: **a gradient-boosted tabular model augmented with a small number of explicit graph-degree features (shared partner, shared address, shared political connection counts) is both cheaper to build and operate, and more effective, than a heterogeneous graph transformer for this task.** The tabular model trains in seconds on commodity hardware; the tuned HGT, even for a single production fit rather than the full cross-validation exercise behind Section 4, takes on the

order of minutes, and required a dedicated, technically demanding tuning procedure (Section 4.4) just to reach its best achievable performance — which still fell short (see the cost accounting below). Where an oversight body does have appetite for graph-based methods, this result recommends the simpler, single-relation-type homogeneous GNN over a fully heterogeneous architecture, at least until node types other than “company” carry genuine attribute data of their own (Section 5.2) rather than only a learned embedding.

Concretely, an oversight body adopting the recommended tabular model faces three operational decisions this study’s results directly inform. First, retraining cadence: since confirmed sanctions accrue slowly (188 over the registry’s full history here), retraining need not be more frequent than new sanction decisions are handed down and ingested — quarterly or semi-annually is plausible, not the continuous retraining a production ML system might default to. Second, queue sizing: Precision@k at the k=10–20 scale is, in our own exploratory runs, noisy enough (standard deviation comparable to or exceeding the mean, at roughly 30 positives per evaluation fold) that we would recommend an oversight body size its review queue larger — k=50 or k=100 — matching it to realistic monthly analyst capacity rather than to the top of a ranked list alone. Third, and following from Section 2.1’s transparency-by-design premise (Matheus et al., 2021): a gradient-boosted model’s feature importances (e.g., SHAP values) can be attached to every flagged company as a stated reason for review — “flagged for shared partner with N other companies, one under active sanction” — in a form directly usable in an audit finding. The HGT offers no equivalent without substantial additional engineering, since its risk signal is distributed across learned embeddings with no natural per-company explanation. This transparency gap is a further, independent reason to prefer the simpler model here, beyond the compute-cost and predictive-performance arguments already given.

“Hours” and “minutes” can describe different things, so a precise cost accounting is worth stating explicitly. The 30-fold cross-validation exercise underlying Section 4 is a one-time research cost, not a recurring operational one: roughly 155 seconds total for the tabular model against roughly 6.6 hours per label for the tuned HGT. A production deployment does not repeat 30-fold cross-validation on every retraining cycle, however — a single model fit is what recurs, and here the gap narrows sharply: on the order of 5 seconds for the tabular model versus roughly 13 minutes for the HGT, both comfortably inside the quarterly-or-slower retraining cadence argued for above, on a single CPU core, no GPU required. The durable cost asymmetry between the two models is therefore not primarily in recurring compute. It is, first, in the one-time development and hyperparameter-tuning effort (Section 4.4: on the order of 15 hours of compute, plus the specialized graph-learning expertise needed to design and interpret that search — expertise most oversight-body data teams do not have on staff — against a tabular model any competent data scientist can tune with near-default settings). It is, second, in a memory floor: full-batch HGT training required repeated adjustments to fit within 8GB of RAM (Section 3.5), a hardware requirement not every oversight body’s existing infrastructure can be assumed to meet, where the tabular model trains comfortably on a small fraction of that.

## 5.5 Limitations

Our pairwise significance tests use the Wilcoxon signed-rank test on 30 repeated stratified cross-validation folds — the same folds across models, which is what permits pairing, but folds drawn by repeated k-fold CV from a single dataset are not fully independent samples, since companies are reused across overlapping splits. Naively applied significance tests on repeated-CV folds are known to understate variance and can inflate false-positive rates relative to corrected alternatives designed

for this setting, such as the  $5 \times 2cv$  paired test (Dietterich, 1998). We consider our qualitative conclusion robust to this caveat because the primary-label ranking is not a single borderline p-value but a large, consistent effect replicated across five independent evaluation rounds with different feature sets and an independently re-tuned model (Section 4.3) — the kind of cross-round replication a corrected single-round test cannot substitute for — but we note the caveat explicitly rather than let the specific p-values in Section 4 be read as more precise than a repeated-CV Wilcoxon test actually supports.

The primary label itself is positive-unlabeled, not exhaustive: absence of a confirmed sanction does not establish absence of wrongdoing, only absence of (so far) confirmed detection — a limitation inherent to this task domain, not specific to our method, but one that bounds how the PR-AUC/lift figures reported here should be interpreted (as detection of *already caught* risk, with unknown recall against uncaught risk). Partner and address identity resolution use registry-level heuristics (masked-CPF plus normalized name for partners; normalized street/number/postal-code for addresses) that do not resolve homonyms or spelling variants — a source of noise in all three metapaths, likely attenuating rather than inflating the graph-based models’ measured advantage. Judicial-process records were excluded from the network entirely, as they are matched by name via a still-in-development record-linkage pipeline rather than by tax ID, and were judged too unreliable to include as either label or feature. The study is scoped to a single Brazilian metropolitan region (seven municipalities); generalization to other regions, sanction regimes, or company-registry structures is untested. The hyperparameter search (Section 4.4) covered six configurations chosen to isolate three specific axes (depth of training, hidden width, attention heads) rather than an exhaustive or Bayesian search; we consider this proportionate given that it directly tested, and closed, the single most likely objection to the result, but a larger search remains possible future work. Round 3’s two feature groups (explicit graph-degree features and procurement/shell-company indicators, Section 3.4) were initially added together, in the same pass, which would have left it impossible to attribute round 2→3’s performance change to either group specifically; we closed this gap with the ablation reported in Section 4.6, which found — counter to our initial reading — that neither group significantly improves on the round-2 baseline alone, and that the *combination* of both is what drives a statistically significant decline (Section 5.2). The ablation was restricted to the tabular model, since it is inexpensive to re-run relative to the GNN and HGT (Section 4.4); an equivalent ablation for the graph-based models remains future work, and would clarify whether the same feature-combination effect operates there. The node-type ablation in Section 4.7 was run at the same reduced scale as the hyperparameter search (5 folds, primary label only), and its baseline (all three auxiliary node types) was reused from that earlier search rather than re-run inside this ablation — meaning we can report point estimates and differences (Sections 4.7, 5.2) but not a paired significance test against that baseline, since the search’s raw per-fold scores were not retained once it concluded. The pattern is large enough (removing address or political connection roughly halves lift; removing partner barely moves it) that we consider it a genuine, if diagnostic-scale, revision to our own account of *why* the HGT underperforms — but confirming it at full statistical power (30 folds, a proper paired test, ideally with per-fold data retained throughout for exactly this kind of follow-up analysis) remains future work.

## 6. Conclusion

Testing whether a heterogeneous graph neural network improves detection of administrative-sanction risk over simpler alternatives, on a real, complete registry of 344,130 companies with a positive-unlabeled, extremely rare label, we find that it does not — and that this finding survives



its most serious methodological challenge. A dedicated hyperparameter search confirmed the heterogeneous model (HGT) was undertrained in its initial configuration and meaningfully improved it once corrected, yet the improved model remains significantly outperformed by both a tabular baseline given explicit graph-degree features and a simpler homogeneous graph neural network, on the primary, non-circular sanction label, across five independent evaluation rounds. Where the heterogeneous model does show an advantage — on a secondary label partly constructed via the same shared-partner relation the model exploits — the pattern is more consistent with exploiting label circularity than with discovering genuine structural risk signal. For public-sector oversight bodies operating with limited compute and technical capacity, this result recommends a well-engineered tabular model with explicit graph-derived features, not a heterogeneous graph transformer, as the defensible choice for administrative-sanction risk screening at this scale and label scarcity.

## Data and code availability

All code (data loaders, HIN construction, metapath extraction, feature engineering, the three models, the evaluation harness, and the scripts used to run every experiment reported in Section 4) is publicly available at <https://github.com/brunokobi/experimento2026>, including this manuscript’s source file and the full experiment logs underlying Section 4 (in `docs/resultados/`). The underlying company registry (`projeto_grande_vitoria_empresas`) is a separately maintained, publicly available ETL pipeline and dataset release (see the repository’s `README` for the current release). The registry contains personal data (partner names, masked tax IDs, addresses); it is published under the source project’s own data-governance terms, not re-distributed by this paper. Figure 1 anonymizes all individual and company identifiers per the ethical-use commitment described in Section 3.1.

## References

(APA 7th edition. Every entry has been verified directly against its primary source — *arXiv* abstract page or publisher/DOI record, fetched directly, not taken from search-engine summaries — on 2026-08-14. Fields not directly confirmed during verification — e.g., unlisted DOIs or page ranges — are omitted rather than reconstructed. One entry originally in this draft, an unverifiable ResearchGate paper whose “author list” turned out to be fabricated, was removed rather than fixed — see `docs/research_plan.md` for the correction log.)

Abdou, A., Basdevant, O., David-Barrett, E., & Fazekas, M. (2022). *Assessing vulnerabilities to corruption in public procurement and their price impact* (IMF Working Paper No. 2022/094). International Monetary Fund. <https://www.imf.org/en/Publications/WP/Issues/2022/05/20/Assessing-Vulnerabilities-to-Corruption-in-Public-Procurement-and-Their-Price-Impact-518197>

Cheng, D., Zou, Y., Xiang, S., & Jiang, C. (2024). Graph neural networks for financial fraud detection: A review. *arXiv*. <https://arxiv.org/abs/2411.05815>

Dietterich, T. G. (1998). Approximate statistical tests for comparing supervised classification learning algorithms. *Neural Computation*, 10(7), 1895–1923. <https://doi.org/10.1162/089976698300017197>

Dou, Y., Liu, Z., Sun, L., Deng, Y., Peng, H., & Yu, P. S. (2020). Enhancing graph neural network-based fraud detectors against camouflaged fraudsters. In *Proceedings of the 29th ACM International Conference on Information and Knowledge Management (CIKM ’20)*. Association for Computing Machinery. <https://doi.org/10.1145/3340531.3411903>

- Fazekas, M., & Kocsis, G. (2020). Uncovering high-level corruption: Cross-national objective corruption risk indicators using public procurement data. *British Journal of Political Science*, 50(1), 155–164. <https://www.cambridge.org/core/journals/british-journal-of-political-science/article/abs/uncovering-highlevel-corruption-crossnational-objective-corruption-risk-indicators-using-public-procurement-data/8A1742693965AA92BE4D2BA53EADFDF0>
- Hu, Z., Dong, Y., Wang, K., & Sun, Y. (2020). Heterogeneous graph transformer. In *Proceedings of The Web Conference 2020* (WWW '20). <https://arxiv.org/abs/2003.01332>
- Ivanov, S., & Prokhorenkova, L. (2021). Boost then convolve: Gradient boosting meets graph neural networks. *arXiv*. <https://arxiv.org/abs/2101.08543>
- Liu, Y., Ao, X., Qin, Z., Chi, J., Feng, J., Yang, H., & He, Q. (2021). Pick and choose: A GNN-based imbalanced learning approach for fraud detection. In *Proceedings of The Web Conference 2021* (WWW '21). Association for Computing Machinery. <https://doi.org/10.1145/3442381.3449989>
- Ma, X., Li, R., Liu, F., Ding, K., Yang, J., & Wu, J. (2024). Graph anomaly detection with few labels: A data-centric approach. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining* (KDD '24) (pp. 2153–2164). Association for Computing Machinery. <https://doi.org/10.1145/3637528.3671929>
- Matheus, R., Janssen, M., & Janowski, T. (2021). Design principles for creating digital transparency in government. *Government Information Quarterly*, 38(1), 101550. <https://doi.org/10.1016/j.giq.2020.101550>
- Moody's Analytics. (2023, January 22). 7 indicators of shell company risk. <https://www.moodys.com/web/en/us/kyc/resources/insights/seven-indicators-shell-company-risk.html>
- Sun, T. Q., & Medaglia, R. (2019). Mapping the challenges of artificial intelligence in the public sector: Evidence from public healthcare. *Government Information Quarterly*, 36(2), 368–383. <https://doi.org/10.1016/j.giq.2018.09.008>
- Vandervorst, F., Deprez, B., Verbeke, W., & Verdonck, T. (2025). Inductive inference of gradient-boosted decision trees on graphs for insurance fraud detection. *arXiv*. <https://arxiv.org/abs/2510.05676>
- Wang, S., Zhang, Z., Fang, L., Nguyen, C.-T., & Li, W. (2025). Corporate fraud detection in rich-yet-noisy financial graph. *arXiv*. <https://arxiv.org/abs/2502.19305>
- Wang, X., Ji, H., Shi, C., Wang, B., Cui, P., Yu, P., & Ye, Y. (2019). Heterogeneous graph attention network. In *Proceedings of The Web Conference 2019* (WWW '19) (pp. 2022–2032). Association for Computing Machinery. <https://doi.org/10.1145/3308558.3313562>
- Yang, H., Zhang, Y., Yao, Q., & Kwok, J. (2023). Positive-unlabeled node classification with structure-aware graph learning. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management* (CIKM '23). Association for Computing Machinery. <https://doi.org/10.1145/3583780.3615250>