Trabalho feito por : Bruno Lopes

Disciplina: DAS

Professor : Andre Carvalhas

Link: https://github.com/brunolopes25/TrabalhoDAS

Criar o repositório local.

bruno@BrunoLopes MINGW64
\$ mkdir TrabalhoDAS

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "Teste"
[develop (root-commit) ac7161d] Teste
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 relatorio.docx

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 9.35 KiB | 9.35 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/brunolopes25/TrabalhoDAS.git

* [new branch] develop -> develop
```

Realização das 5 alterações sugeridas.

1ºcommit

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "alteração1"
[develop 12f0f62] alteração1
1 file changed, 0 insertions(+), 0 deletions(-)

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 60.11 KiB | 30.05 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/brunolopes25/TrabalhoDAS.git
ac7161d..12f0f62 develop -> develop
```

2ºcommit

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "alteração2"
[develop cbc0a60] alteração2
1 file changed, 0 insertions(+), 0 deletions(-)

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 46.83 KiB | 15.61 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/brunolopes25/TrabalhoDAS.git
12f0f62..cbc0a60 develop -> develop
```

3ºcommit

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "alteração3"
[develop 51f27f4] alteração3
1 file changed, 0 insertions(+), 0 deletions(-)

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 51.31 KiB | 12.83 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/brunolopes25/TrabalhoDAS.git
    cbc0a60..51f27f4 develop -> develop
```

4ºcommit

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "alteração4"
[develop b420129] alteração4
1 file changed, 0 insertions(+), 0 deletions(-)

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 52.06 KiB | 13.01 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/brunolopes25/TrabalhoDAS.git
51f27f4..b420129 develop -> develop
```

5ºcommit

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git commit -a -m "alteração5"
[develop 976fa32] alteração5
1 file changed, 0 insertions(+), 0 deletions(-)

bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)

$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 52.14 KiB | 10.43 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/brunolopes25/TrabalhoDAS.git
b420129..976fa32 develop -> develop
```


Release

```
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git flow release start REL_V.1
Switched to a new branch 'release/REL_V.1'
Summary of actions:
  A new branch 'release/REL_V.1' was created, based on 'master'
You are now on branch 'release/REL_V.1'
Follow-up actions:
  Bump the version number now!
   Start committing last-minute fixes in preparing your release
   When done, run:
       git flow release finish 'REL_V.1'
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (release/REL_V.1)
$ git flow release publish REL_V.1
Total O (delta O), reused O (delta O), pack-reused O
remote:
remote: Create a pull request for 'release/REL_V.1' on GitHub by visiting: remote: https://github.com/brunolopes25/TrabalhoDAS/pull/new/release/REL_V
remote:
To https://github.com/brunolopes25/TrabalhoDAS.git
* [new branch] release/REL_V.1 -> release/REL_V.1 branch 'release/REL_V.1' set up to track 'origin/release/REL_V.1'.
Already on 'release/REL_V.1'
Your branch is up to date with 'origin/release/REL_V.1'.
Summary of actions:
- The remote branch 'release/REL_V.1' was created or updated
- The local branch 'release/REL_V.1' was configured to track the remote branch
- You are now on branch 'release/REL_V.1'
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (release/REL_V.1)
$ git flow release finish REL_V.1 -m "finish"
Switched to branch 'develop'
To https://github.com/brunolopes25/TrabalhoDAS.git
    [deleted]
                             release/REL_V.1
Deleted branch release/REL_V.1 (was 3221cb5).
Summary of actions:
- Release branch 'release/REL_V.1' has been merged into 'develop'
- The release was tagged 'REL_V.1'
- Release branch 'release/REL_V.1' has been locally deleted; it has been remote ly deleted from 'origin'
  You are now on branch 'develop'
 bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git push origin develop
Everything up-to-date
```

.gitignore

```
oruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git add .gitignore
fatal: pathspec '.gitignore' did not match any files
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git commit -a -m ".gitignore"
On branch develop
Untracked files:
   (use "git add <file>..." to include in what will be committed)
nothing added to commit but untracked files present (use "git add" to track)
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
s git add .gitignore
fatal: pathspec '.gitignore' did not match any files
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
  touch .gitignore
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
  git add .gitignore
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git commit -a -m ".gitignore"
[develop cce8c39] .gitignore
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 .gitignore
bruno@BrunoLopes MINGW64 ~/TrabalhoDAS (develop)
$ git push origin develop
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 287 bytes | 287.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/brunolopes25/TrabalhoDAS.git
3221cb5..cce8c39 develop -> develop
```

revisão de código antes de um pull request ser aprovado;

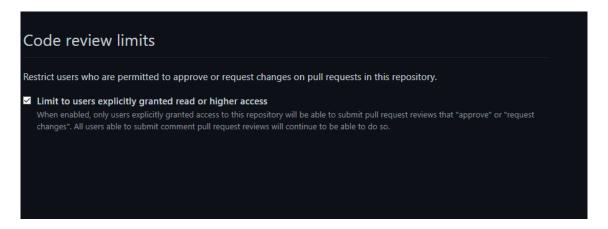

Regras

