



Events in ODC

Using Events
How Events Work
Considerations

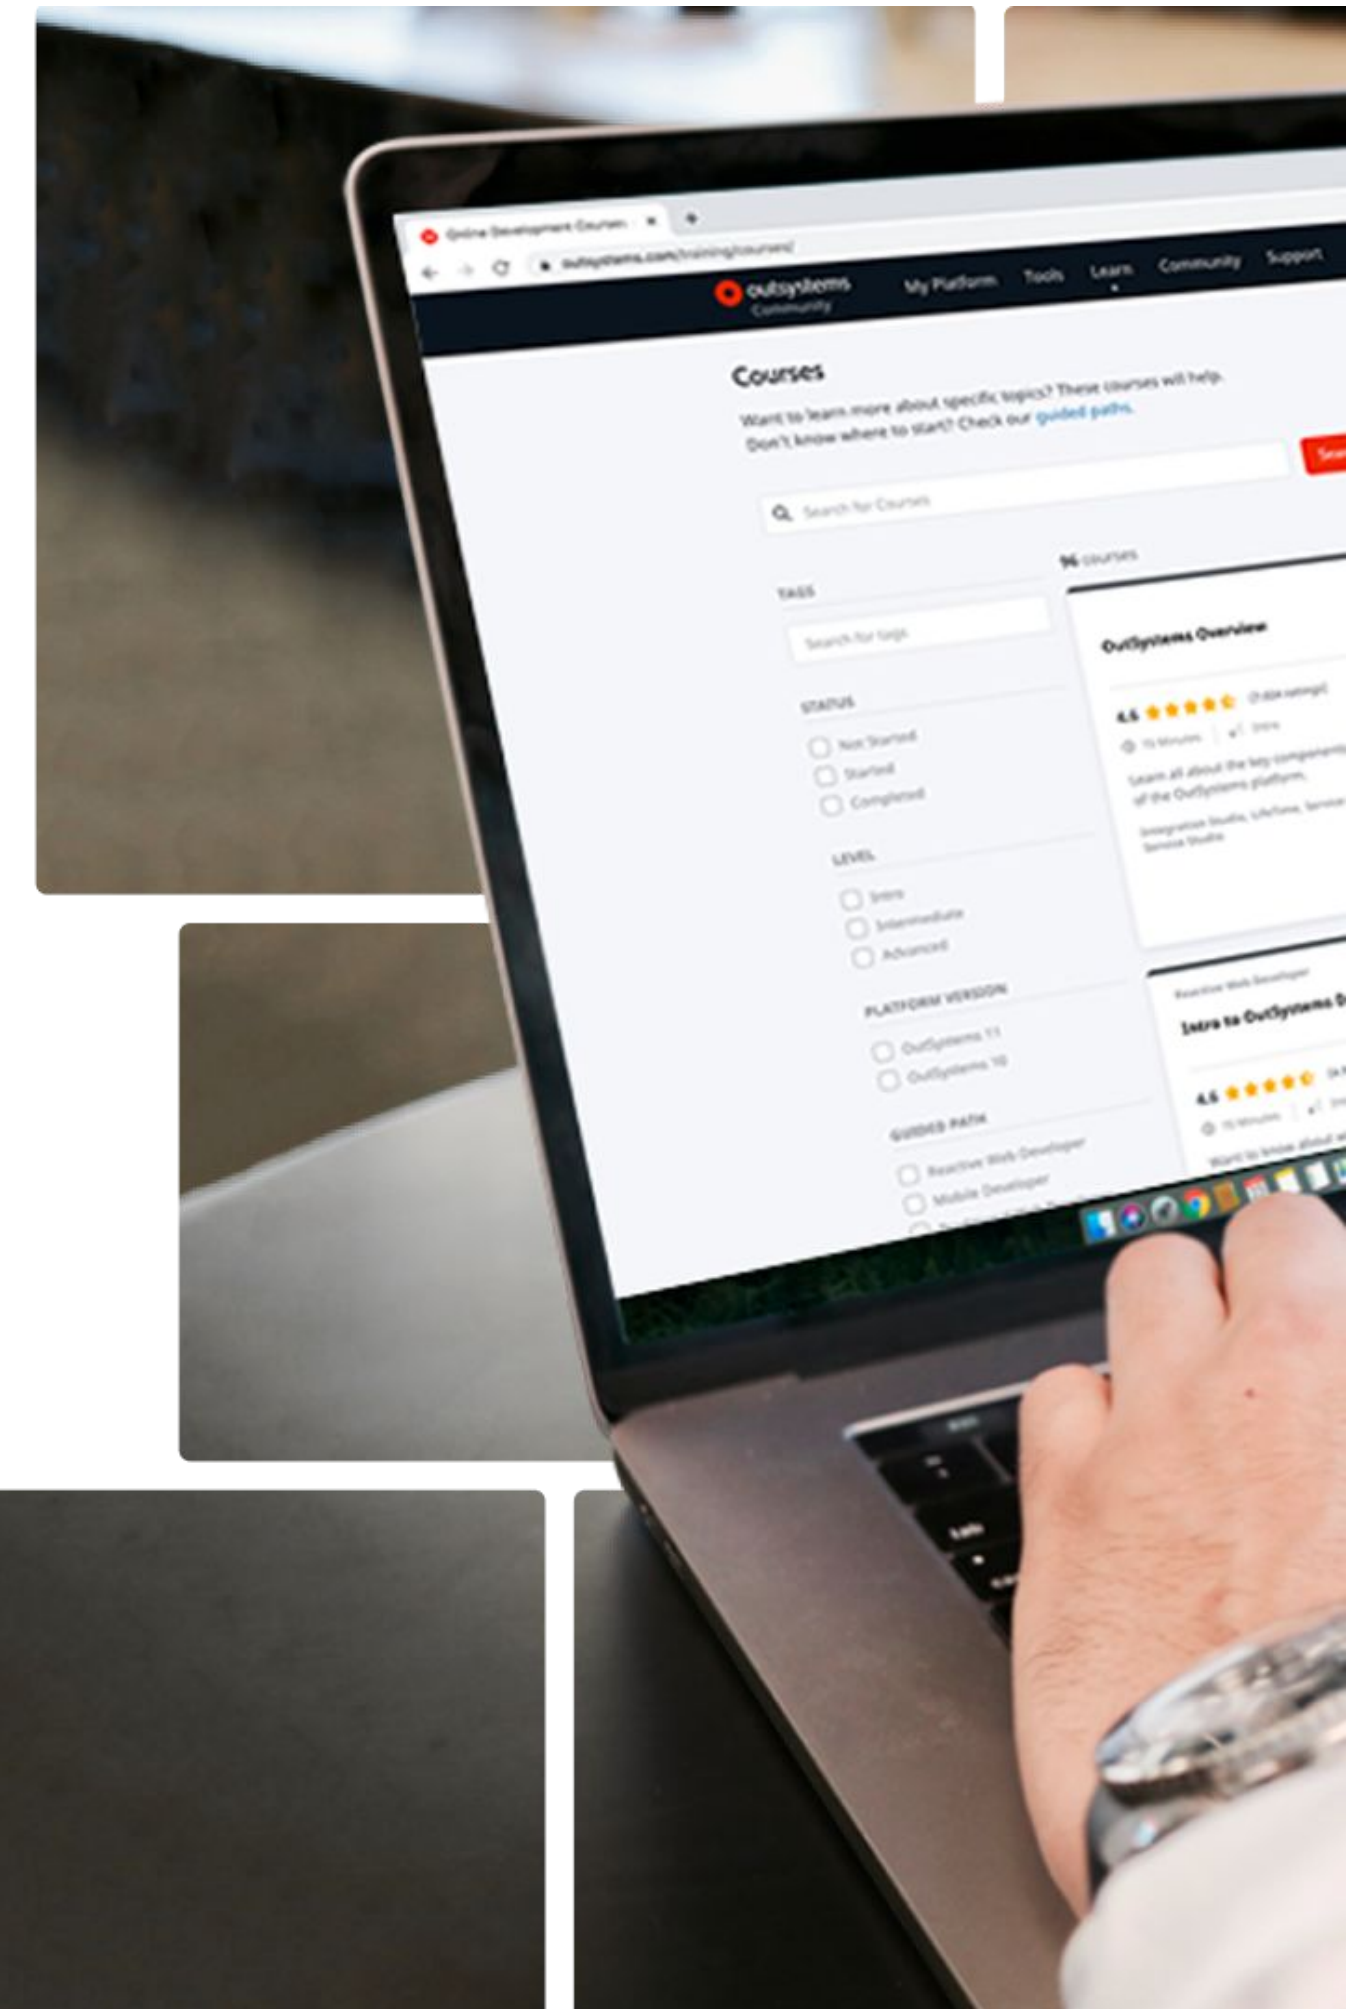


Using Events

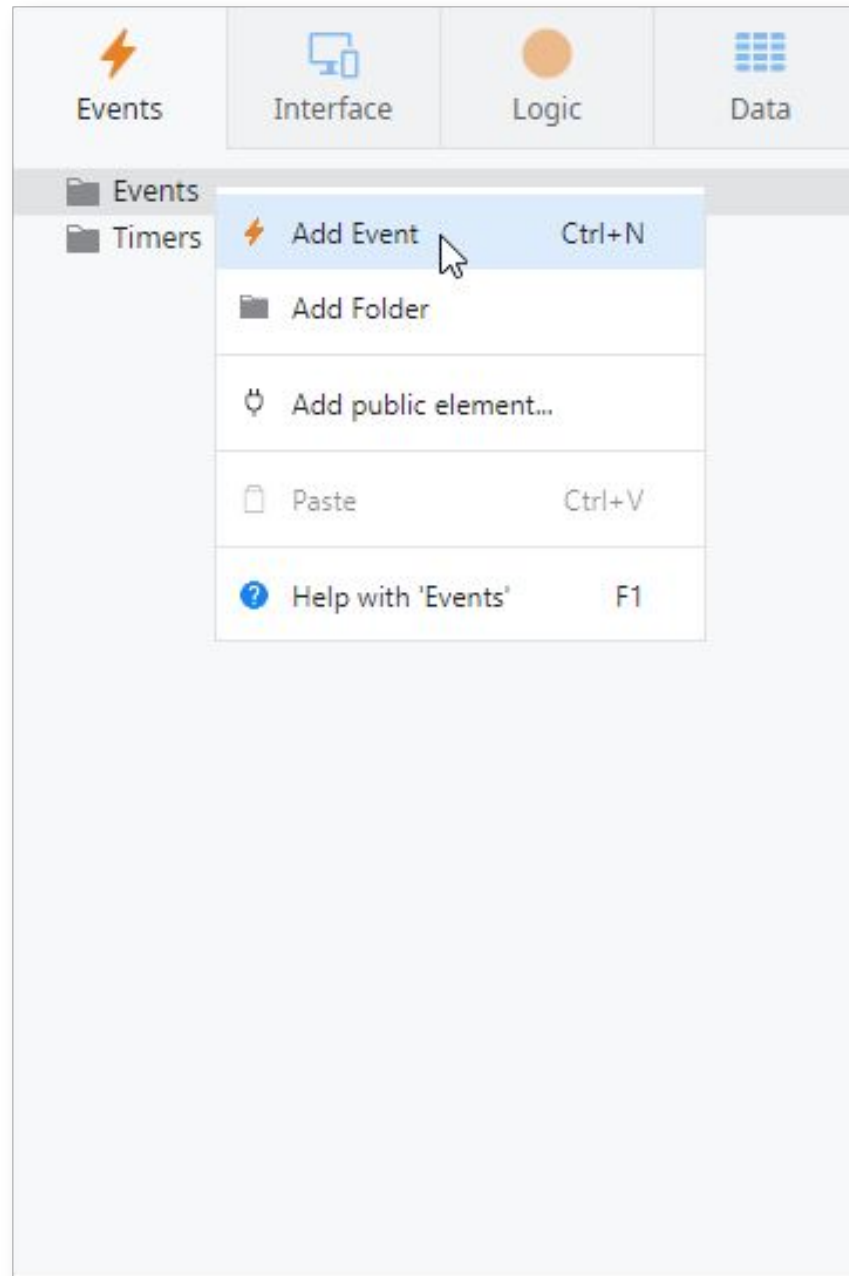


1. Create the Event

Using Events

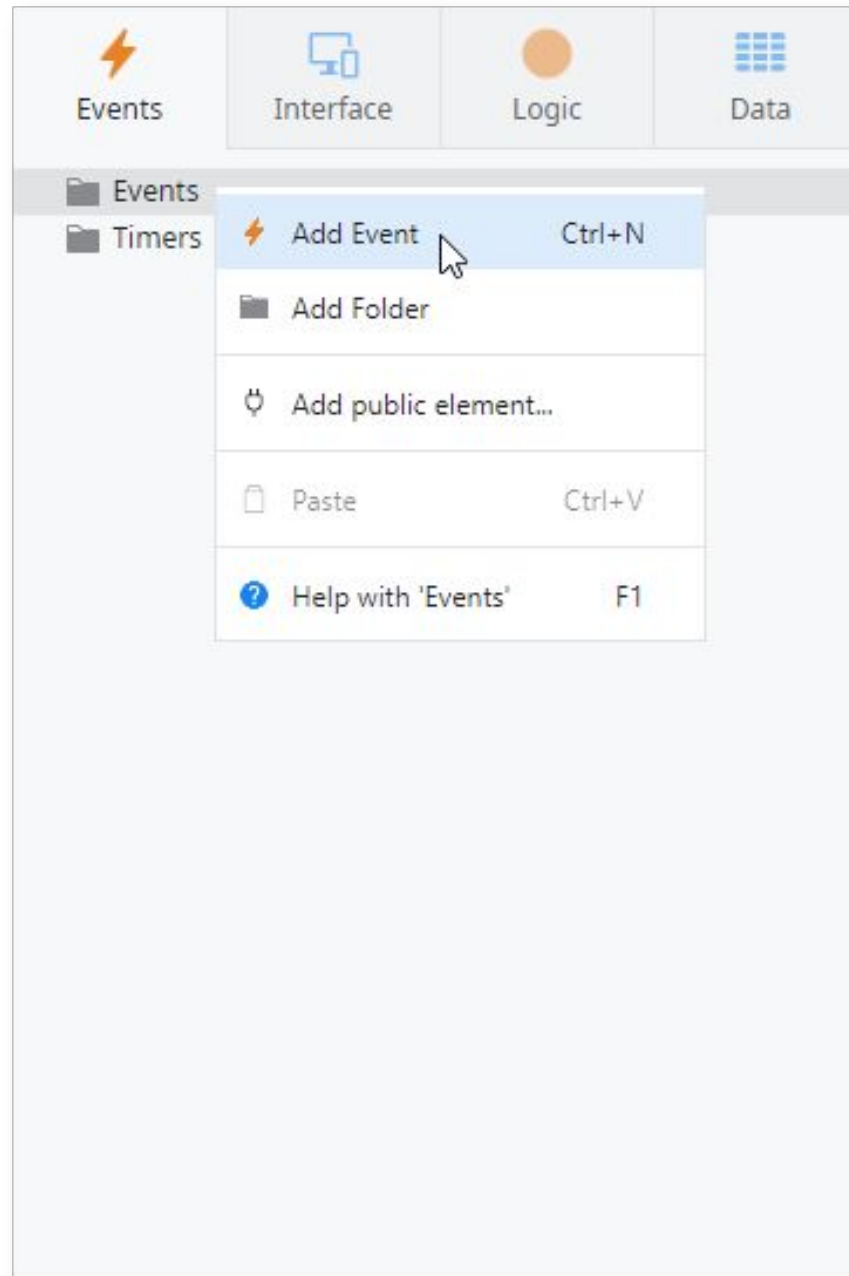


1. Create the Event

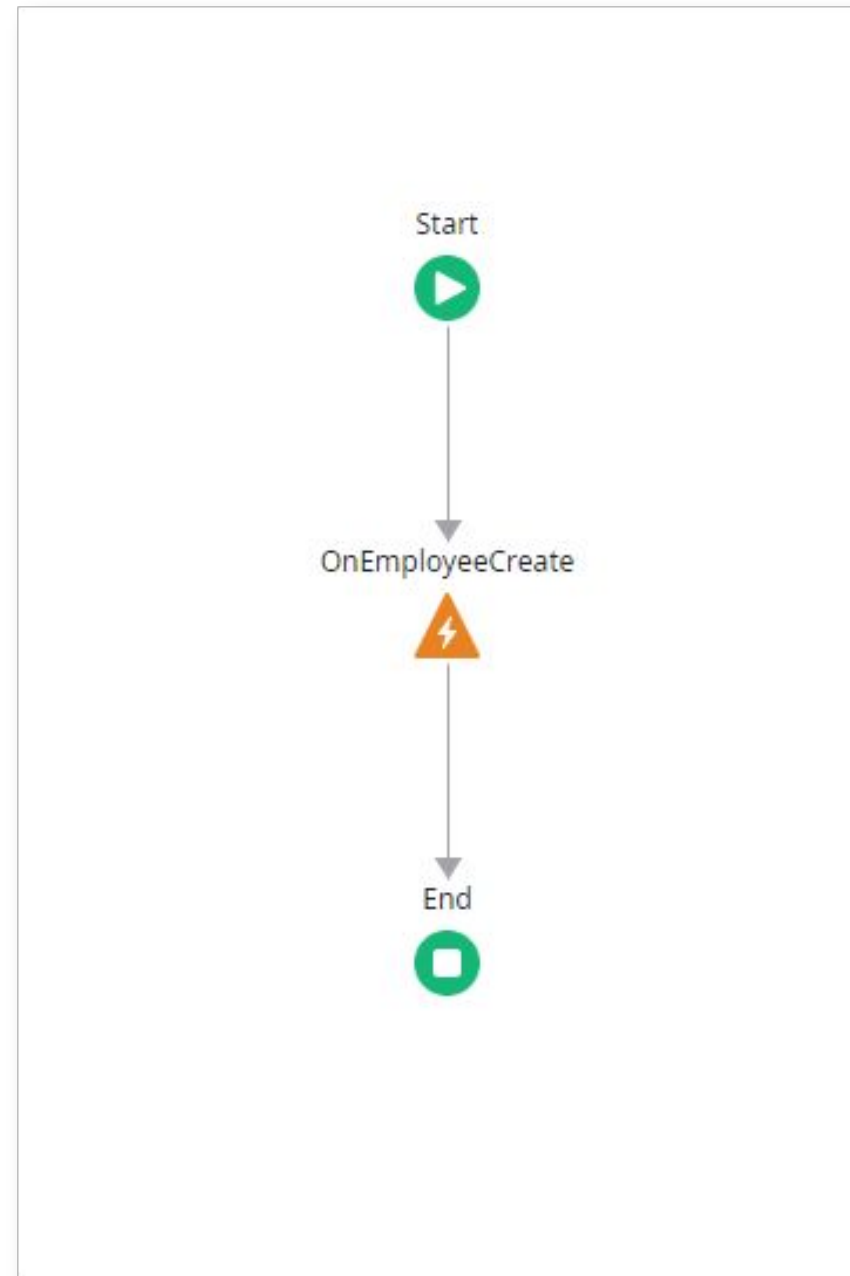


2. Define Event triggers


Using Events

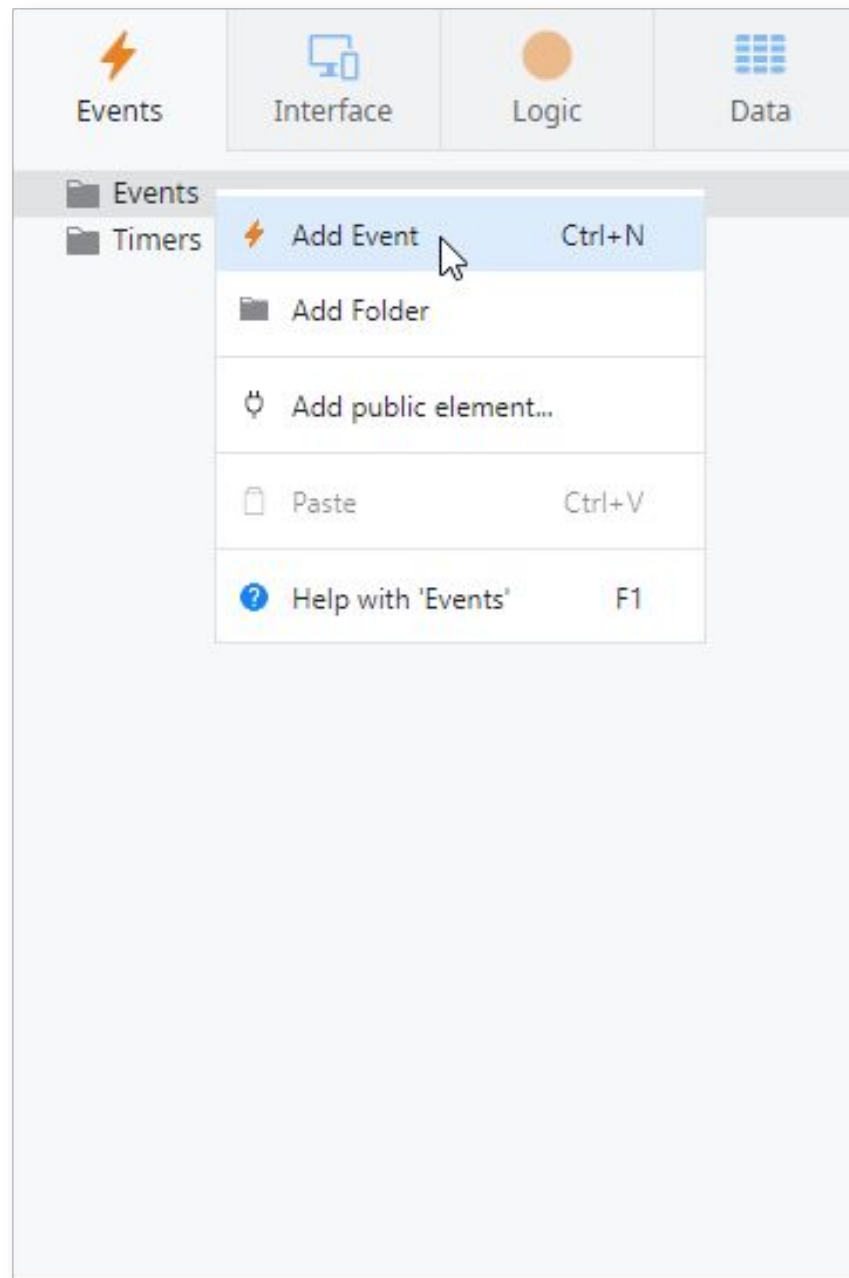

1. Create the Event

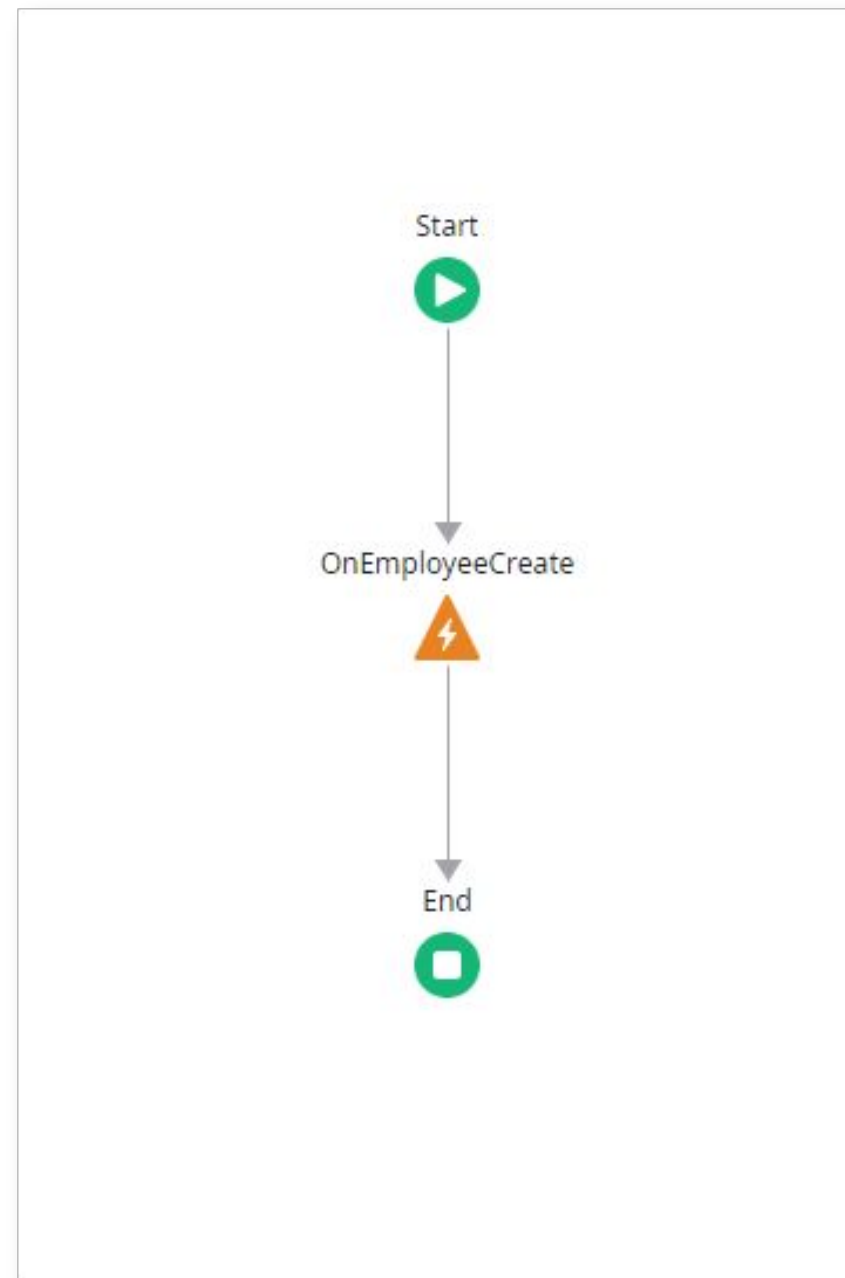


2. Define Event triggers

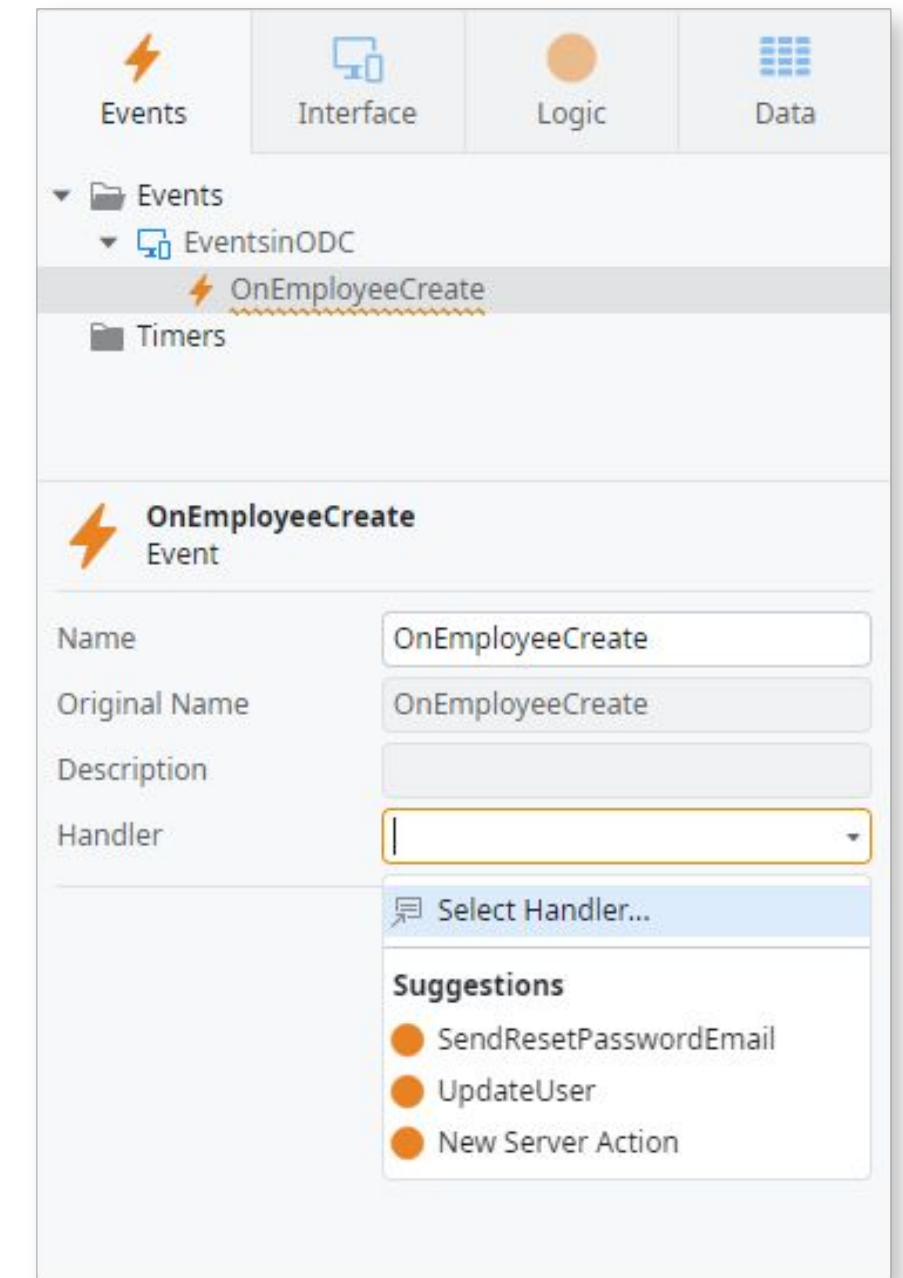

3. Subscribe the Event

How Events Work in ODC?

Events can be created in Web and Mobile apps.

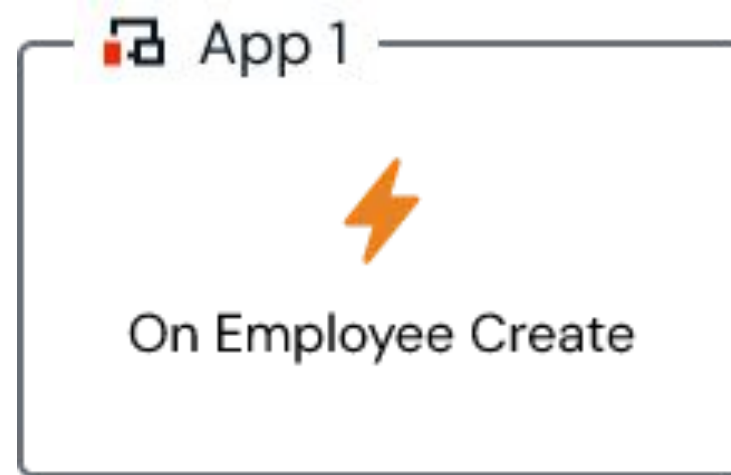


How Events Work in ODC?

Event and Trigger are both defined in the same app.




How Events Work in ODC?

Multiple handlers can be defined, in the same app, or in other apps.

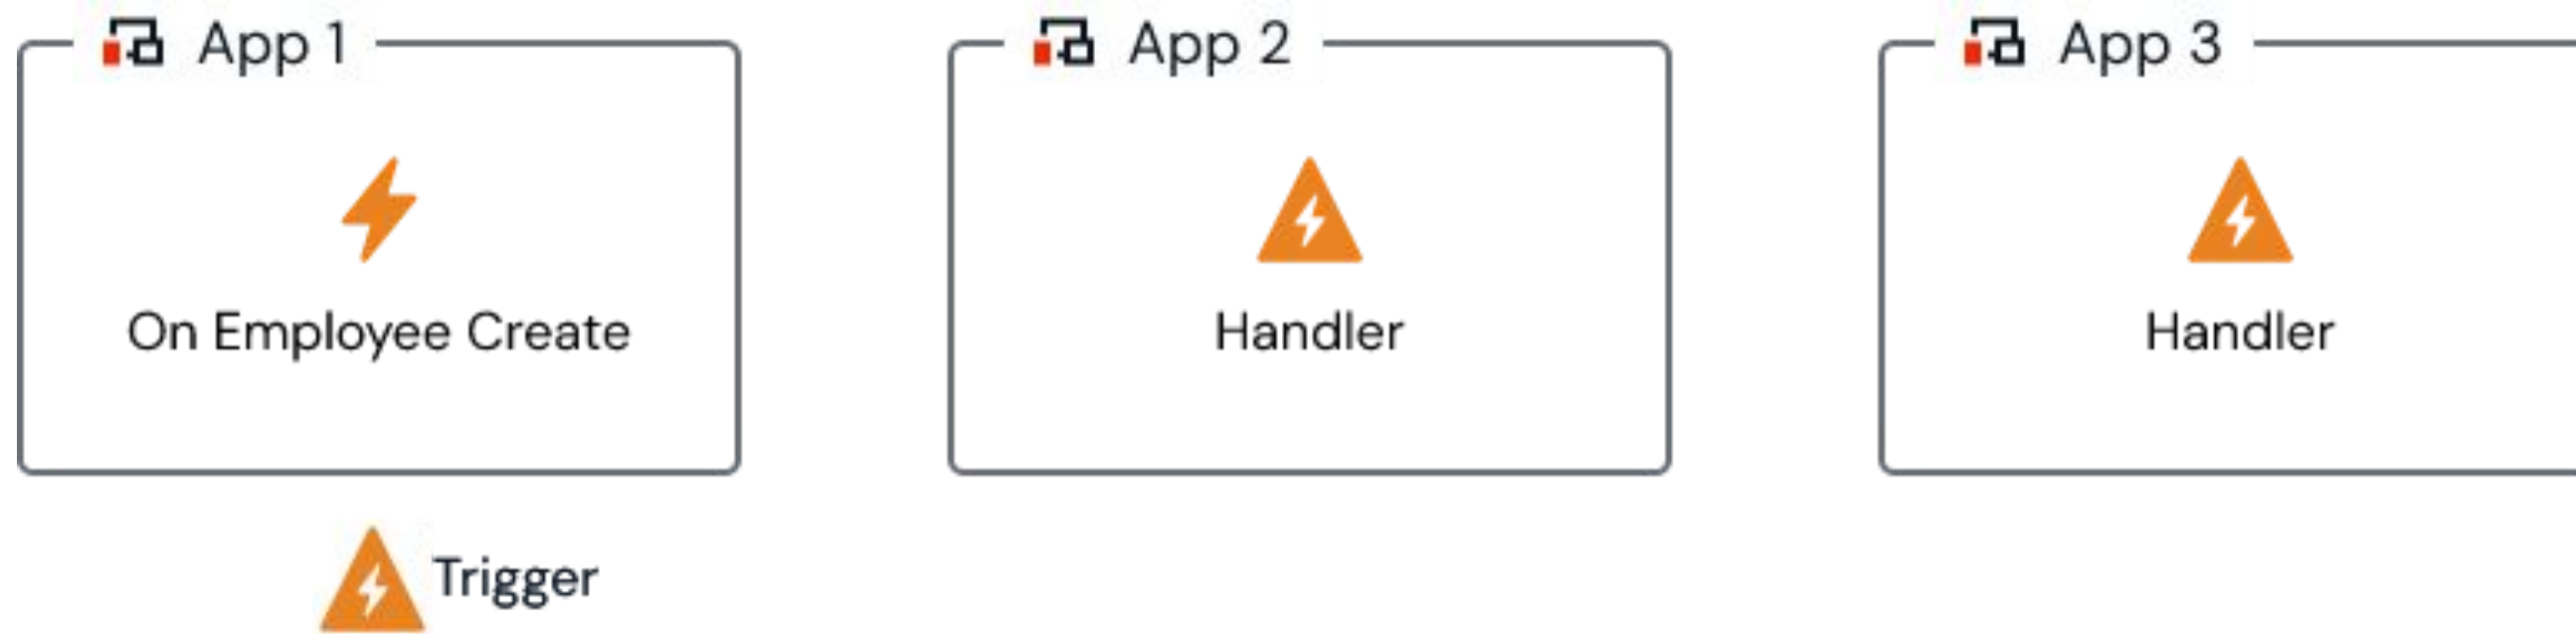


How Events Work in ODC?

Each Event has its own queue, and the queue can hold up to 10 000 events.

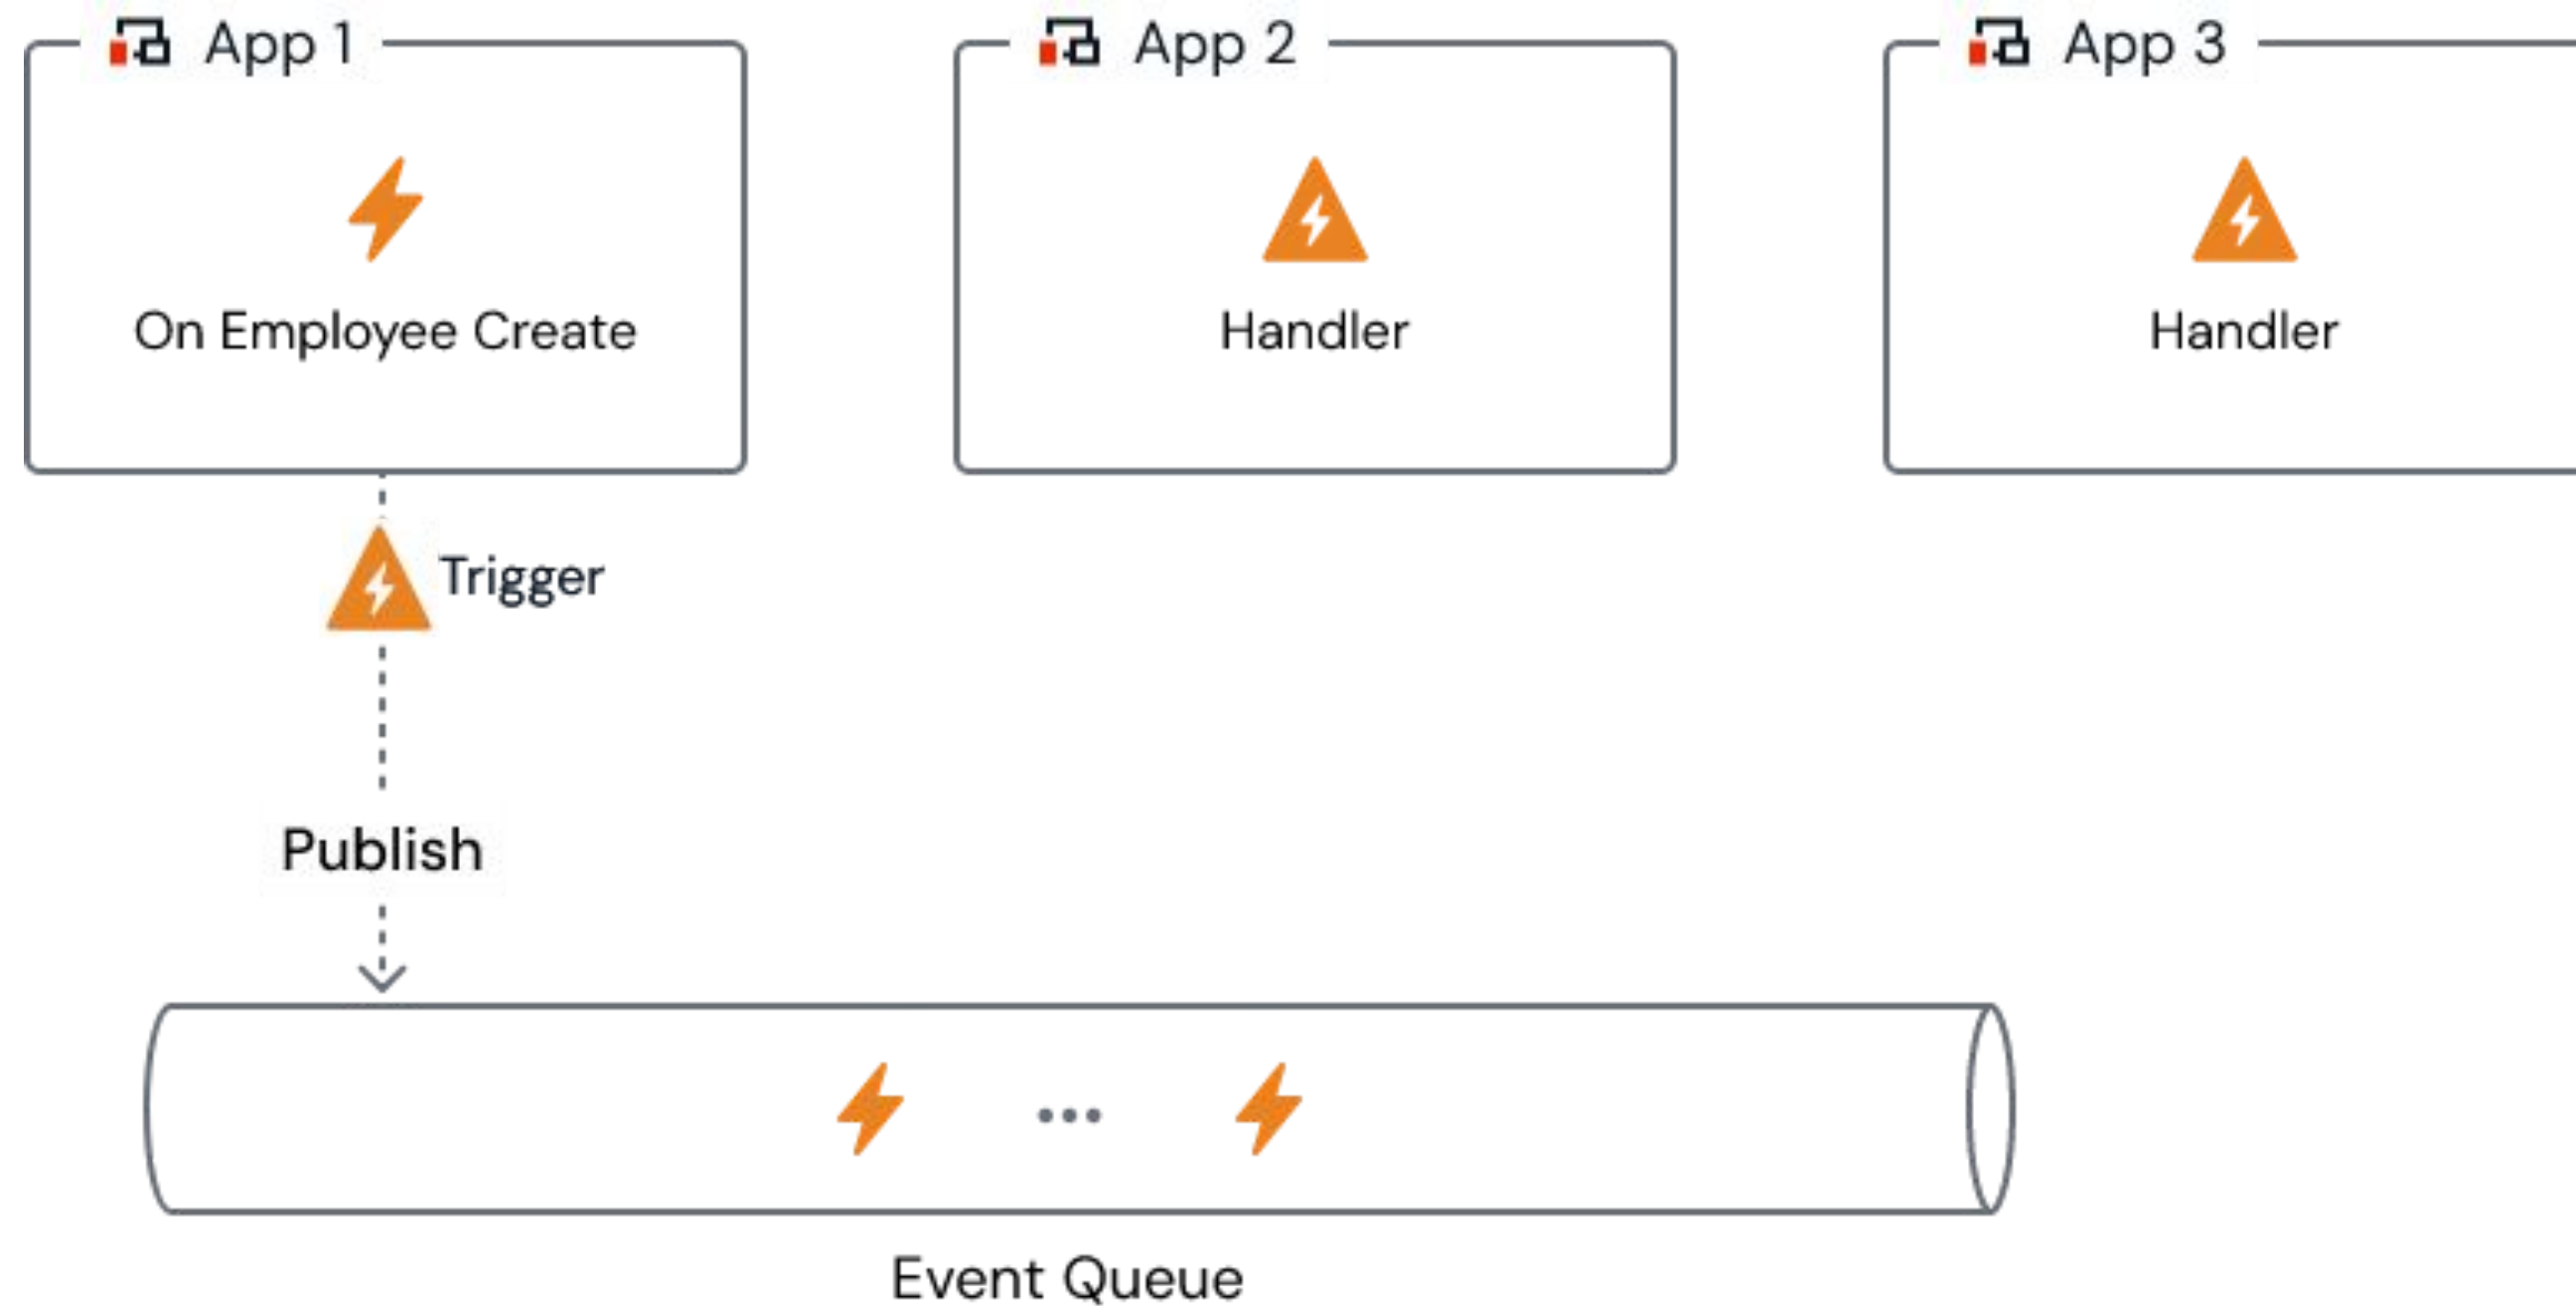

How Events Work in ODC?


Each event is delivered once, without a guaranteed order. On failure, it is retried.

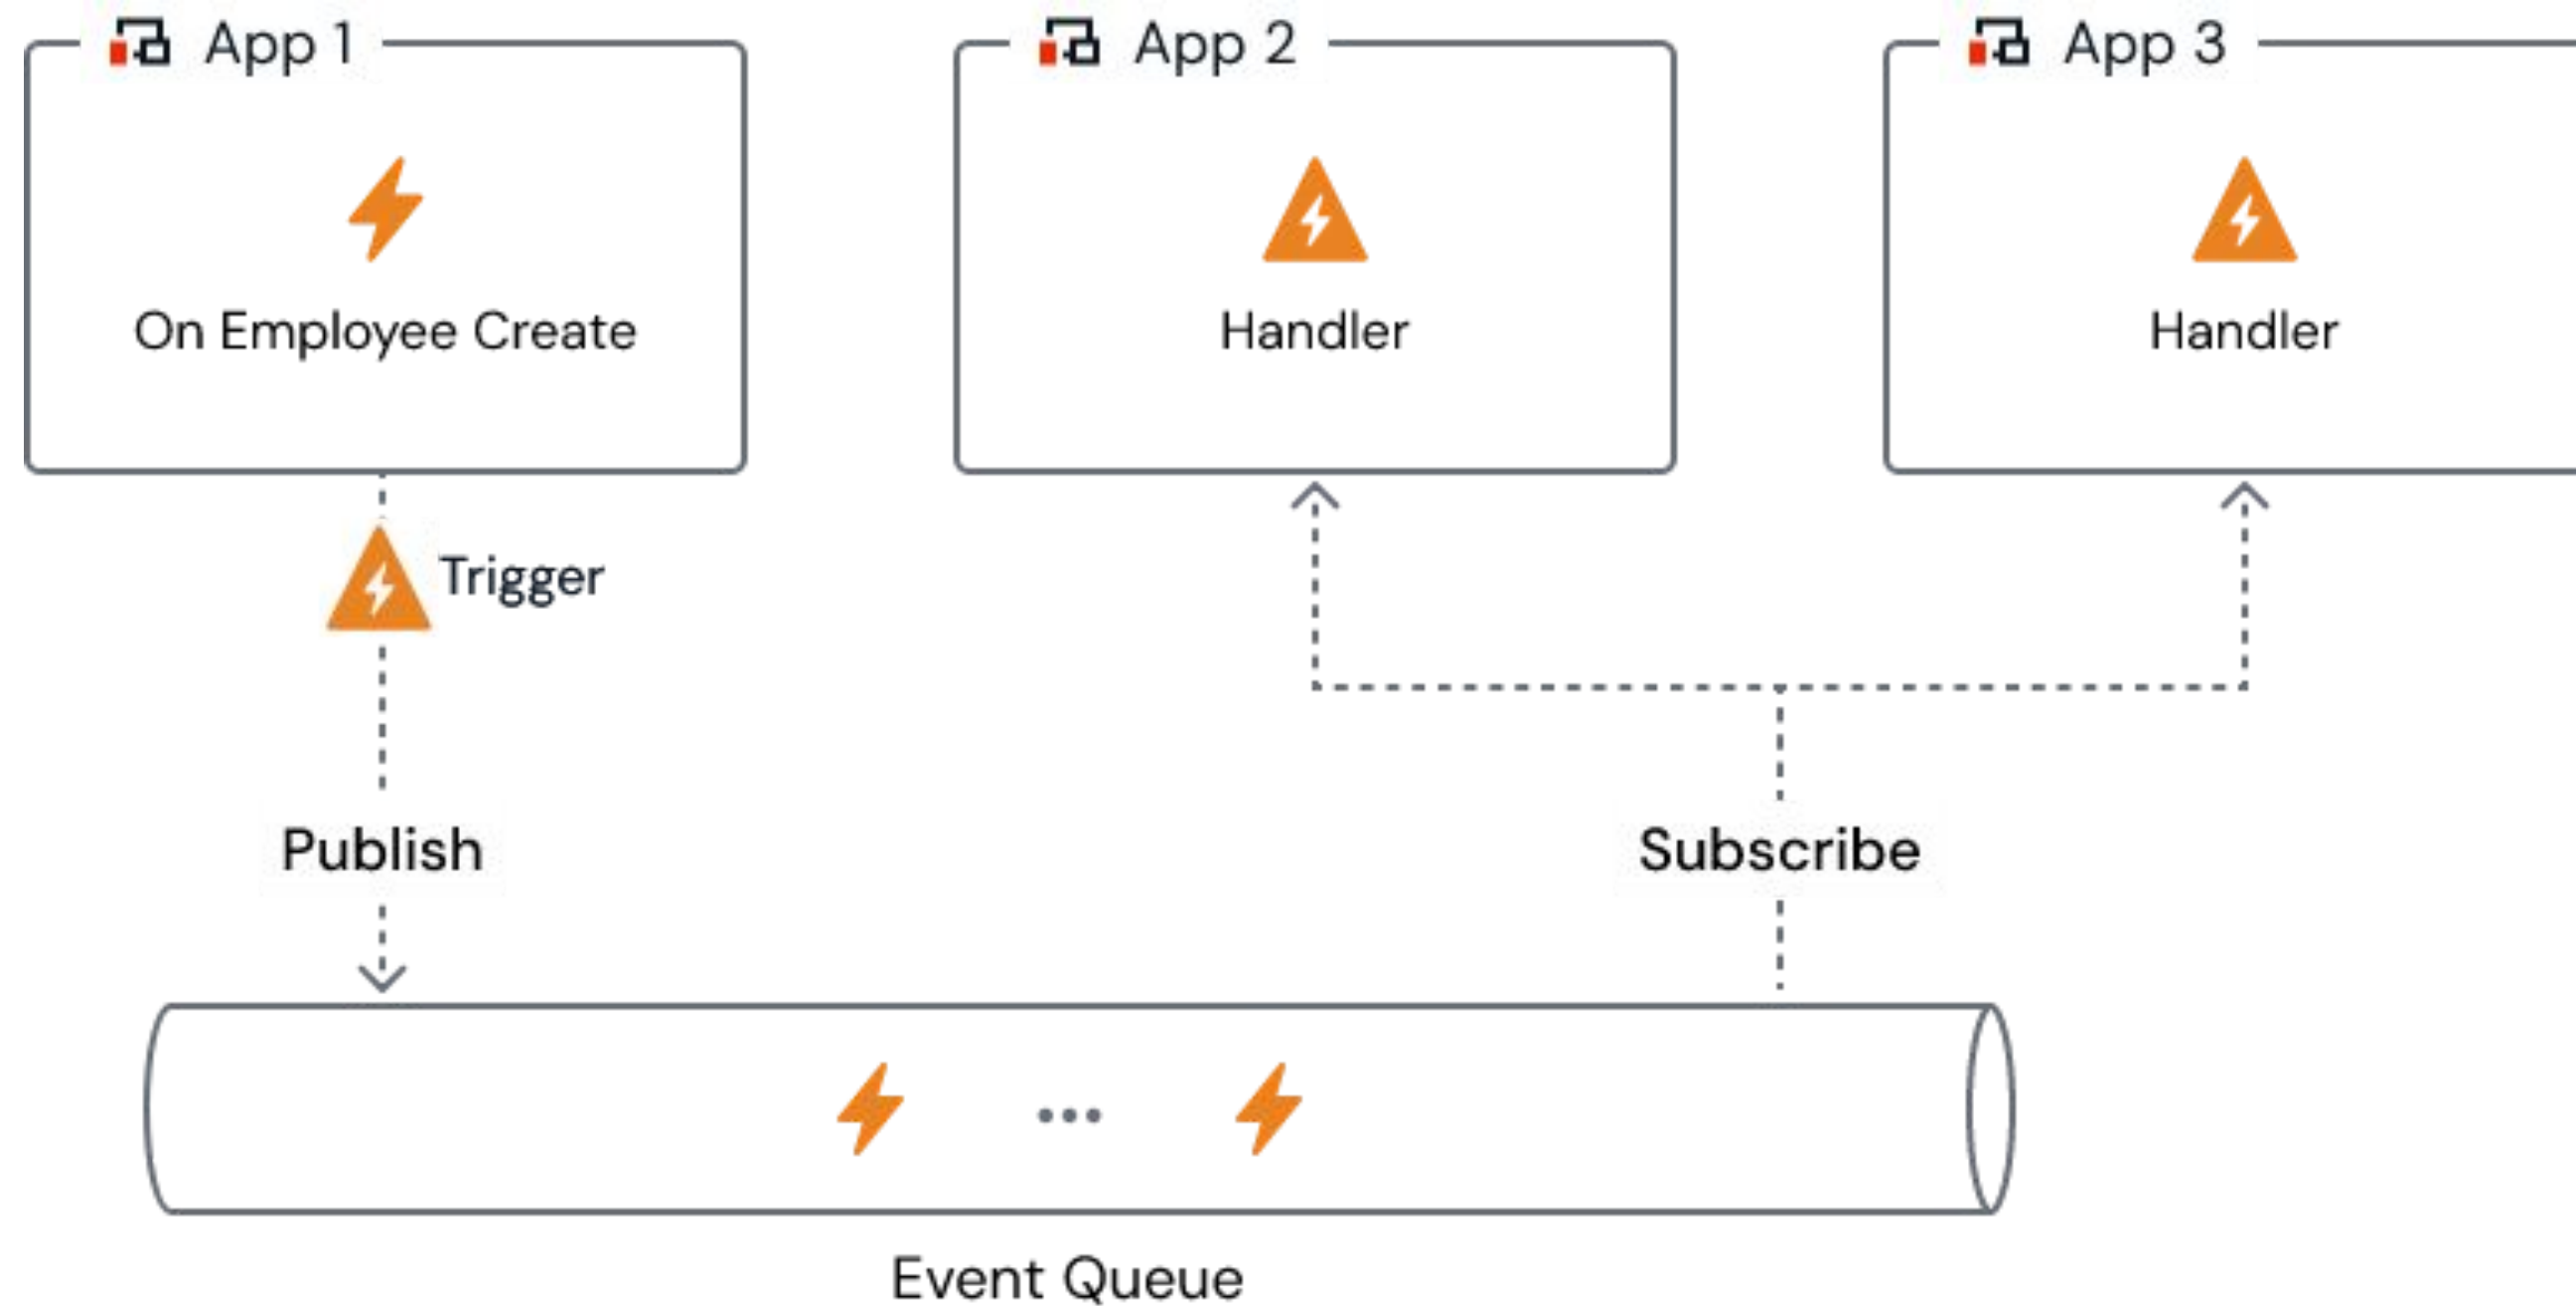

Considerations


Payload

- Each Event can have up to 10 KB of payload
- Input Parameters of Events must be of a basic data types (except Binary Data)
 - Boolean, Currency, Date, Time, Date Time, Integer, Long Integer, Email, Phone Number, or Text (max. Length of 2000)
 - Structures, Lists or Entity Records are not allowed

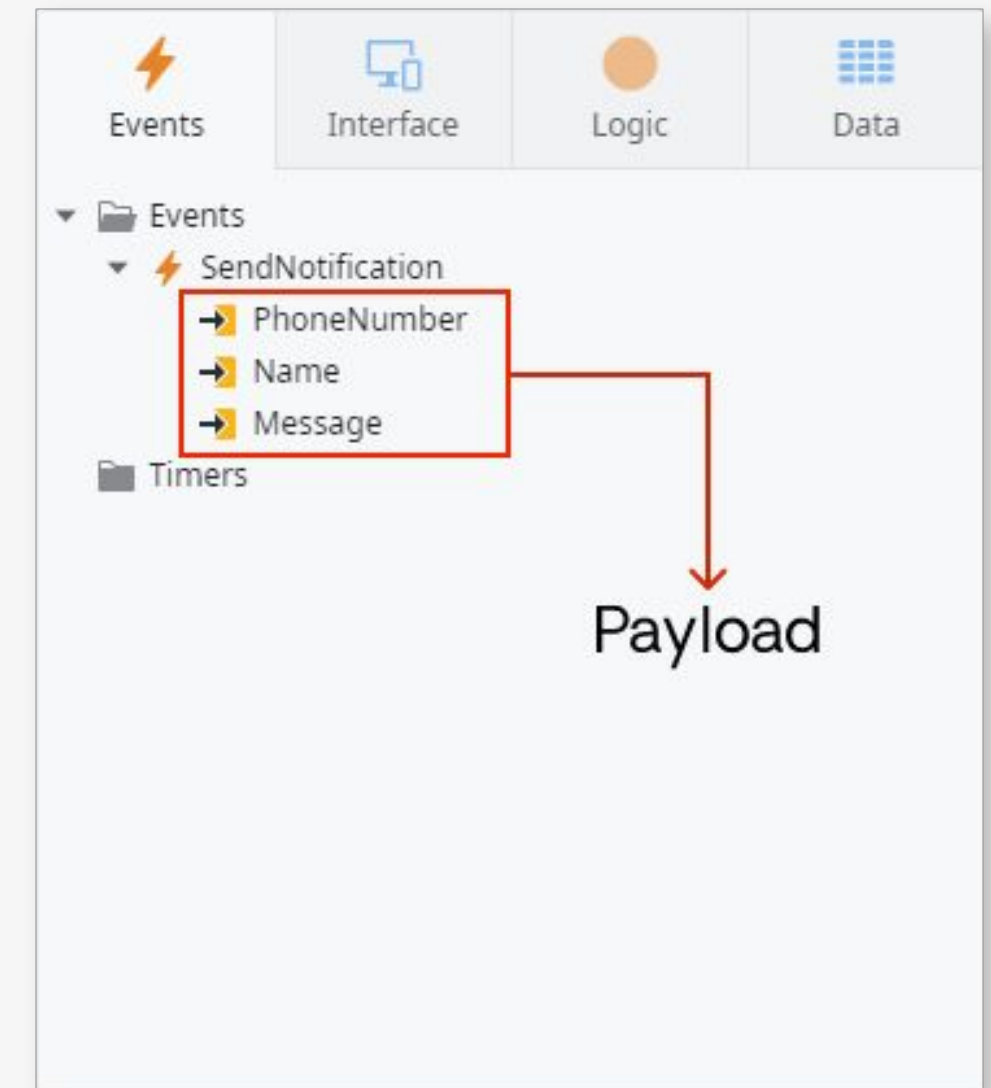

Queues

- Each Event has its own queue
- Each queue can hold up to 10 000 Events

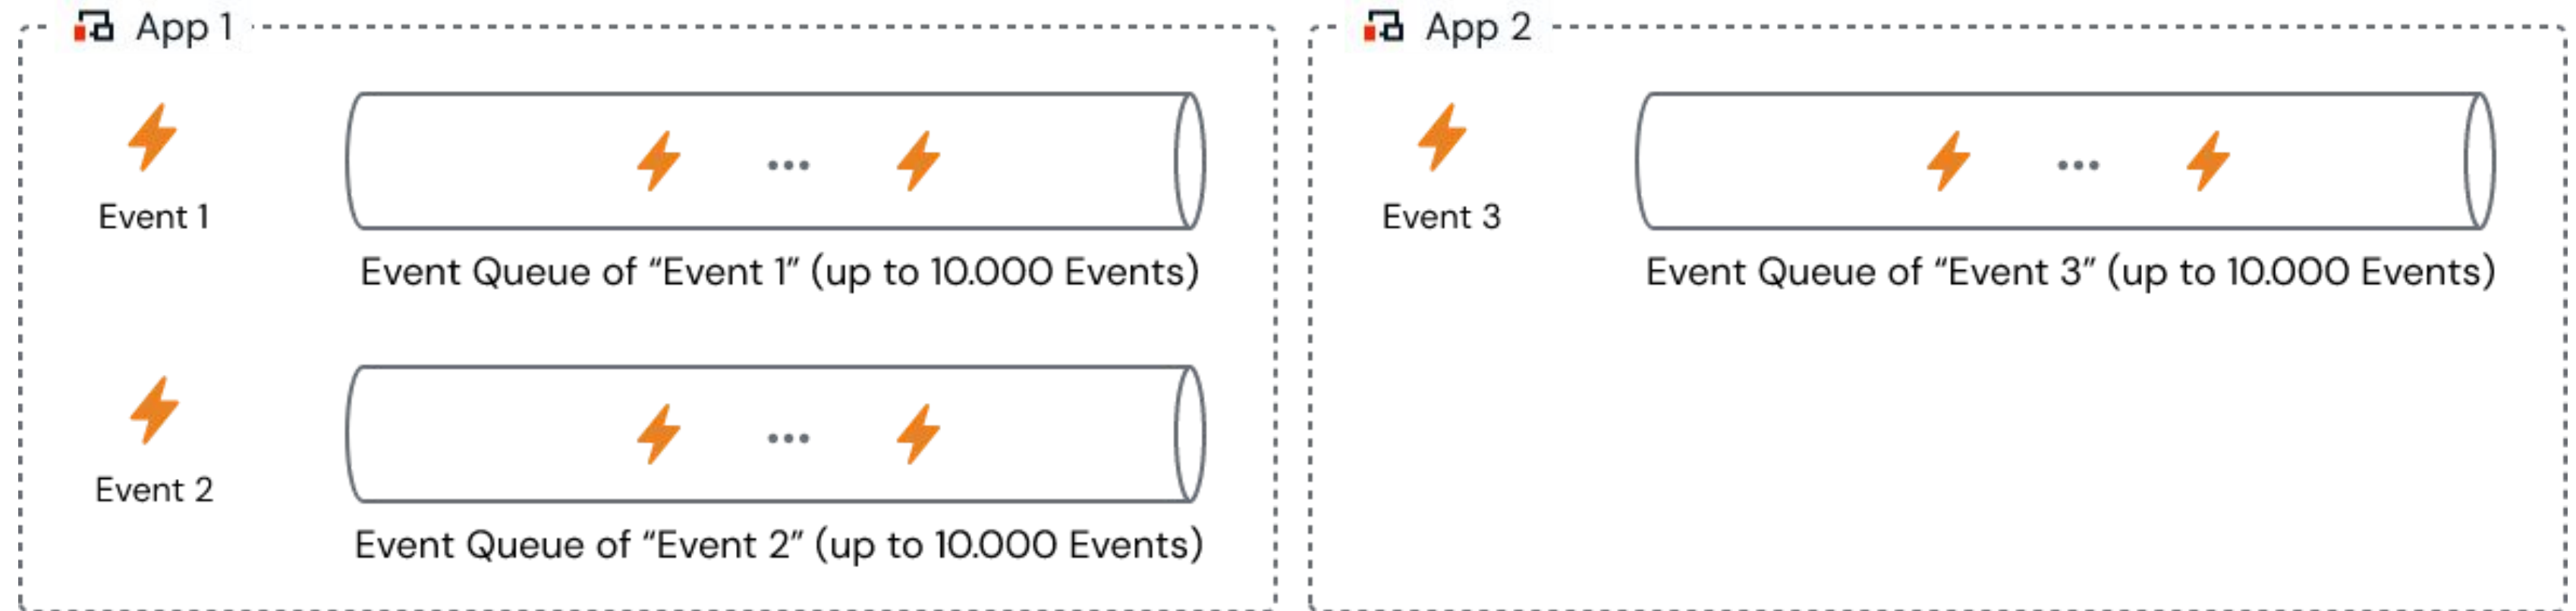


Delivery

- An Event is delivery only once to each handler
- Delivery order is not guaranteed


Delivery

- An Event is delivery only once to each handler
- Delivery order is not guaranteed

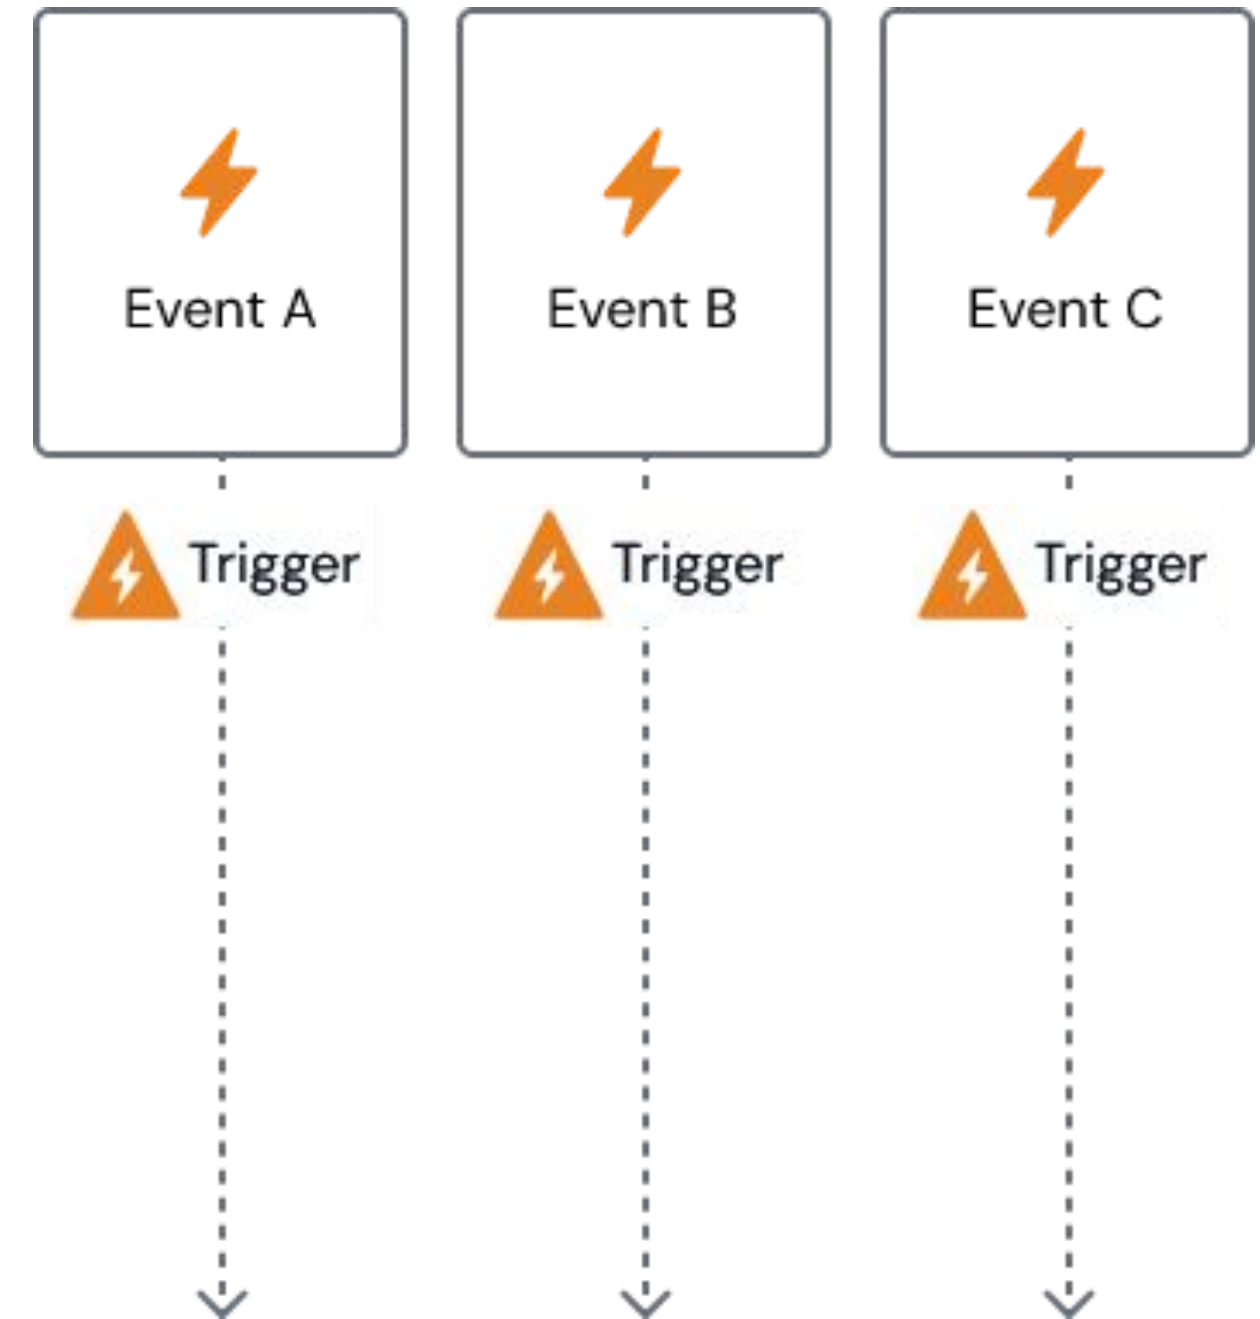


Delivery

- An Event is delivery only once to each handler
- Delivery order is not guaranteed

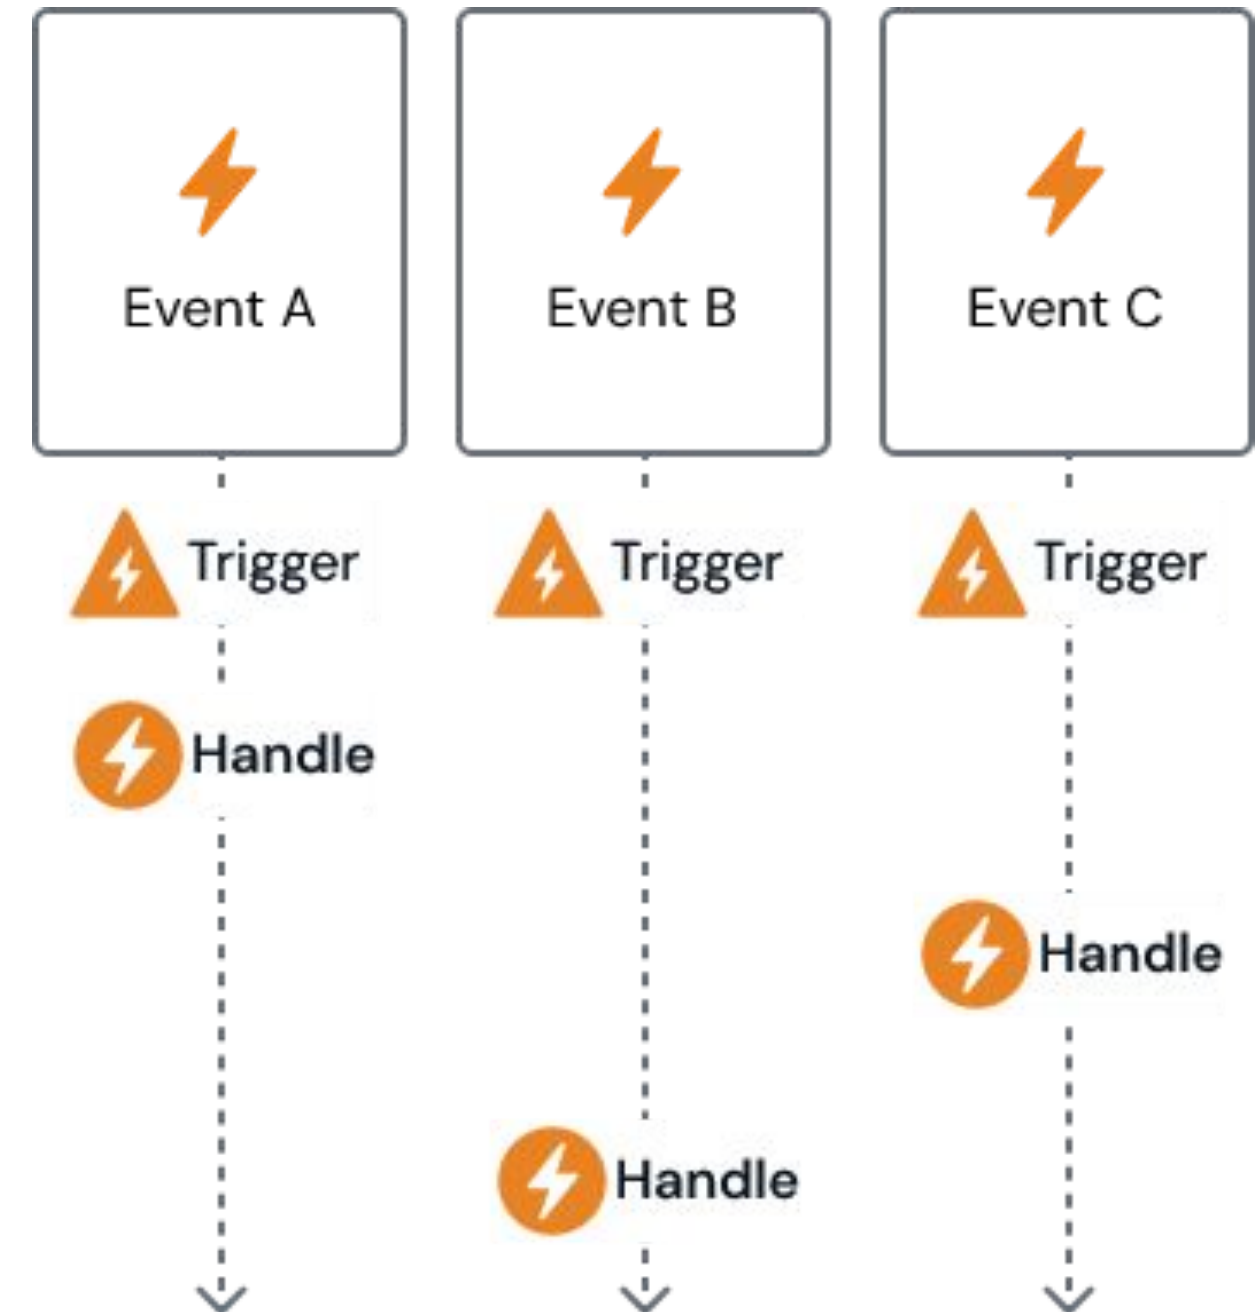


Delivery

- An Event is delivery only once to each handler
- Delivery order is not guaranteed

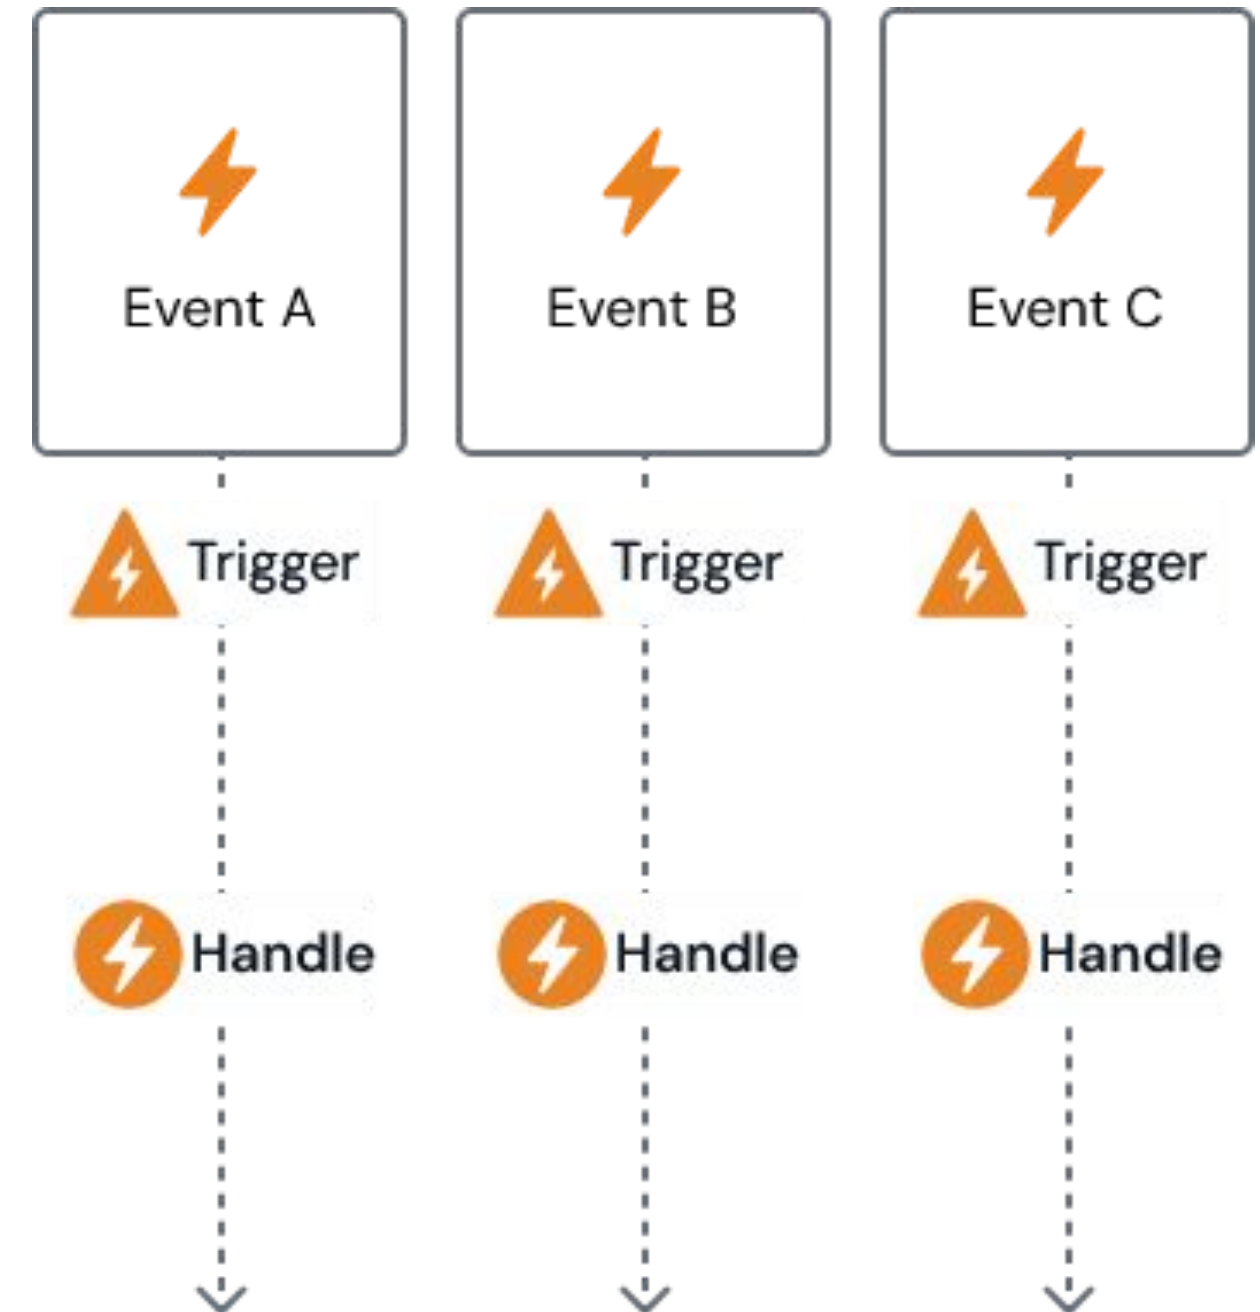


Execution

- Each application can execute up to 100 events in parallel

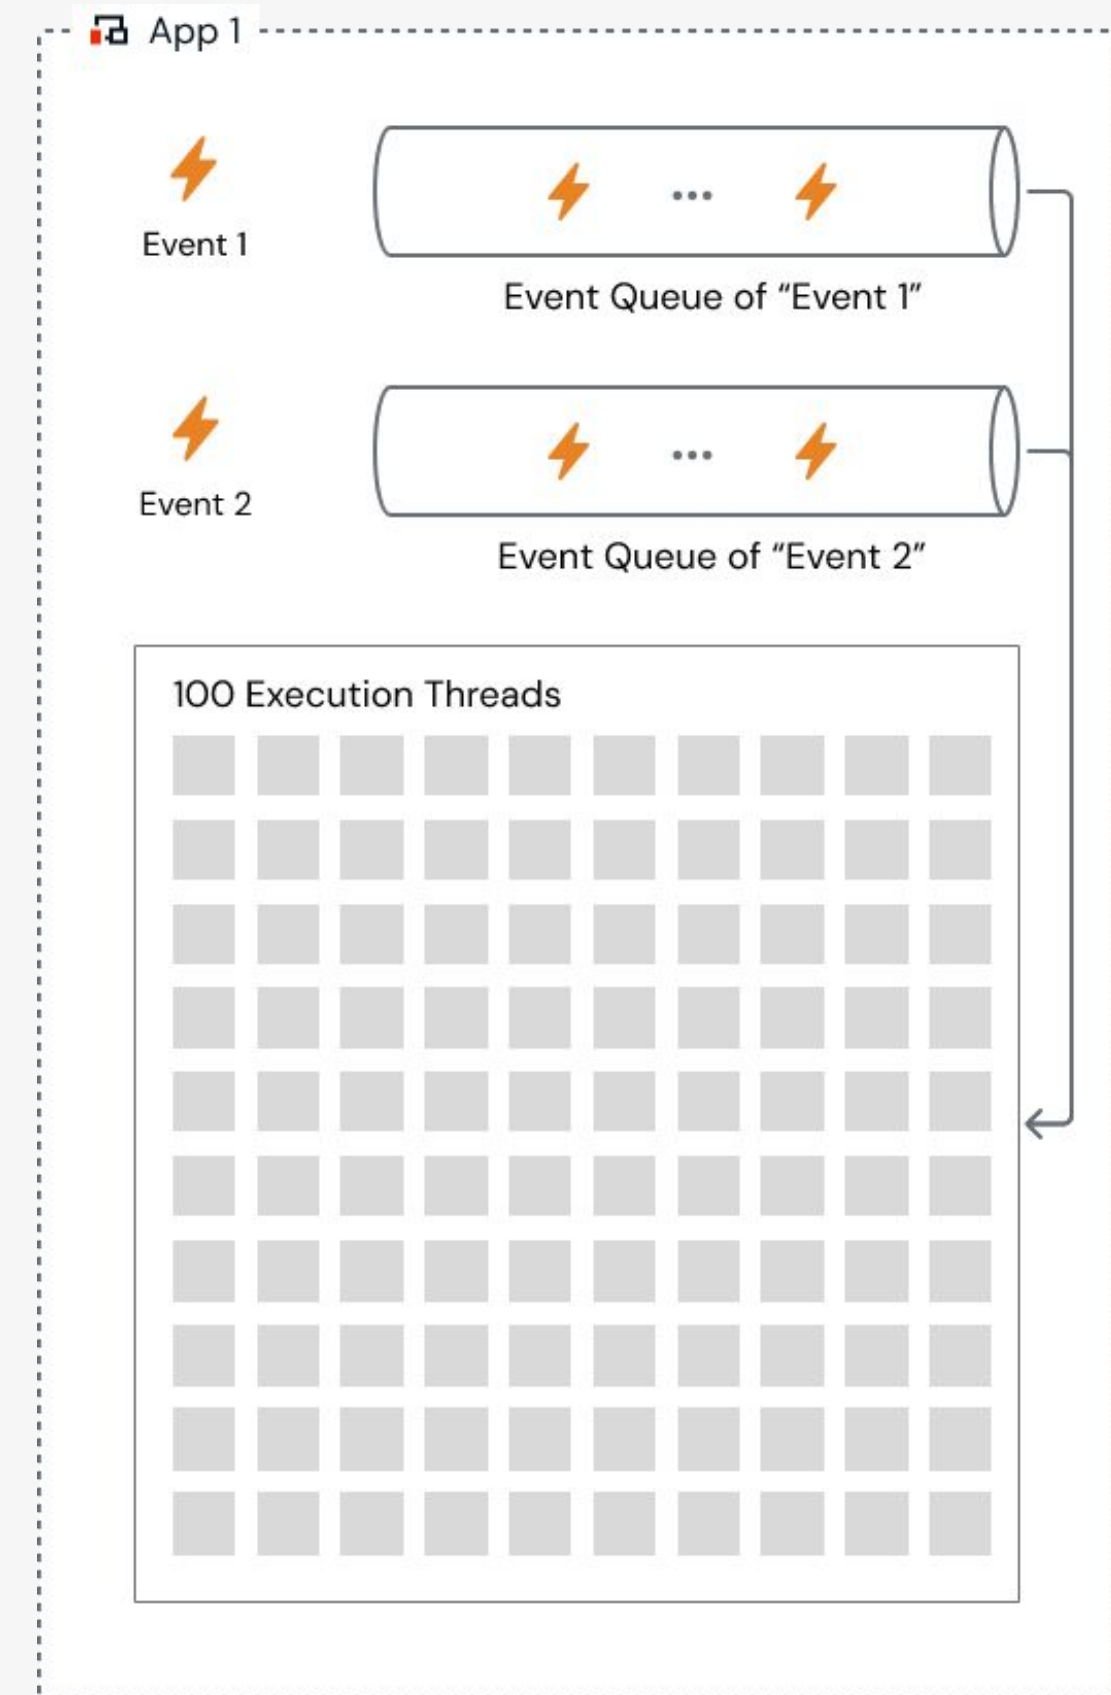


Execution

- Each application can execute up to 100 events in parallel

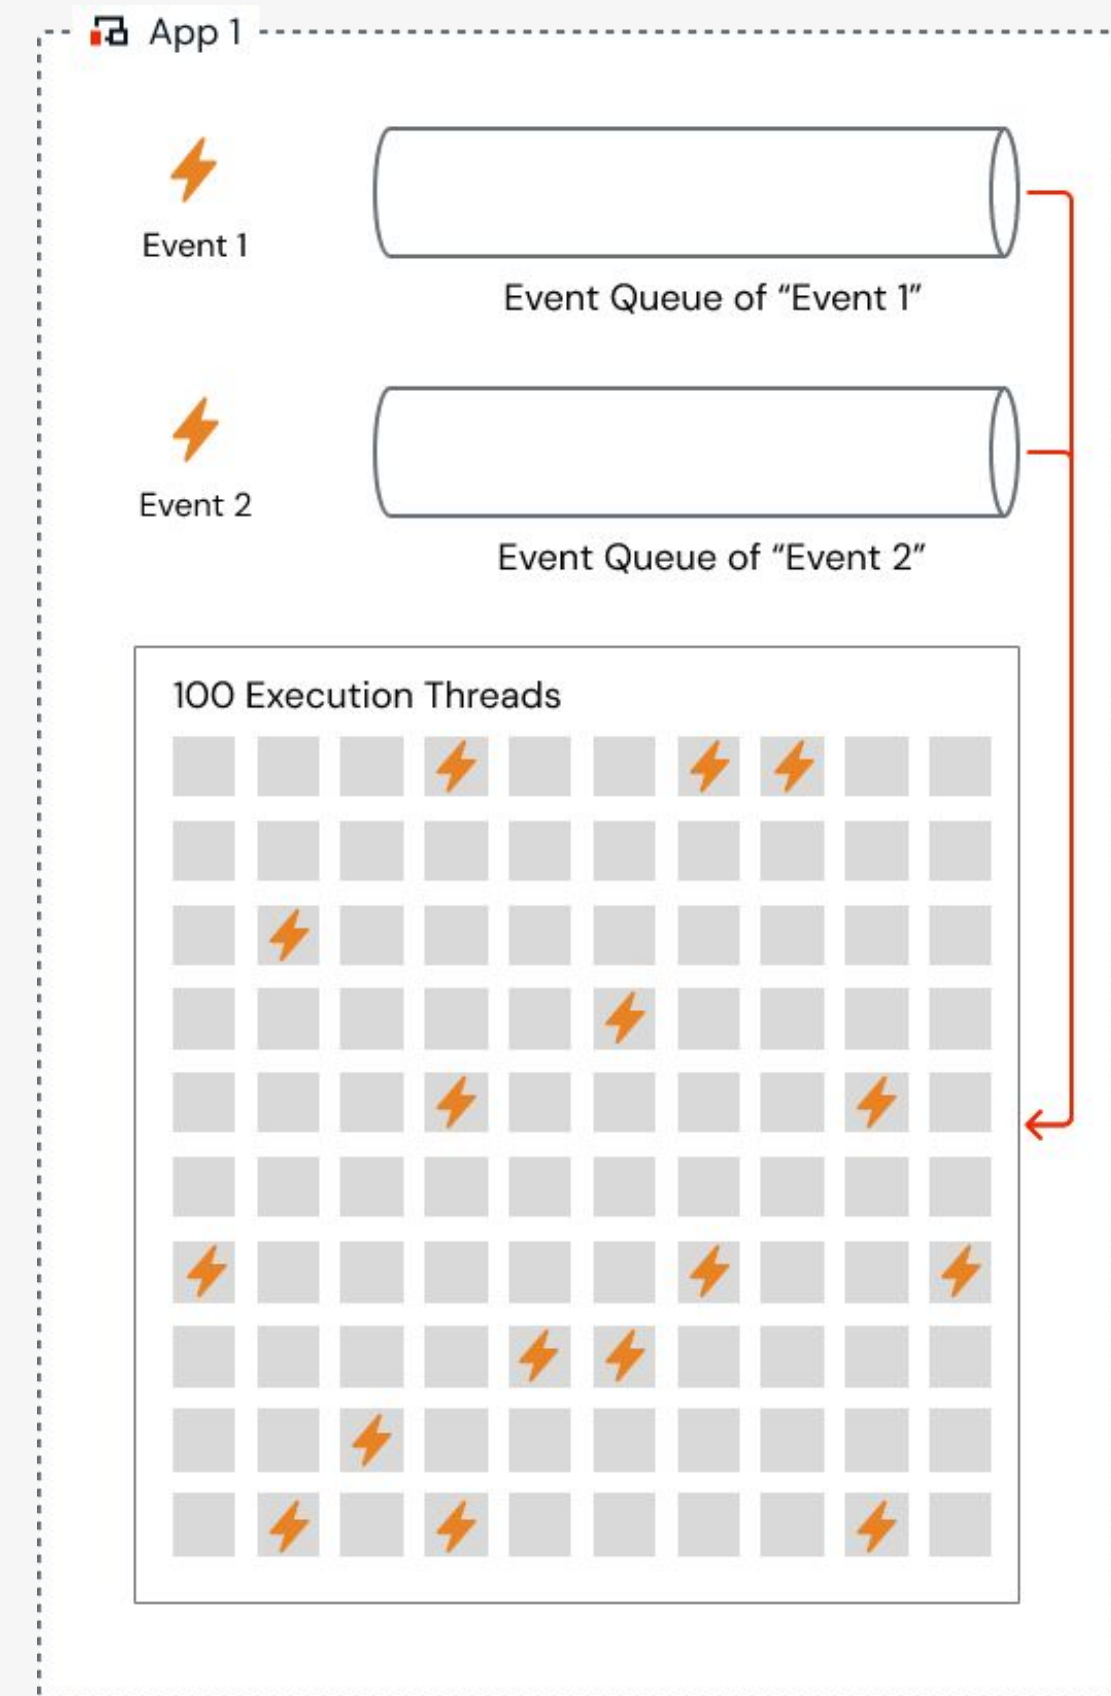


Execution

- Each application can execute up to 100 events in parallel
- Each event can execute for up to 2 minutes
- When an Event fails during the execution (timeout or error) it will be retried up to 10 times

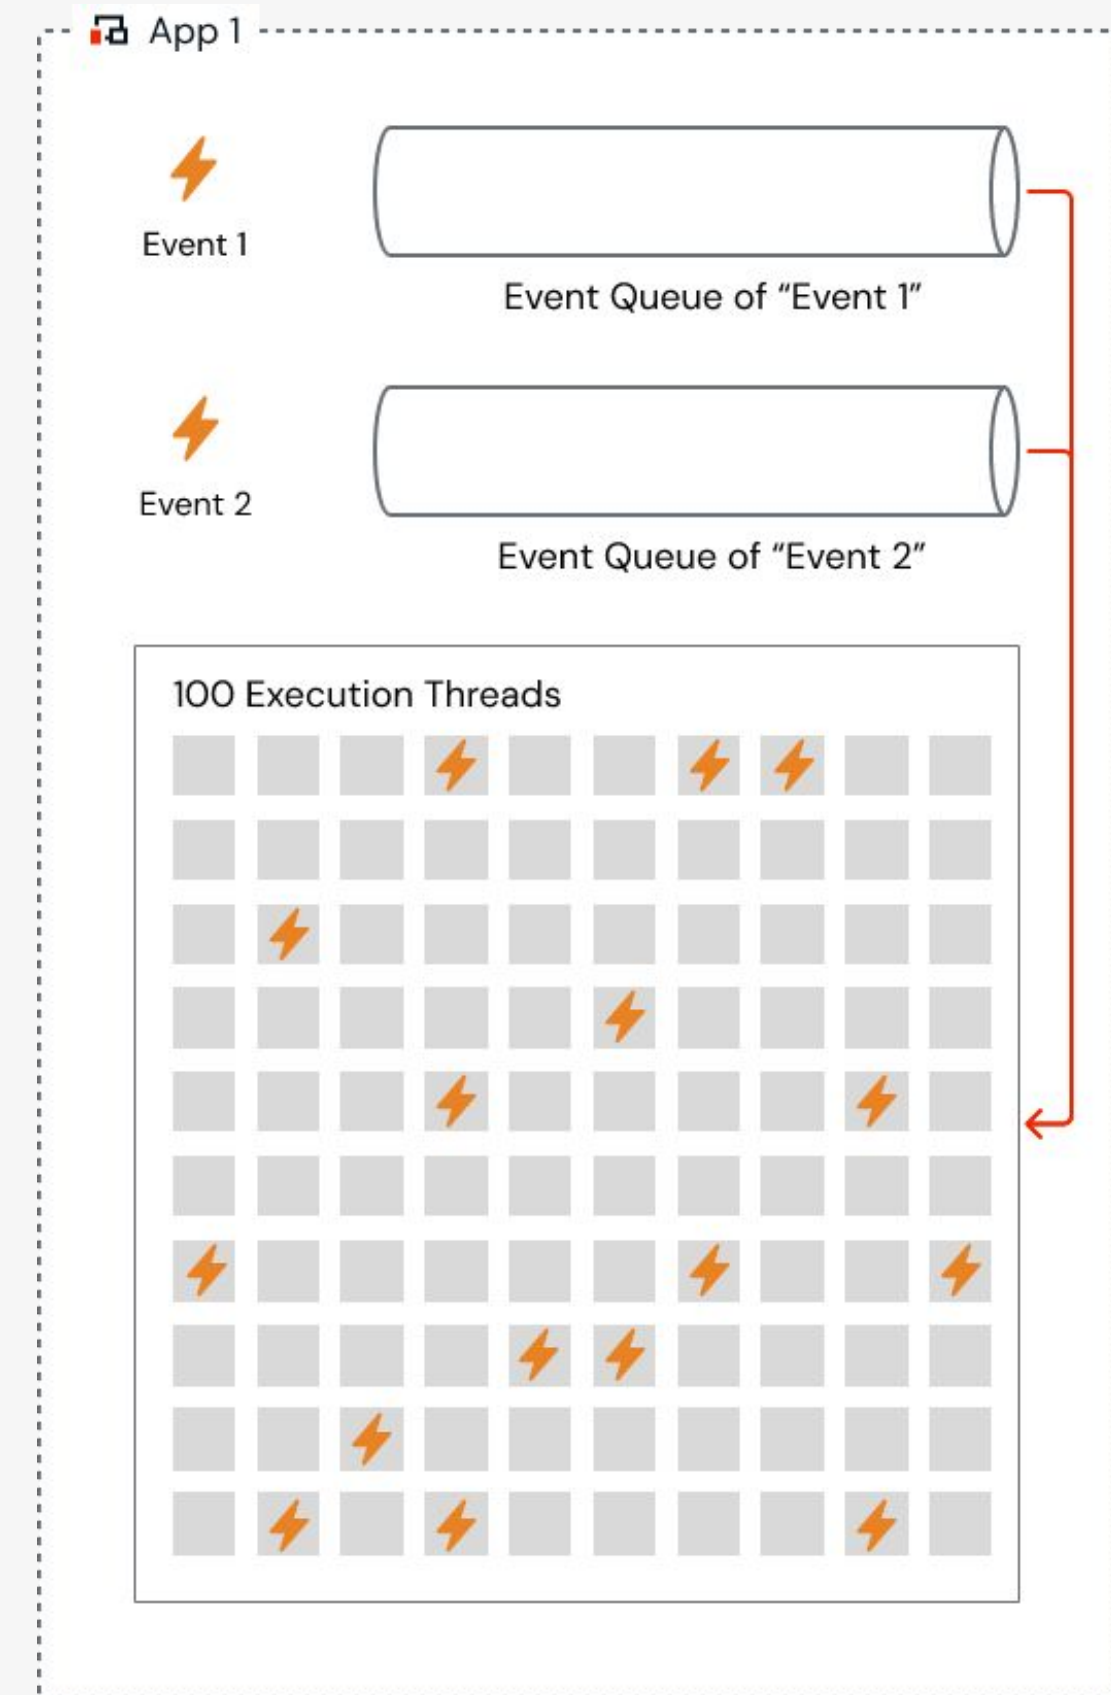

Execution

- Each application can execute up to 100 events in parallel
- Each event can execute for up to 2 minutes
- When an Event fails during the execution (timeout or error) it will be retried up to 10 times
 - Interval between retries increases (5 secs., 10 secs., 20 secs., 30 secs., 1 min., 2 mins., 4 mins., 8 mins., 16 mins, 32 mins.)

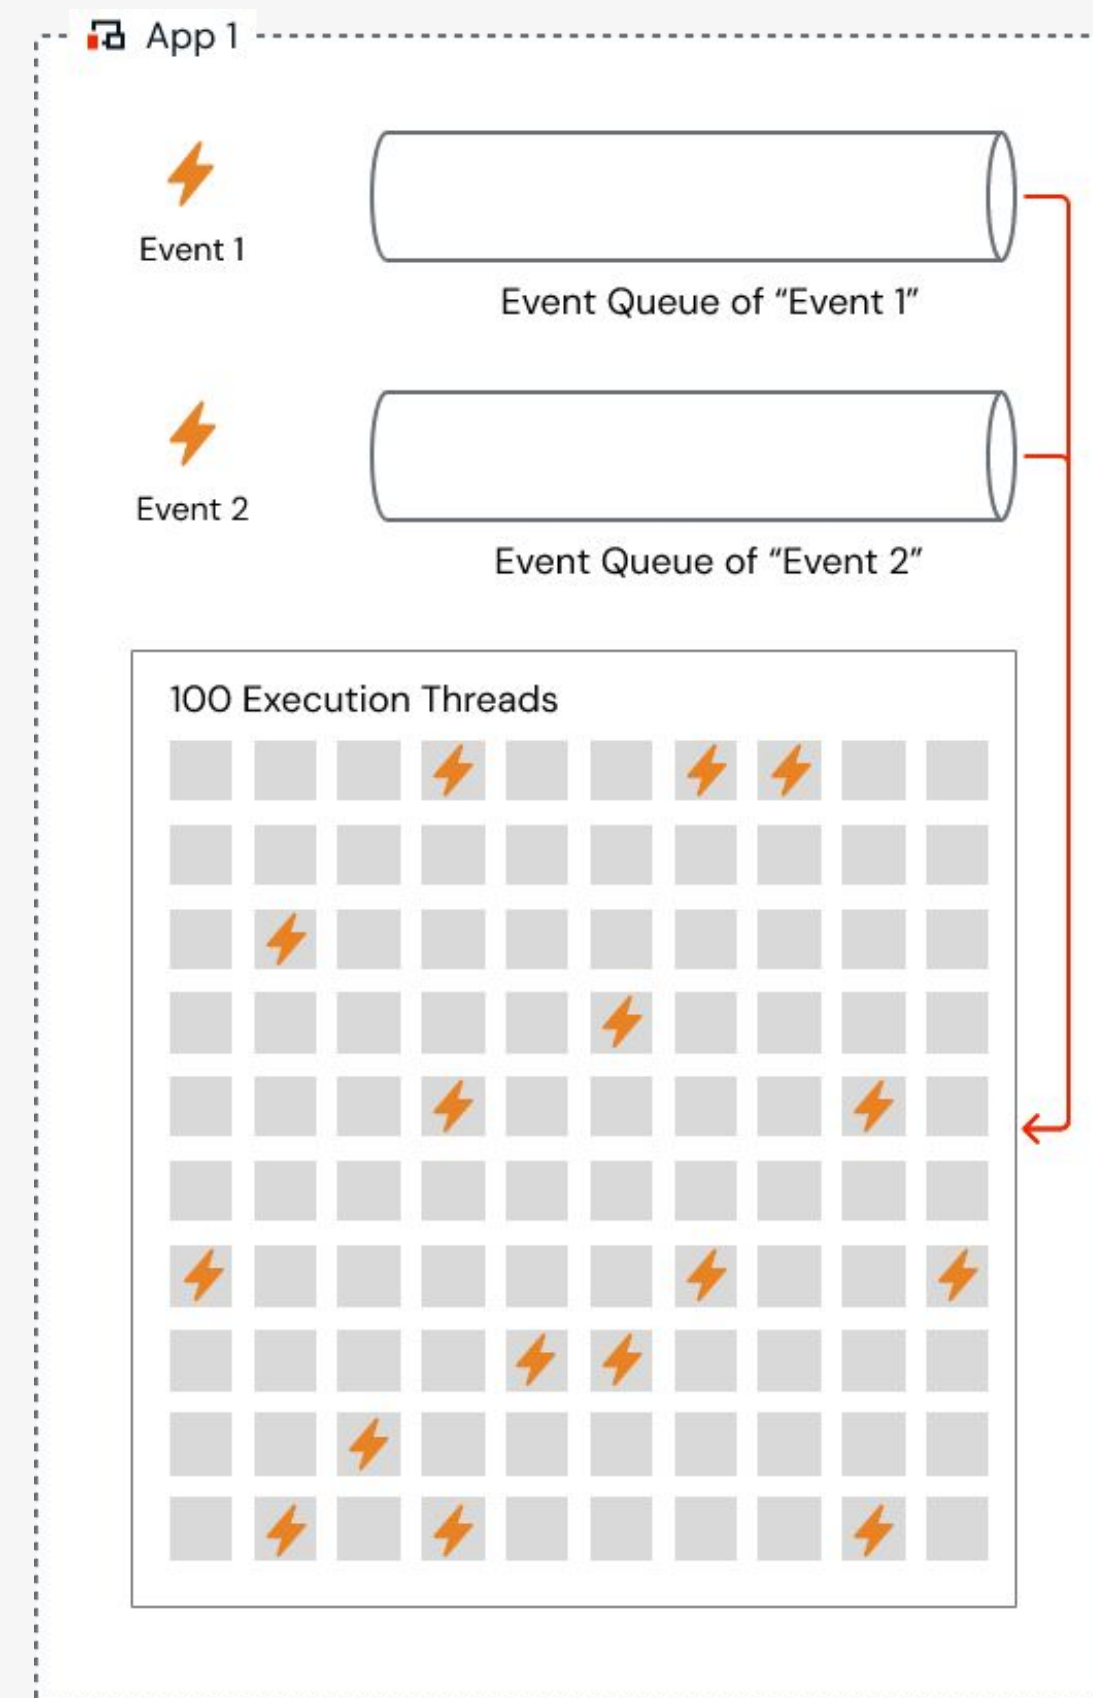

Summary

Payload

- Maximum **payload of 10 KB** per Event.
- **Only basic data types** (except Binary Data) supported as Event parameters (no Structures, Lists or Entity Records allowed).

Queues

- Each **Event** has its **own queue**.
- Maximum **queue size of 10 000 events per Event**.

Delivery

- Each **Event is delivered only once** to each subscriber.
- Delivery **order** of the events is **not guaranteed**.

Execution

- **100 threads** per app for Event execution.
- **Maximum execution time** of each event thread **is 2 minutes**.