

# TEST CASE – H5 STANDARD

---

**Version:** 1.1  
**Author:** Cina Arjmand

netcompany

Document history

Version	Date	Author	Status	Comments
0.1	28-02-2024	Cina Arjmand	Draft	Original Draft
0.2	16-10-2024	Emilie Madsen	Draft	Review
1.0	24-10-2024	Emilie Madsen	Completed	
1.1	06-12-2024	Johannes Bæk	Update	

Table of contents

1        **Pre-conditions..... 3**

2        **Process flow ..... 4**

3        **Test Scenarios ..... 5**

      3.1        **Description of test scenarios ..... 5**

      3.2        **Test scenario 1 – Acceptance..... 6**

      3.3        **Test scenario 2 – Rejection ..... 7**

          3.3.1        XML example ..... 7

# 1 Pre-conditions

To complete the functional test case for “H5 Standard”, the company must have an established connection to the AS4-gateway, and have a functioning system user to DMS Import, see [Connectivity Guide & System Guide](#).

Furthermore, ensure that you for this test case have the correct URLs, Services, and Actions, as seen below. In place of {CVR} and {UID}, fill out your own CVR and UID in the URLs below. While the URLs and Services are the same for all the test cases, the Actions however, will change depending on the test case you are performing, please keep an eye out that you have the correct Action for the test case in hand.

To submit the XML for this test case, use the following endpoint:

URL	TFE02 Service	TFE01 Service	Action
<a href="https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UID}">https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UID}</a>	DMS.Import4		Declaration.Submit

For retrieving the notification, use the following endpoint:

URL	TFE02 Service	TFE01 Service	Action
<a href="https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UID}">https://secureftpgatewaytest.skat.dk:6384/exchange/CVR_{CVR}_UI_{UID}</a>	DMS.Import4		Notification

## 2 Process flow

The process flow for a H5 standard declaration can be seen in Figure 1 below:

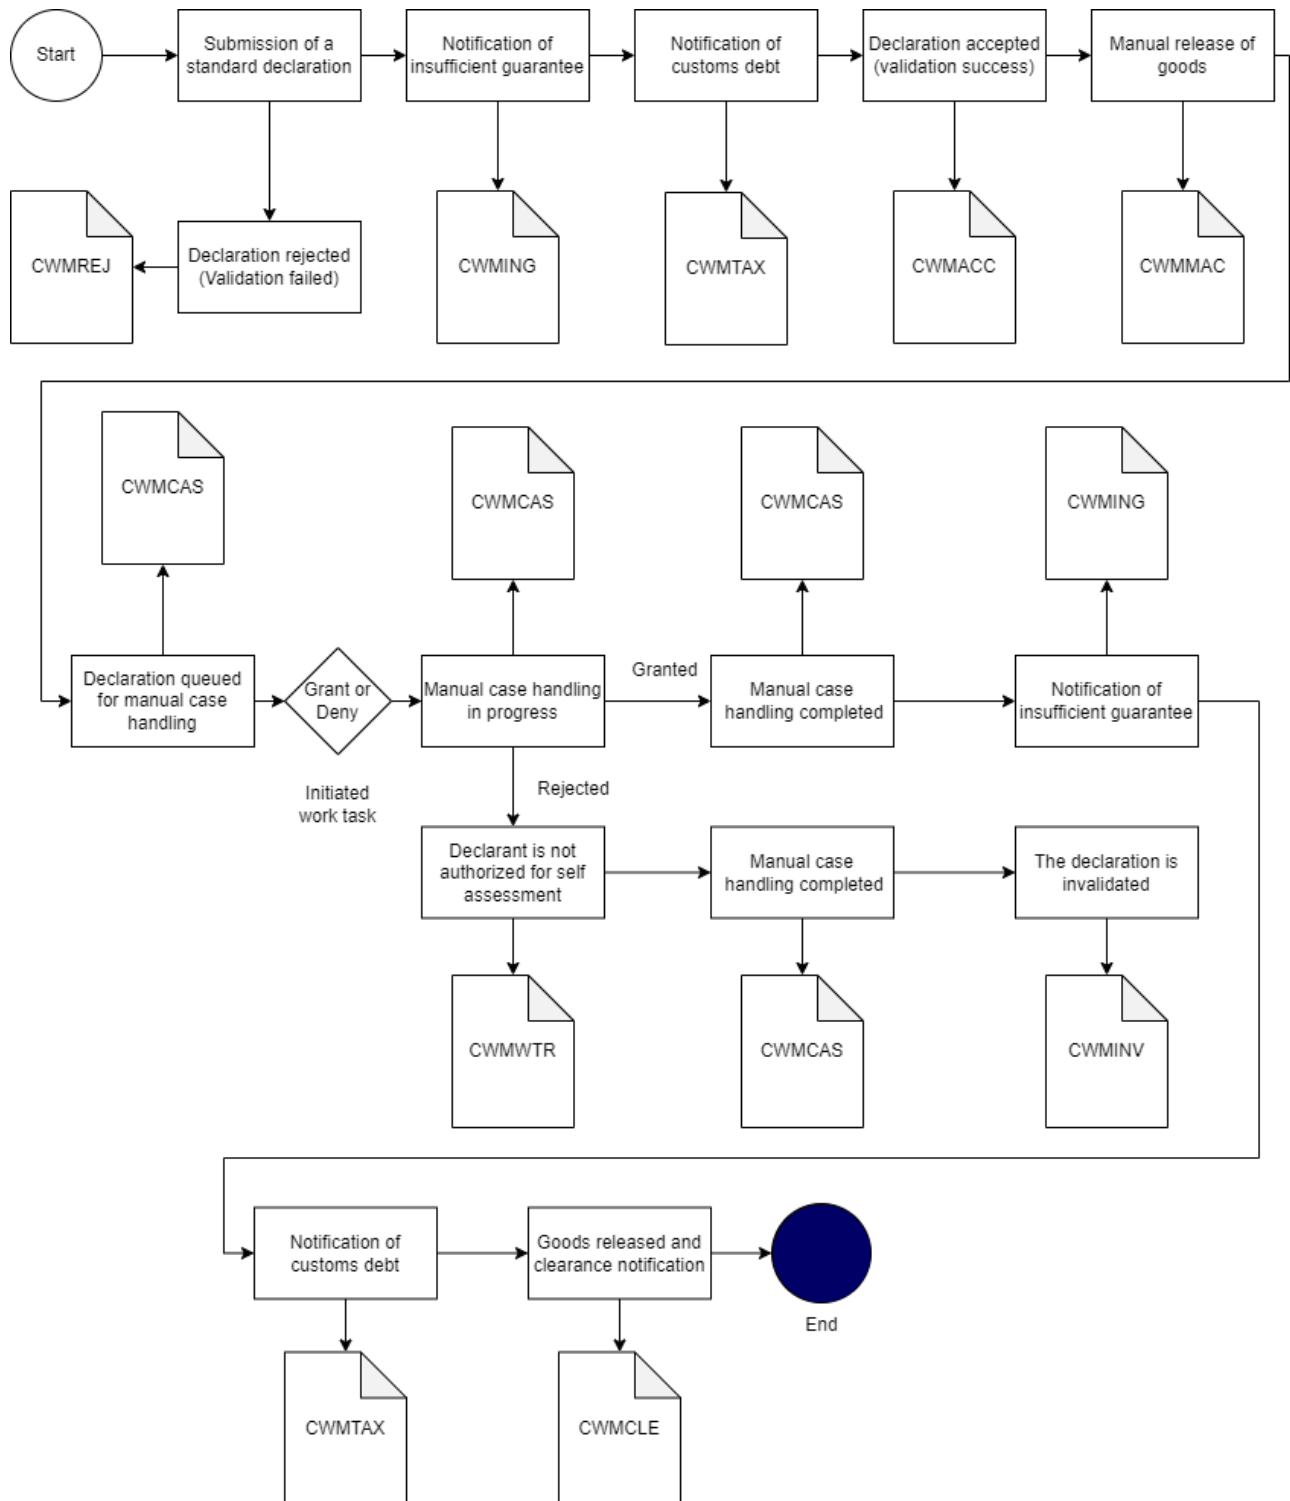


Figure 1: process flow for H5 standard declaration

## 3 Test Scenarios

To complete this test case, test scenario 1 and 2 must be passed successfully. Descriptions and specifics for each test can be found in the coming sections. Be sure to go through the scenarios thoroughly. It is recommended that you use the attached files to test the notifications.

Test no.	Test scenario	Passed/Failed
1	Submit H5 – Standard declaration, which is accepted	<input type="checkbox"/>
2	Submit H5 – Standard declaration, which is rejected	<input type="checkbox"/>

### 3.1 Description of test scenarios

The following sections will describe the aim of each specific scenario and provide the desired results of the test scenarios.

The purpose of the test scenarios is to ensure your connection to the system, and that you as a company can receive the correct notifications when sending in XMLs. Each step describes what you need to do when going through the test case. An XML for the standard declaration is made available in the same folder where you found this test case document. This can be changed according to the test scenario.

## 3.2 Test scenario 1 – Acceptance

The aim of this scenario is to get a notification that the H5 Standard XML has been accepted.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

Step no.	Description of steps	Expected result	Passed
1	Use the provided “Test Case - H5 Standard Acceptance” XML found in the test case folder (remember to replace the placeholders)	You should have the test <b>XML</b> ready for the next step	<input type="checkbox"/>
2	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	<input type="checkbox"/>
3	Pull the notifications	You should be able to pull notifications from the system	<input type="checkbox"/>
4	Receive the notification <b>CWMING</b> and <b>CWMTAX</b> .	Receive notifications <b>CWMING</b> and <b>CWMTAX</b>	<input type="checkbox"/>
5	Receive <b>CWMACC</b> , <b>CWMMAC</b> and <b>CWMCAS</b> notifications informing you of a manual acceptance work task being created.  A manual work task needs to be manually approved by a customs official. Until a customs official has manually processed your declaration, you won't receive any further notifications. As such, the declaration may remain on this step for some time before proceeding.	Receive notifications <b>CWMACC</b> , <b>CWMMAC</b> and <b>CWMCAS</b>	<input type="checkbox"/>
6	Pull the notifications	You should be able to pull notifications from the system	<input type="checkbox"/>
7	If the manual work task has been completed by a customs official, receive <b>2x CWMCAS</b> notifications. If not, repeat step 5 after waiting for some time.	Receive two <b>CWMCAS</b> notifications	<input type="checkbox"/>
8	Receive the notification <b>CWMING</b> and <b>CWMTAX</b> .	Receive notifications <b>CWMING</b> and <b>CWMTAX</b>	<input type="checkbox"/>
9	Acceptance of submission of H5 declaration by receiving the <b>CWMCLE</b> notifications	Receive notifications <b>CWMCLE</b> and pass the test	<input type="checkbox"/>

### 3.3 Test scenario 2 – Rejection

The aim of this scenario is for the EO to get a notification that the H5 Standard XML has been rejected.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration XML found in the Test Case folder. Secondly, make sure that your **LRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI** and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant (Declarant/ID) and Importer (Importer/ID) roles. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

Step no.	Description of steps	Expected result	Passed
1	Use the provided “Test Case - H5 Standard Acceptance” XML found in the test case folder (remember to replace the placeholders)	You should have the test <b>XML</b> ready for the next step	<input type="checkbox"/>
2	Enter information from section <a href="#">3.3.1</a> with the invalid data in the element <b>Declarant</b> (13 05 000 000) to ensure rejection	<b>Declarant</b> (13 05 000 000) element should resemble section <a href="#">3.3.1</a>	<input type="checkbox"/>
3	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	<input type="checkbox"/>
4	Pull the notifications	You should be able to pull notifications from the system	<input type="checkbox"/>
5	Rejection of a submission of H5 declaration by receiving the <b>CWMREJ</b> notification	Receive <b>CWMREJ</b> and pass the test	<input type="checkbox"/>

#### 3.3.1 XML example

```
<ns2:Declarant>
  <ns2:ID>DK12345678</ns2:ID>
</ns2:Declarant>
```