

TEST CASE – H2 INVALIDATION

Version: 1.1
Author: Emilie Madsen

netcompany

Document history

Version	Date	Author	Status	Comments
0.1	04-04-2024	Emilie Madsen	Draft	Original Draft
1.0	13-01-2025	Thomas Sørup Bavnhøj	Completed	Update document for TFE02 RC11
1.1	16-01-2025	Michael Larsson	Completed	Updated routing for Standard folder

Table of contents

1 **Pre-conditions..... 3**

2 **Process flow..... 4**

3 **Test Scenarios 5**

 3.1 **Description of test scenarios 5**

 3.2 **Test scenario 1 – Acceptance..... 6**

 3.2.1 XML example..... 7

 3.3 **Test scenario 2 – Rejection 8**

 3.3.1 XML example..... 8

1 Pre-conditions

To complete the functional test case for “H2 Invalidation”, the company must have an established connection to the AS4-gateway, and have a functioning system user to DMS Import, see [Connectivity Guide & System Guide](#).

Furthermore, ensure that you for this test case have the correct URLs, Services, and Actions, as seen below. In place of {CVR} and {UUID}, fill out your own CVR and UUID in the URLs below. While the URLs and Services are the same for all the test cases, the Actions however, will change depending on the test case you are performing, please keep an eye out that you have the correct Action for the test case in hand.

To submit the XML for this test case, use the following endpoint:

URL	TFE02 Service	TFE Service	Action
https://secureftpgatewaytest.skat.dk/6384/exchange/CVR_{CVR}_UI_{UUID}	DMS.Import3		Declaration.Submit

For retrieving the notification, use the following endpoint:

URL	TFE02 Service	TFE Service	Action
https://secureftpgatewaytest.skat.dk/6384/exchange/CVR_{CVR}_UI_{UUID}	DMS.Import3		Notification

2 Process flow

The process flow for a H2 Invalidation declaration can be seen in Figure 1 below:

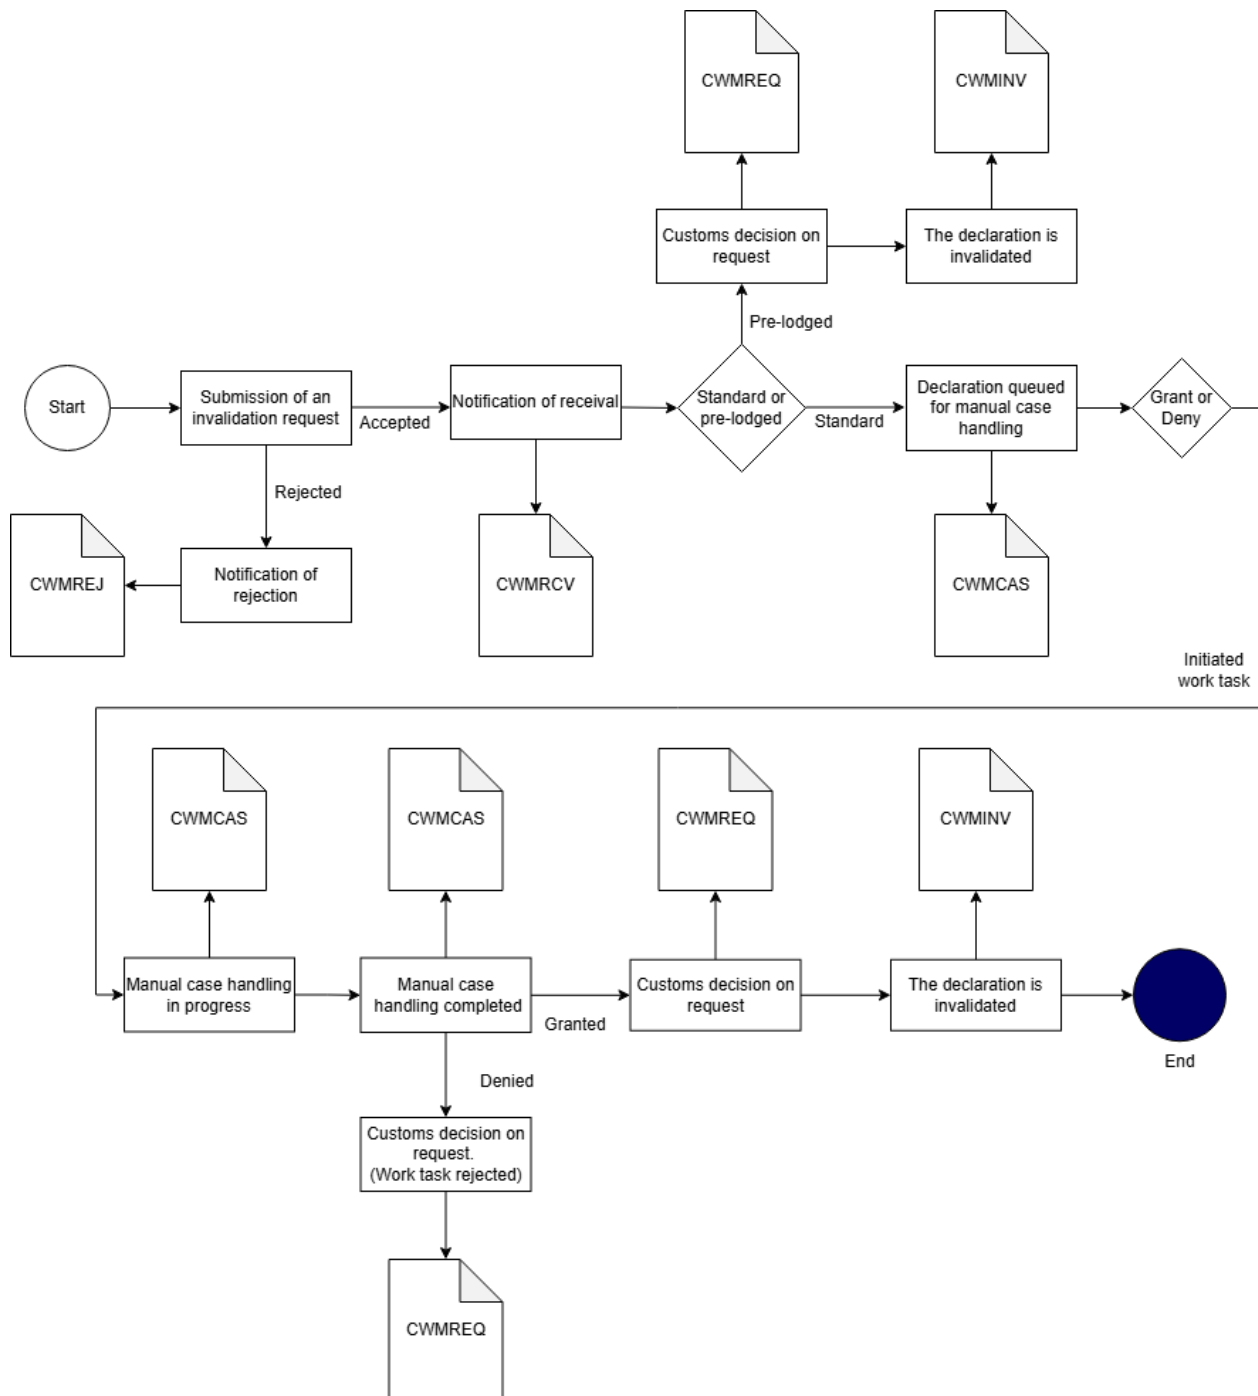


Figure 1: Process flow for H2 Invalidation declaration.

3 Test Scenarios

To complete this test case, test scenario 1 and 2 must be passed successfully. Descriptions and specifics for each test can be found in the coming sections. Be sure to go through the scenarios thoroughly. It is recommended that you use the attached files to test the notifications.

Test no.	Test scenario	Passed/Failed
1	Submit H2 – Invalidation declaration, which is accepted	<input type="checkbox"/>
2	Submit H2 – Invalidation declaration, which is rejected	<input type="checkbox"/>

3.1 Description of test scenarios

The following sections will describe the aim of each specific scenario and provide the desired results of the test scenarios.

The purpose of the test scenarios is to ensure your connection to the system, and that you as a company can receive the correct notifications when sending in XMLs. Each step describes what you need to do when going through the test case. An XML for the standard declaration is made available in the same folder where you found this test case document. This can be changed according to the test scenario.

3.2 Test scenario 1 – Acceptance

The aim of this scenario is to get a notification that the H2 Invalidation XML has been accepted.

The following table shows the necessary test steps for completing this scenario as well as expected results. For the first step it is recommended using the provided declaration **XML** found in the Test Case folder. Secondly, make sure that your **LRN** and **MRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI**, and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant, and Importer roles. You should also make sure that the **Amendment** field is filled with a valid **ChangeReasonCode** and a **ChangeReasonText** of at least 10 characters. The placeholders are denoted in the XML by double curly brackets {{placeholder}}.

Step no.	Description of steps	Expected result	Passed
1	Submit a H2 Standard XML . It is found within the H2 Standard folder that is found in the parent directory at H2 Test Cases (remember to replace the placeholders)	You should have the test XML ready for the next step	<input type="checkbox"/>
2	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	<input type="checkbox"/>
3	Pull the notifications	You should be able to pull the notification from the system	<input type="checkbox"/>
4	Acceptance of submission of declaration	Receive the CWMACC notifications	<input type="checkbox"/>
5	Use the H2 Invalidation XML found in the test case folder (remember to replace the placeholders). Make sure that the Amendment field is filled in as shown in section 2.2.1	Find the H2 Invalidation XML in the H2 Invalidation test case folder	<input type="checkbox"/>
6	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	<input type="checkbox"/>
7	Pull the notifications	You should be able to pull notifications from the system	<input type="checkbox"/>
8	Successful validation of submission of invalidation request by receiving the CWMRCV and CWMCAS notifications	You should receive the CWMRCV and CWMCAS notifications	<input type="checkbox"/>
9	After having received the CWMCAS , read the AdditionalInformation field regarding the status. This notification informs you of a manual acceptance work task being created.	You should find a StatementCode field with the number 41 (CWMCAS Queued). Then in the StatementDescription field there should be an explanation	<input type="checkbox"/>
10	When the queued request is being handled receive another CWMCAS and once the request is completed, receive the final CWMCAS , both notification with changes to AdditionalInformation . This informs you that the worktask is completed.	Two notifications with StatementCode field 42 (CWMCAS in progress) and 43 (CWMCAS Completed)	<input type="checkbox"/>

	A manual work task needs to be manually approved by a customs official. Until a customs official has manually processed your declaration, you won't receive any further notifications. As such, the declaration may remain on step 9 for some time if so, pull the notification again to get these notifications.		
11	Acceptance of submission of invalidation request by receiving the CWMREQ and CWMINV notifications. If the request were to be denied	Receive notifications CWMREQ and CWMINV to pass the test	<input type="checkbox"/>

3.2.1 XML example

```

<ns2:Amendment>
  <ns2:SequenceNumeric>1</ns3:SequenceNumeric>
  <ns2:ChangeReasonCode>22</ns3:ChangeReasonCode>
  <ns2:ChangeReasonText>Goods have been returned to supplier</ns3:ChangeReasonText>
</ns2:Amendment>

```

3.3 Test scenario 2 – Rejection

The aim of this scenario is for the EO to get a notification that the H2 Invalidation XML has been rejected.

The following table shows the test steps necessary to complete this scenario as well as expected results. For the first step it is recommended adapting the provided declaration **XML** found in the Test Case folder. Secondly, make sure that your **LRN** and **MRN** is unique, and that the Submitter field is correct (this is done by putting your **CVR** in the Submitter/Name and Submitter/ID fields). The fields **DeclarantEORI**, and **ImporterEORI** should also be filled out with the corresponding EORI numbers for the Declarant, Exporter, and Importer roles. You should also make sure that the **Amendment** field is filled with a valid **ChangeReasonCode** and a **ChangeReasonText** of at least 10 characters.

Step no.	Description of steps	Expected result	Passed
1	Submit a H2 Standard XML . It is found within the H2 Standard folder that is found in the parent directory at H2 Test Cases (remember to replace the placeholders)	You should have the test XML ready for the next step	<input type="checkbox"/>
2	Submit the declaration using the conditions found under Pre-conditions	The declaration should be sent to the system	<input type="checkbox"/>
3	Pull the notifications	You should be able to pull the notification from the system	<input type="checkbox"/>
4	Acceptance of submission of declaration	Receive the CWMACC notifications	<input type="checkbox"/>
5	Use the H2 Invalidation XML found in the test case folder (remember to replace the placeholders – {{LRN}} and {{MRN}} should match the MRN and LRN from the initially submitted H2 declaration)	Find the H2 Invalidation XML in the H2 Invalidation test case folder	<input type="checkbox"/>
6	Adapt the H2 Invalidation XML so that the Amendment field is filled in as shown in section 3.3.1	Adapt the H2 Invalidation XML in the H2 Invalidation test case folder	<input type="checkbox"/>
7	Submit the XML	The declaration should be sent to the system	<input type="checkbox"/>
8	Pull the notifications	The H2 Invalidation XML should be sent to the system	<input type="checkbox"/>
9	Rejection of submission of invalidation request by receiving the CWMREJ notification	Receive notification CWMREJ and pass the scenario	<input type="checkbox"/>

3.3.1 XML example

```
<ns2:Amendment>
  <ns2:SequenceNumeric>1</ns2:SequenceNumeric>
  <ns2:ChangeReasonCode>22</ns2:ChangeReasonCode>
```



```
<ns2:ChangeReasonText>Invalid</ns2:ChangeReasonText>  
</ns2:Amendment>
```