Evidencias de solución a problema 1 Compute Sales

Pylint execution

```
→ ComputeSales git:(main) x pylint compute_sales.py

-----


Your code has been rated at 10.00/10 (previous run: 10.00/10, +0.00)
```

Flake8 execution

No errors


```
ComputeSales git:(main) x flake8 compute_sales.py
ComputeSales git:(main) x
```

Resulting file

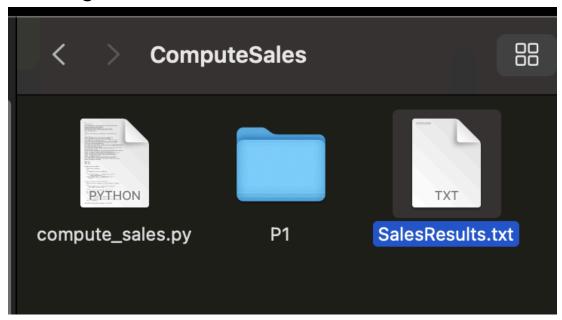


Test executions

TC1

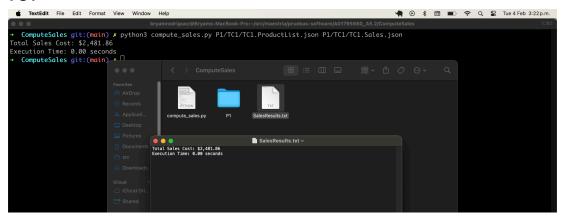

TC2

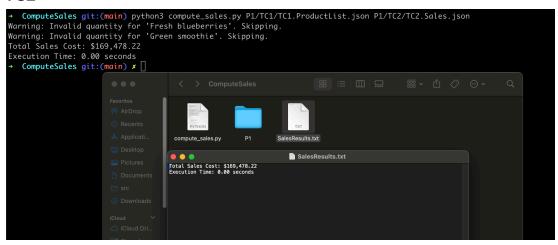

TC3

