24/2

(Float) = 70.5 (Decimal)

~~Integer~~ a = 7 (Integer

name = "Hi" (String - Combination of characters)

Concadenation means putting 2 String togeher

To convert String to Integer do this:

a = int(input("Enter a value: "))

If you want Int Output do:

20//2 (use //)

but for 20/2 you'll get decimal

To use Multiplication use *

To get reminder use %

eg 23 % 10

means comment

""" """ means comment

comma (,) gives space

(+) puts it together

sep basically replace comma

so print("24", "09", "2026", sep='/')

then result will be 24/09/2026

end basically put all print statements in one line

```
print("Hi", end=' ')
print("bye")
```

Resp Hi bye

\n means new line

\t means horizontal tab

To print a \ use \\

To print " use \"

```
print("x" * 5)
```

→ xxxxx

CamScanner

a=a+1 can be written as

a += 1

a++

++a

CamScanner

28/09/26

Week-2

① Conditional operators eg $<$, $>$, $<=$, $>=$, $==$, $!=$

Output -> Boolean -> True
-> False

a=b -> assignment statement

a==b -> conditional ||

* In Or statement if it is True or False
Output = True

If there is atleast one True in or then
Output = True

Otherwise if False of False
Output = False

* In And statemit if it is True and Fals
Output = False

All input shud be True then only
Output = True


If atleast one false then Output = False

If marks >= : → then
print(f" {stdName} passed)

else:
print(f" {stdName} failed)


elif means else + if

Loops

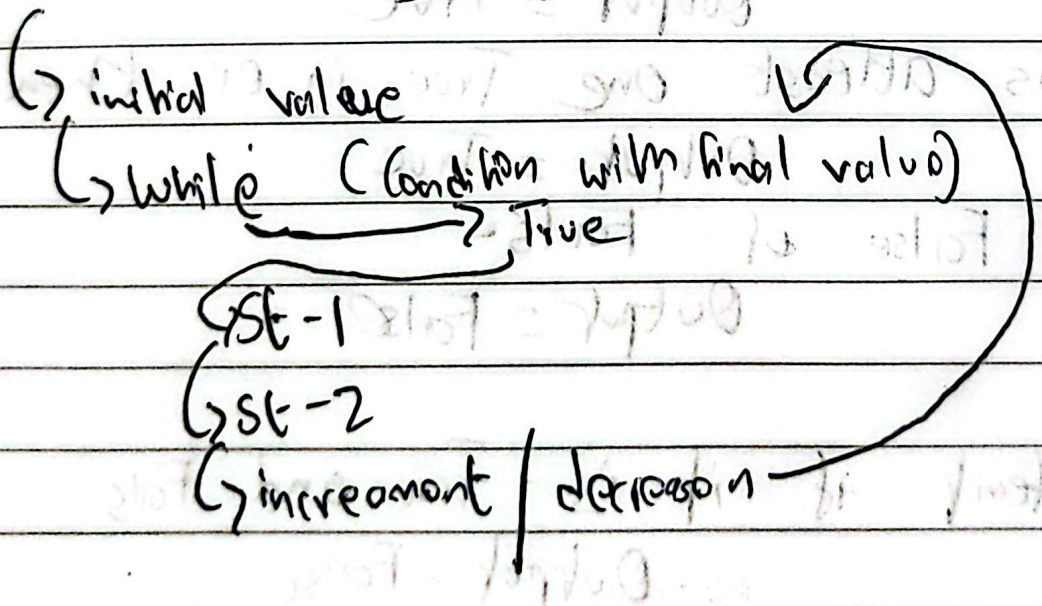

CST-1510

1/10/26

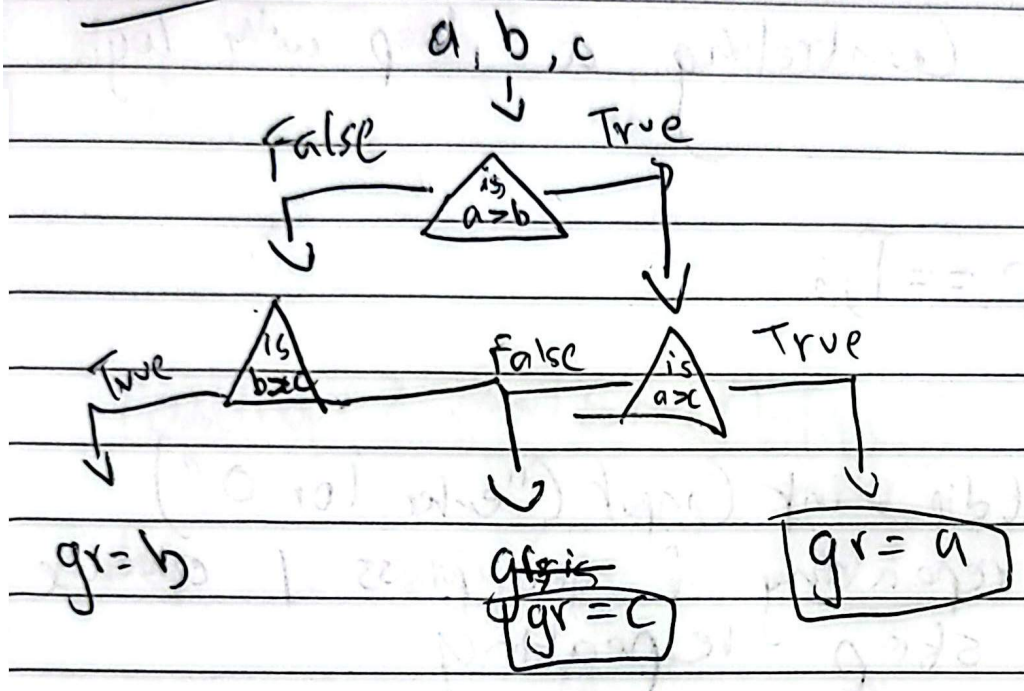

if you have else: then use elif
if

```
m1 =    input ("enter m1 = ")
m2 =    input ("enter m2 = ")

if (m1>m2
```

For Loop

range(5) starts at 0 & increasing till 5 without including 5.

range(2, 11, 2)

- 2 → initial
- 11 → Final (till 10)
- 2 → increament

Sentinal - Controlling a loop with logic

```
stdip=1
while (stdip == 1):

        stdip = int (input ("enter 1 or 0"))
```

If keeps repeating if ipp press 1 otherwise it will stop repeating

enumerate is giving index & content in index

Week-3 Monday

5/10/26

defining

```
def readStdData():
```

This is name of function

input data or "parameter" are variables used in methods

Calling :- readStdData()

```
def display(name):
    print("Hi", name)
```

parameter

display("Ali") → "Attributes are values"

It starts here then goes to the code block

+Jb takes the value "Ali"

Three function are there

12/10/26

Week-4

CST1510

* Array require continous memory allocations

Array are finite. We need to know how many data we have to use Array.

Arrays are homogeneous. Same data types for eg string or integer

* Linked Lists the address of next location to store data will be given at the present loc

Lists are not homogenous

Tuples are like list but locked can't be altered or mutable. it is non mutable

Tuples = ()
Lists = []
Dictionary = {}
Sets = {}

★ Dictionary { _ : _ , _ : _ }

(key value) pairs

There is no index in Dic only keys

To add new stuff

★ rec["Passmarks"] = 100

To print value

print(rec["name of key"])

★ .get() is a method

get is used to check if the key is there or not in the dict if no key is found, it gives you none.

.items() is a method

it gives both the key & value

☆ with zip() we can combine 2 lists & make a dictionary or another list

paired = list(zip(hostnames, disk_used))

list ← Type, combine, list1, list2

☆ Sets has {}

In sets, they will have only unique value

No repeating stuff

Opening Files

"a" → to save mode

```
with open("output.txt", "w") as f:
    f.write("Hi")
    f.read()
```

"w" → write mode

If yo want to read & write then do r+ or w+

15/10/26

week-4

CST1510

```
try:
    with open("filename.txt") as f:
        text = f.read()
except FileNotFoundError:
```

19/10/26

Week-5

CST1510

Classes & Objects

Class is basically data and its respective methods wrapped together ie encapsulation is a feature of Object oriented Programing (OOP)

What is Object? Its an instance of a class

std1.name , dot is called reference

self means current Object

__init__ is used to initialize the values