

Same frame, different knots

surface kinship is not graph kinship (the C2 split)


census [45] — “After traveling 50 miles by taxi, Ann is charged a fare of \$120. Assuming the taxi fare is directly proportional to distance traveled, how much would Ann be charged if she traveled 70 miles?”

RATE frame

same frame (z = -2.05 at the frozen trunk)


census [7] — “Three faucets fill a 100-gallon tub in 6 minutes. How long, in seconds, does it take six faucets to fill a 25-gallon tub? Assume that all faucets dispense water at the same rate.”

RATE frame

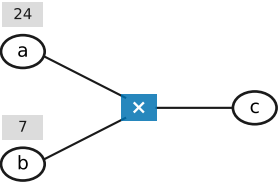

3 vars · {given, given, mul}

no shared graph class at n = 94

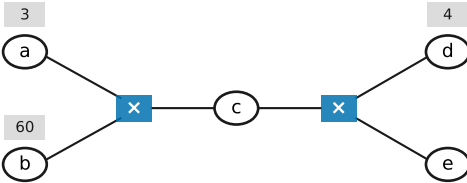

5 vars · {given×3, mul, mul} junction

Same knot, different surfaces

graph kinship is not surface kinship (the hash audit's cross-fixtured isomorphs)


bigtest[1187] — “Let c, a, d, b be whole numbers. the fourth number has the value 16. The difference between c and a is b. Work carefully through each fact. d has the value 50. d is what you get from c plus a. What is c?”

terse register


vtest[116] — “In this problem we are working with the numbers a, b, c, d. If a and b are gathered into one pile, that pile amounts to c. If you look at d, you will find that its value is exactly 16. It turns out that c works out to be 50 in the end. If you start from a and take away everything b has, what remains is d. ... what value does a end up holding?”

verbose register

4 vars · {rel+, rel-, given, given} · query c

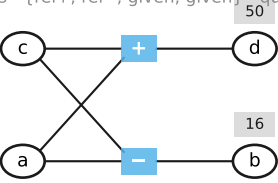

one canonical digest: 468be959...

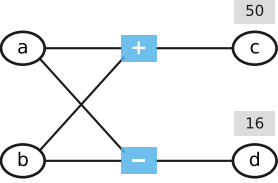

4 vars · {rel+, rel-, given, given} · query a

The concept is the binding between a linguistic frame and a structural role — recoverable from neither side alone.