


C1 | observed_choice | all saved historical coordinates; case names in case_metadata.csv

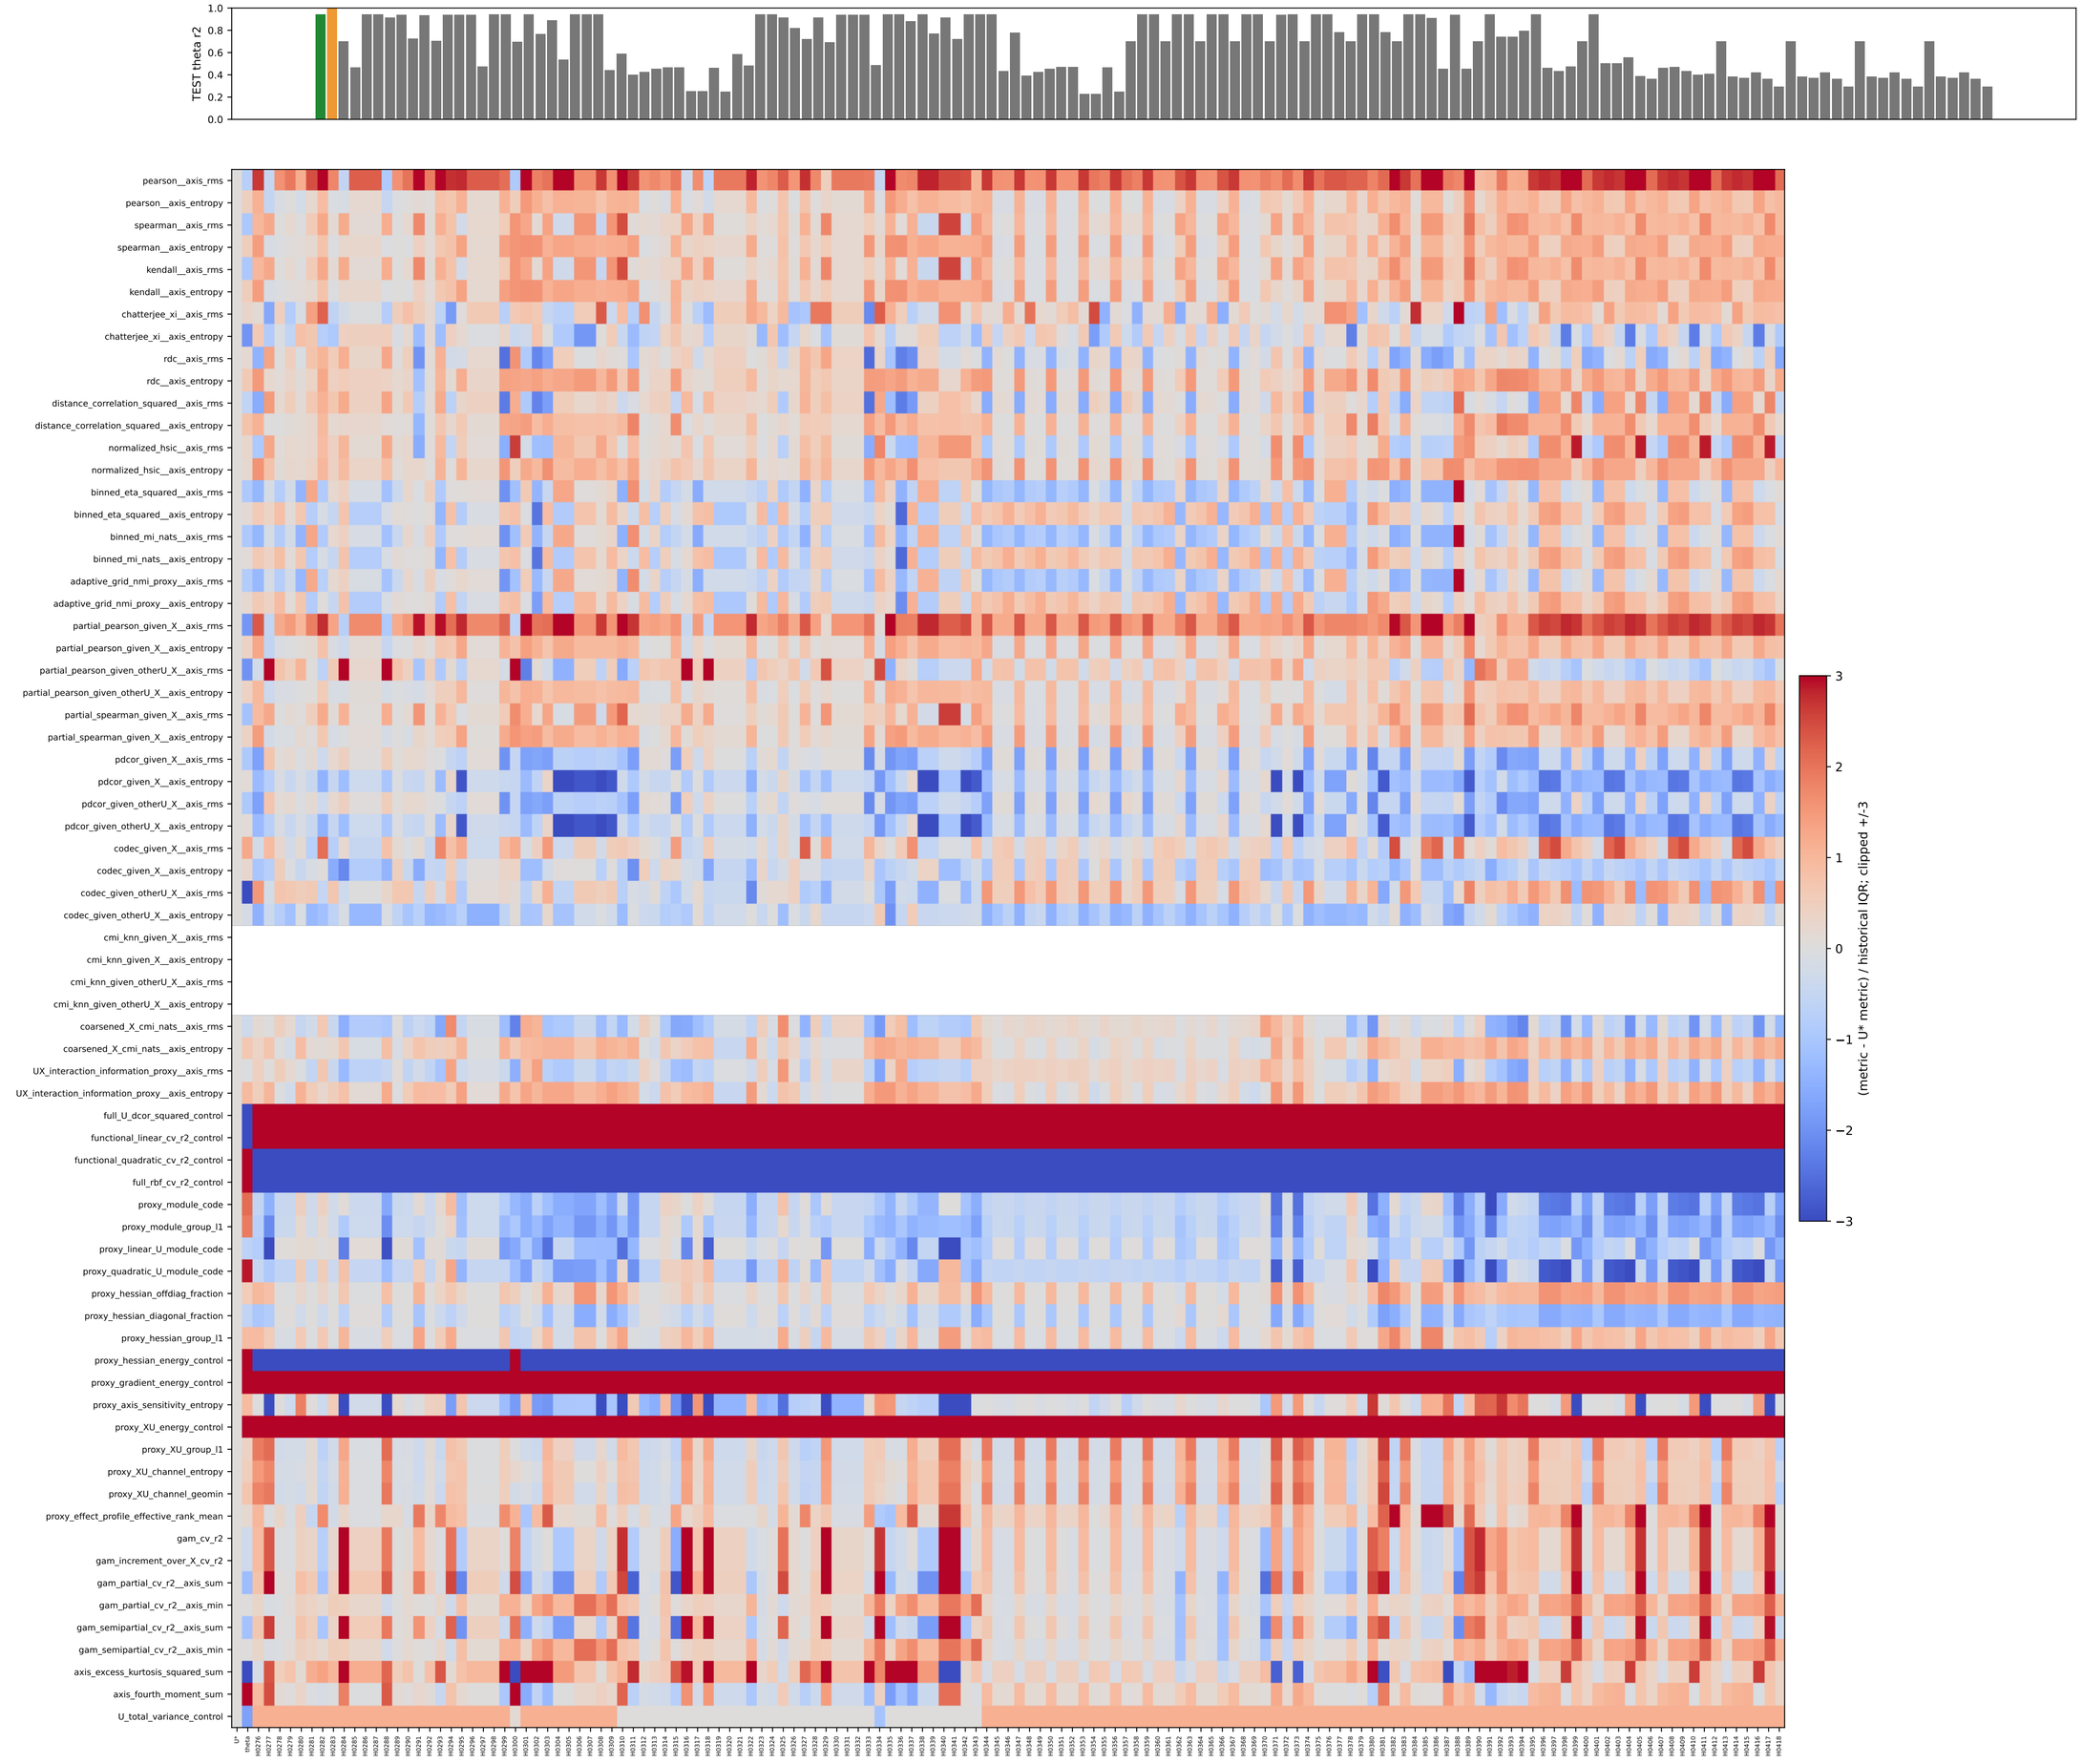


C1 | decoder_choice | all saved historical coordinates; case names in case_metadata.csv

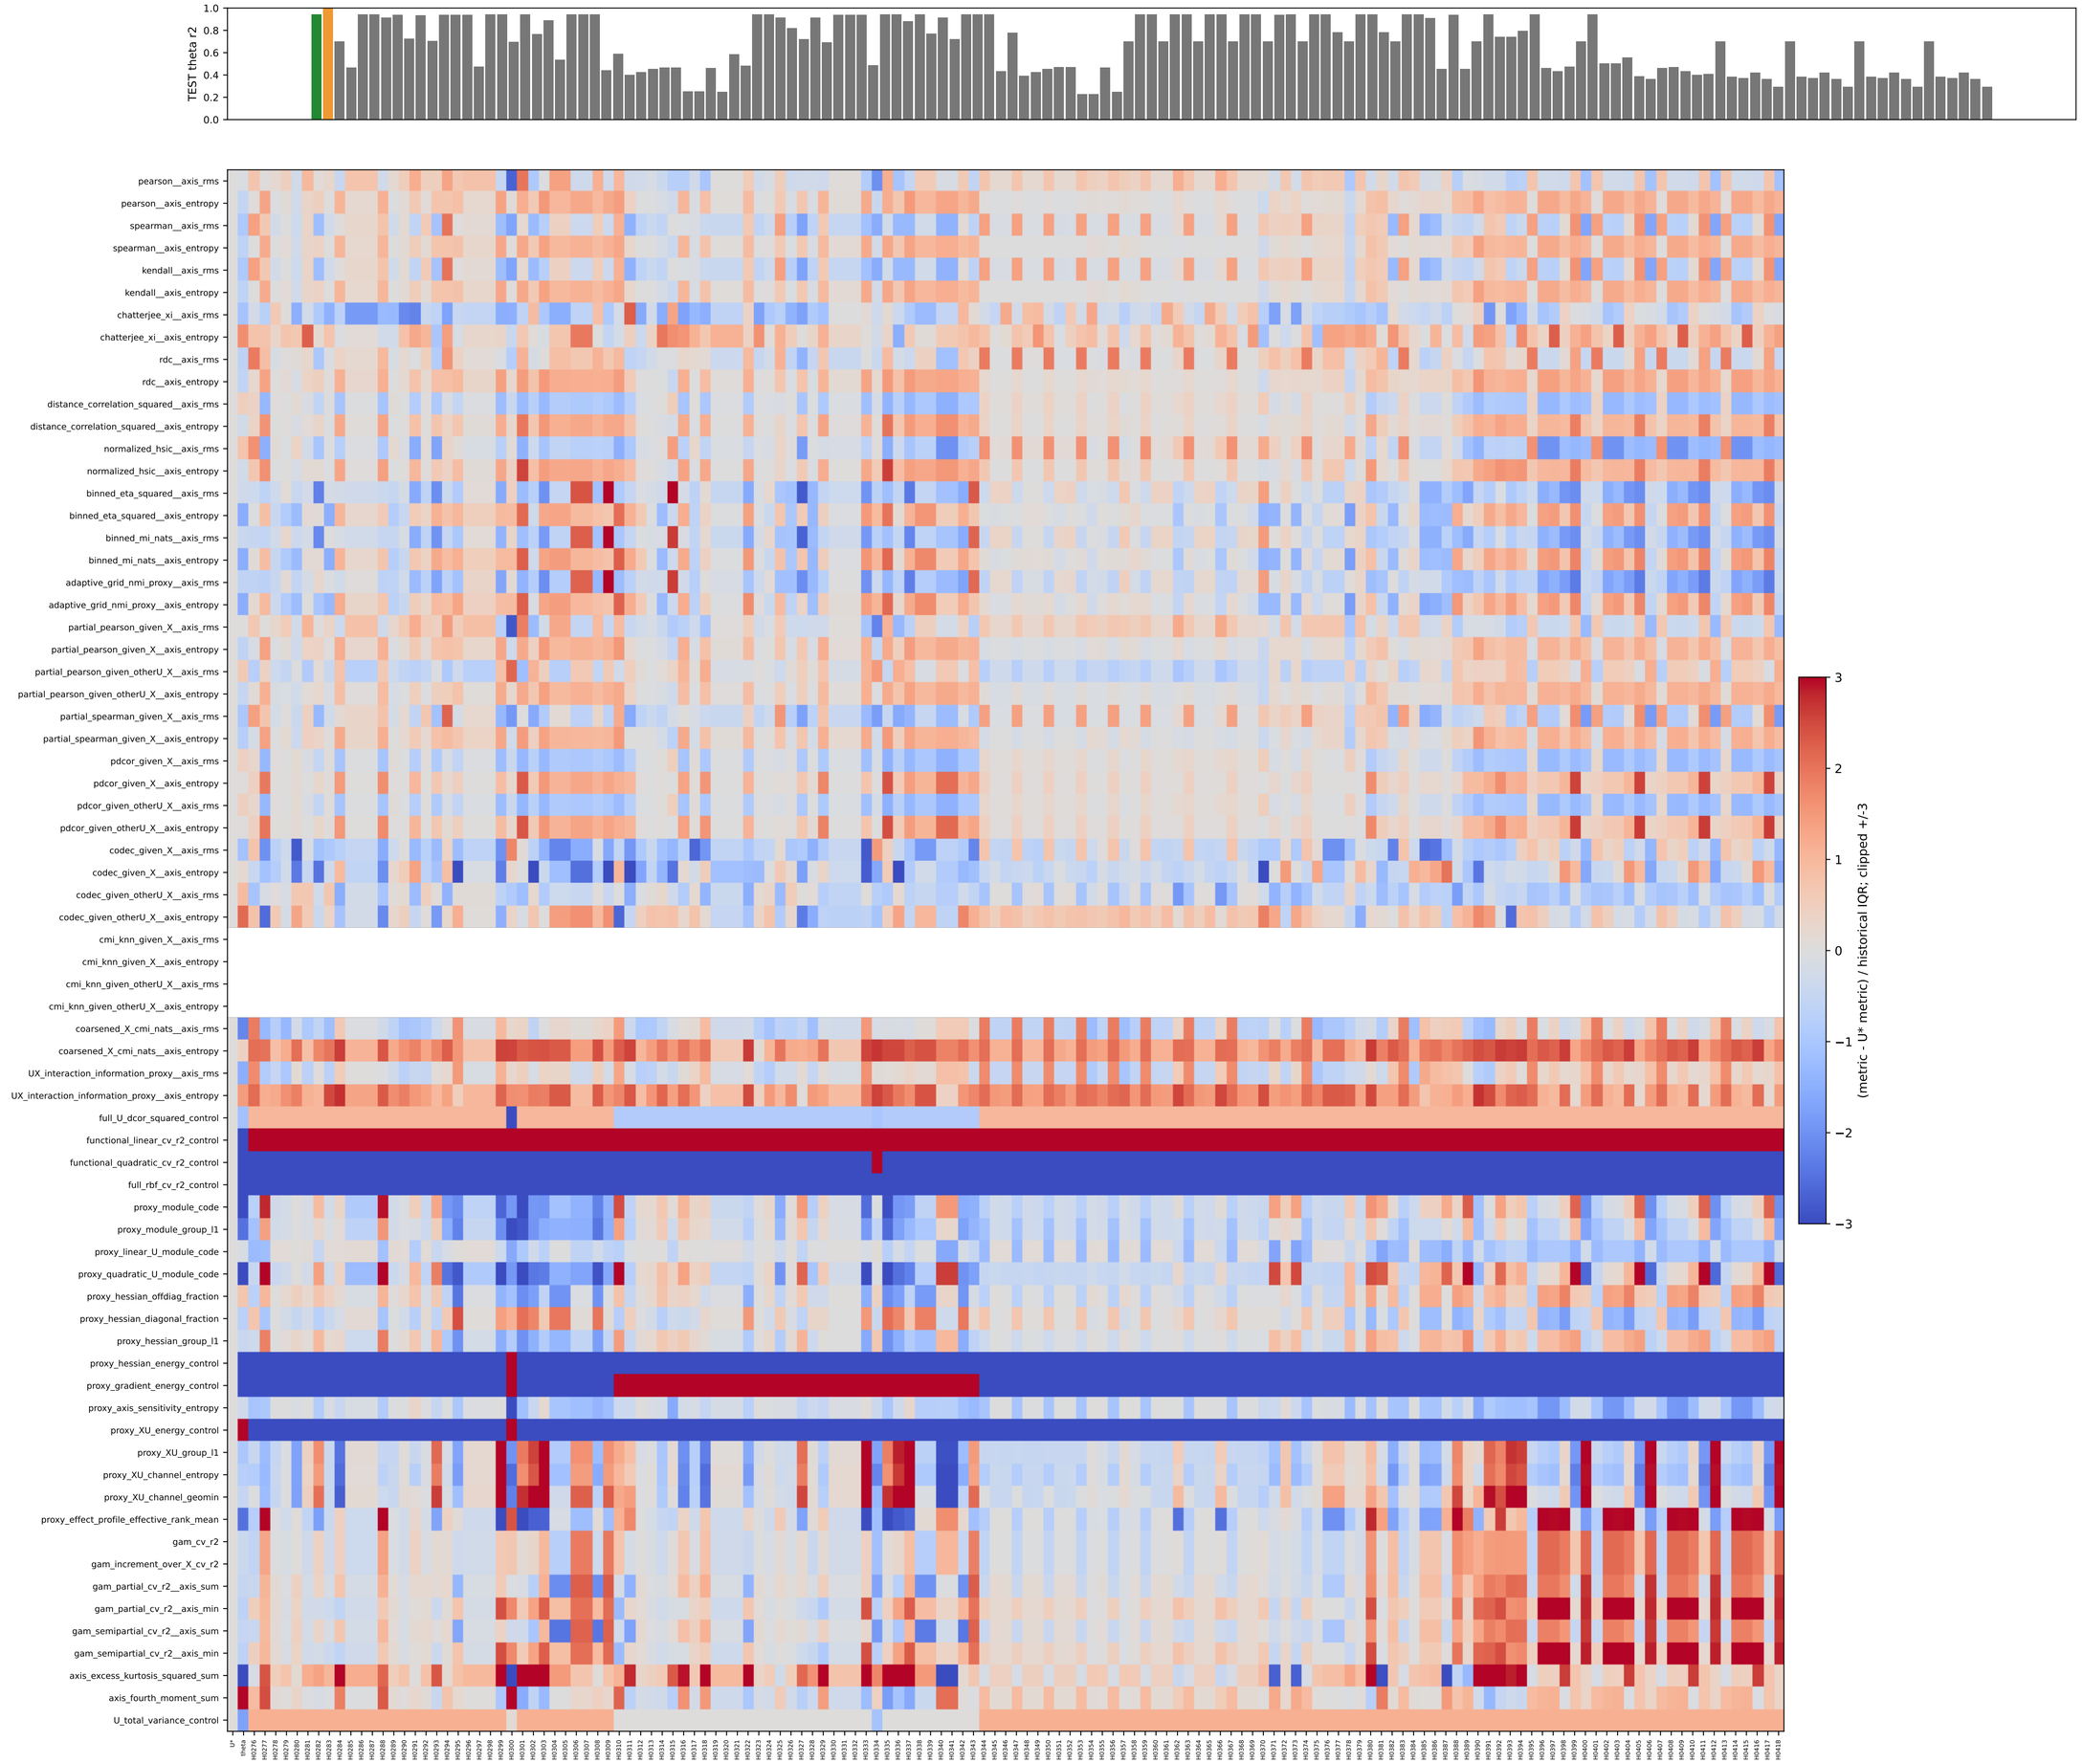

C1 | decoder_logit | all saved historical coordinates; case names in case_metadata.csv

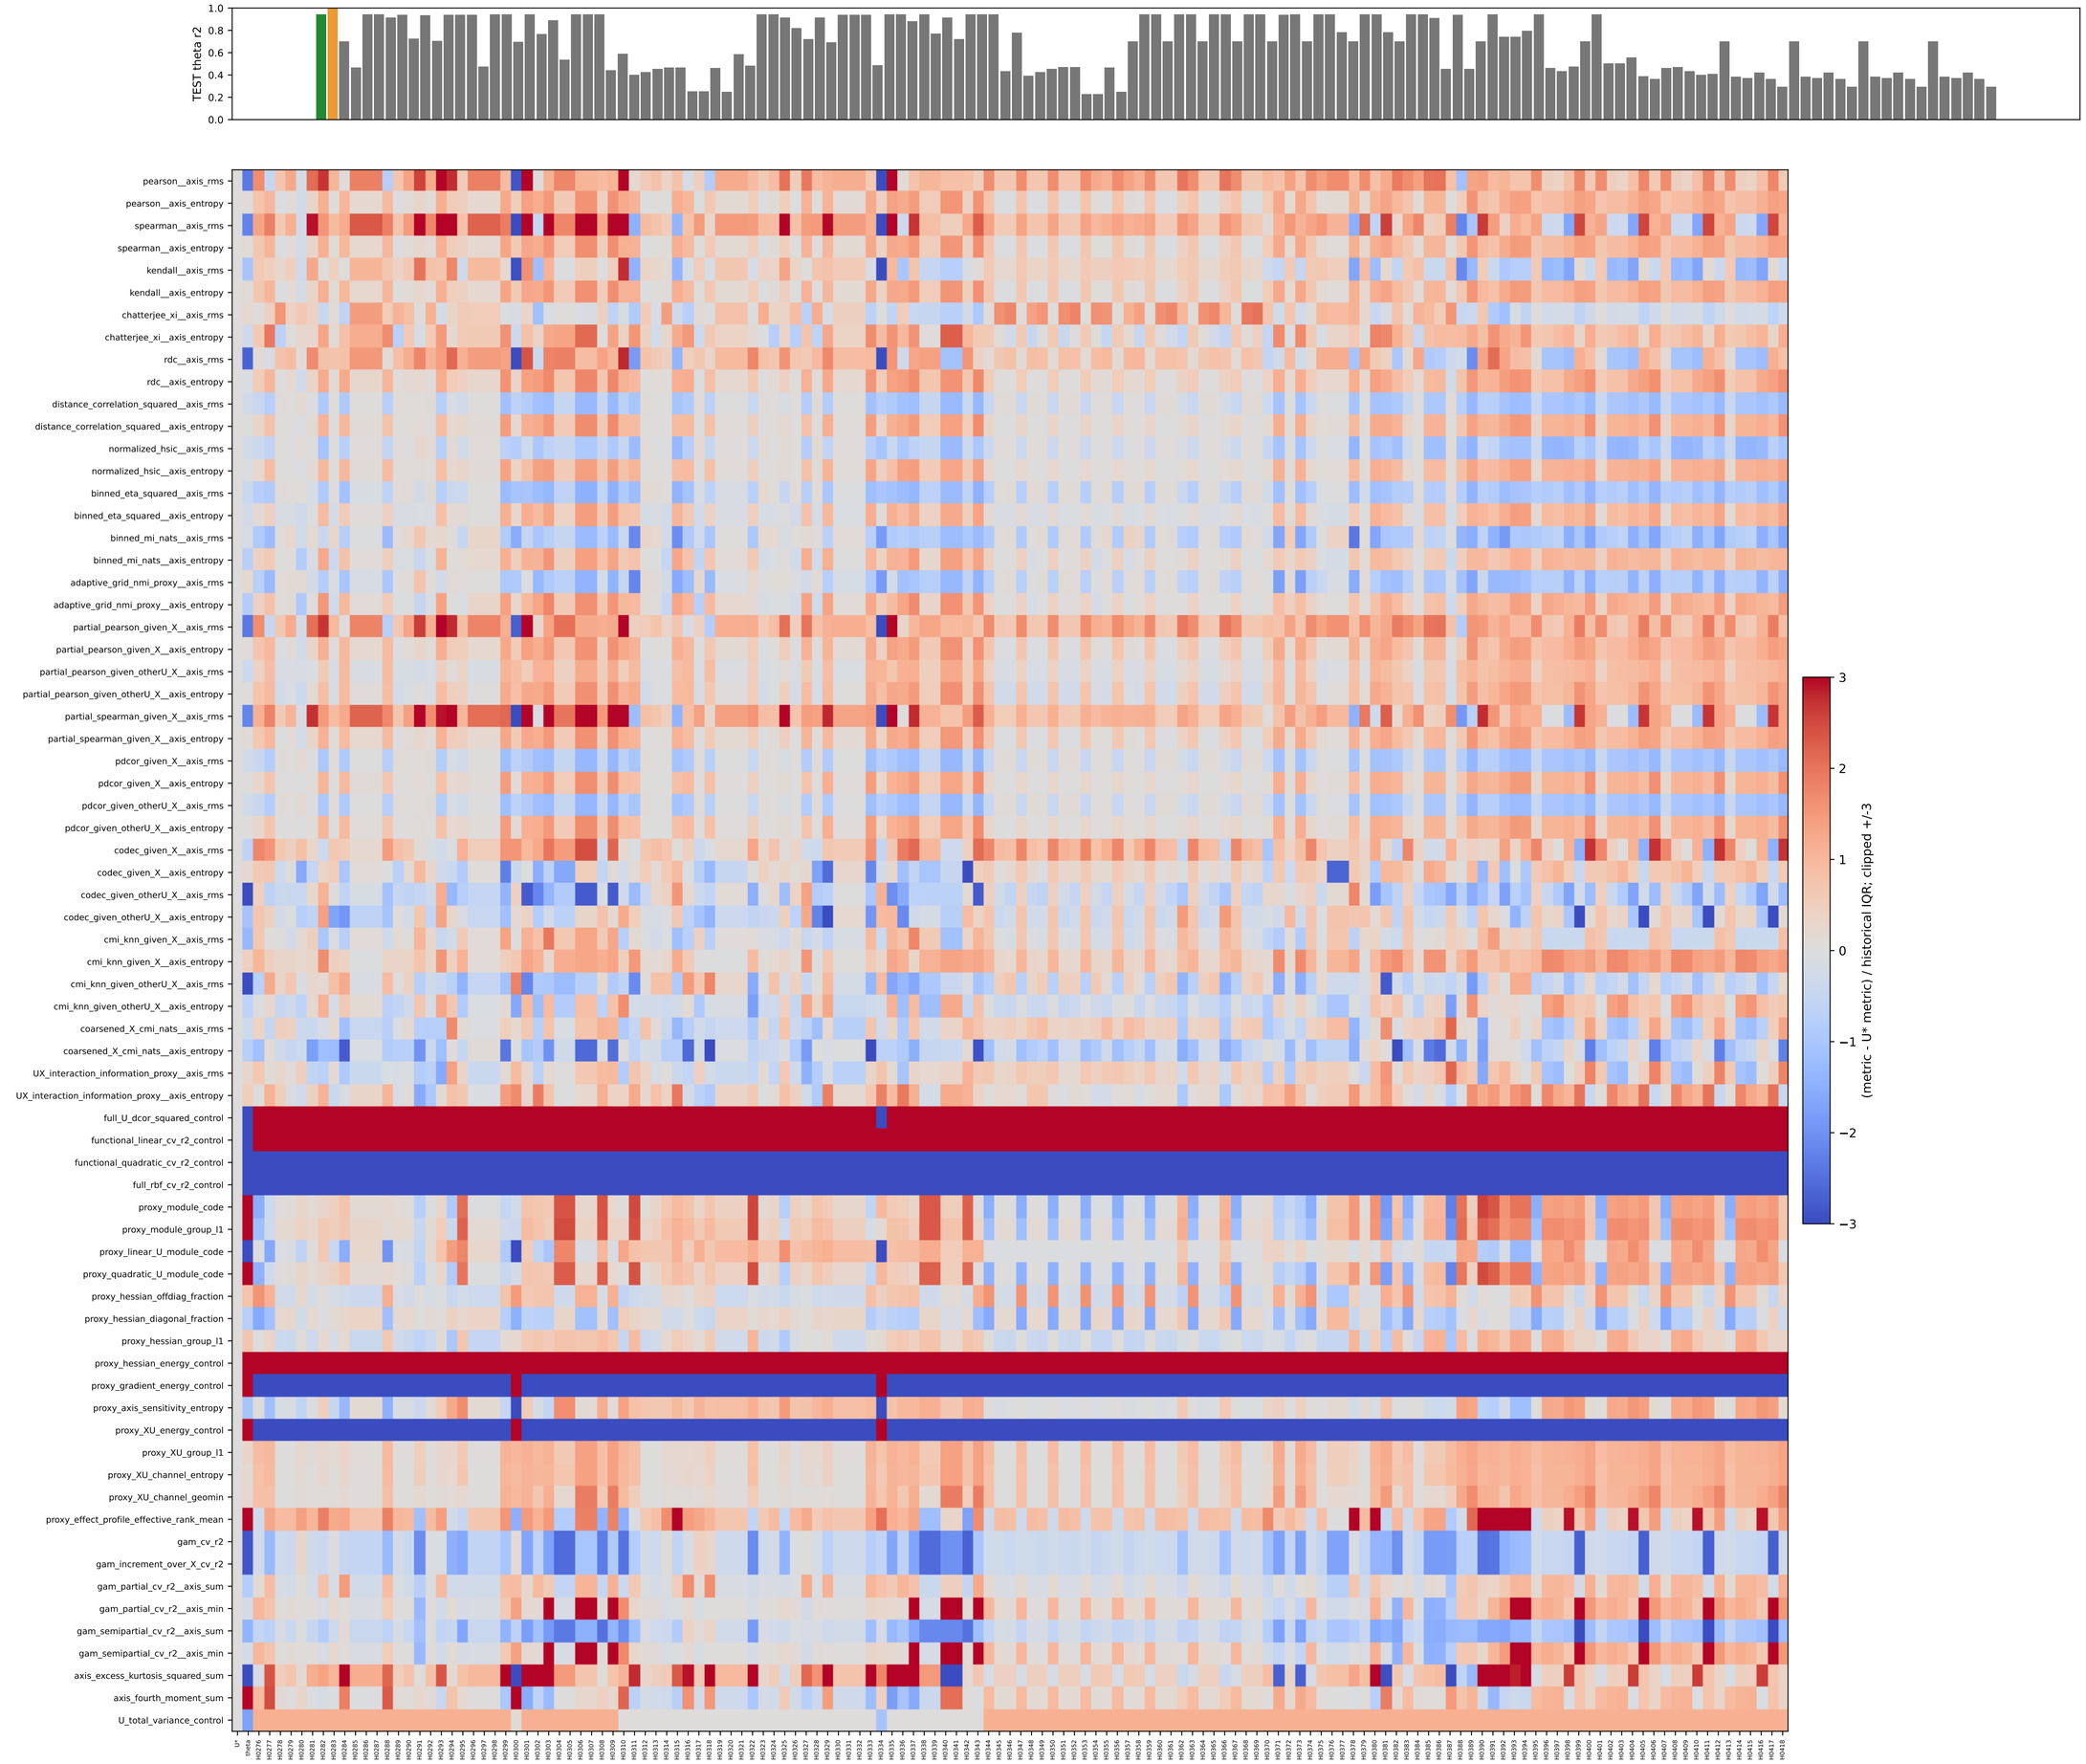

C1 | true_logit | all saved historical coordinates; case names in case_metadata.csv

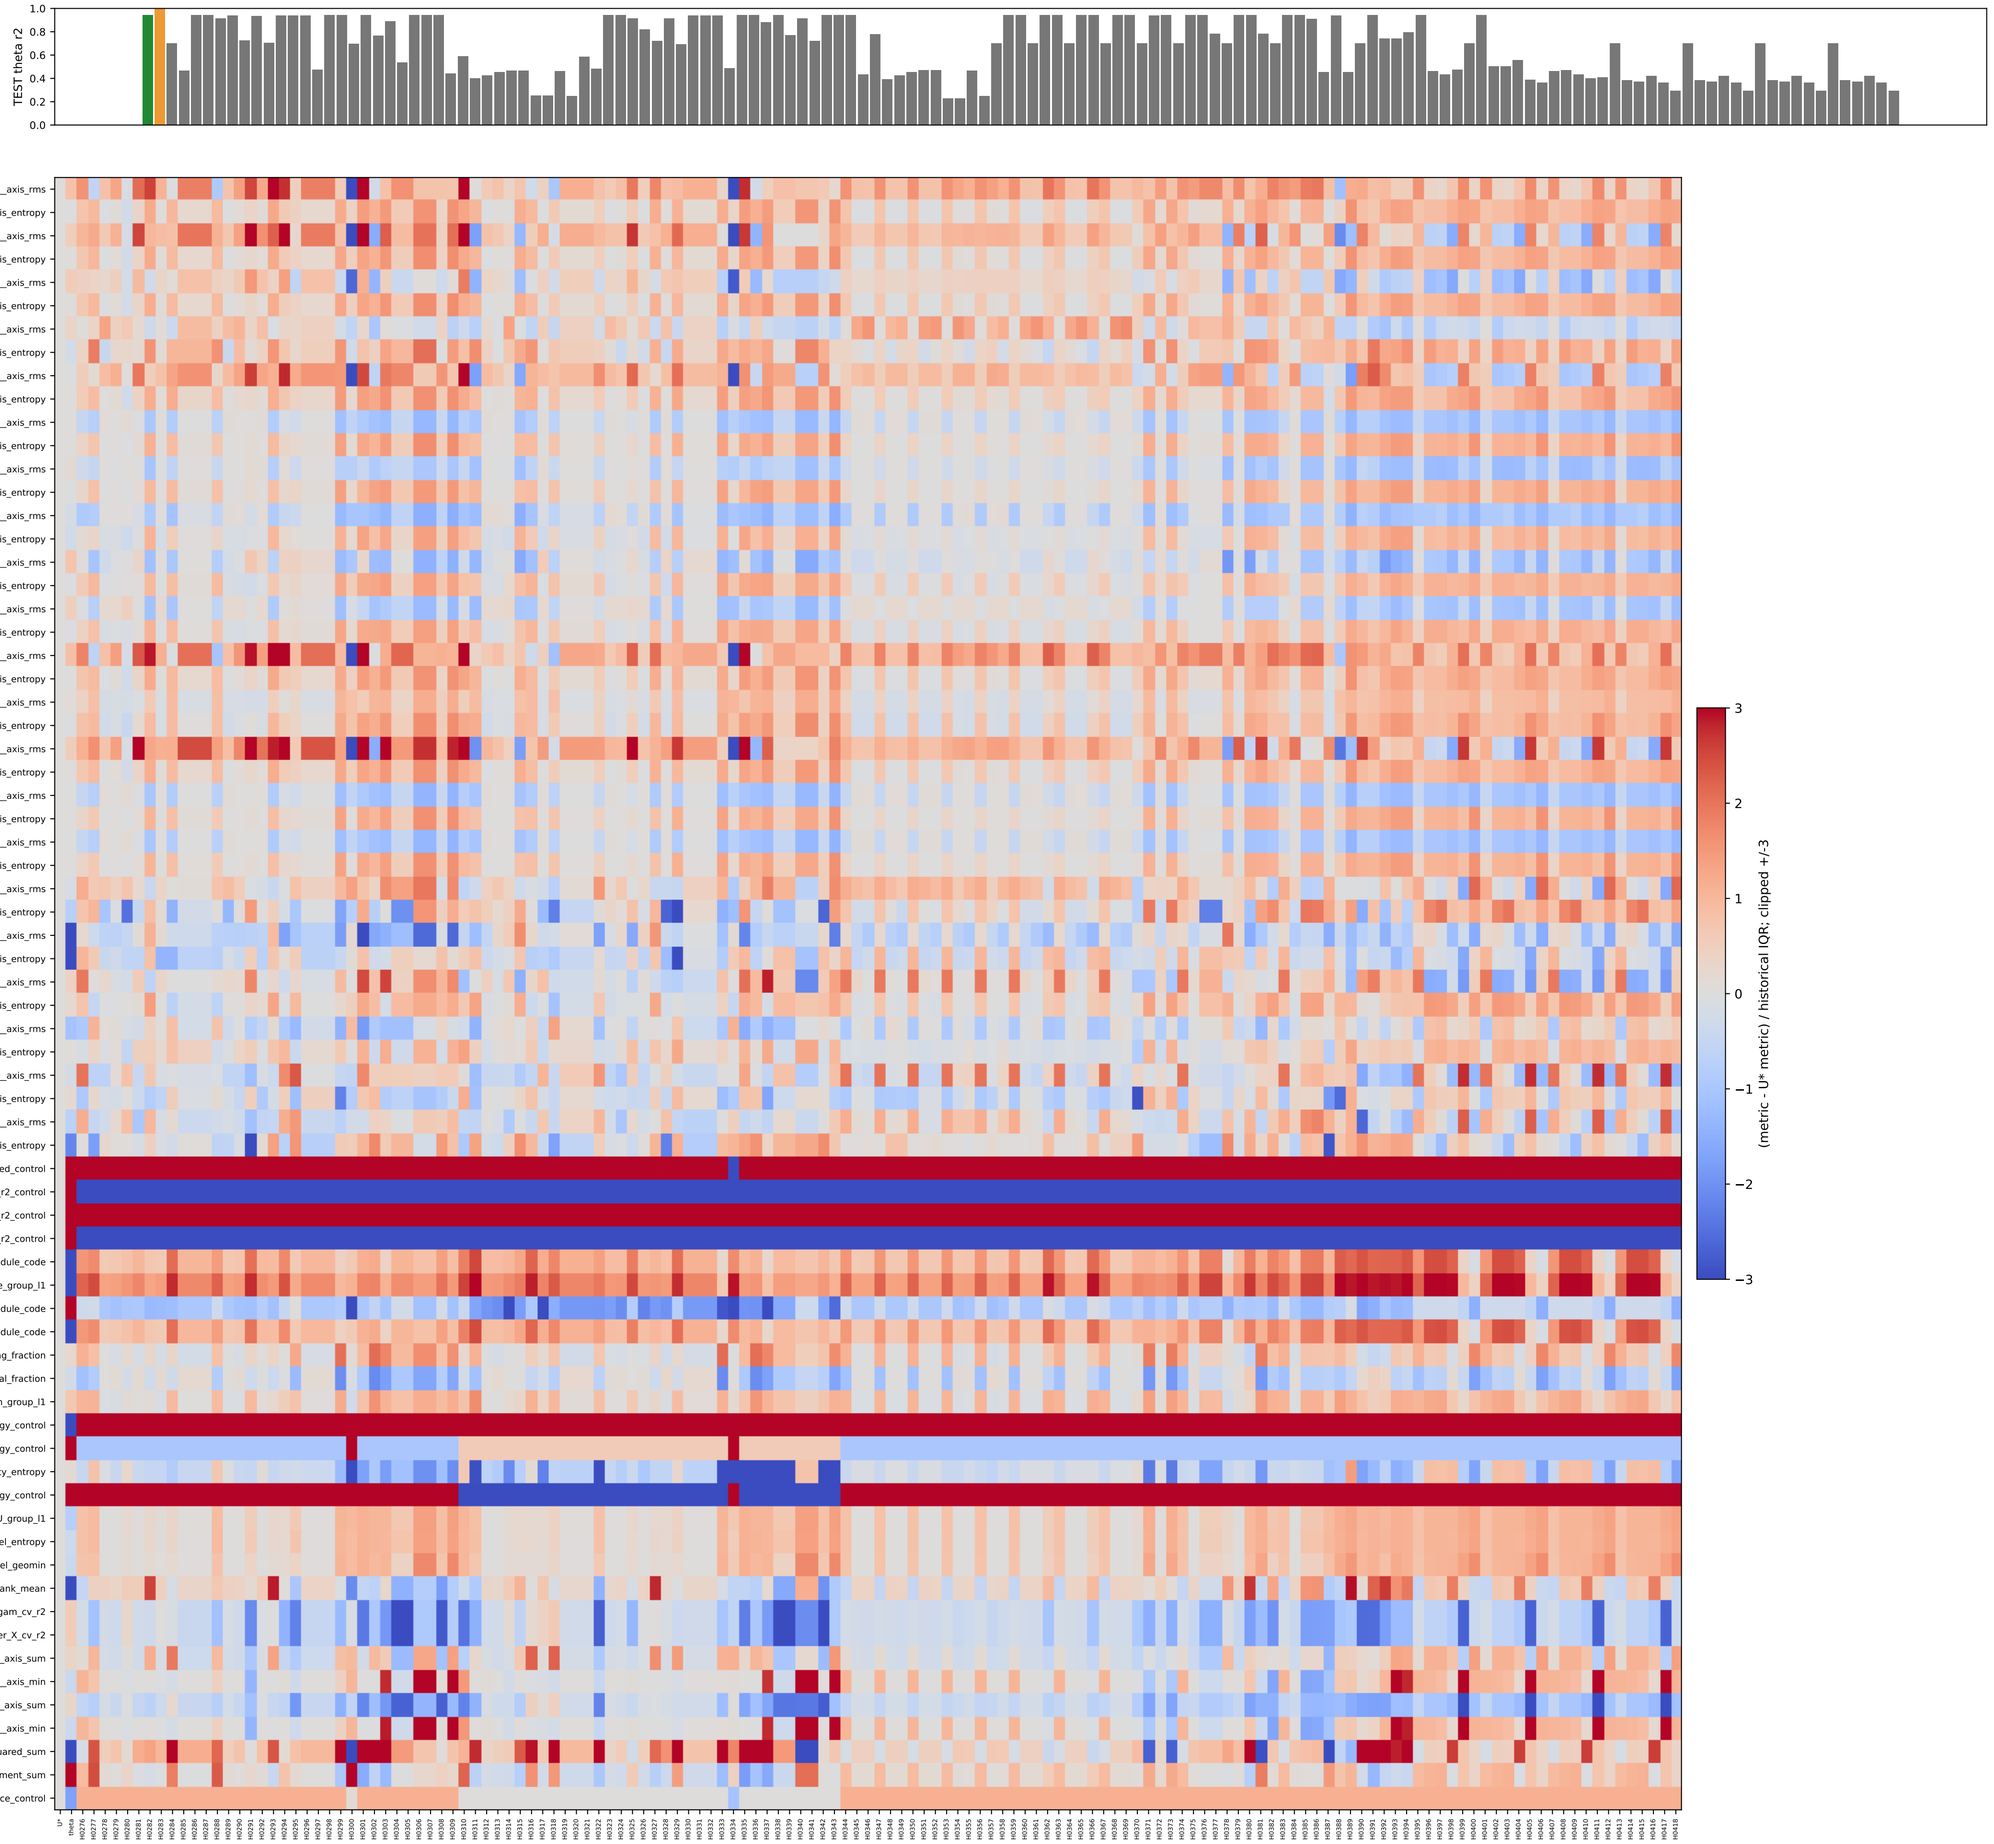

C1 | true_logit_noise | all saved historical coordinates; case names in case_metadata.csv

