


CR3 | observed_choice | all saved historical coordinates; case names in case_metadata.csv

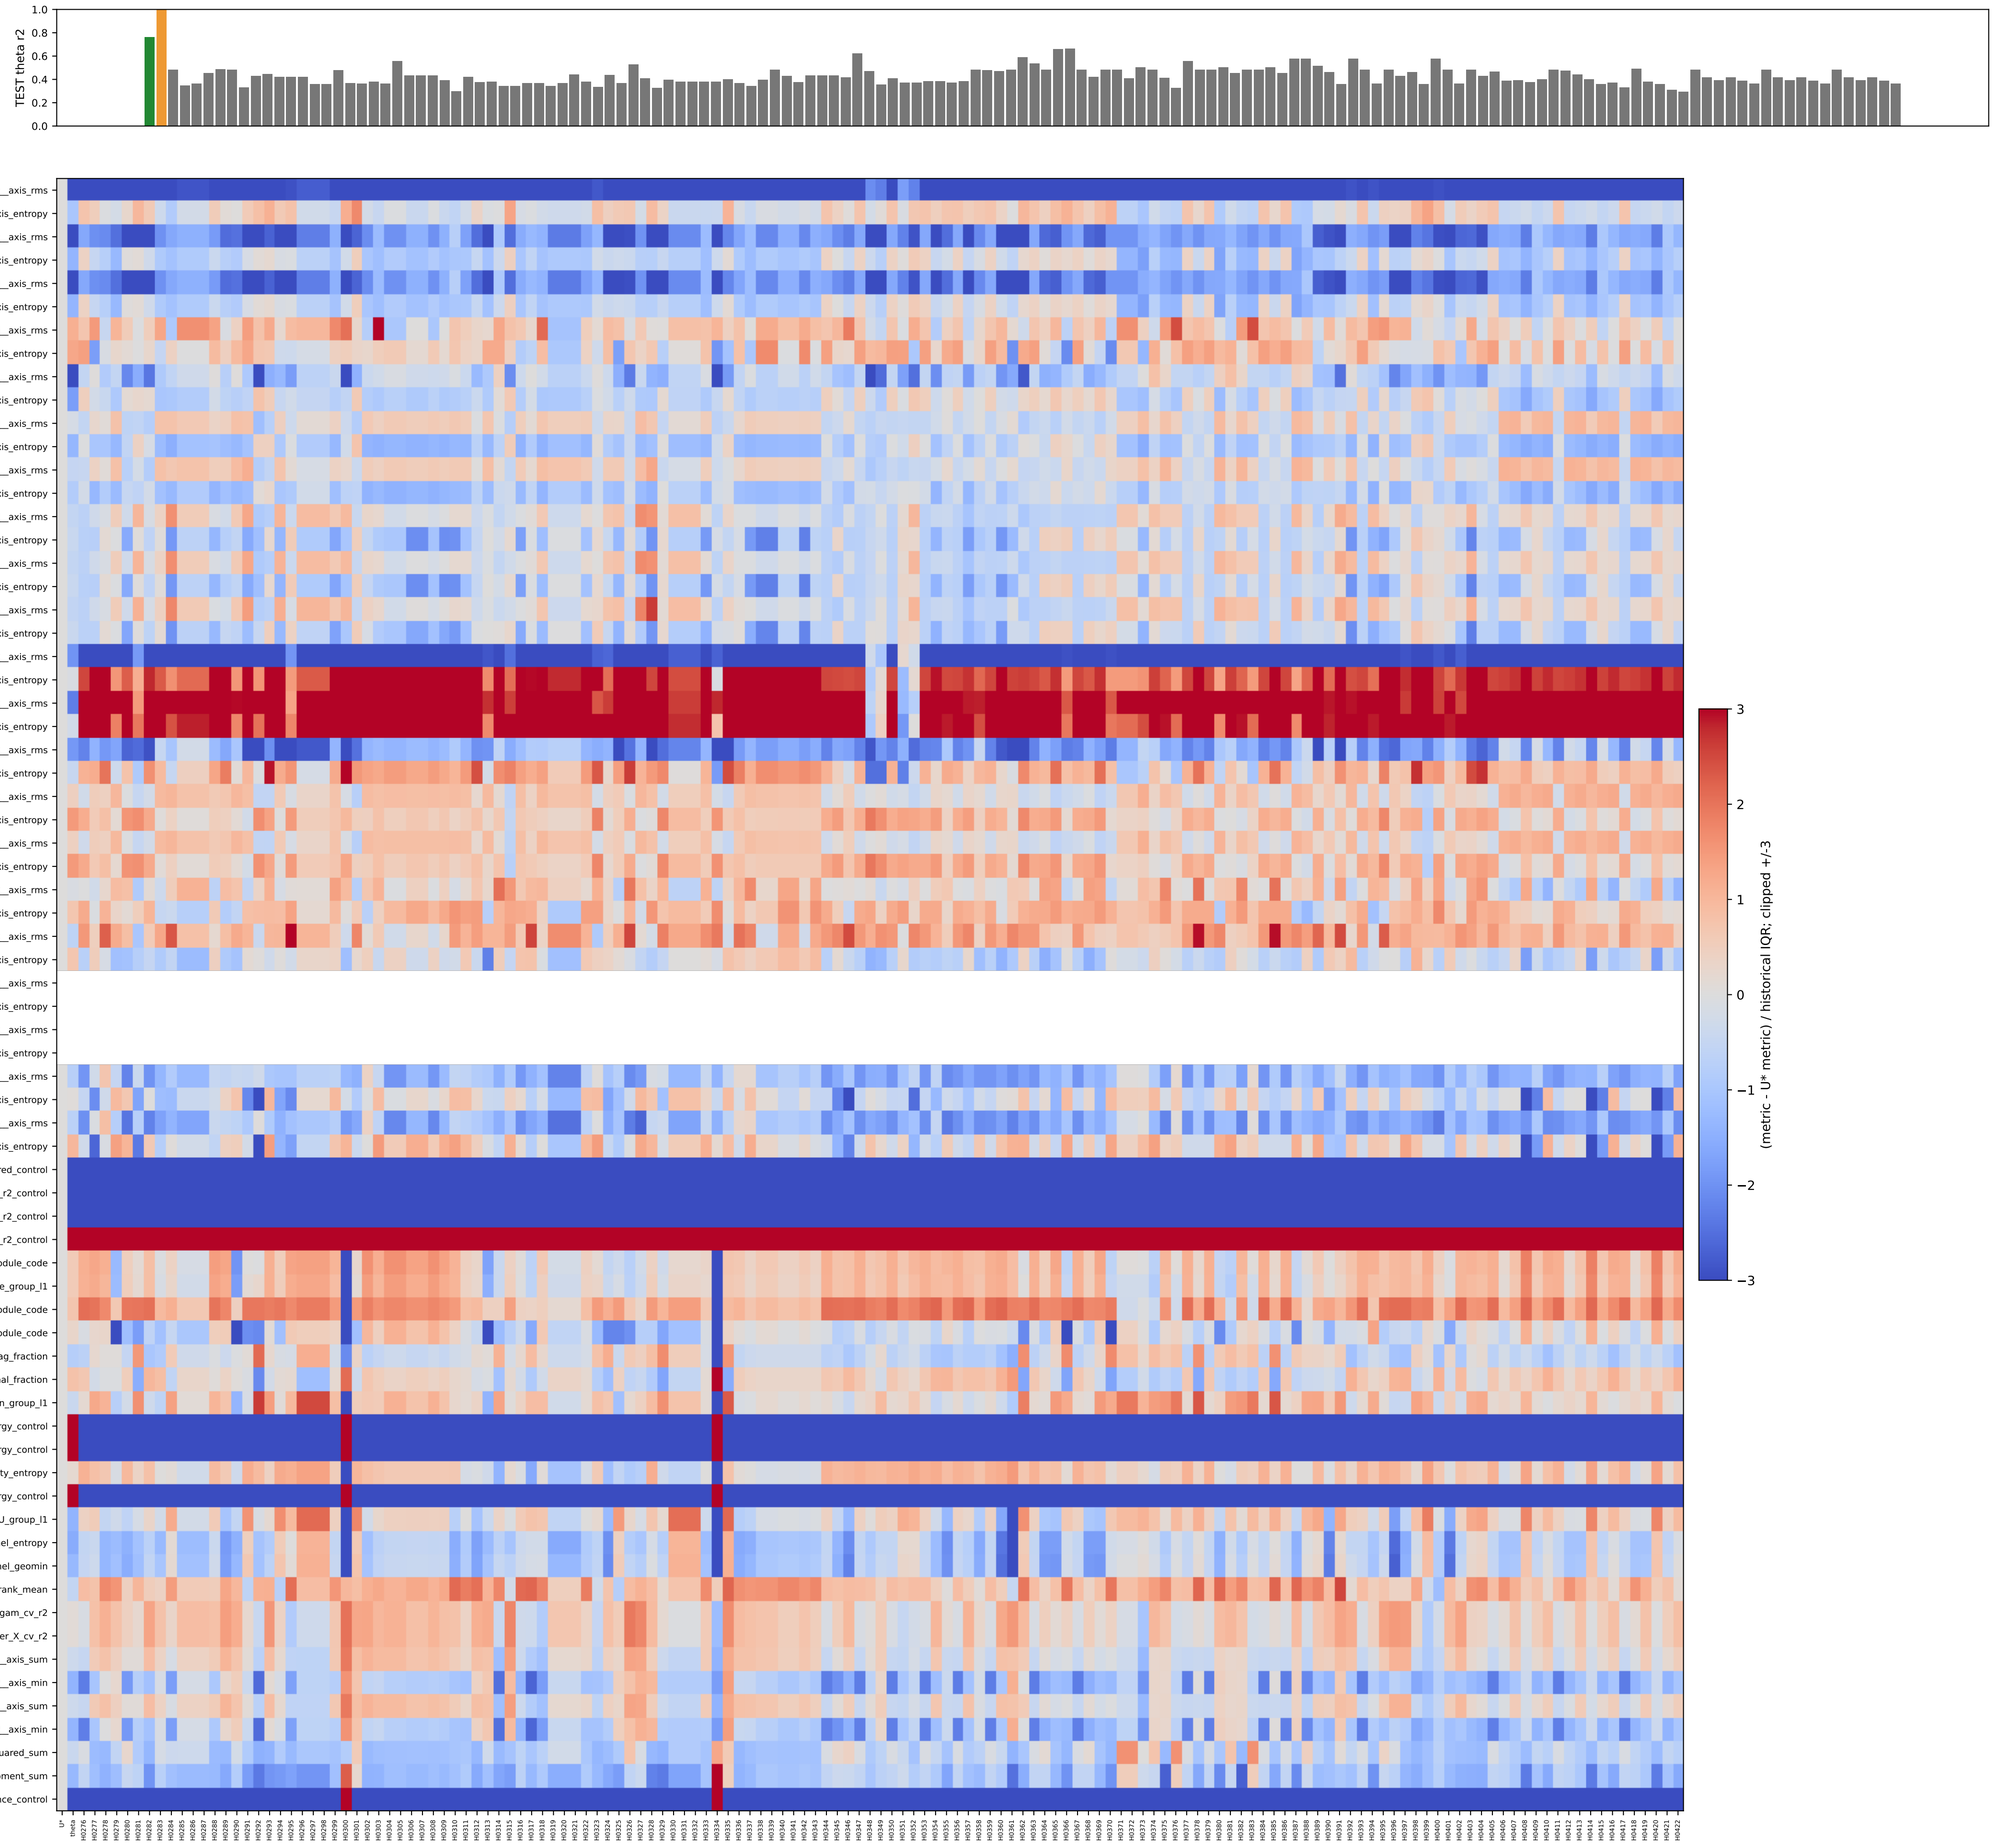


CR3 | decoder_choice | all saved historical coordinates; case names in case_metadata.csv

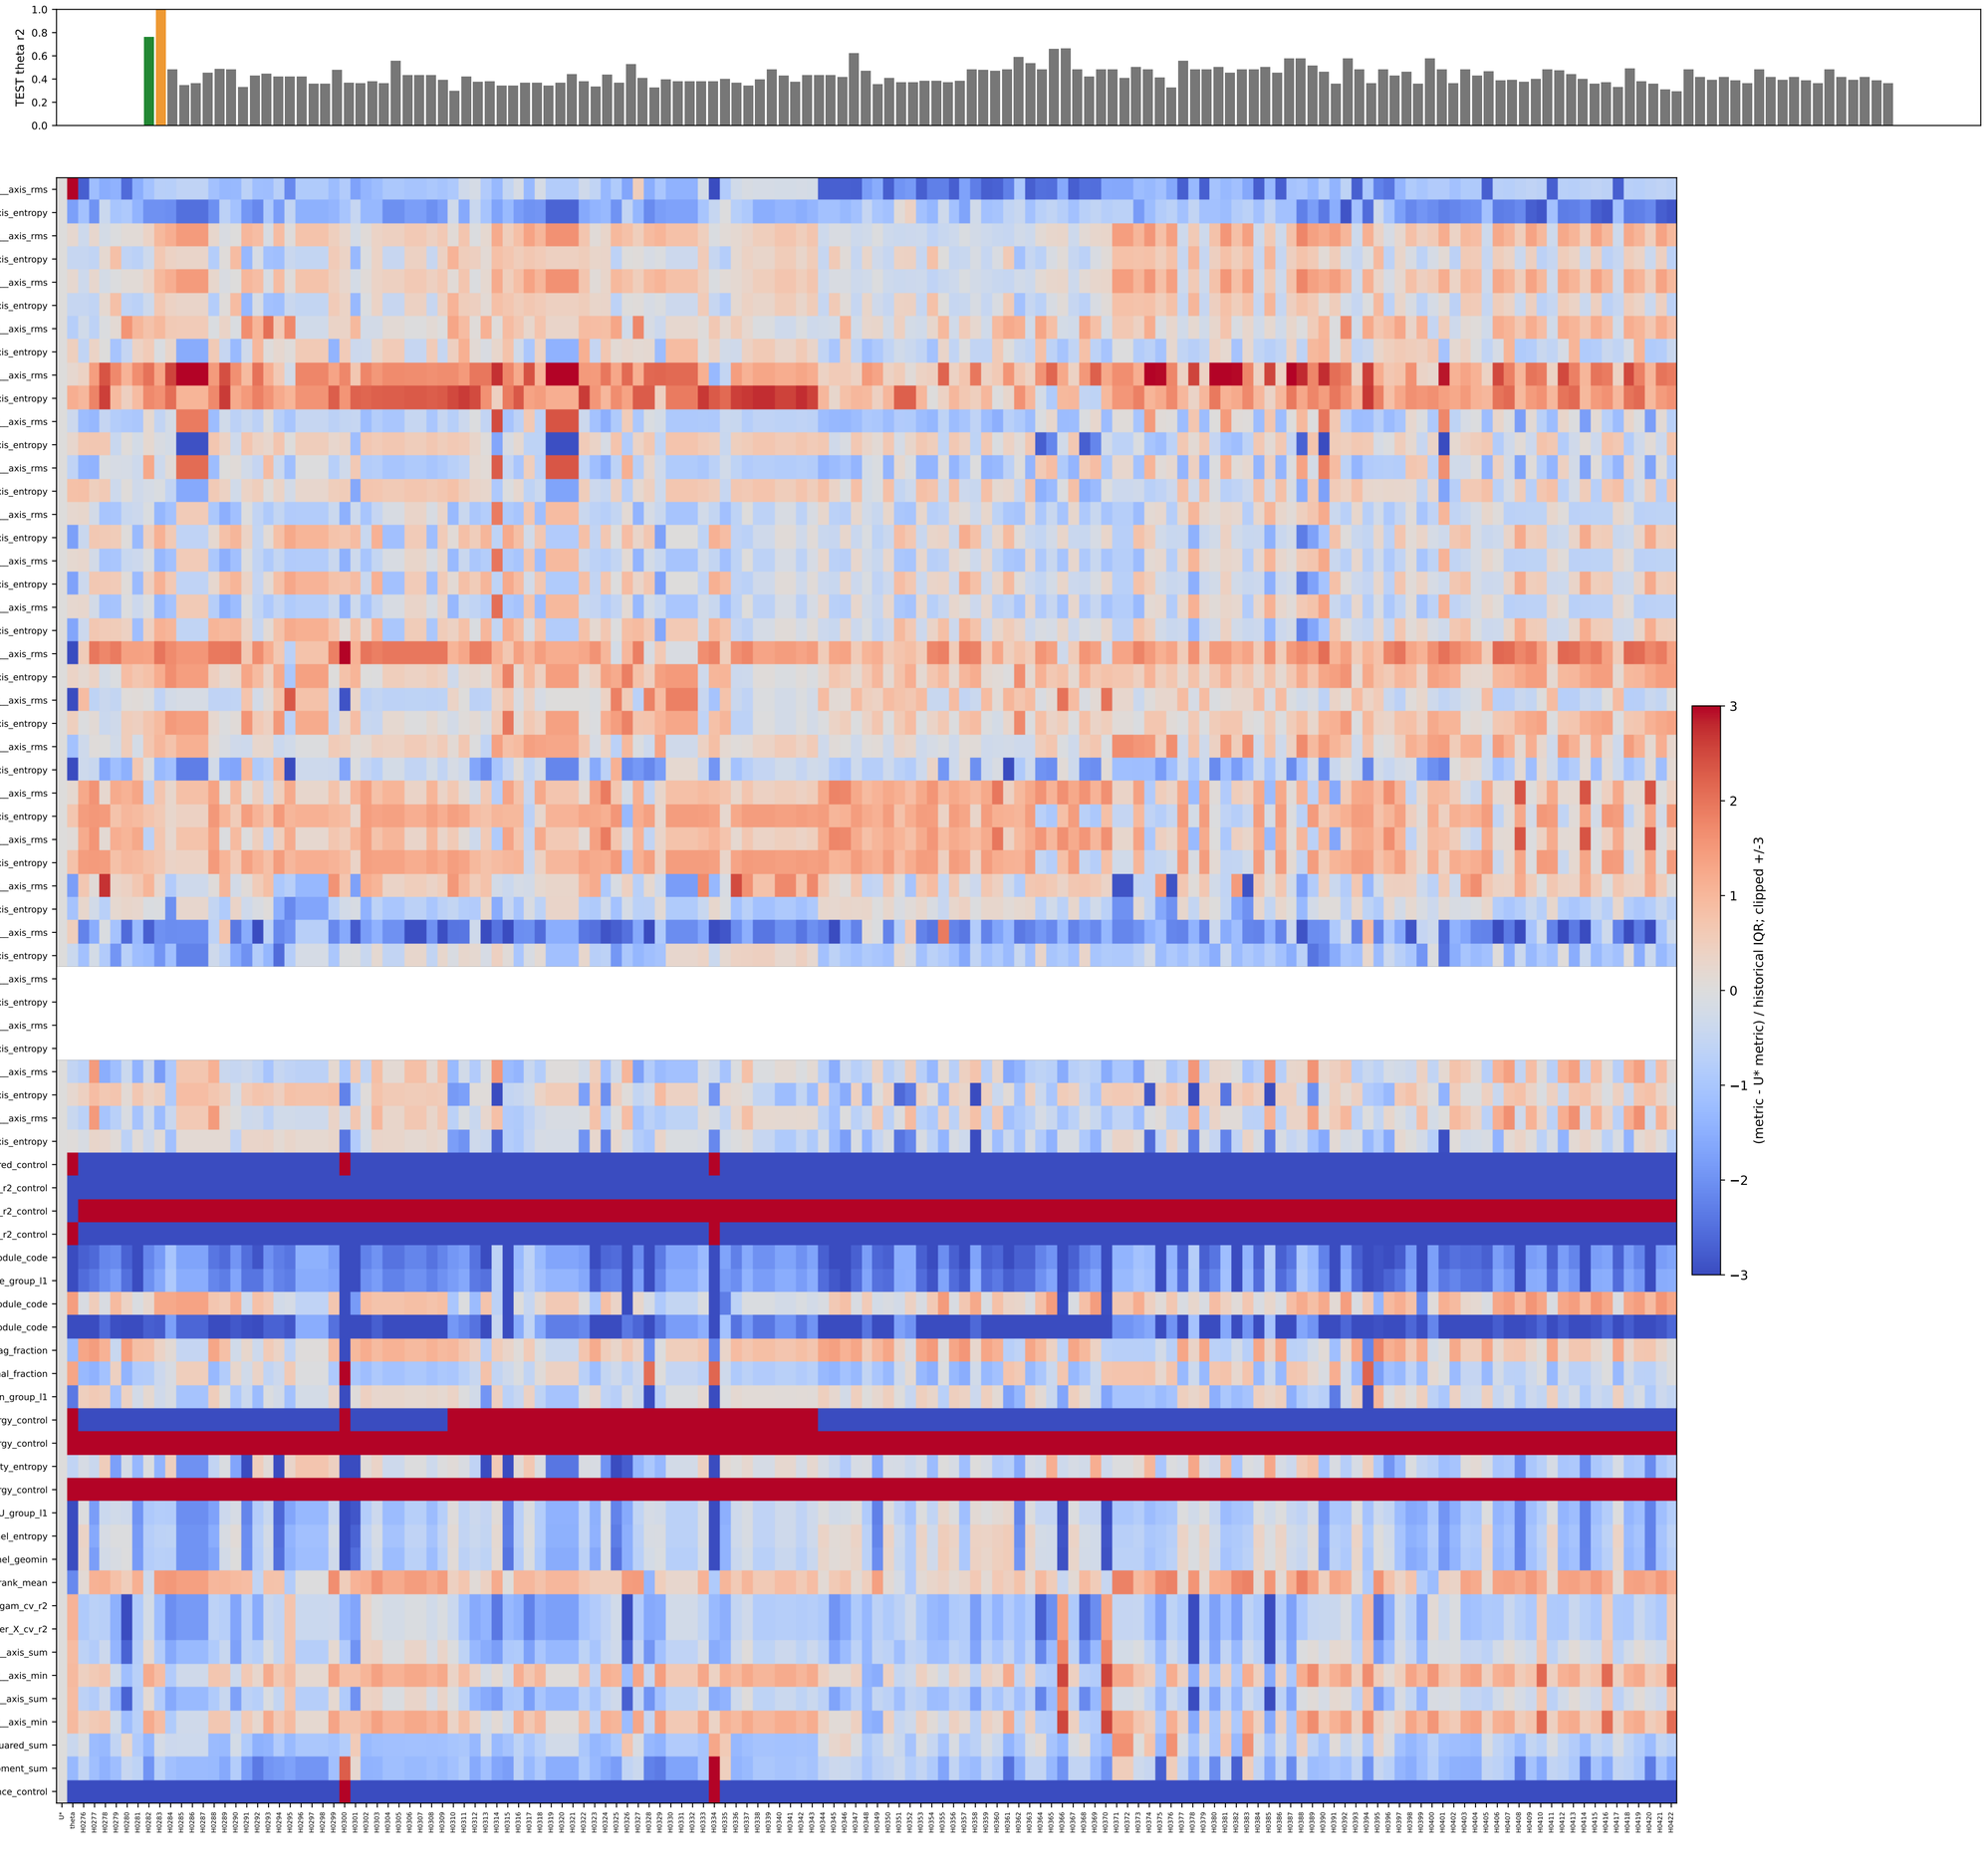

CR3 | decoder_logit | all saved historical coordinates; case names in case_metadata.csv

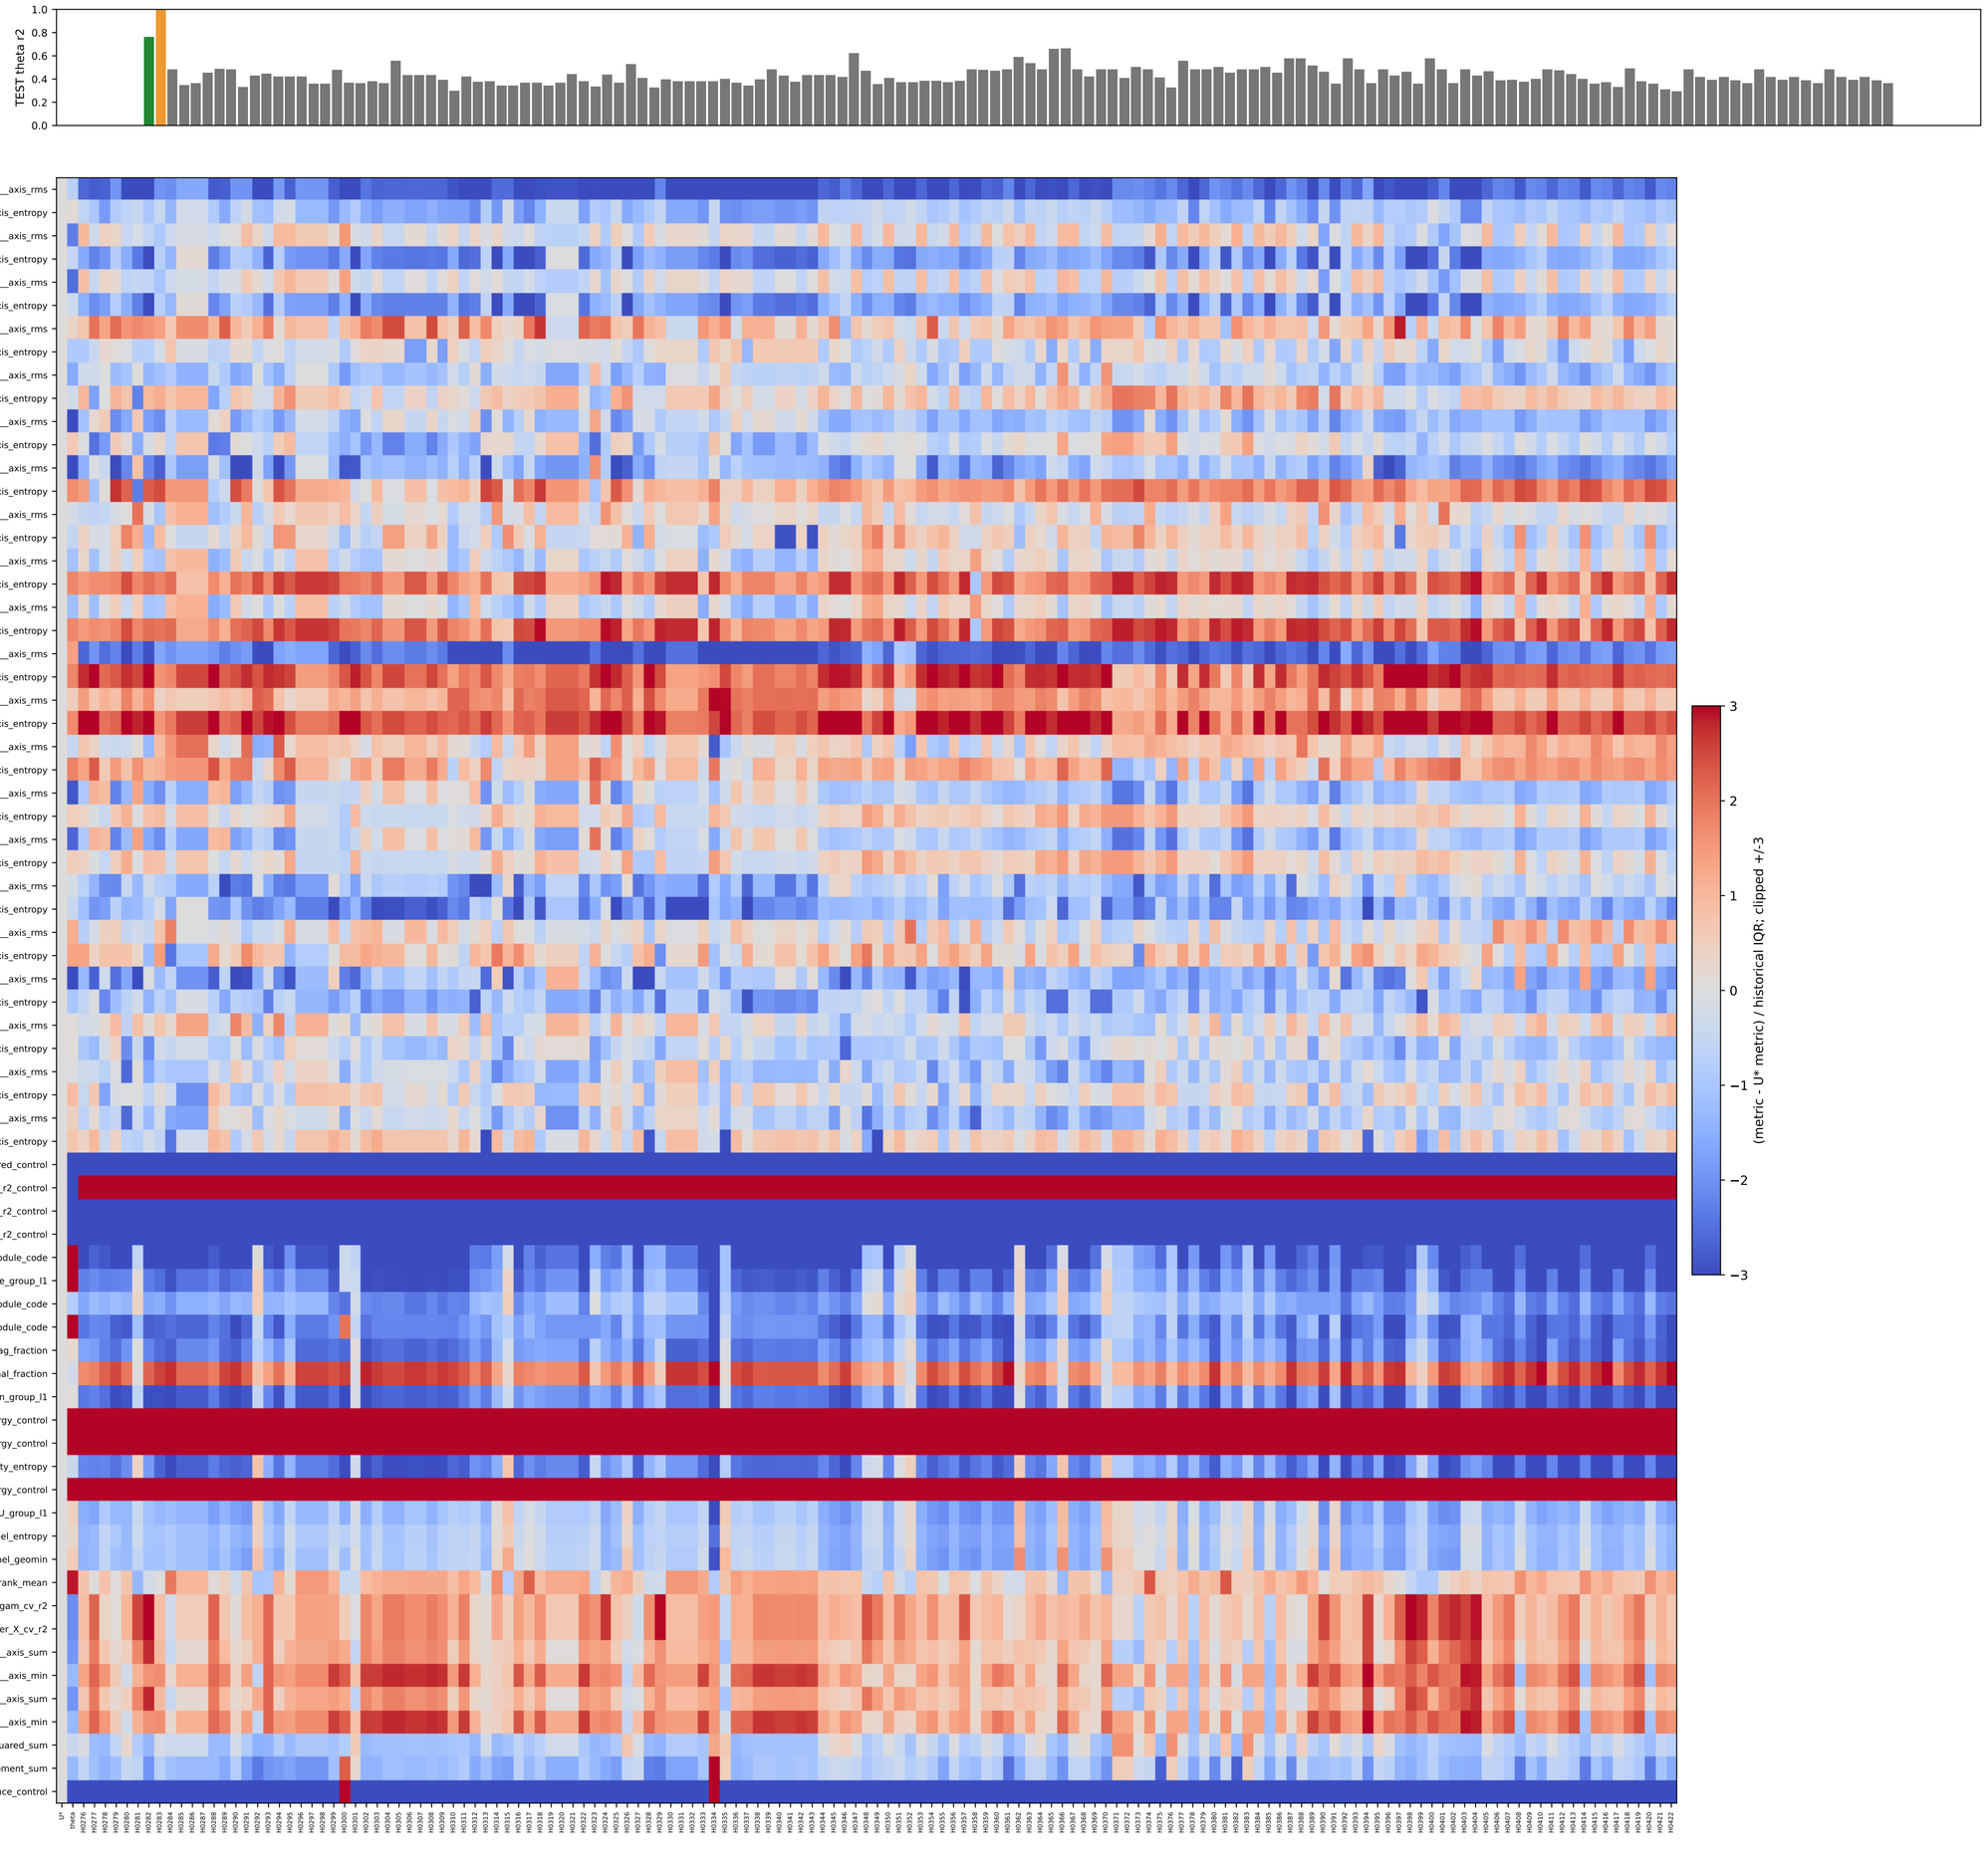

CR3 | true_logit | all saved historical coordinates; case names in case_metadata.csv

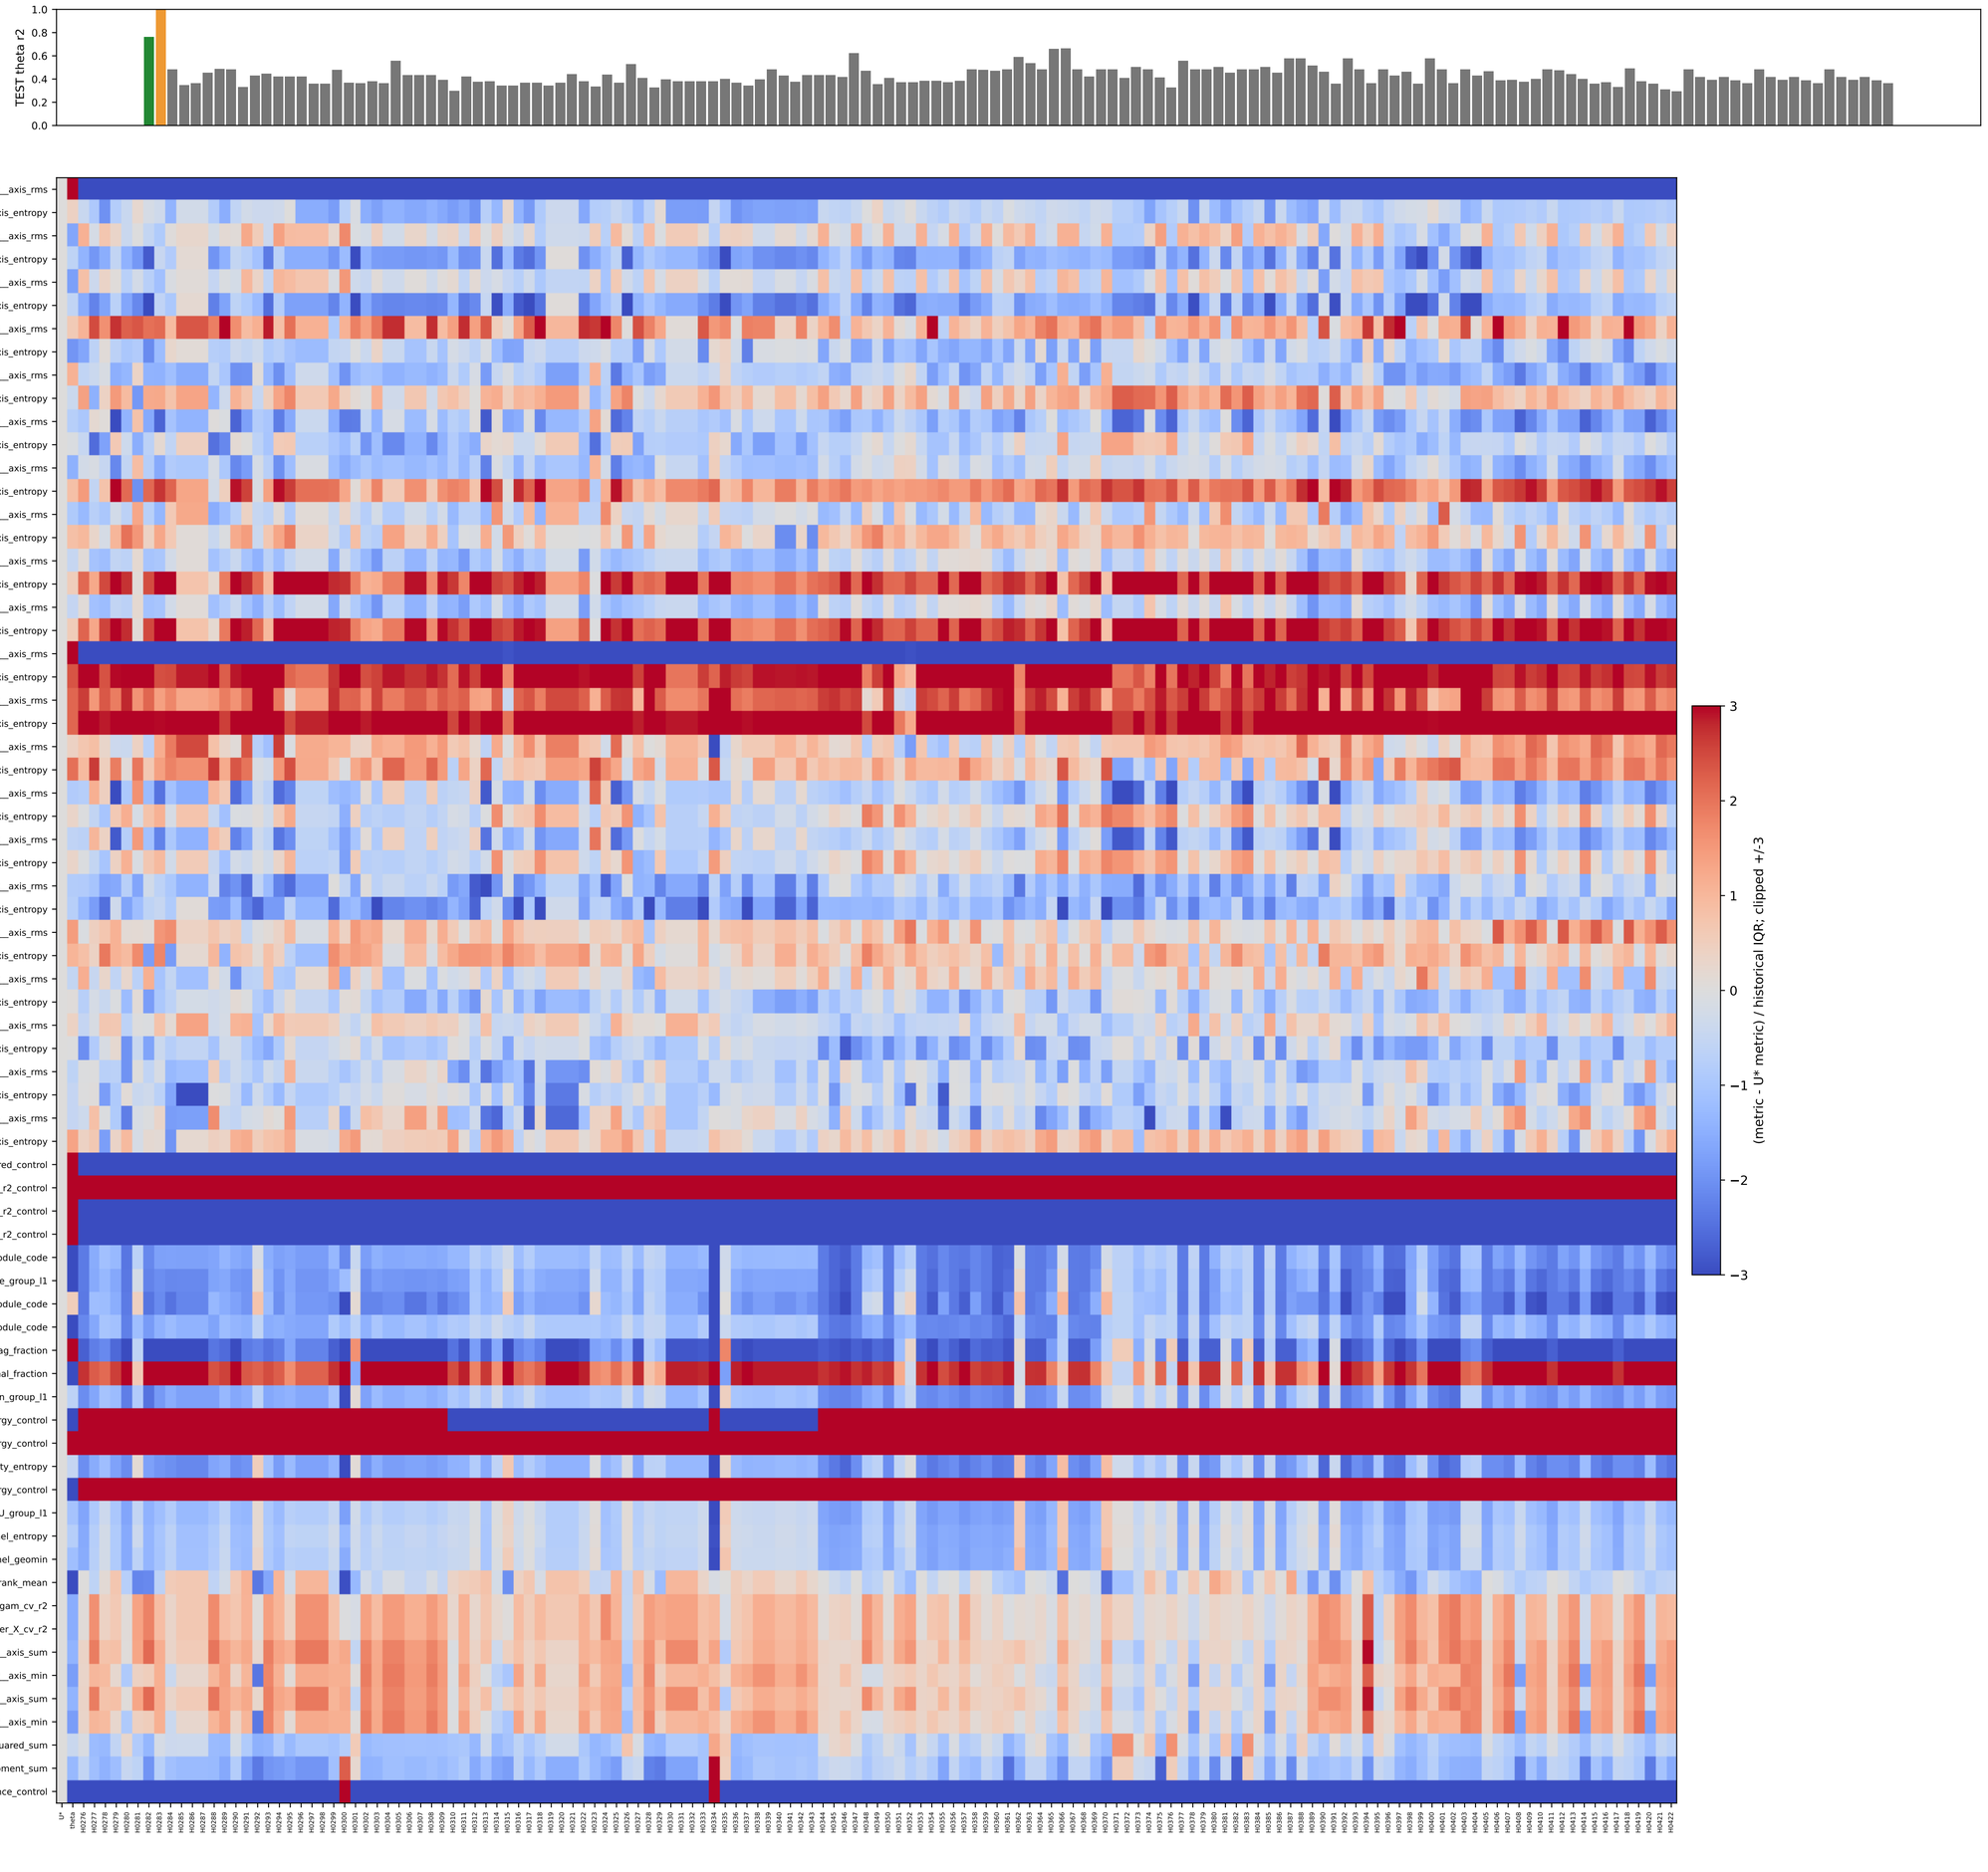

CR3 | true_logit_noise | all saved historical coordinates; case names in case_metadata.csv

