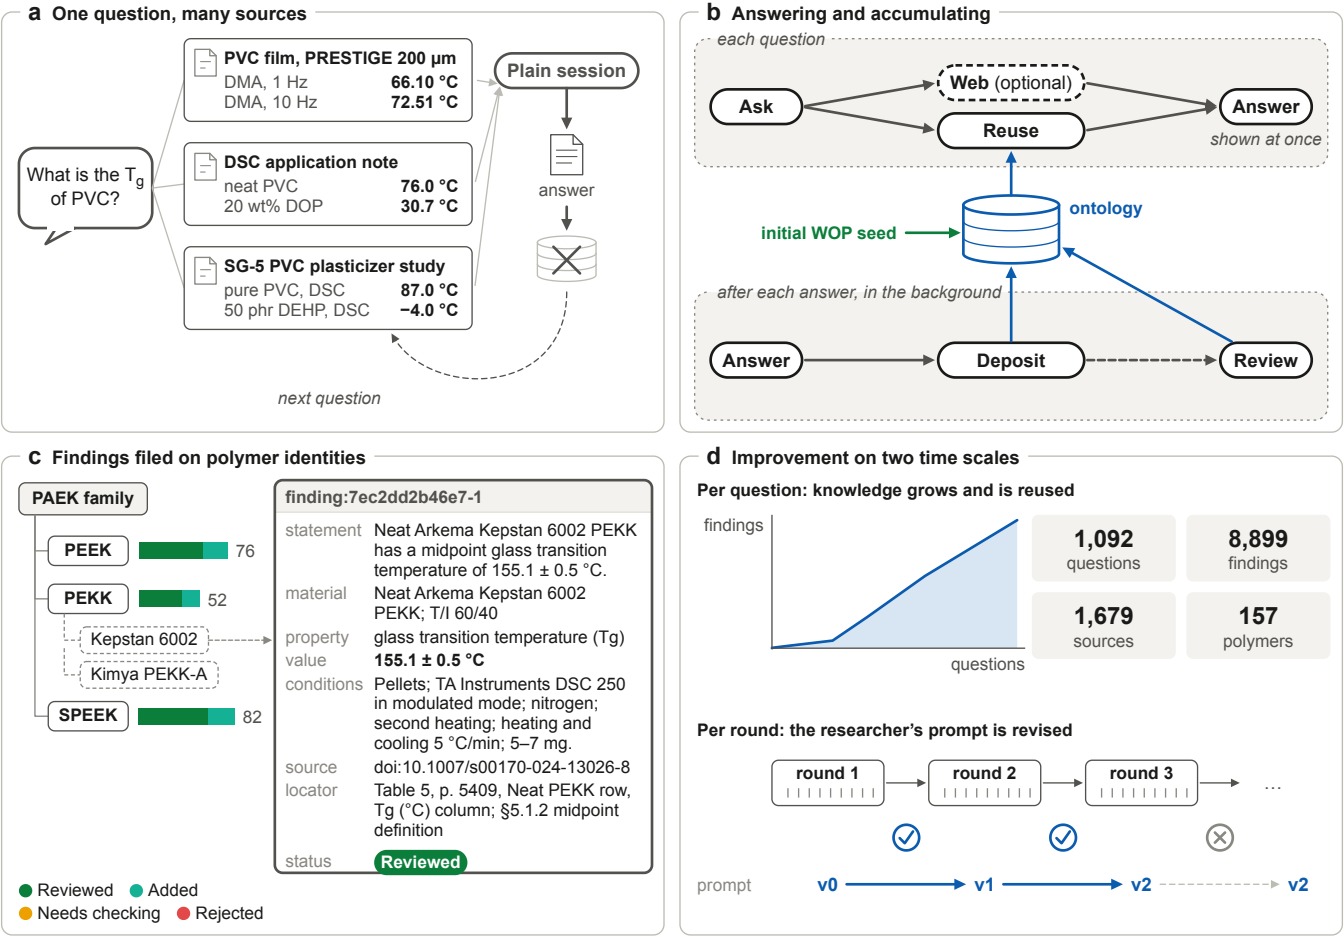

a One question, many sources
What is the T_g of PVC?
PVC film, PRESTIGE 200 µm
DMA, 1 Hz 66.10 °C
DMA, 10 Hz 72.51 °C
DSC application note
neat PVC 76.0 °C
20 wt% DOP 30.7 °C
SG-5 PVC plasticizer study
pure PVC, DSC 87.0 °C
50 phr DEHP, DSC −4.0 °C
Plain session
answer
next question
b Answering and accumulating
each question
Ask
Web (optional)
Reuse
Answer
shown at once
ontology
initial WOP seed
after each answer, in the background
Answer
Deposit
Review
c Findings filed on polymer identities
PAEK family
PEEK 76
PEKK 52
Kepstan 6002
Kimya PEKK-A
SPEEK 82
finding:7ec2dd2b46e7-1
statement Neat Arkema Kepstan 6002 PEKK has a midpoint glass transition temperature of 155.1 ± 0.5 °C.
material Neat Arkema Kepstan 6002 PEKK; T/I 60/40
property glass transition temperature (Tg)
value 155.1 ± 0.5 °C
conditions Pellets; TA Instruments DSC 250 in modulated mode; nitrogen; second heating; heating and cooling 5 °C/min; 5–7 mg.
source doi:10.1007/s00170-024-13026-8
locator Table 5, p. 5409, Neat PEKK row, Tg (°C) column; §5.1.2 midpoint definition
status Reviewed
Reviewed
Added
Needs checking
Rejected
d Improvement on two time scales
Per question: knowledge grows and is reused
findings
questions
1,092 questions
8,899 findings
1,679 sources
157 polymers
Per round: the researcher's prompt is revised
round 1
round 2
round 3
prompt
v0
v1
v2
v2