



INICIALIZACION DE IONIC

Documentación de procesos



25 DE MARZO DE 2025

Jhon Sebastian Caviedes Guevara
Brayan Smith Bedoya
Jhon Sebastian Caviedes Guevara

Institucion Universitaria del Huila - Corhula

INICIALIZACION DE LOS SERVICIOS DE IONIC

```
C:\Users\Molina211\OneDrive\Documentos\Prueba Vue\persona>ionic serve
> vite.cmd --host=localhost --port=8100
[vite] → Local: http://localhost:8100/
[vite] → press h + enter to show help

[INFO] Development server running!

Local: http://localhost:8100


Use Ctrl+C to quit this process

[INFO] Browser window opened to http://localhost:8100!
```

FRAMEWORK VUE


```
? Framework: Vue
? .\persona exists. Overwrite? Yes
✓ Preparing directory .\persona in 2.31ms
✓ Downloading and extracting blank starter in 343.44ms
> ionic integrations enable capacitor --quiet -- persona io.ionic.starter
> npm.cmd i --save -E @capacitor/core@latest
npm warn deprecated inflight@1.0.6: This module is not supported, and leaks memory. Do not use it. Check out lru-cache i
f you want a good and tested way to coalesce async requests by a key value, which is much more comprehensive and powerfu
l.
```

CREACION DE LOS COMPONENTES

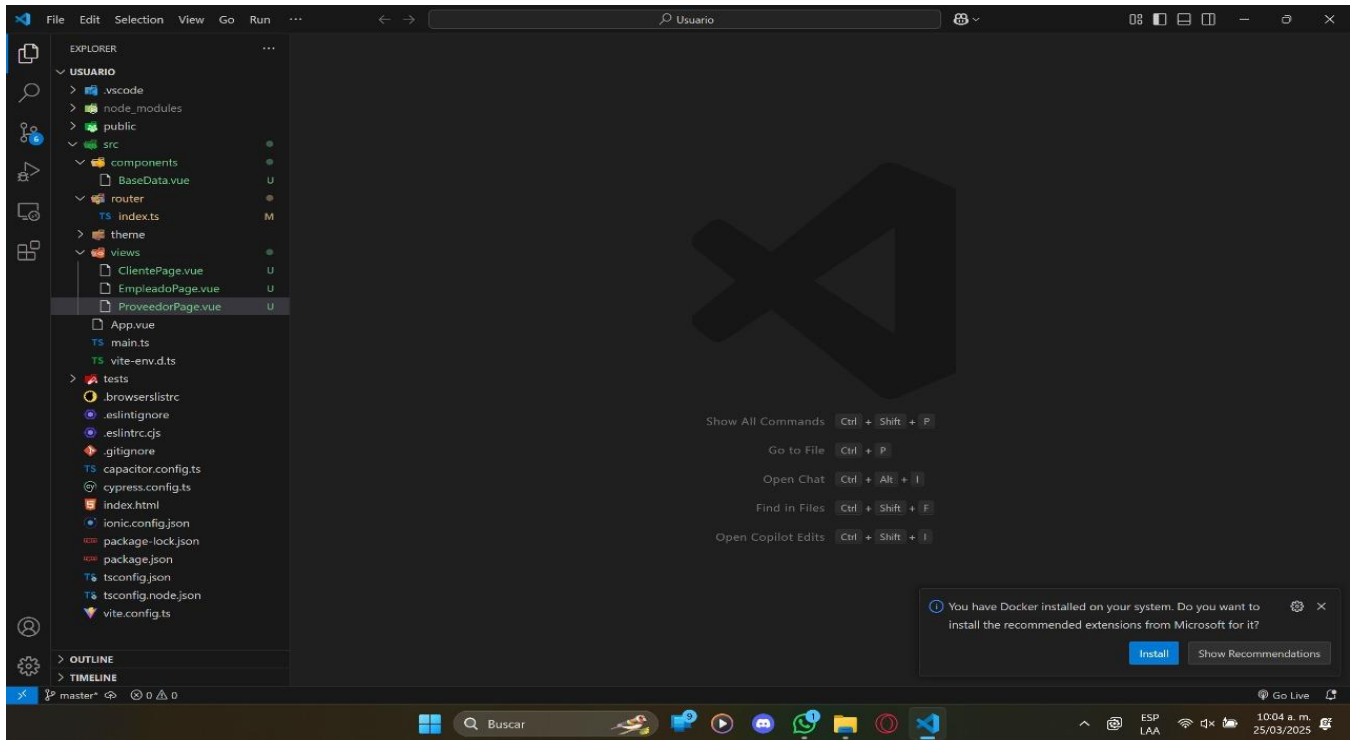


VISTAS


° PROVEEDOR

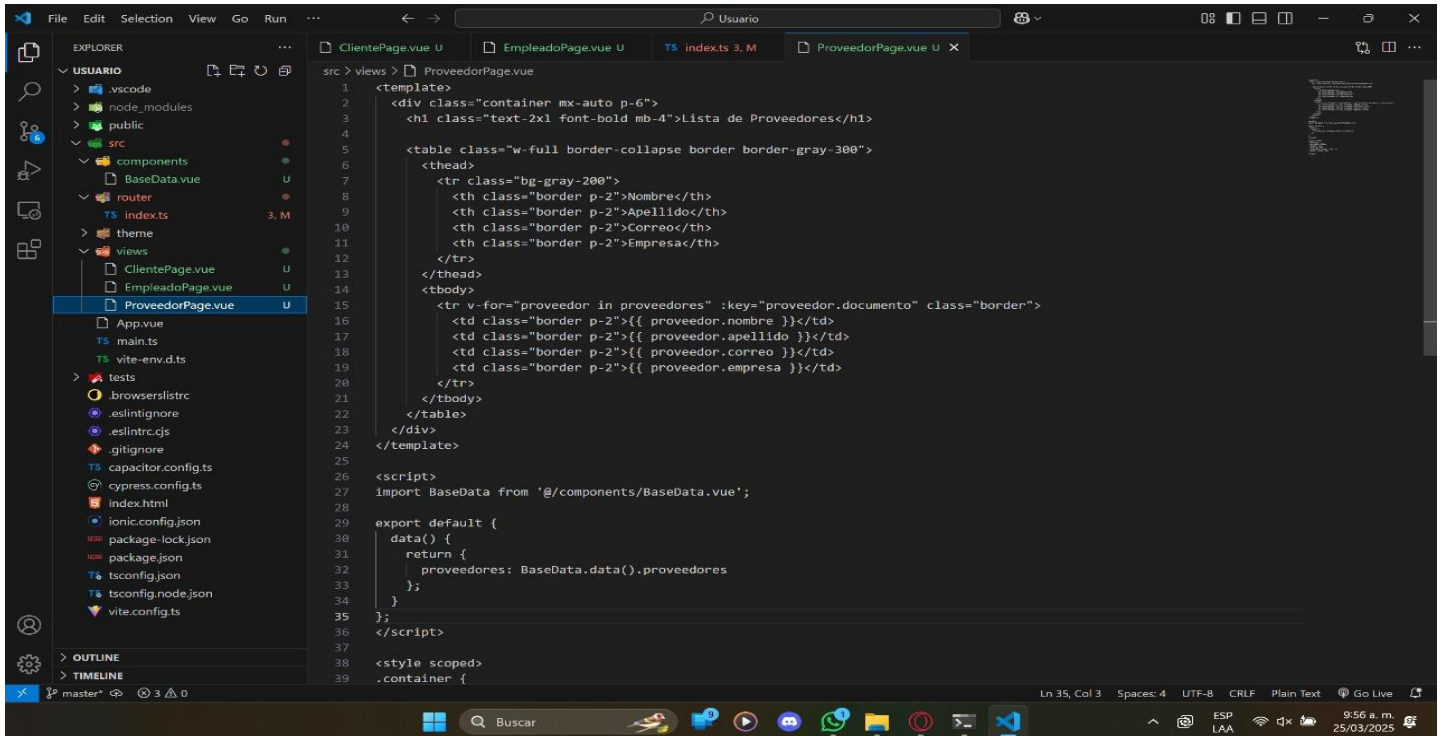


```
1 <template>
2   <div class="container mx-auto p-6">
3     <h1 class="text-2xl font-bold mb-4">Lista de Proveedores</h1>
4
5     <table class="w-full border-collapse border border-gray-300">
6       <thead>
7         <tr class="bg-gray-200">
8           <th class="border p-2">Nombre</th>
9           <th class="border p-2">Apellido</th>
10          <th class="border p-2">Correo</th>
11          <th class="border p-2">Empresa</th>
12        </tr>
13      </thead>
14      <tbody>
15        <tr v-for="proveedor in proveedores" :key="proveedor.documento" class="border">
16          <td class="border p-2">{{ proveedor.nombre }}</td>
17          <td class="border p-2">{{ proveedor.apellido }}</td>
18          <td class="border p-2">{{ proveedor.correo }}</td>
19          <td class="border p-2">{{ proveedor.empresa }}</td>
20        </tr>
21      </tbody>
22    </table>
23  </div>
24 </template>
25
26 <script>
27   import BaseData from '@components/BaseData.vue';
28
29   export default {
30     data() {
31       return {
32         proveedores: BaseData.data().proveedores
33       };
34     }
35   };
36 </script>
37
38 <style scoped>
39   .container {
```

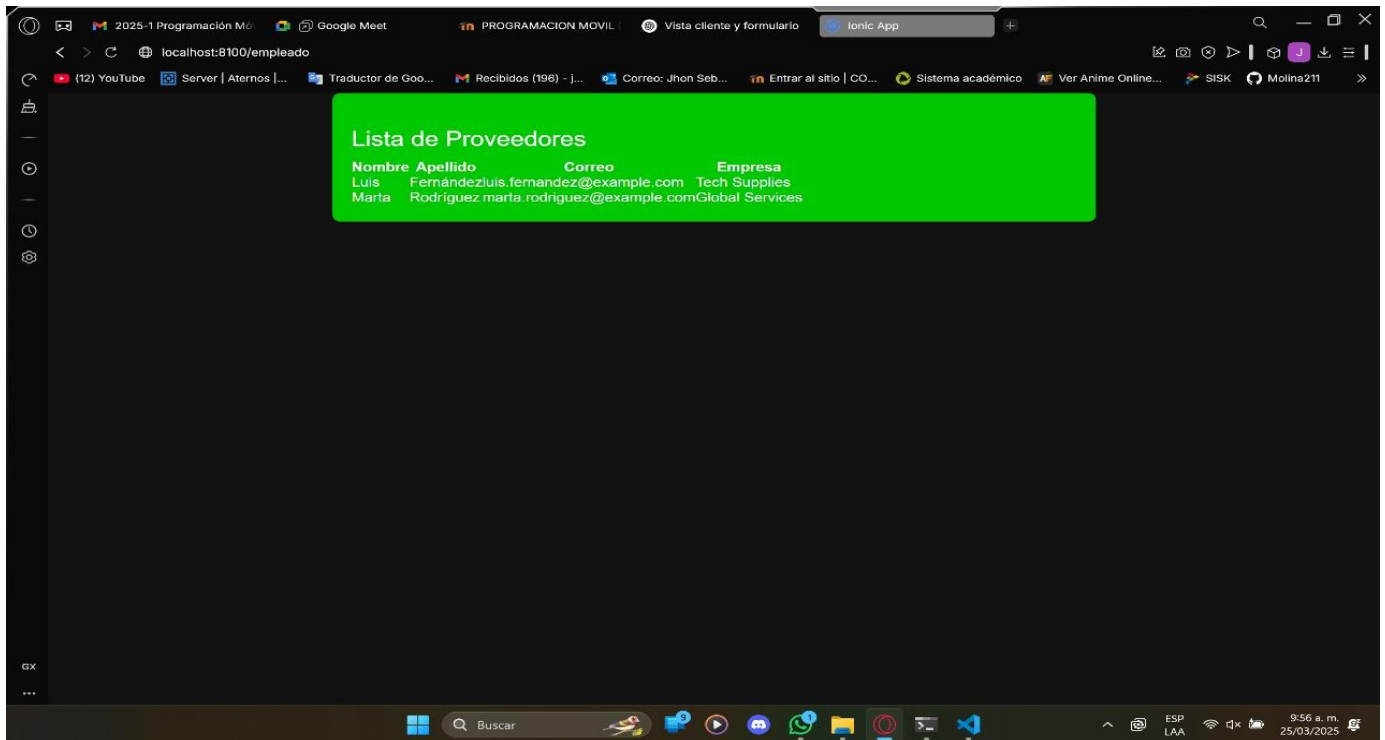



|° EMPLEADOS

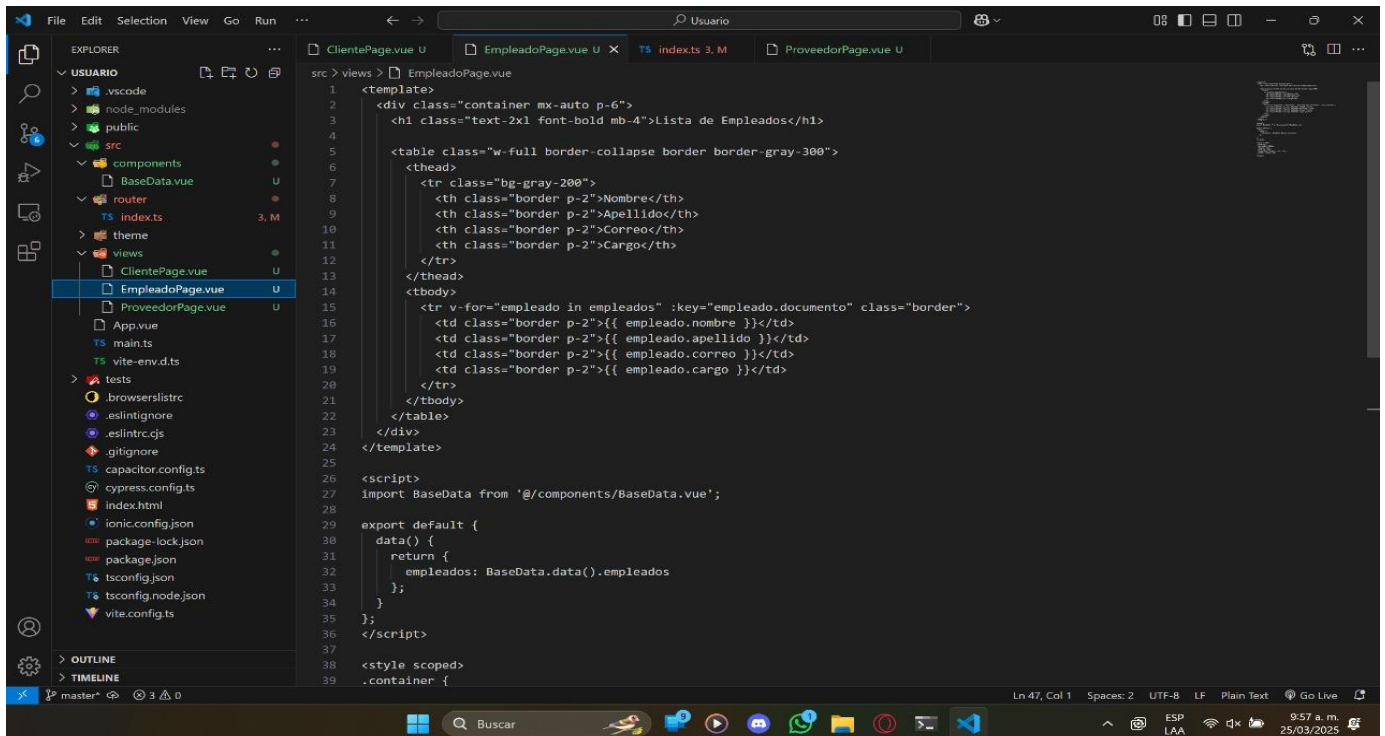

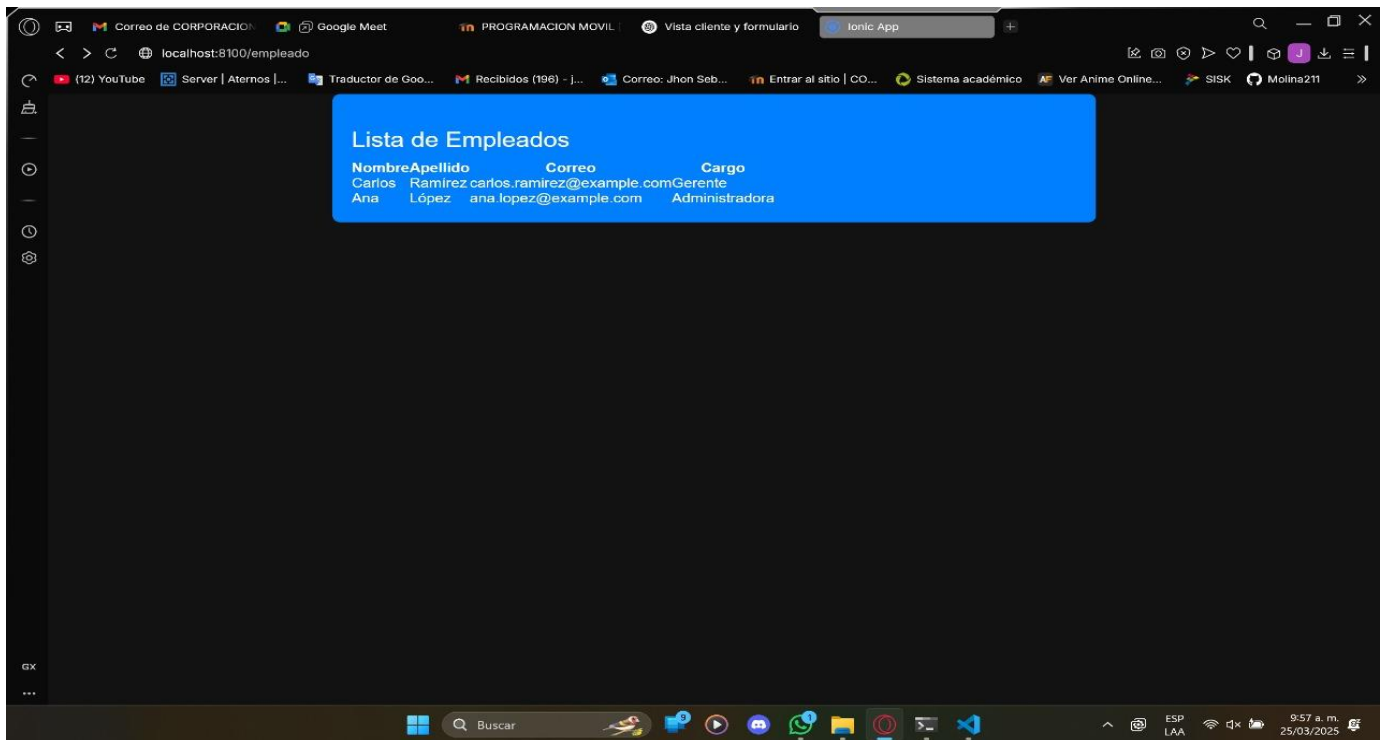


° CLIENTE

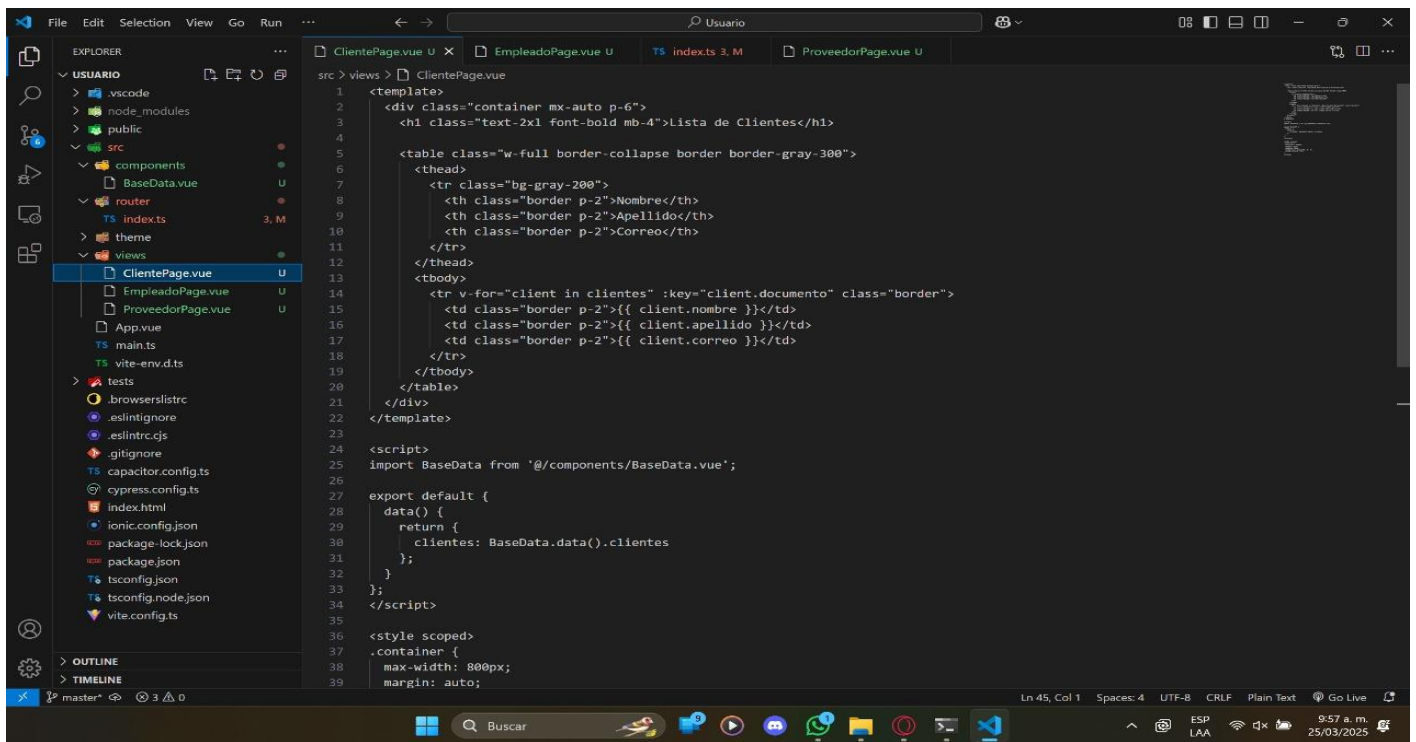

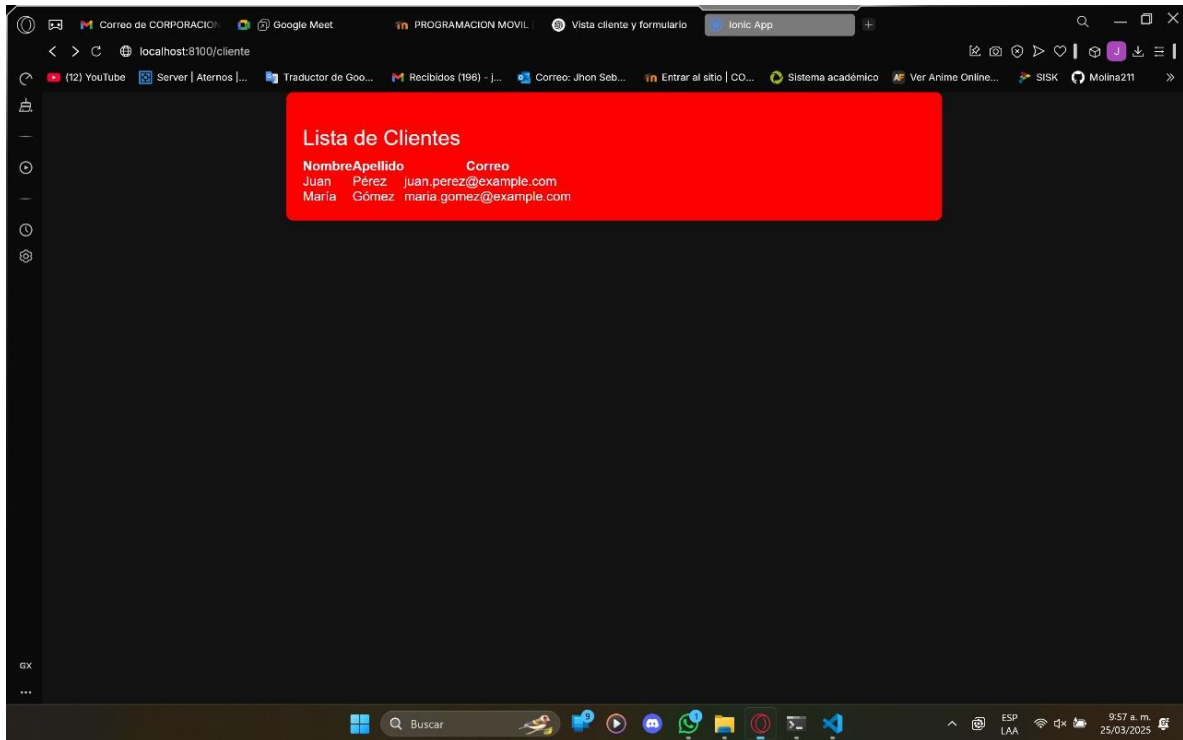

BASE DE DATOS

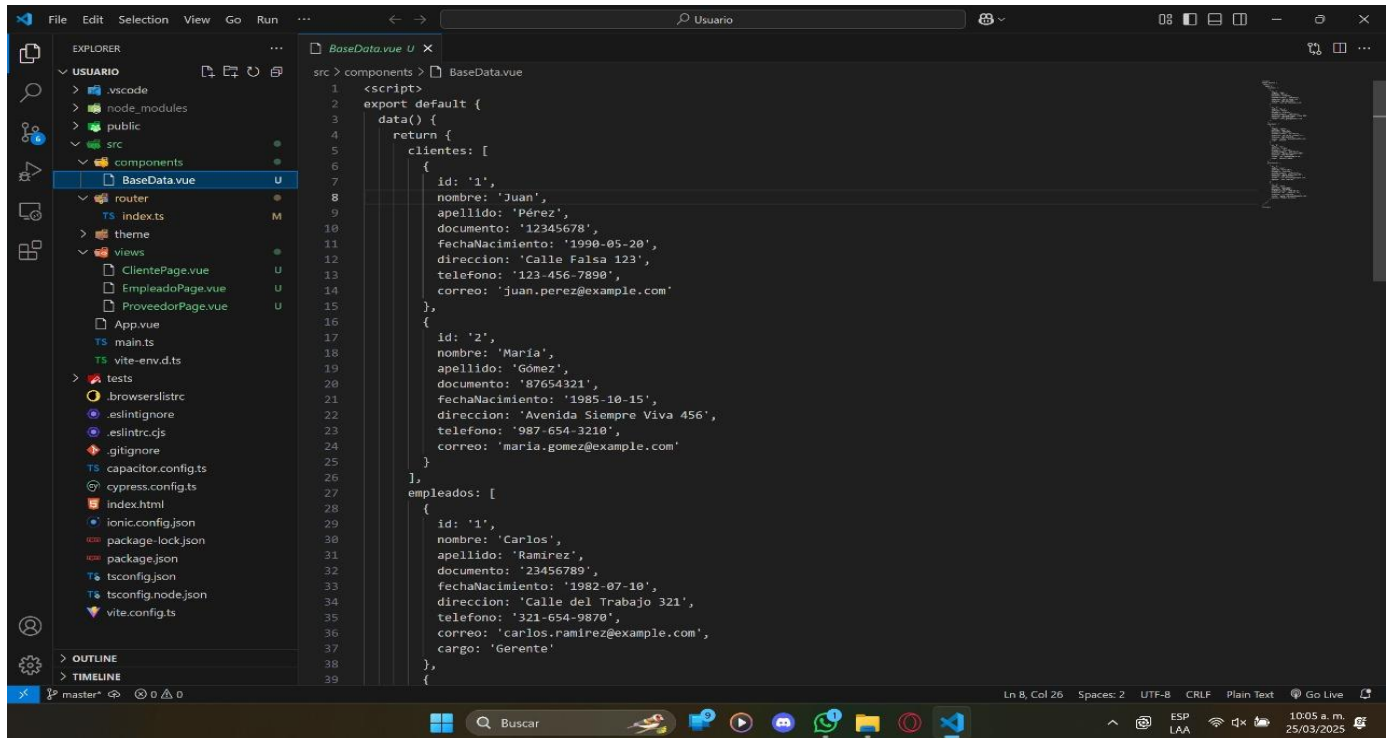

```
1 <script>
2 export default {
3   data() {
4     return {
5       clientes: [
6         {
7           id: '1',
8           nombre: 'Juan',
9           apellido: 'Pérez',
10          documento: '12345678',
11          fechaNacimiento: '1990-05-20',
12          direccion: 'Calle Falsa 123',
13          telefono: '123-456-7890',
14          correo: 'juan.perez@example.com'
15        },
16        {
17          id: '2',
18          nombre: 'María',
19          apellido: 'Gómez',
20          documento: '87654321',
21          fechaNacimiento: '1985-10-15',
22          direccion: 'Avenida Siempre Viva 456',
23          telefono: '987-654-3210',
24          correo: 'maria.gomez@example.com'
25        }
26      ],
27      empleados: [
28        {
29          id: '1',
30          nombre: 'Carlos',
31          apellido: 'Ramírez',
32          documento: '23456789',
33          fechaNacimiento: '1982-07-10',
34          direccion: 'Calle del Trabajo 321',
35          telefono: '321-654-9870',
36          correo: 'carlos.ramirez@example.com',
37          cargo: 'Gerente'
38        }
39      ]
40    }
41  }
42 }
```