

Preliminary analysis

Samuel Pawel

11 August 2023

```
## libraries
library(dplyr)

##
## Attaching package: 'dplyr'
## The following objects are masked from 'package:stats':
##
##   filter, lag
## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union

library(tidyr)
library(ggplot2)

## RStudio Community is a great place to get help:
## https://community.rstudio.com/c/tidyverse


library(ggpubr)
theme_set(theme_bw() +
  theme(legend.position = "top",
        panel.grid.minor = element_blank()))

## data
sim_res_fac_full <- readRDS(file = "data/sim_res_fac.RDS")
sim_res_num_full <- readRDS(file = "data/sim_res_num.RDS")


# subset assessment only
sim_res_fac <- sim_res_fac_full %>%
  filter(simstudy_q1 == "yes",
         coding_type == "assessment")
sim_res_num <- sim_res_num_full %>%
  filter(simstudy_q1 == "yes",
         coding_type == "assessment")

## proportion of simulation studies by journal
sim_res_fac_full %>%
  group_by(journal) %>%
  summarize(propSim = mean(simstudy_q1 == "yes"),
            n = n()) %>%
  mutate(journalLab = paste0(journal, " (n = ", n, ")")) %>%
  ggplot(aes(x = journalLab, y = propSim)) +
  geom_bar(stat = "identity") +
```


```
scale_y_continuous(labels = scales::percent, limits = c(0, 1)) +
labs(x = "Journal", y = "Proportion of simulation studies") +
theme(panel.grid.major.x = element_blank())
```

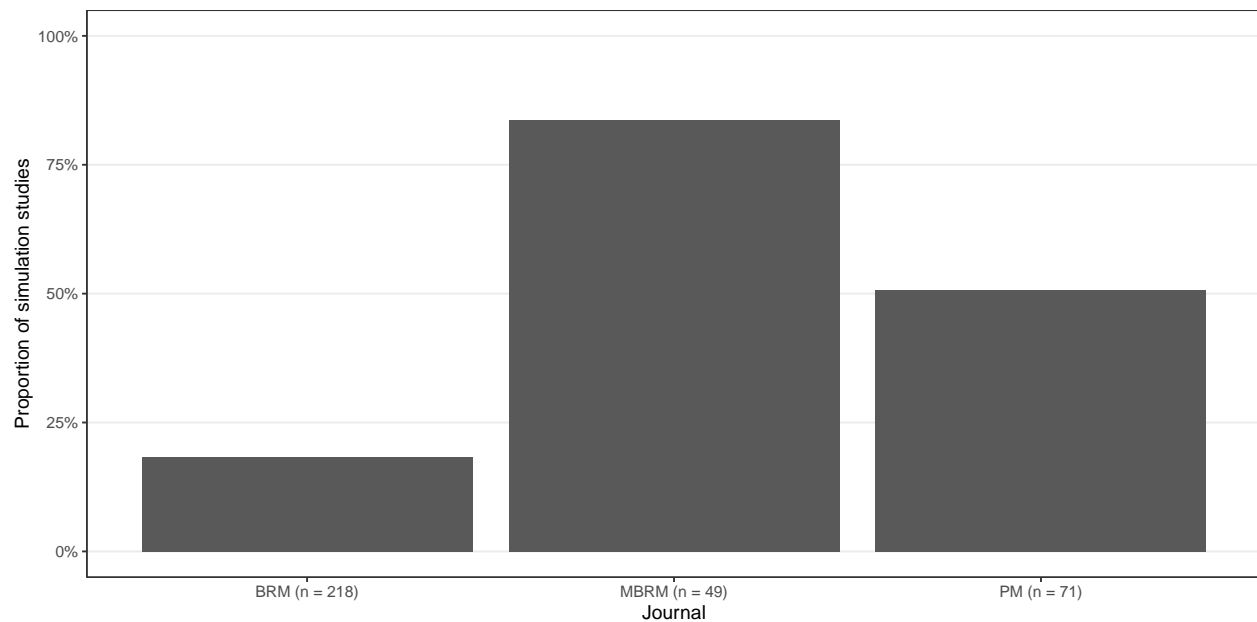


```
## year
ggplot(data = sim_res_fac, aes(x = factor(year))) +
  geom_bar() +
  labs(x = "Year")
```

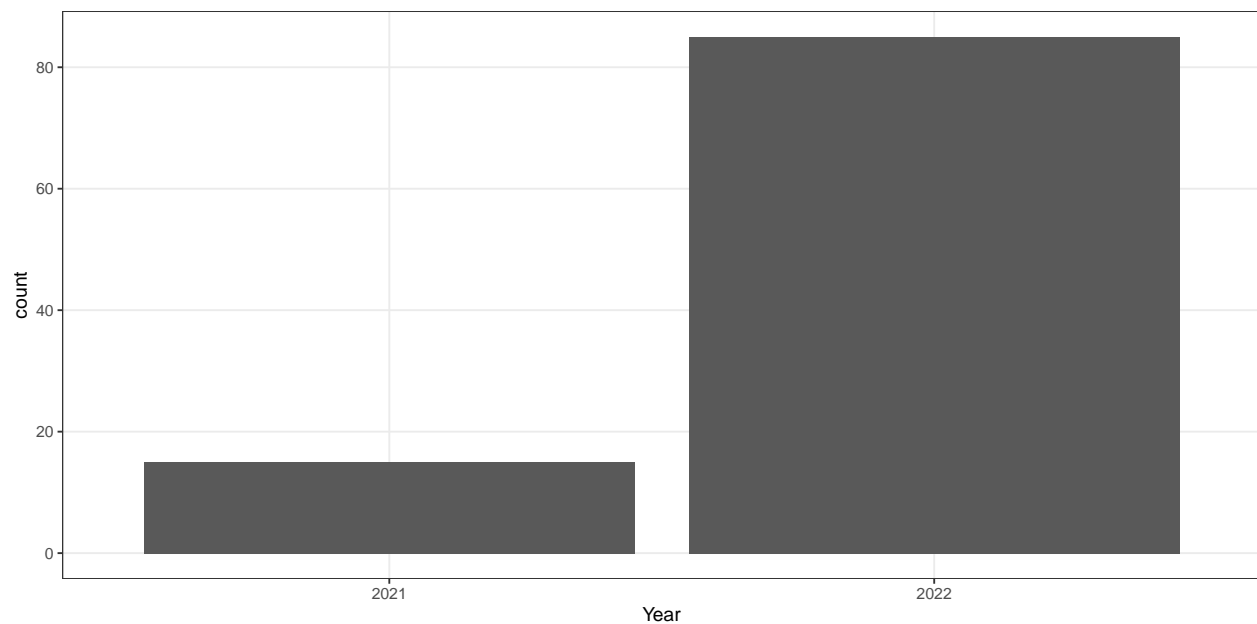


```
## journal
ggplot(data = sim_res_fac, aes(x = journal)) +
  geom_bar() +
  labs(x = "Journal")
```

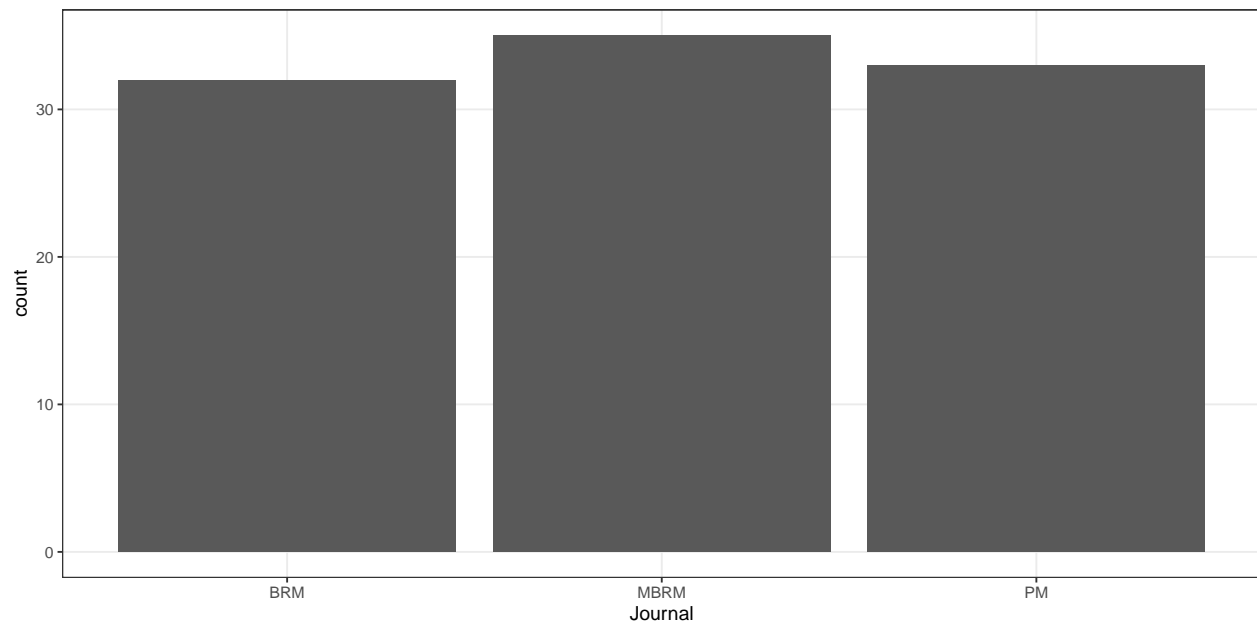

```
## reviewer
ggplot(data = sim_res_fac, aes(x = reviewer)) +
  geom_bar() +
  labs(x = "Reviewer")
```

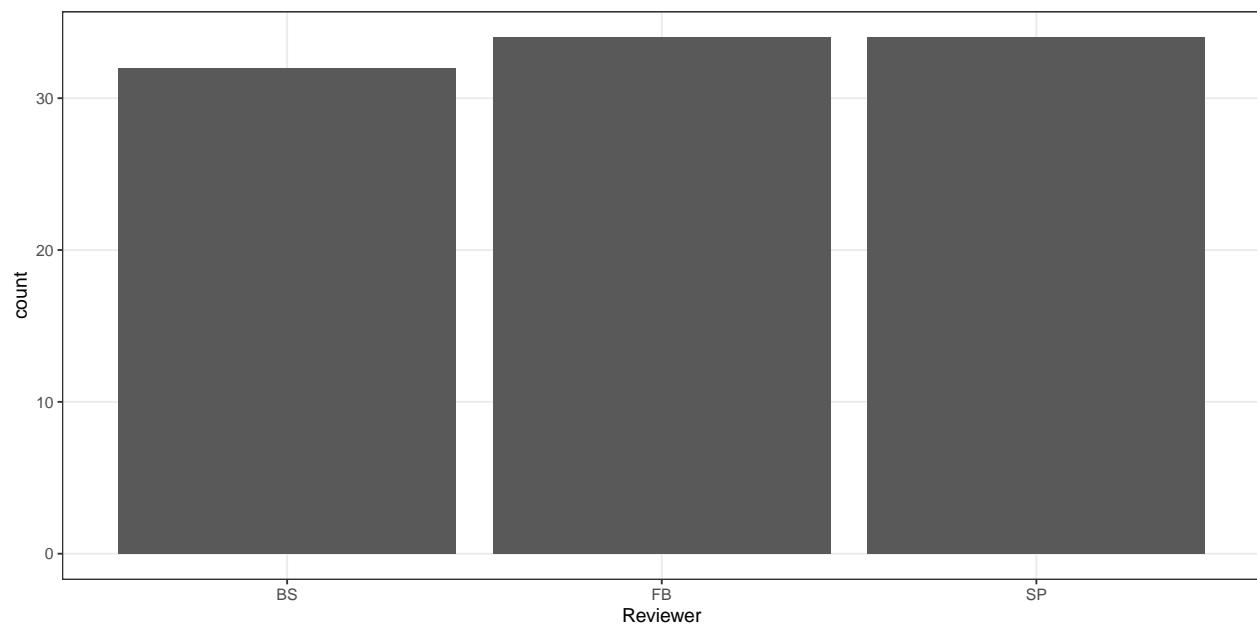


```
## Q2 number of simulation studies
ggplot(data = sim_res_fac, aes(x = nsimstudies_q2, fill = journal)) +
  geom_bar() +
  labs(x = "Number of simulation studies in article", fill = "Journal")
```

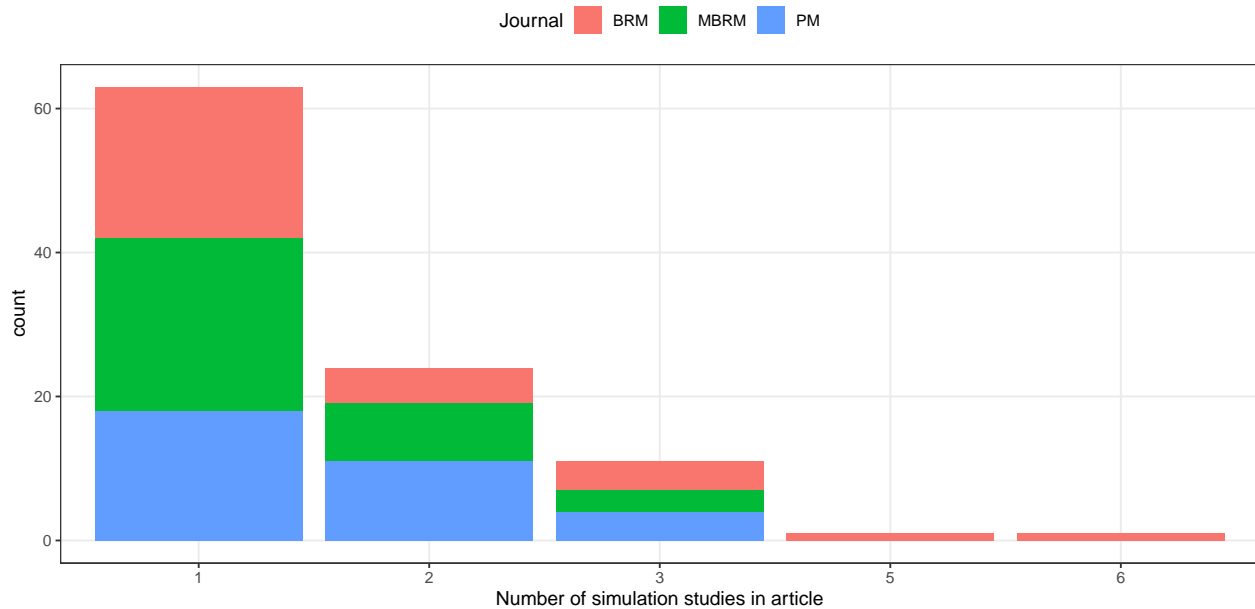


Q3 are the aims of the study defined

```
ggplot(data = sim_res_fac, aes(x = aimsdefined_q3, fill = journal)) +
  geom_bar() +
  labs(x = "Aims of the study defined?", fill = "Journal")
```

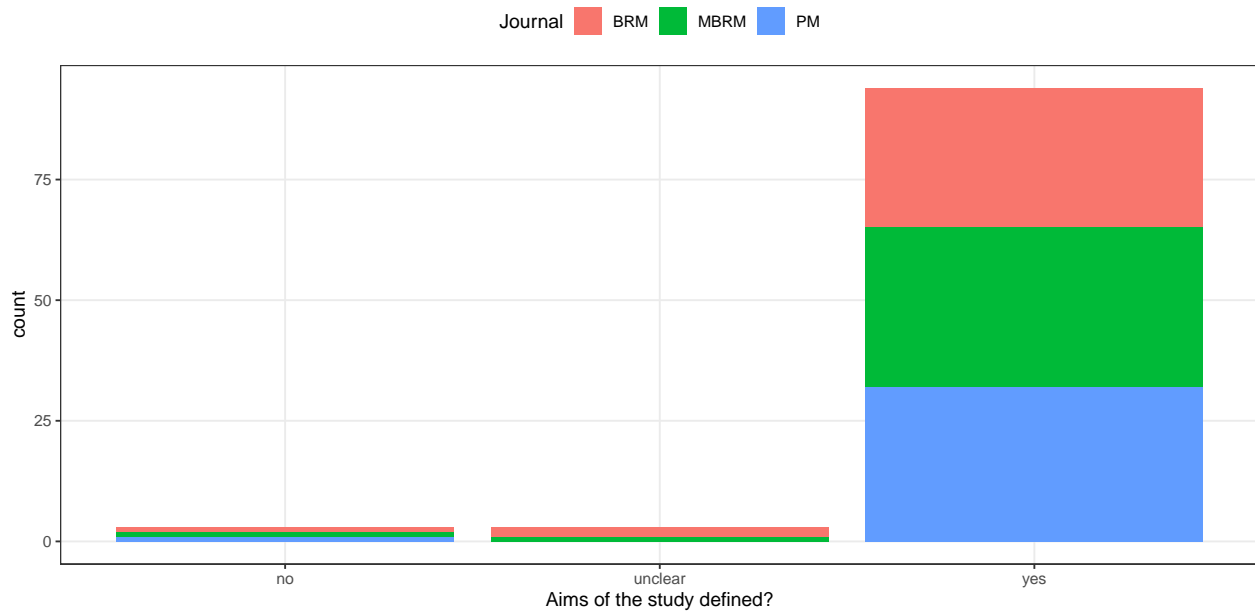


Q4 type of DGP

```
ggplot(data = sim_res_fac, aes(x = dgptype_q4, fill = journal)) +
  geom_bar() +
  labs(x = "Type of DGP", fill = "Journal")
```

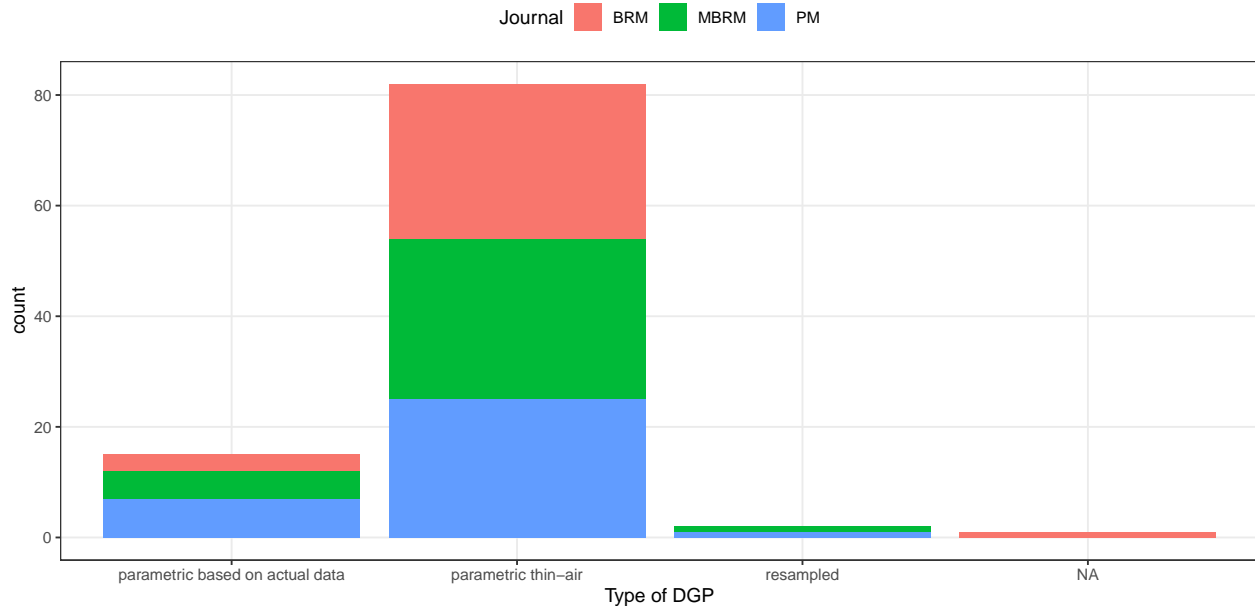

Q5 DGP parameters provided?

```
ggplot(data = sim_res_fac, aes(x = dgpparameters_q5, fill = journal)) +
  geom_bar() +
  labs(x = "Are DGP parameters provided?", fill = "Journal")
```

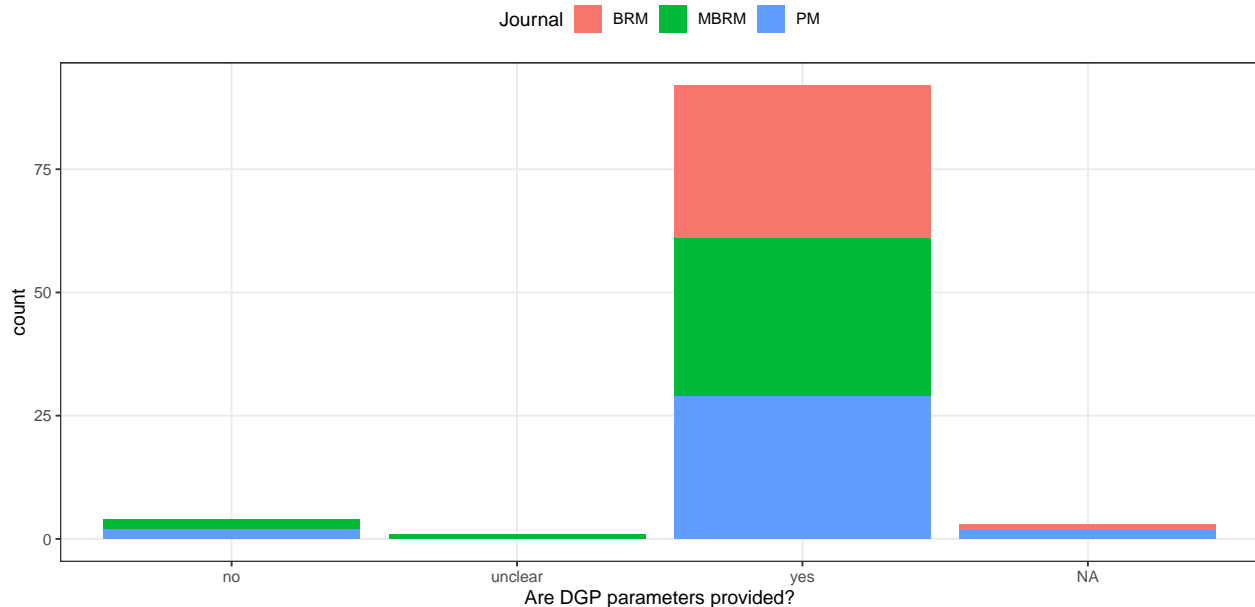

Q6 How many conditions?


```
summary(sim_res_num$nconds_q6)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.     NA's
##       1.0     5.0     16.0   185.8   96.0   6000.0         1
```

```
breaks <- c(1, 10, 100, 1000, 10000)
ggplot(data = sim_res_num, aes(x = log(nconds_q6))) +
  geom_histogram(breaks = seq(0, log(10000), 0.5), col = 1, alpha = 0.5) +
  scale_x_continuous(breaks = log(breaks), labels = breaks) +
  scale_y_continuous(breaks = seq(0, 10, 2)) +
```


```
labs(x = "How many simulation conditions?", fill = "Journal")
```

```
## Warning: Removed 1 rows containing non-finite values (`stat_bin()`).
```

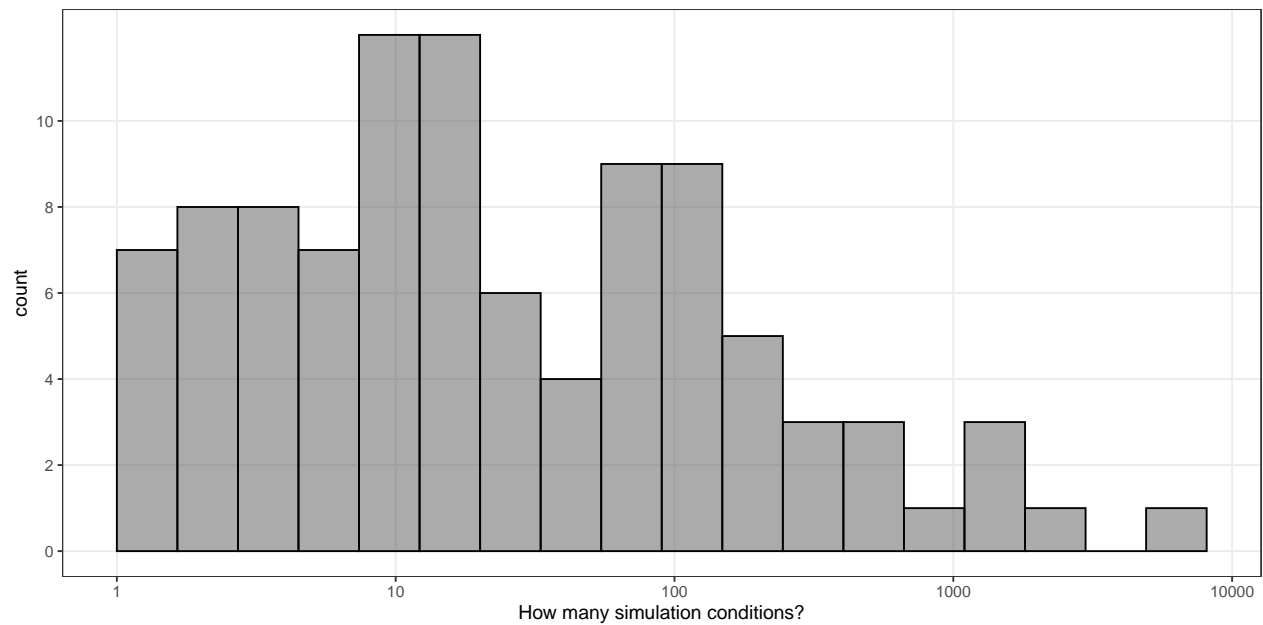

```
## Q7 How many factors?
```


```
sim_res_num %>%
  mutate(factorsvaried_q7_fac = ifelse(is.na(factorsvaried_q7),
                                       "unclear", factorsvaried_q7)) %>%
  ggplot(aes(x = factorsvaried_q7_fac, fill = journal)) +
  geom_bar() +
  labs(x = "How many factors varied?", fill = "Journal")
```

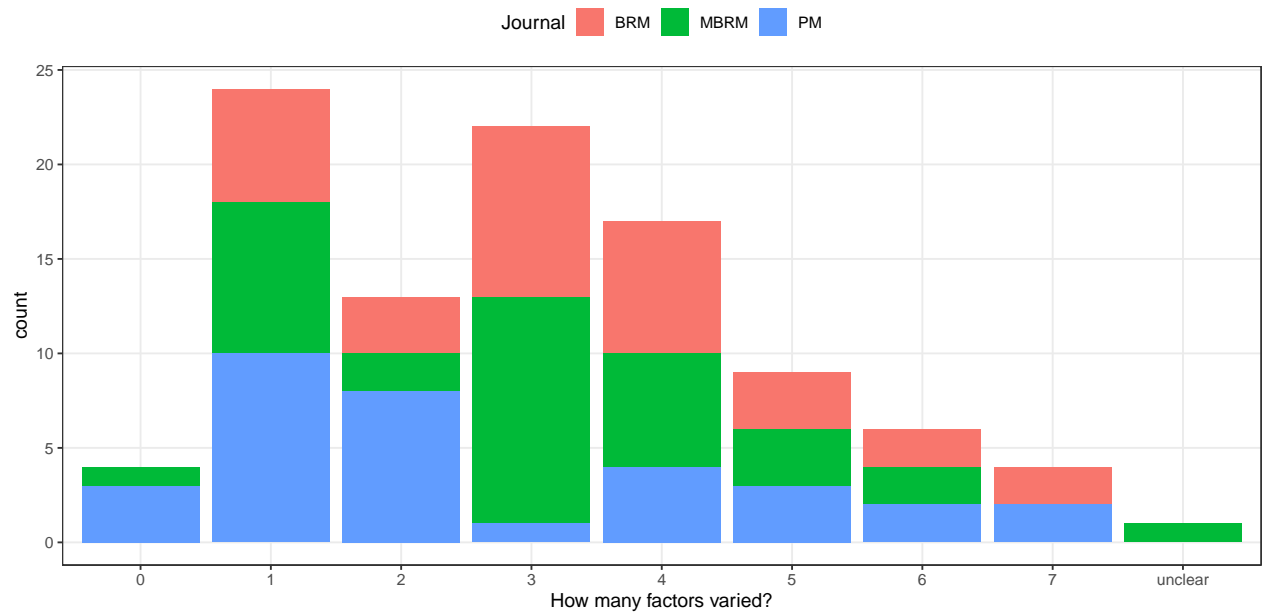

```
## Q7 Fully factorial?
```

```
ggplot(data = sim_res_fac, aes(x = dgmfactorial_q7, fill = journal)) +
  geom_bar() +
```

```
labs(x = "How are factors varied?", fill = "Journal")
```

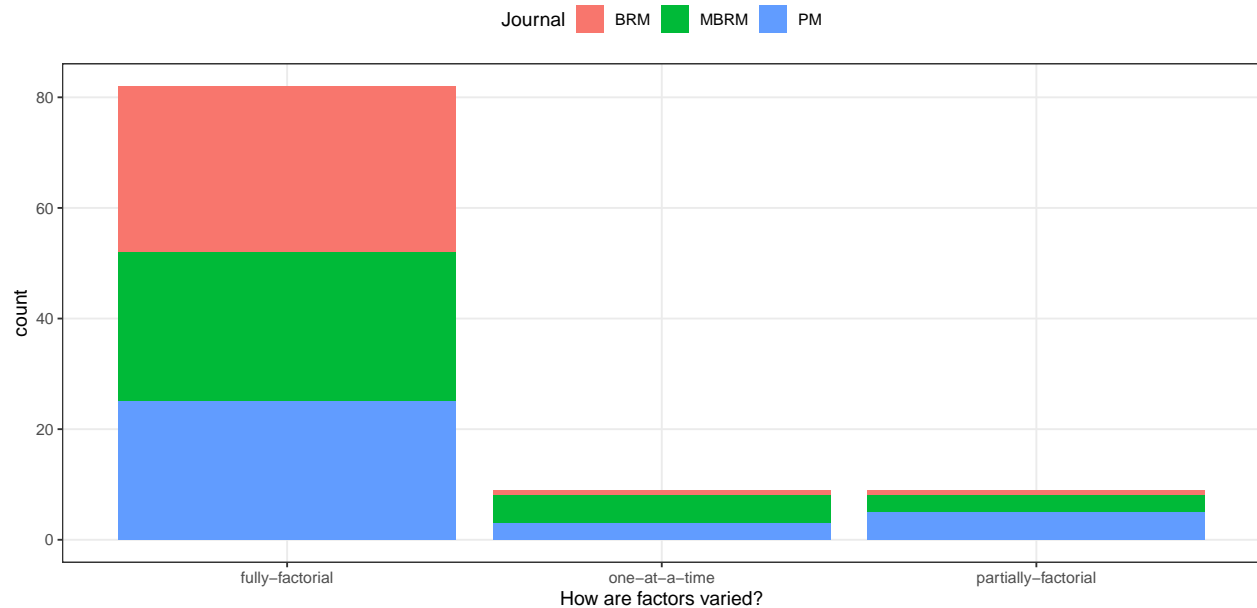


```
## Q8 How many repetitions?
summary(sim_res_num$nsim_q8)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.     NA's
##         1     100     900   12198    1000 1000000         6
```


```
breaks <- c(1, 10, 100, 1000, 10000, 100000, 1000000)
ggplot(data = sim_res_num, aes(x = log(nsim_q8))) +
  geom_histogram(breaks = seq(0, log(2000000), 0.5), col = 1, alpha = 0.5) +
  labs(x = "How many repetitions?", fill = "Journal") +
  scale_x_continuous(breaks = log(breaks), labels = breaks)
```

```
## Warning: Removed 6 rows containing non-finite values (`stat_bin()`).
```

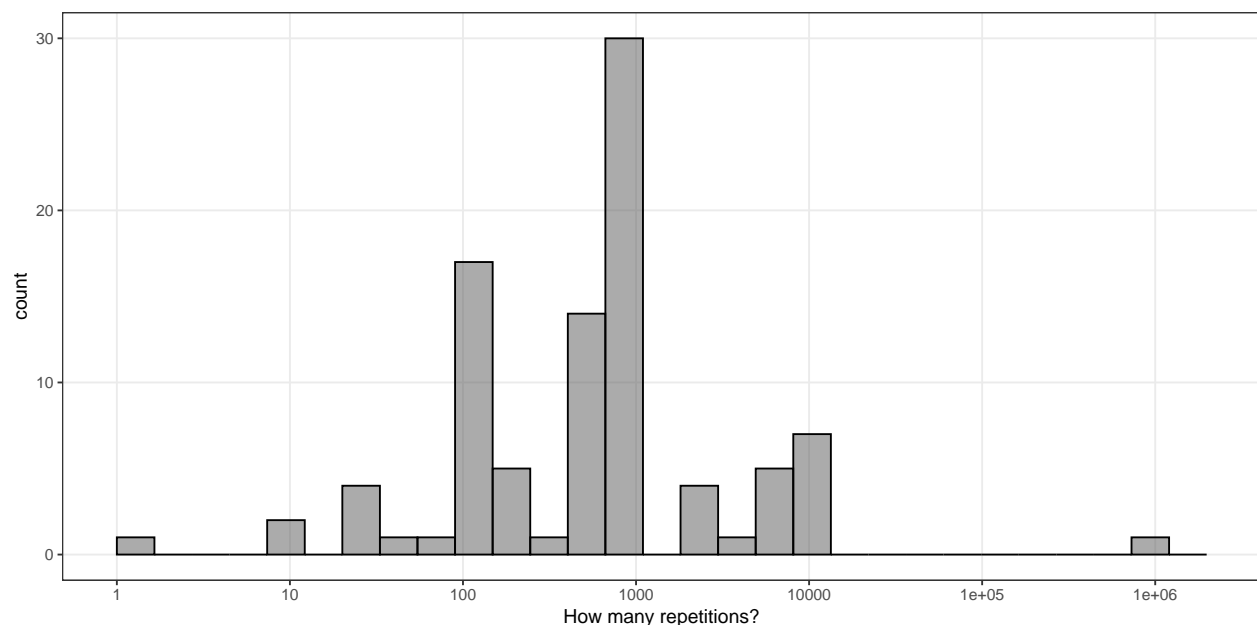


Q9 Are the number of repetitions justified?

```
ggplot(data = sim_res_fac, aes(x = nsimjustified_q9, fill = journal)) +
  geom_bar() +
  labs(x = "Are the number of repetitions justified?", fill = "Journal")
```

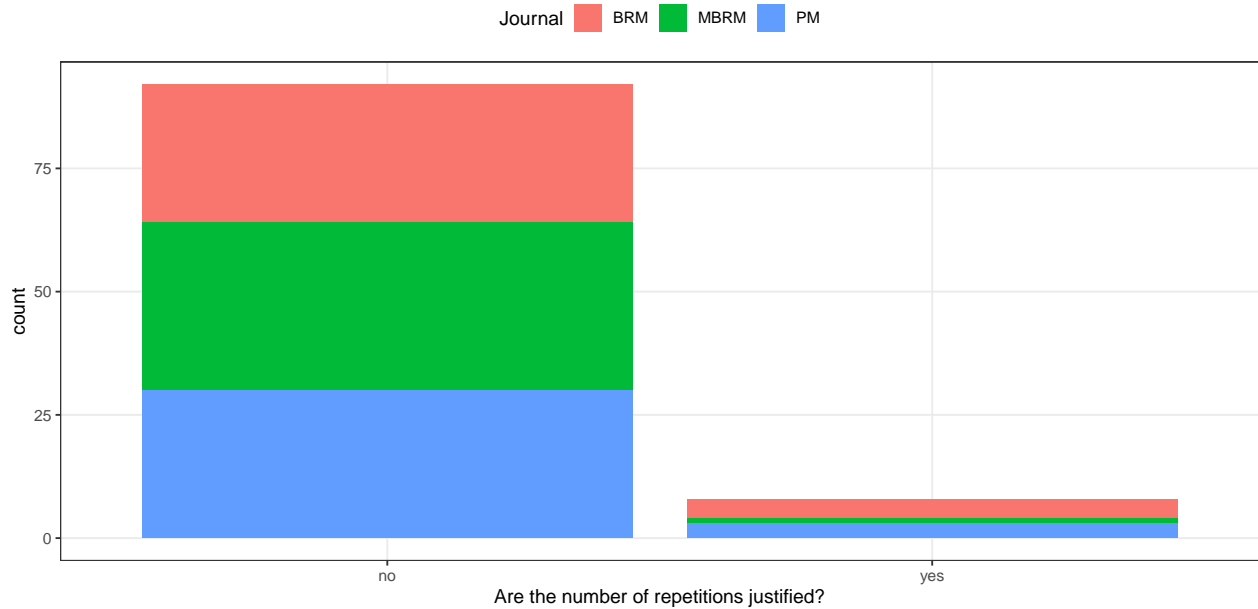

Q10 Is the estimand stated?

```
ggplot(data = sim_res_fac, aes(x = estimandstated_q10, fill = journal)) +
  geom_bar() +
  labs(x = "Is the estimand stated?", fill = "Journal")
```

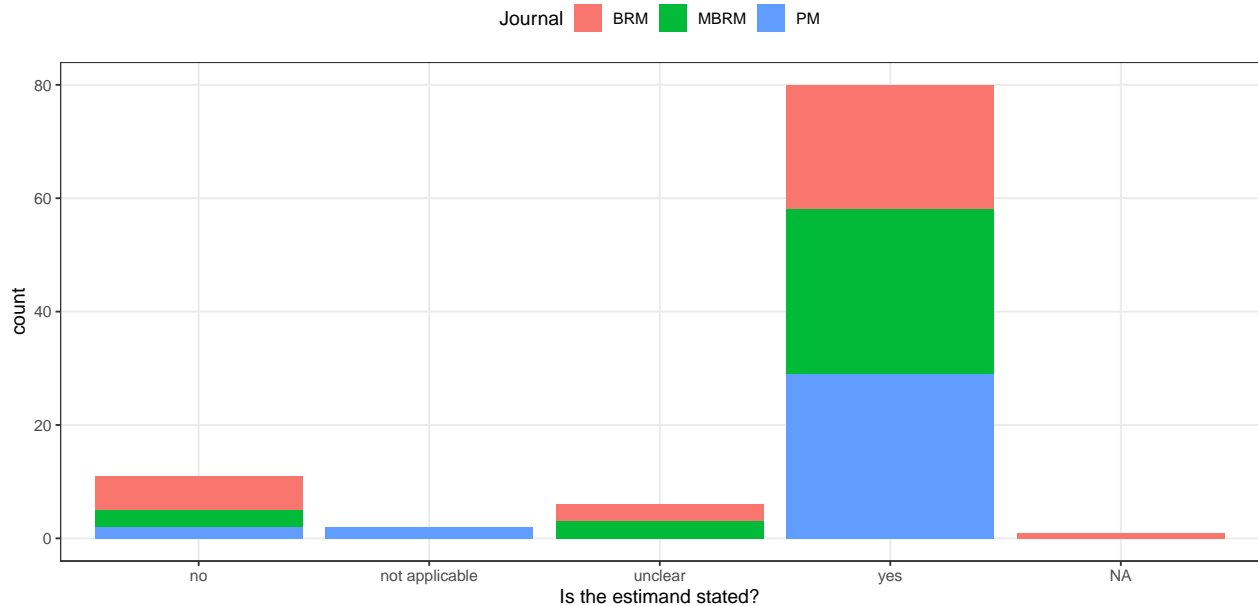


Q11 How many estimands?

```
summary(sim_res_num$nestimands_q11)
```


##	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.	NA's
##	1.00	2.00	4.00	20.11	15.00	384.00	11


```
breaks <- c(1, 3, 10, 30, 100, 300)
ggplot(data = sim_res_num, aes(x = log(nestimands_q11))) +
  geom_histogram(breaks = seq(0, log(500), 0.4), col = 1, alpha = 0.5) +
  scale_x_continuous(breaks = log(breaks), labels = breaks) +
  labs(x = "How many estimands?", fill = "Journal")
```

Warning: Removed 11 rows containing non-finite values (`stat_bin()`).

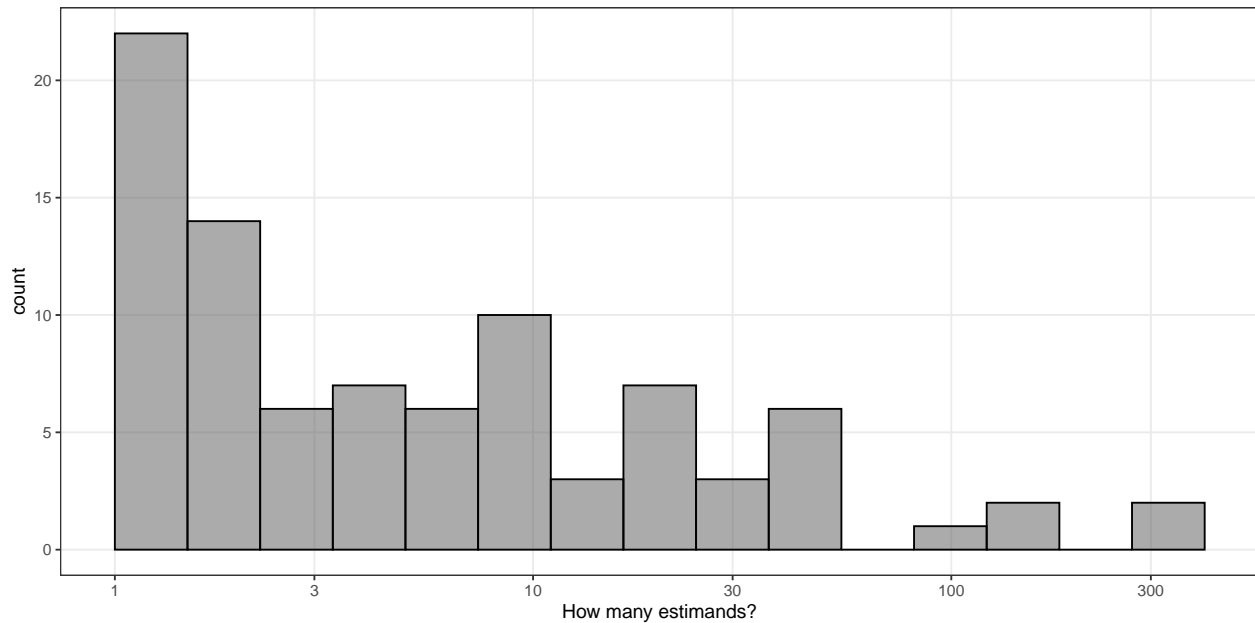


```
## Q12 Are estimands aggregated?
ggplot(data = sim_res_fac, aes(x = estimandsagg_q12, fill = journal)) +
  geom_bar() +
  labs(x = "Are estimands aggregated?", fill = "Journal")
```

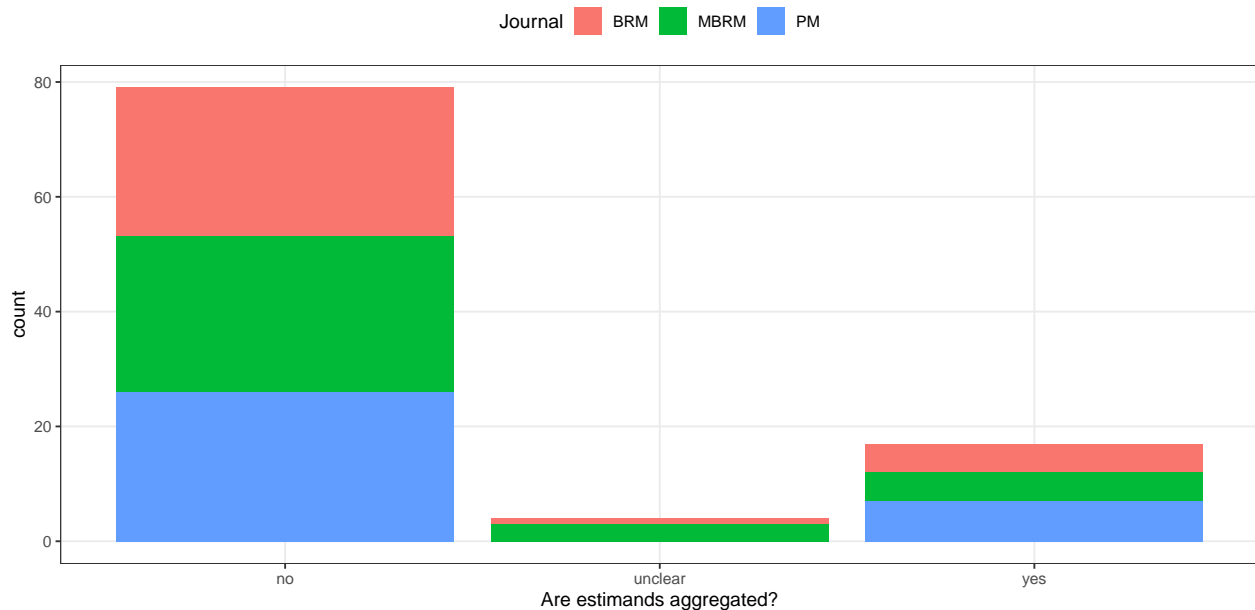

```
## Q13 How are the true parameters specified?
ggplot(data = sim_res_fac, aes(x = truetheta_q13, fill = journal)) +
```

```
geom_bar() +
labs(x = "How are the true parameters specified?", fill = "Journal")
```

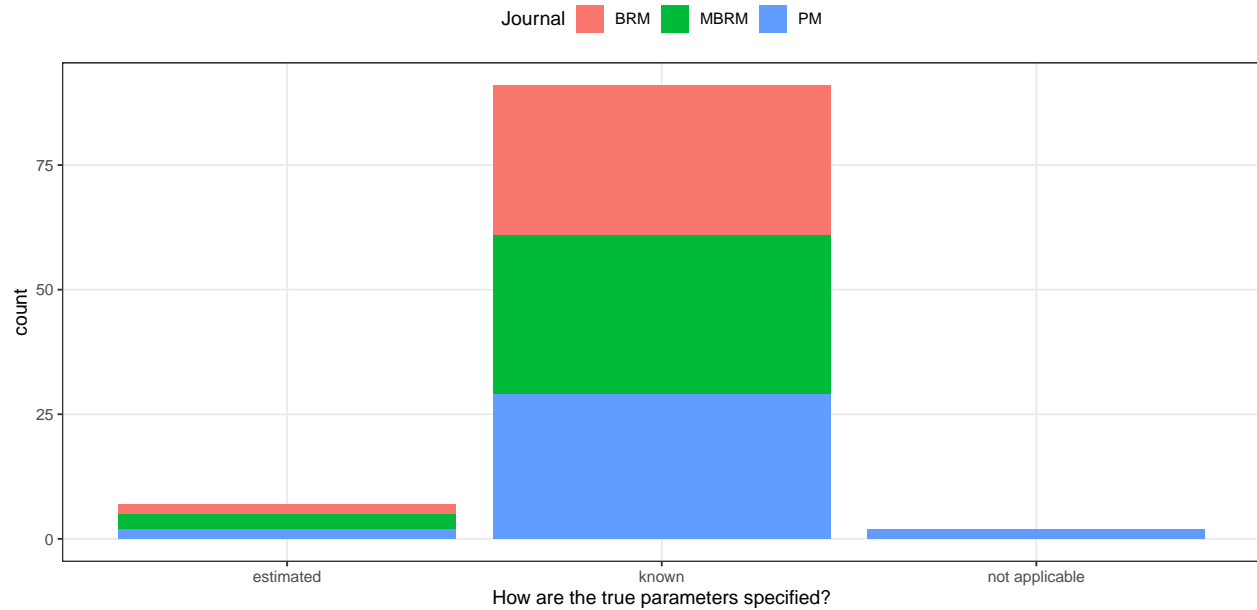

```
## Q14 How many methods are included?
```


```
summary(sim_res_num$nmethods_q14)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.00   2.00   3.00   5.63   5.00  192.00
```


```
# HACK there is one study with 192 methods, let's exclude it for a moment
```

```
ggplot(data = sim_res_num, aes(x = nmethods_q14, fill = journal)) +
  geom_bar() +
  lims(x = c(0, 15)) +
  labs(x = "How many methods are included?", fill = "Journal")
```

```
## Warning: Removed 1 rows containing non-finite values (`stat_count()`).
```

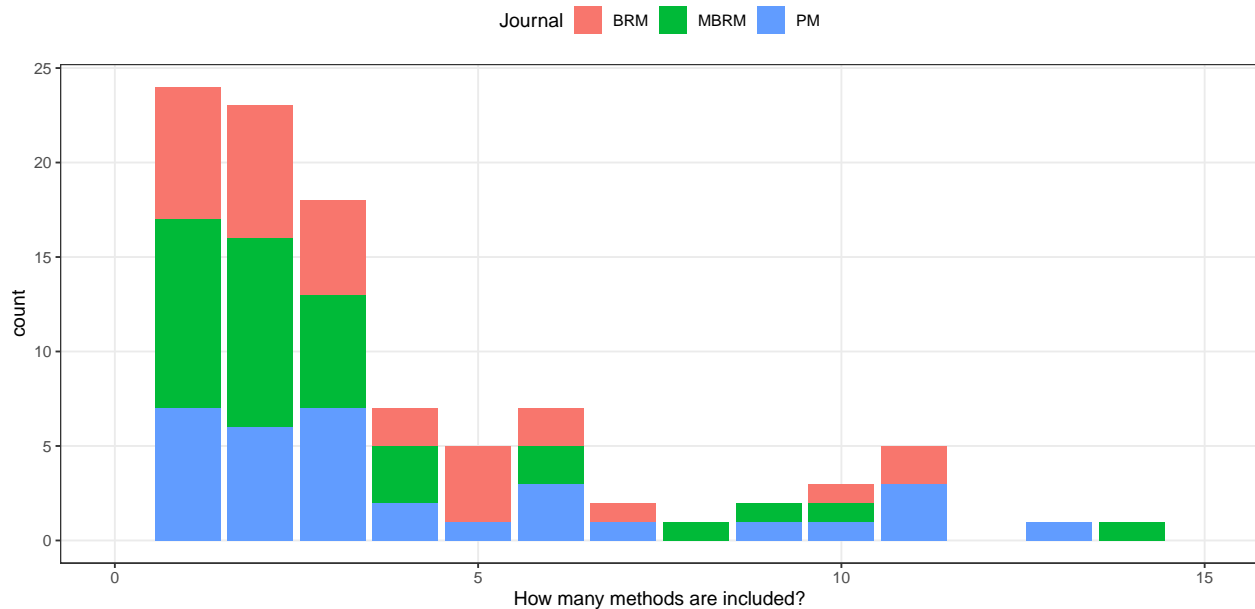

```
## Q15 What is the evaluation target of the simulation?
ggplot(data = sim_res_fac, aes(x = target_q15, fill = journal)) +
  geom_bar() +
  labs(x = "What is the evaluation target of the simulation?", fill = "Journal") +
  coord_flip()
```

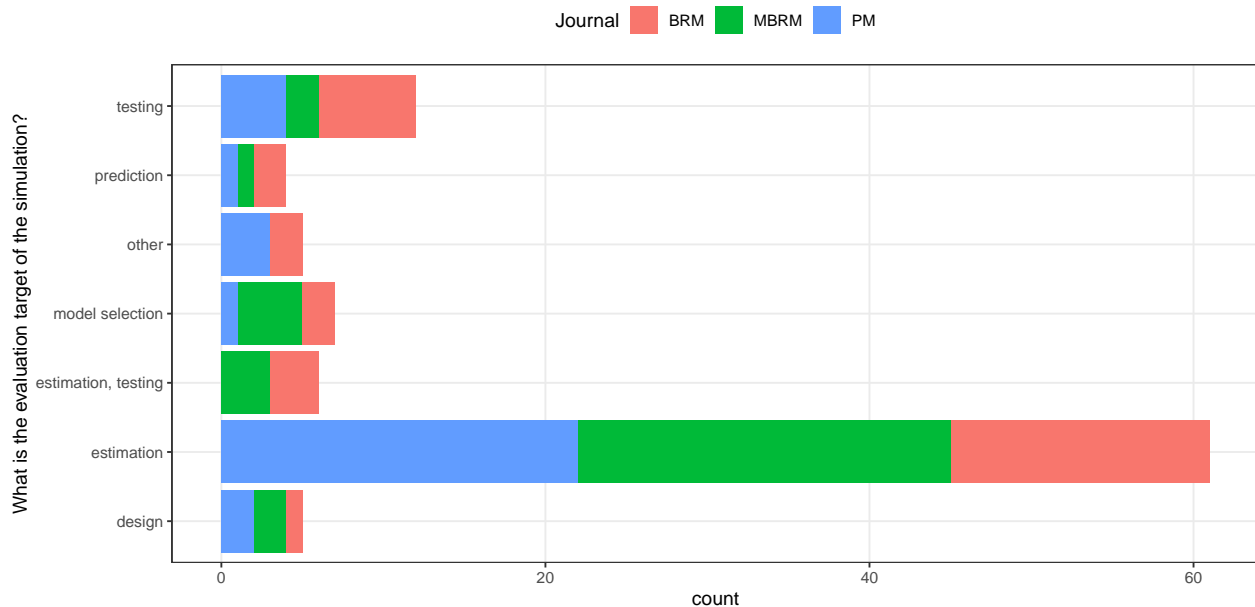


```
## Q15 Which performance measures were used?
sim_res_fac %>%
  group_by(journal) %>%
  summarise("Convergence" = sum(pmconvergence_q15 == "yes"),
            "Bias" = sum(pmbias_q15 == "yes"),
            "Empirical SE" = sum(pmempse_q15 == "yes"),
            "(R)MSE" = sum(pm_r_mse_q15 == "yes"),
            "Coverage" = sum(pmcover_q15 == "yes"),
            "Type I error rate" = sum(pmtypeierror_q15 == "yes"),
```

```

    "Power" = sum(pmpower_q15 == "yes"),
    "CI width" = sum(pmciwidth_q15 == "yes"),
    "Other" = sum(!is.na(pmother_q15)) %>%
gather(key = "PM", value = "count", "Convergence", "Bias", "Empirical SE",
    "Coverage", "Type I error rate", "Power", "CI width", "Other") %>%
ggplot(aes(x = PM, y = count, fill = journal)) +
geom_bar(stat = "identity") +
labs(x = "Performance measure", fill = "Journal") +
coord_flip()


```

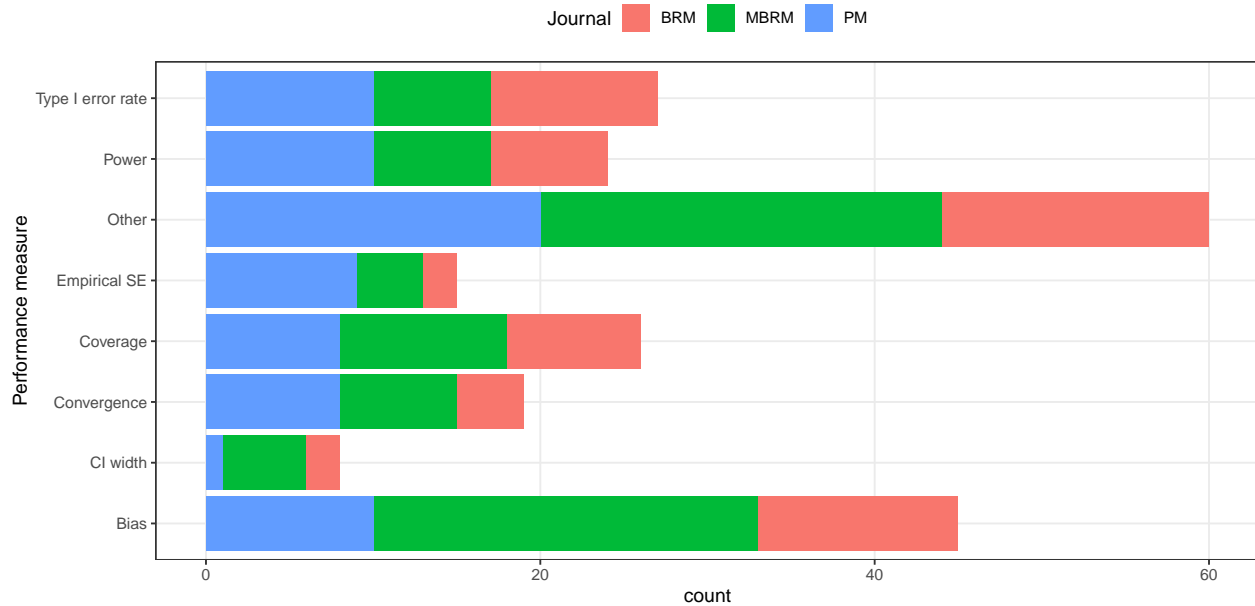


```

## Q16 Is Monte Carlo uncertainty reported anywhere?
ggplot(data = sim_res_fac, aes(x = mcerrors_q16, fill = journal)) +
geom_bar() +
labs(x = "Is Monte Carlo uncertainty reported anywhere?", fill = "Journal") +
coord_flip()


```

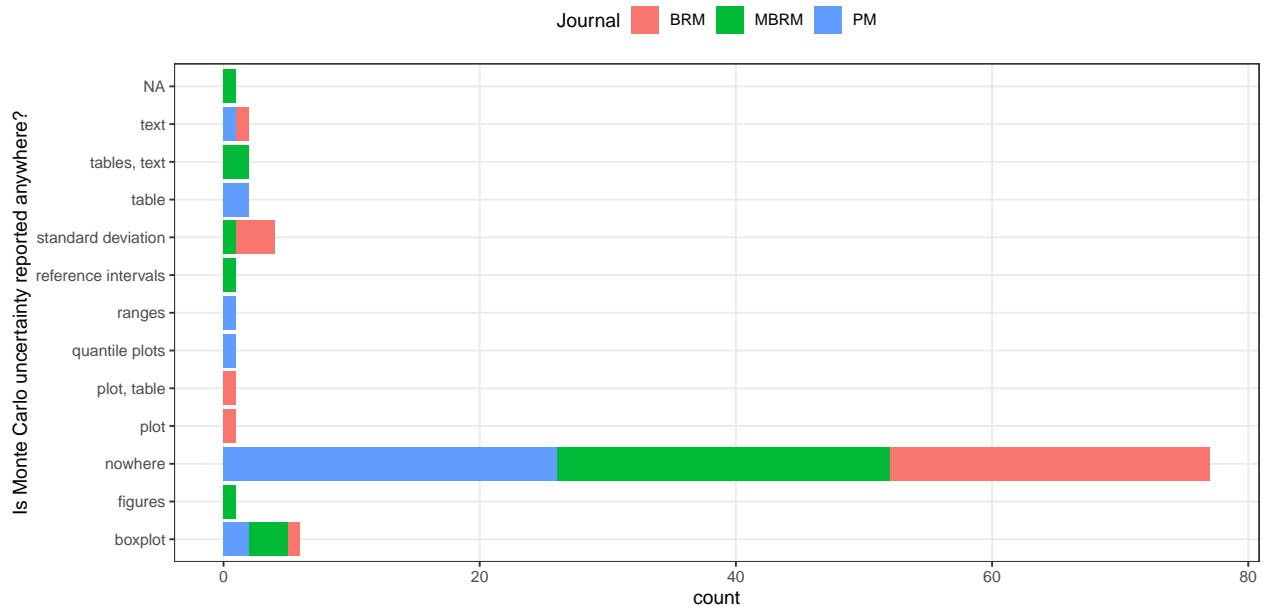


```
## Q17 In which way are the results reported?
sim_res_fac %>%
  group_by(journal) %>%
  summarise("Figure" = sum(resultsfigure_q17 == "yes"),
            "Table" = sum(resultstable_q17 == "yes"),
            "Text" = sum(resultstext_q17 == "yes"),
            "Other" = sum(resultsother_q17 == "yes")) %>%
  gather(key = "Type", value = "count", "Figure", "Table", "Text", "Other") %>%
  ggplot(aes(x = Type, y = count, fill = journal)) +
  geom_bar(stat = "identity") +
  labs(x = "In which way are the results reported?", fill = "Journal")
```

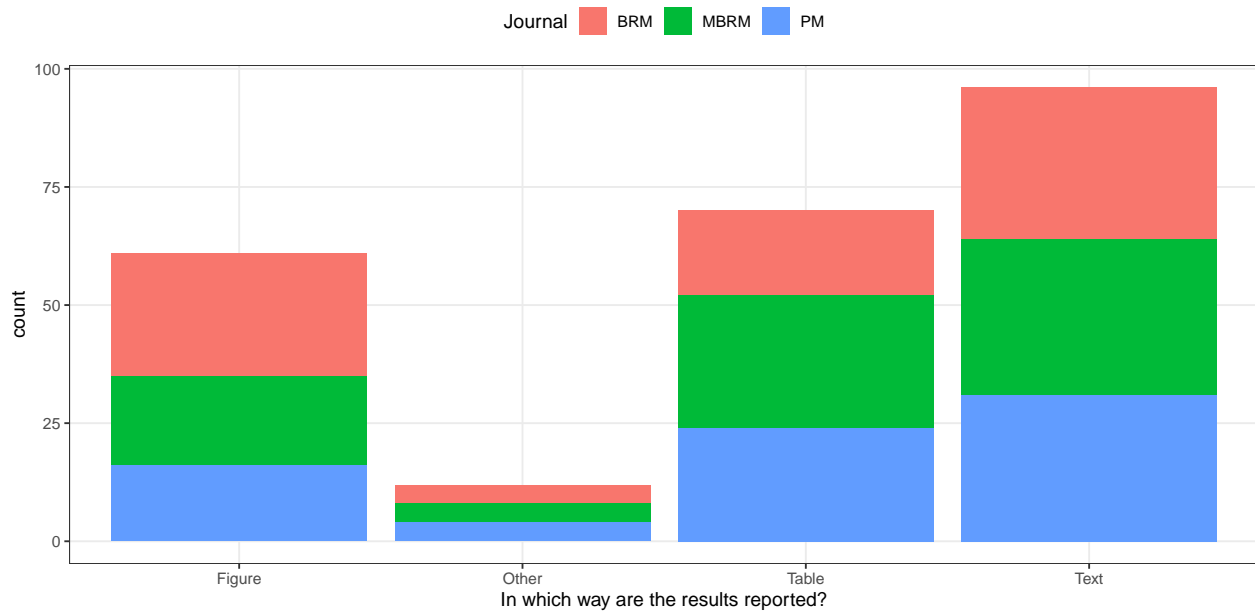


```
## Q18 Which software was used to conduct the simulation?
## TODO add also information from software_2_q18 and software_3_q18
ggplot(data = sim_res_fac, aes(x = software_1_q18, fill = journal)) +
  geom_bar() +
  labs(x = "Which primary software was used?", fill = "Journal") +
  coord_flip()
```

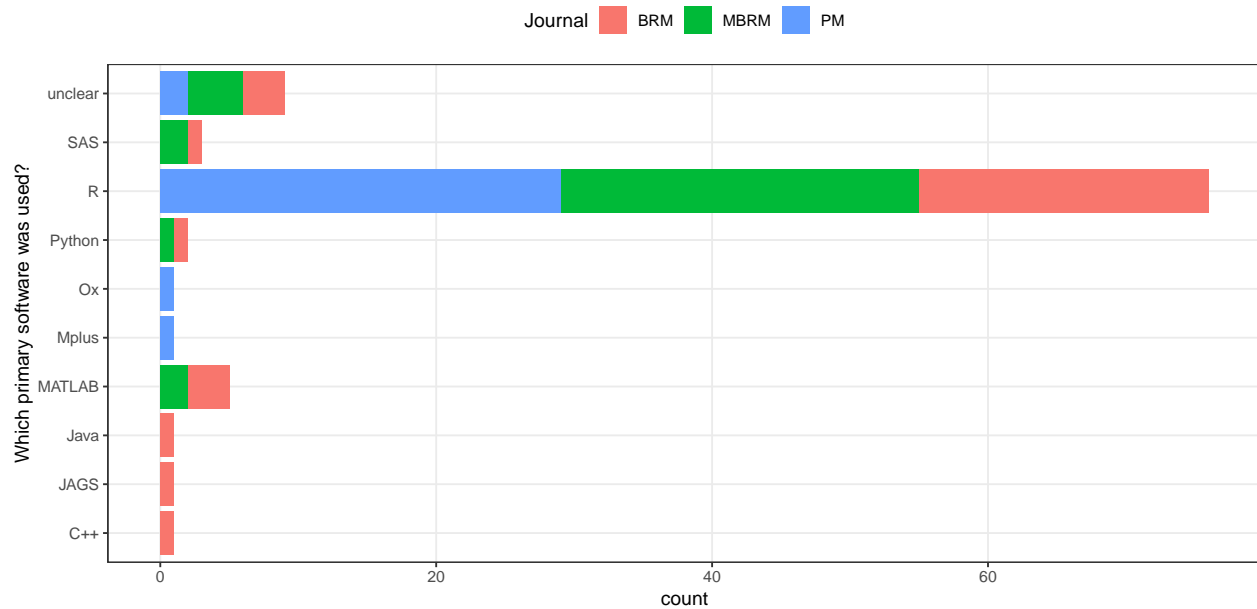


```
## Q19 Are there userwritten commands/packages/macros?
ggplot(data = sim_res_fac, aes(x = userwritten_q19, fill = journal)) +
  geom_bar() +
  labs(x = "Are there userwritten commands/packages/macros?", fill = "Journal")
```

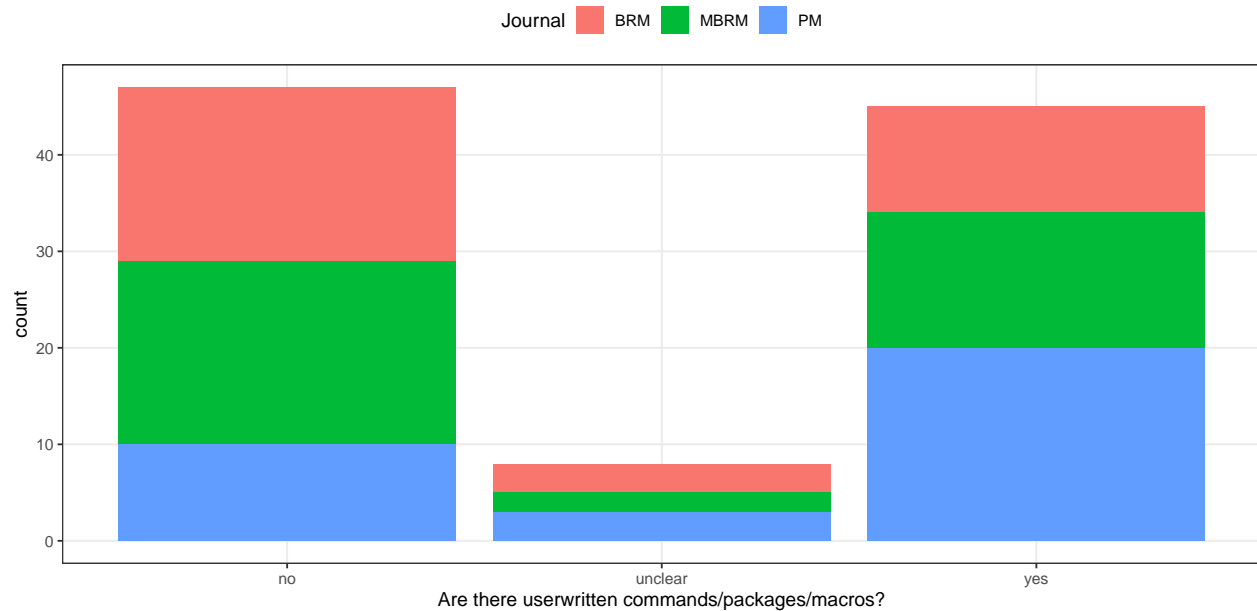


```
## Q20 Is code provided?
ggplot(data = sim_res_fac, aes(x = codeprovided_q20, fill = journal)) +
  geom_bar() +
  labs(x = "Is code provided?", fill = "Journal")
```

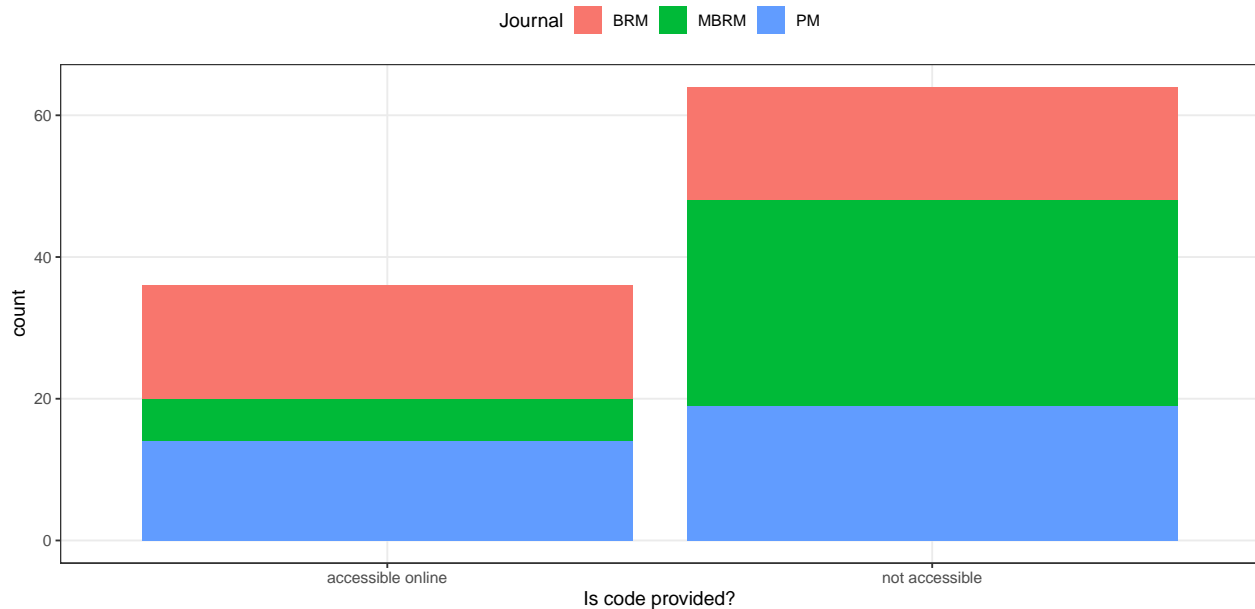

```
## Q21 If code is provided, is a seed provided?
ggplot(data = sim_res_fac, aes(x = seedprovided_q21, fill = journal)) +
  geom_bar() +
  labs(x = "If code is provided, is a seed provided?", fill = "Journal")
```

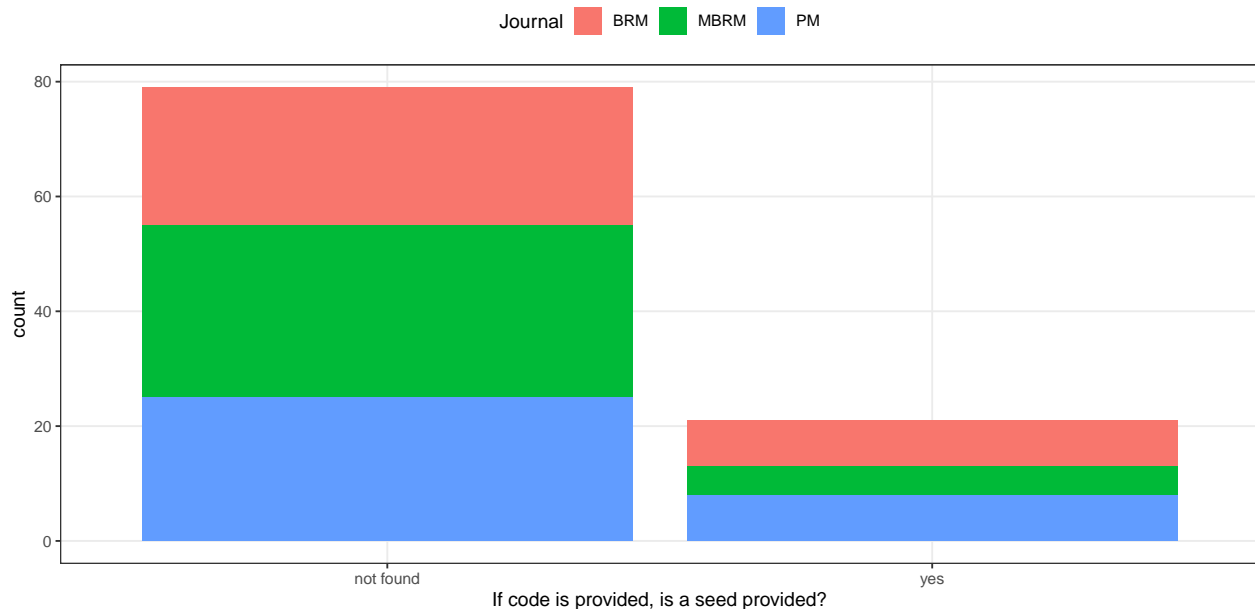


```
## Q22 Is information on the computational environment provided?
sim_res_fac %>%
  mutate(compenvironment_q22 = factor(compenvironment_q22,
                                     levels = c("no", "minimal", "partially", "fully"))) %>%
  ggplot(aes(x = compenvironment_q22, fill = journal)) +
  geom_bar() +
  labs(x = "Is information on the computational environment provided?",
       fill = "Journal")
```

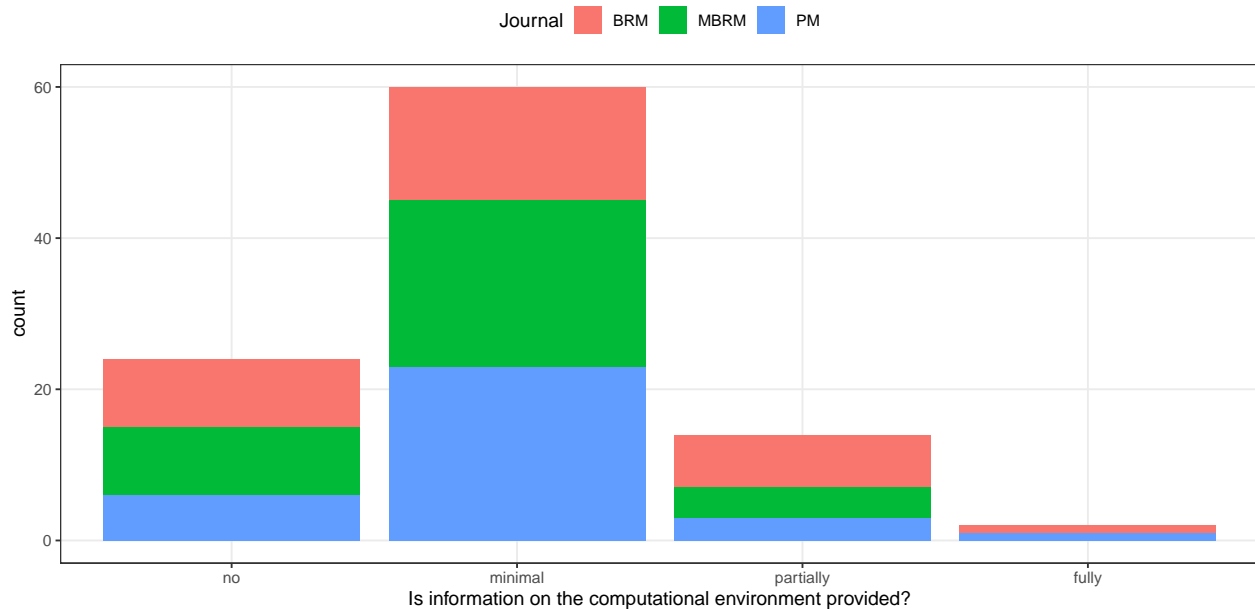

Q23 Is information on the operating system provided?

```
sim_res_fac %>%
  mutate(compos_q23 = factor(compos_q23,
                             levels = c("no", "partially", "fully"))) %>%
  ggplot(aes(x = compos_q23, fill = journal)) +
  geom_bar() +
  labs(x = "Is information on the operating system provided?",
       fill = "Journal")
```

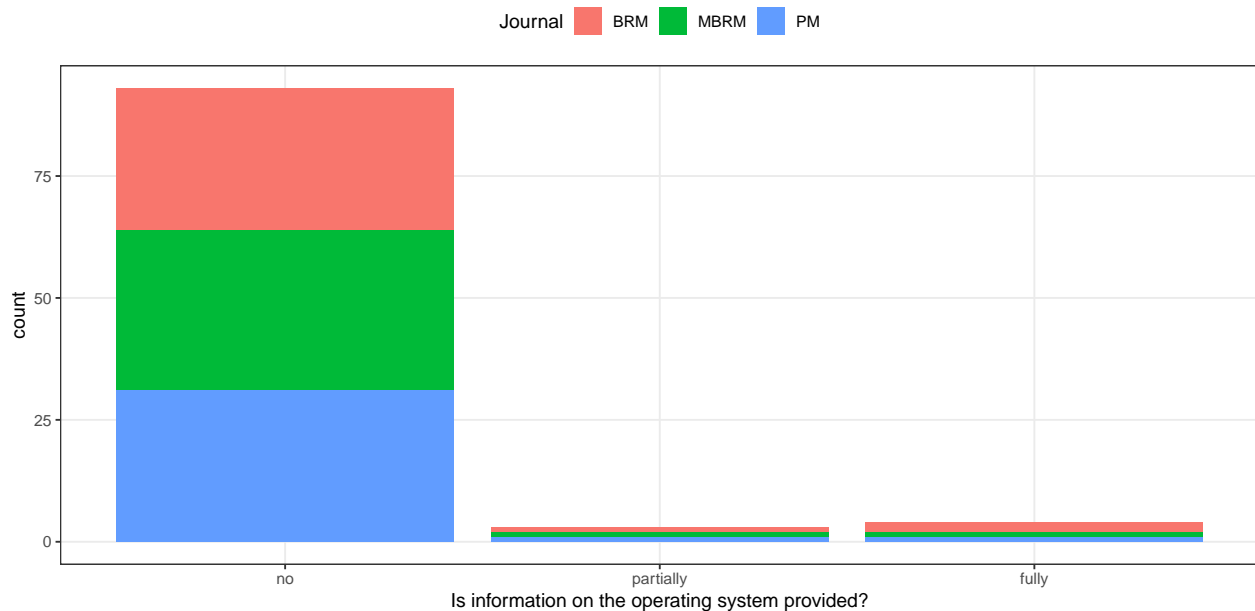


Q24 How confident was reviewer in coding of the article?

```
sim_res_fac %>%
  mutate(coding_confidence = factor(coding_confidence,
                                     levels = c("poor", "medium", "great"))) %>%
  ggplot(aes(x = coding_confidence, fill = journal)) +
  geom_bar() +
```



```
labs(x = "How confident was reviewer in coding of the article?",
     fill = "Journal")
```

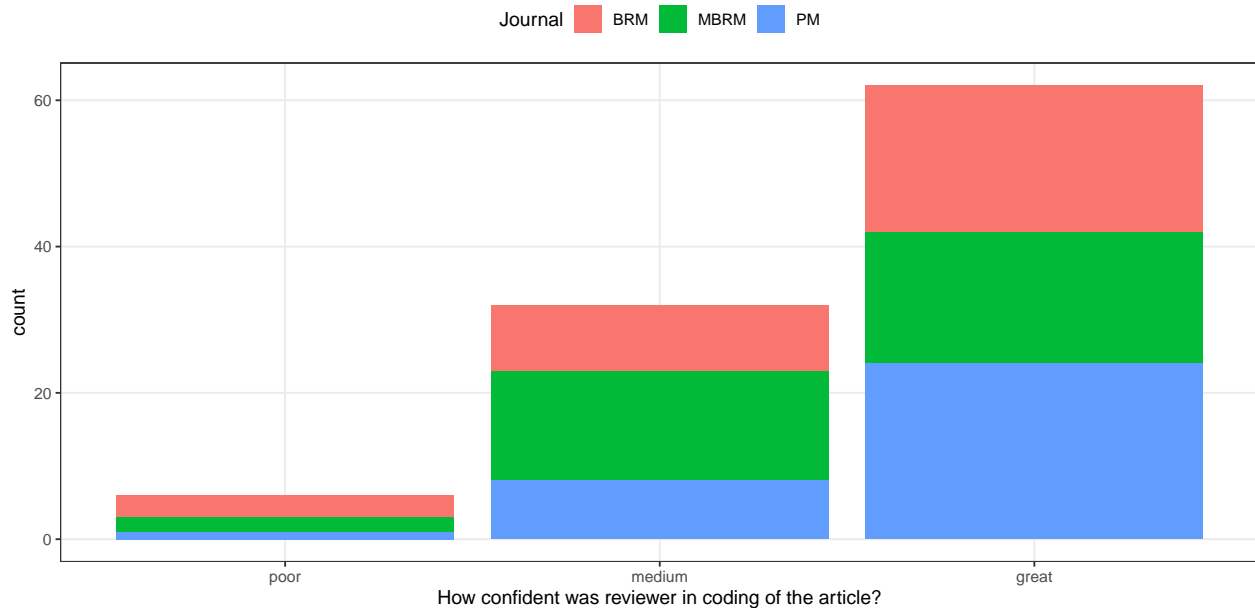

```
sessionInfo()
```

```
## R version 4.3.1 (2023-06-16)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Debian GNU/Linux 12 (bookworm)
##
## Matrix products: default
## BLAS: /usr/lib/x86_64-linux-gnu/openblas-pthread/libblas.so.3
## LAPACK: /usr/lib/x86_64-linux-gnu/openblas-pthread/libopenblas-r0.3.21.so; LAPACK version 3.11.0
##
## locale:
## [1] LC_CTYPE=en_US.UTF-8      LC_NUMERIC=C
## [3] LC_TIME=en_US.UTF-8      LC_COLLATE=en_US.UTF-8
## [5] LC_MONETARY=en_US.UTF-8  LC_MESSAGES=en_US.UTF-8
## [7] LC_PAPER=en_US.UTF-8     LC_NAME=C
## [9] LC_ADDRESS=C             LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C
##
## time zone: Europe/Zurich
## tzcode source: system (glibc)
##
## attached base packages:
## [1] stats      graphics  grDevices  utils      datasets  methods    base
##
## other attached packages:
## [1] ggpubr_0.6.0  ggplot2_3.4.2  tidyr_1.3.0   dplyr_1.1.2
##
## loaded via a namespace (and not attached):
## [1] gtable_0.3.3  compiler_4.3.1  ggsignif_0.6.4  tidymodels_1.2.0
## [5] scales_1.2.1  yaml_2.3.7      fastmap_1.1.1   R6_2.5.1
## [9] labeling_0.4.2 generics_0.1.3  knitr_1.43      backports_1.4.1
```

## [13]	tibble_3.2.1	car_3.1-2	munsell_0.5.0	pillar_1.9.0
## [17]	rlang_1.1.1	utf8_1.2.3	broom_1.0.5	xfun_0.39
## [21]	cli_3.6.1	withr_2.5.0	magrittr_2.0.3	digest_0.6.33
## [25]	grid_4.3.1	lifecycle_1.0.3	vctrs_0.6.3	rstatix_0.7.2
## [29]	evaluate_0.21	glue_1.6.2	farver_2.1.1	abind_1.4-5
## [33]	carData_3.0-5	fansi_1.0.4	colorspace_2.1-0	rmarkdown_2.23
## [37]	purrr_1.0.1	tools_4.3.1	pkgconfig_2.0.3	htmltools_0.5.5