Учреждение образования
«БЕЛОРУССКИЙ ГОСУДАРСТВЕННЫЙ ТЕХНОЛОГИЧЕСКИЙ УНИВЕРСИТЕТ»

Отчёт по дисциплине:
«Основы програмной инженерии л.р №9»

Студент: Тавырин М. В.
ФИТ 1 курс 7 группа
Преподаватель: Лыкова Ю. Д.

Минск 2026

1) Установил гит и просмотрел текущую версию

```
mihail@MacBook-Pro-Mihail ~ % git -v
git version 2.55.0
mihail@MacBook-Pro-Mihail ~ %
```

2) Получил справку по Git.

```
mihail — -zsh — 120×30

           [--work-tree=<path>] [--namespace=<name>] [--config-env=<name>=<envvar>]
           <command> [<args>]
mihail@MacBook-Pro-Mihail ~ % git config --list
credential.helper=osxkeychain
mihail@MacBook-Pro-Mihail ~ % git -v
git version 2.55.0
mihail@MacBook-Pro-Mihail ~ % git --help
usage: git [-v | --version] [-h | --help] [-C <path>] [-c <name>=<value>]
           [--exec-path[=<path>]] [--html-path] [--man-path] [--info-path]
           [-p | --paginate | -P | --no-pager] [--no-replace-objects] [--no-lazy-fetch]
           [--no-optional-locks] [--no-advice] [--bare] [--git-dir=<path>]
           [--work-tree=<path>] [--namespace=<name>] [--config-env=<name>=<envvar>]
           <command> [<args>]

These are common Git commands used in various situations:

start a working area (see also: git help tutorial)
   clone      Clone a repository into a new directory
   init       Create an empty Git repository or reinitialize an existing one

work on the current change (see also: git help everyday)
   add        Add file contents to the index
   mv         Move or rename a file, a directory, or a symlink
   restore    Restore working tree files
   rm         Remove files from the working tree and from the index

examine the history and state (see also: git help revisions)
   bisect     Use binary search to find the commit that introduced a bug
   diff       Show changes between commits, commit and working tree, etc
   grep       Print lines matching a pattern
```

3) Создал локальный репозиорий при помощи команды git init

```
Terminal   Local                                                    AI Agents

mihail@MacBook-Pro-Mihail lab9op % git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /Users/mihail/CLionProjects/lab9op/.git/

mihail@MacBook-Pro-Mihail lab9op % git status
On branch master

No commits yet
```


4) Выполнил конфигурацию git и проверил конфигурацию командой git config --list

```
nothing added to commit but untracked files present (use "git add" to track)

mihail@MacBook-Pro-Mihail lab9op % git config --list
credential.helper=osxkeychain
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
core.ignorecase=true
core.precomposeunicode=true

mihail@MacBook-Pro-Mihail lab9op %
```

5) Создал текстовый файл

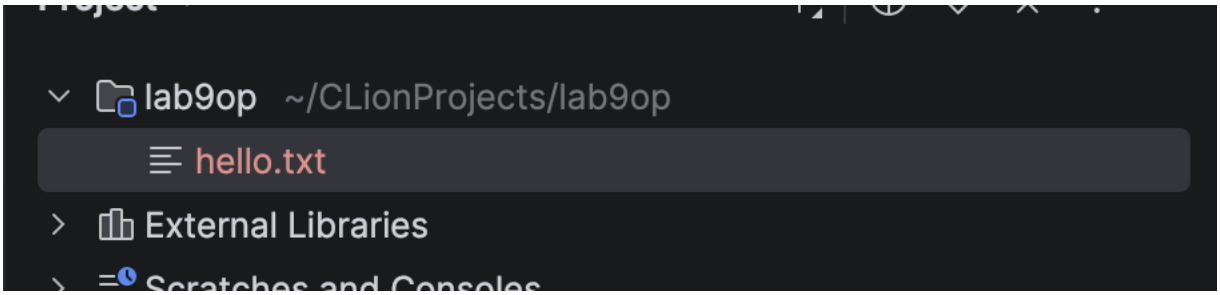

6) Проверил состояние локального репозитория командой git status

```
mihail@MacBook-Pro-Mihail lab9op % git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .idea/
        hello.txt

nothing added to commit but untracked files present (use "git add" to track)
```

7) Проиндексировал файл hello.txt и проверил что с ним проиошло командой git status

```
mihail@MacBook-Pro-Mihail lab9op % git add .

mihail@MacBook-Pro-Mihail lab9op % git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   .idea/.gitignore
        new file:   .idea/editor.xml
        new file:   .idea/lab9op.iml
        new file:   .idea/misc.xml
        new file:   .idea/modules.xml
        new file:   .idea/vcs.xml
        new file:   hello.txt
```

8) Зафиксировал изменения при помощи команды git commit –m “’

```
mihail@MacBook-Pro-Mihail lab9op % git commit -m "add hello.txt"
[master (root-commit) 57b2e16] add hello.txt
 Committer: Михаил <mihail@MacBook-Pro-Mihail.local>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author


 7 files changed, 383 insertions(+)
 create mode 100644 .idea/.gitignore
 create mode 100644 .idea/editor.xml
 create mode 100644 .idea/lab9op.iml
 create mode 100644 .idea/misc.xml
 create mode 100644 .idea/modules.xml
 create mode 100644 .idea/vcs.xml
 create mode 100644 hello.txt
```

9) Просмотрел и воспользовался командой git log

```
mihail@MacBook-Pro-Mihail lab9op % git log
commit 57b2e16d21bc874df220068a98eaf95d837833fe (HEAD -> master)
Author: Михаил <mihail@MacBook-Pro-Mihail.local>
Date:   Wed Nov 4 00:43:50 2026 +0300

    add hello.txt
```

10) Изменил файл hello.txt и проиндексировал все именения

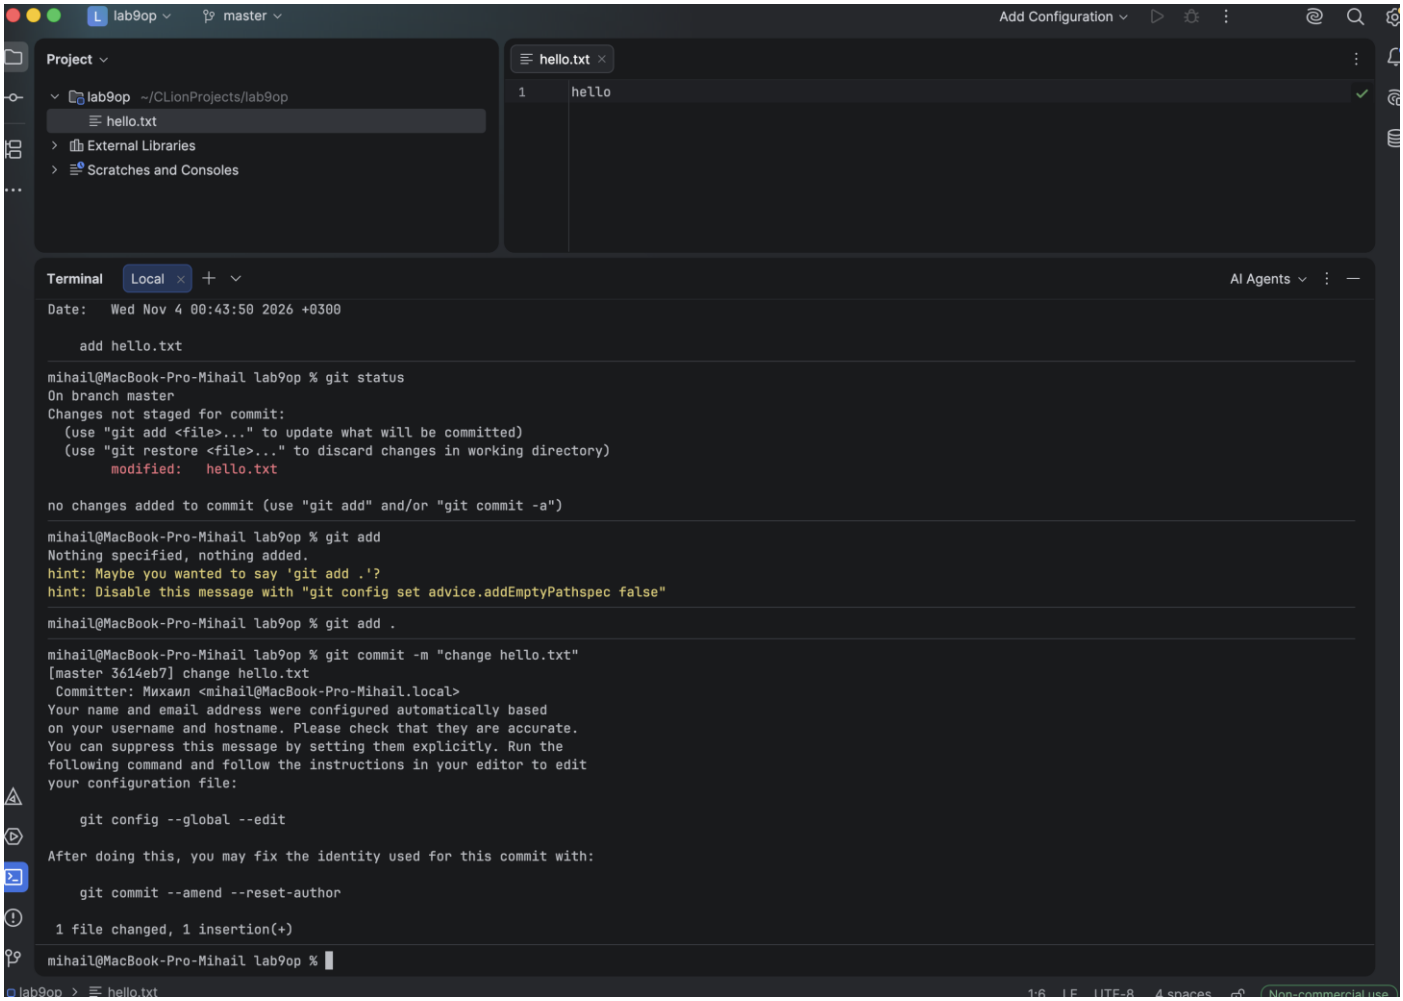

11) Создал gitignore для того чтобы гит игнорировал папку с настройками моей ide

