

PLAN HISTORY

DATE	REV. NO	PROJ. NO.	DESCRIPTION	WEIGHT(Kg)				TOTAL PAGES	DWN	CHK	APP
				REV	ADD	CAN	SUM				
2025.06.18	0	D2581/2	D2581/2 5LP250V 호선용으로 출도함(2SET)						김갑진	-	임우택
2025.09.26		D2602	D2602 5LP250V 호선용으로 출도함						진호련	김갑진	인진태
2026.02.26		D2603	D2603 5LP250V 호선용으로 출도함						진호련	김갑진	인진태

* 총중량(KG/SHIP) : A-SET : 2,020kg B-SET : 1,579kg

NOTE

- 의문사항은 임의 제작처 마시고 설계부로 문의 후 작업 바랍니다.
- 제작 수량 주의바랍니다.(도면 및 중량 LIST 확인 후 작업바랍니다.)
- 제작에 사용된 자재에 대한 MILL SHEET 제출 바랍니다.(국산, KS 규격 사용)
- OPEN GRAT'G 과 설치재(BOLT, NUT, WASHER)는 제작 SCOPE가 아닙니다.
- PAINT : FRAME - BCX-18
H/RAIL - BCX-1
- LOOSE품(SHIM PLATE) 고박 입고바랍니다.

Designation and Activity	Procedure according to DNV	Procedure Drawing or Spec. BCAG	Procedure according to Design Code	Code, standard or spec. reference Acceptance Criteria
Non Destructive Examination	NA	AWS D1.1	AWS D1.1	Welding Seams 20%MT or PT Lifting Lug Welds 100%PT or MT

CAUTION

THIS DRAWING OR DOCUMENT IS THE PROPERTY OF SUNBO INDUSTRIES CO., LTD.
AND IT MUST NOT BE PARTIALLY OR WHOLLY COPIED OR USED FOR ANY OTHER PURPOSE
WITHOUT PRIOR WRITTEN PERMISSION OF SUNBO INDUSTRIES CO., LTD.

도면배포처	SEC NO.	MACH. OUTFITTING DESIGN DEP'T	SHIP	174K LNG		
구매부 ▼		DESIGN 8 TEAM	TYPE			
생산부 ▼	TEL. NO.	SHIP NO.	SHIP			
QC ▼	051-260-5638	D2581/2/2602/2603 5LP250V	NAME			
	DATE 2025.09.26	APPROVED 인진태	NAME OF DRAWING 사외제작철의장품 FOR HP COMPRESSOR PACKAGE (5LP250V)			
		CHECKED 김갑진				
		DRAWN 진호련	DRAWING NO.	SCALE		
			SB - 0	NONE		
			CLASS	UNIT	CONSOLIDATED	
			0	mm		
TOTAL 3	 SUNBO UNITECH CO., LTD					










SUNBO UNITECH CO., LTD

도면 및 중량 LIST

DWG NO	PART NO	A SET 제작수량	B SET 제작수량	중량(kg)	비고
125.619.980	BRIDGE MOTOR SIDE	1EA	1EA	399	
125.619.981	BRIDGE PUMP SIDE	1EA	1EA	385	
125.619.982	BRIDGE COMP/MOTOR	2EA	2EA	564	
125.622.368	BALCONY M2	1EA	-	371	A SET만 제작
125.619.983	STIFFNER	1EA	1EA	155	
125.623.891	BRIDGE OVER PIPE	2EA	2EA	76	
125.619.994	LIFTING DEVICE M3	1EA	-	70	A SET만 제작
A SET 중량				2,020	
B SET 중량				1,579	

TYPICAL CONNCTION DETAIL

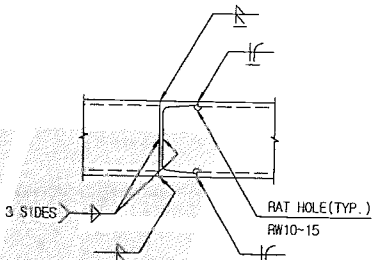EQUAL DEPTH BEAM 		
BEAM TO ANGLE 	ANGLE TO ANGLE 	CHANNEL TO CHANNEL 
CHANNEL TO ANGLE 	CONER JOINT DETAIL 	
STIFF. PLATE DETAIL 		

 Burckhardt Compression	Painting Spezifikation C5-M ISO 12944-5 Für CS, Eisen- und Ni-resist Guss, $\leq +205^{\circ}\text{C}$ (inkl. kryogenische Anwendung) <i>Painting specification C5-M ISO 12944-5 for CS, cast-iron</i> <i>and Ni-resist cast $\leq +205^{\circ}\text{C}$ (incl. cryogenic application)</i>	(TSP) BCX_PAINT_ SYST_18	Revision
---	---	--	----------

6. Farbaufbau/ painting system

Burckhardt Compression Farbaufbau
auf Kohlenstoffstahl, Eisen- und Ni-resist
Guss für Betriebstemperaturen $\leq +205^{\circ}\text{C}$
inklusive kryogener Anwendungen.

*Burckhardt Compression painting system
for carbon steel, cast-iron and Ni-resist cast
with operating temperatures
 $\leq +205^{\circ}\text{C}$ including cryogenic service.*

1. und 2. Schicht

1st and 2nd layer

2-K Alkyliertes Amin Epoxy


2-Pack Alkylated Amine Epoxy

INTERBOND 2340UPC

TDO 2072271

Farbton: Produkt standard grau

Colour shade: *Product standard grey*

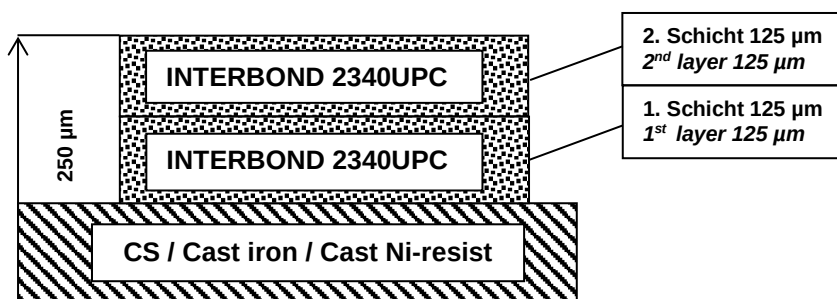

Hinweis:

2340 UPC ist nur in 3 Produkte Standard
Farbtönen erhältlich: Grau, Pink, Olive. Wie
bei allen Epoxiden kann es zu Verfärbung
und zu Verkreidung kommen, was die
Funktionalität jedoch nicht beeinträchtigt,
vorausgesetzt die empfohlenen
Temperaturlimiten werden nicht
überschritten.

Remark:

*2340UPC is only available in 3 standard
colour shades Grey, Pink, Olive. In common
with all epoxies, discoloration and chalking
may occur. This will not have influence on
the functionality provided recommended
temperature limits are not exceeded.*

Anwendungsempfehlungen und Produkte-
details entnehmen Sie bitte dem technischen
Merkblatt

*For application recommendations and
product details please refer to the product
data sheet*

Erstellt / Prepared Überprüft / Reviewed Freigabe / Approval DVS	Rev.	Dat. 29.12.2021 03.01.2022 03.01.2022	Sig. RIEDENER_T BERNHARD_M RIEDENER_T	Ersatz für Replacement for Revision vom / date	Seite 3 von 5 Page 3 of 5
--	------	--	--	---	------------------------------

 Burckhardt Compression	Painting Spezifikation Für C-Stahl, Grau-, Sphäroguss $\leq +120^{\circ}\text{C}$ <i>Painting specification for carbon steel, grey-, nodular cast</i> C5-M (ISO 12944-5)	(TSP) BCX_PAINT_ SYST_01	Revision
---	---	--	----------

6. Farbaufbau / Coating system

Burckhardt Compression Farbaufbau
auf Kohlenstoffstahl, Grau- und Sphäroguss
für Betriebstemperaturen $\leq +120^{\circ}\text{C}$

*Burckhardt Compression painting system
for carbon steel, cast-iron and nodular cast
for service temperatures $\leq +120^{\circ}\text{C}$*

Grundierung / Primer

2-K Epoxy – Zinkstaubgrundierung

2-Pack Epoxy – zinc rich primer

INTERZINC 52

TDO 2039235

Zwischenbeschichtung / Interlayer

2-K Epoxy / Polyamid Glimmerfarbe

2-Pack Epoxy / Polyamide Mio paint

INTERGARD 475 HS

TDO 2039236

Decklack / Top coat


2-K Polyurethan - Acrylat

2-Pack Acrylic - Polyurethane

INTERTHANE 990

TDO 2039237

FINAL COLOR : RAL1018(YELLOW)

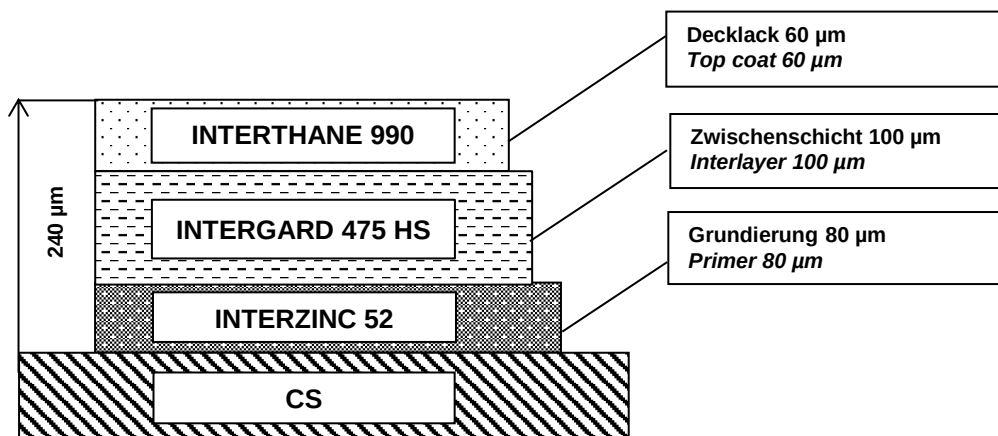


Produktspezifische Details entnehmen Sie
bitte den technischen Merkblättern (TDO)


*For product details please refer to
manufacturer data sheets (TDO)*

	Rev.	Dat.	Sig.	Ersatz für Replacement for	Seite 3 von 5 Page 3 of 5	
Erstellt / Prepared		28.12.2021	RIEDENER_T	Revision		
Überprüft / Reviewed		03.01.2022	BERNHARD_M	vom / date		
Freigabe / Approval DVS		03.01.2022	RIEDENER_T			

VIEW A

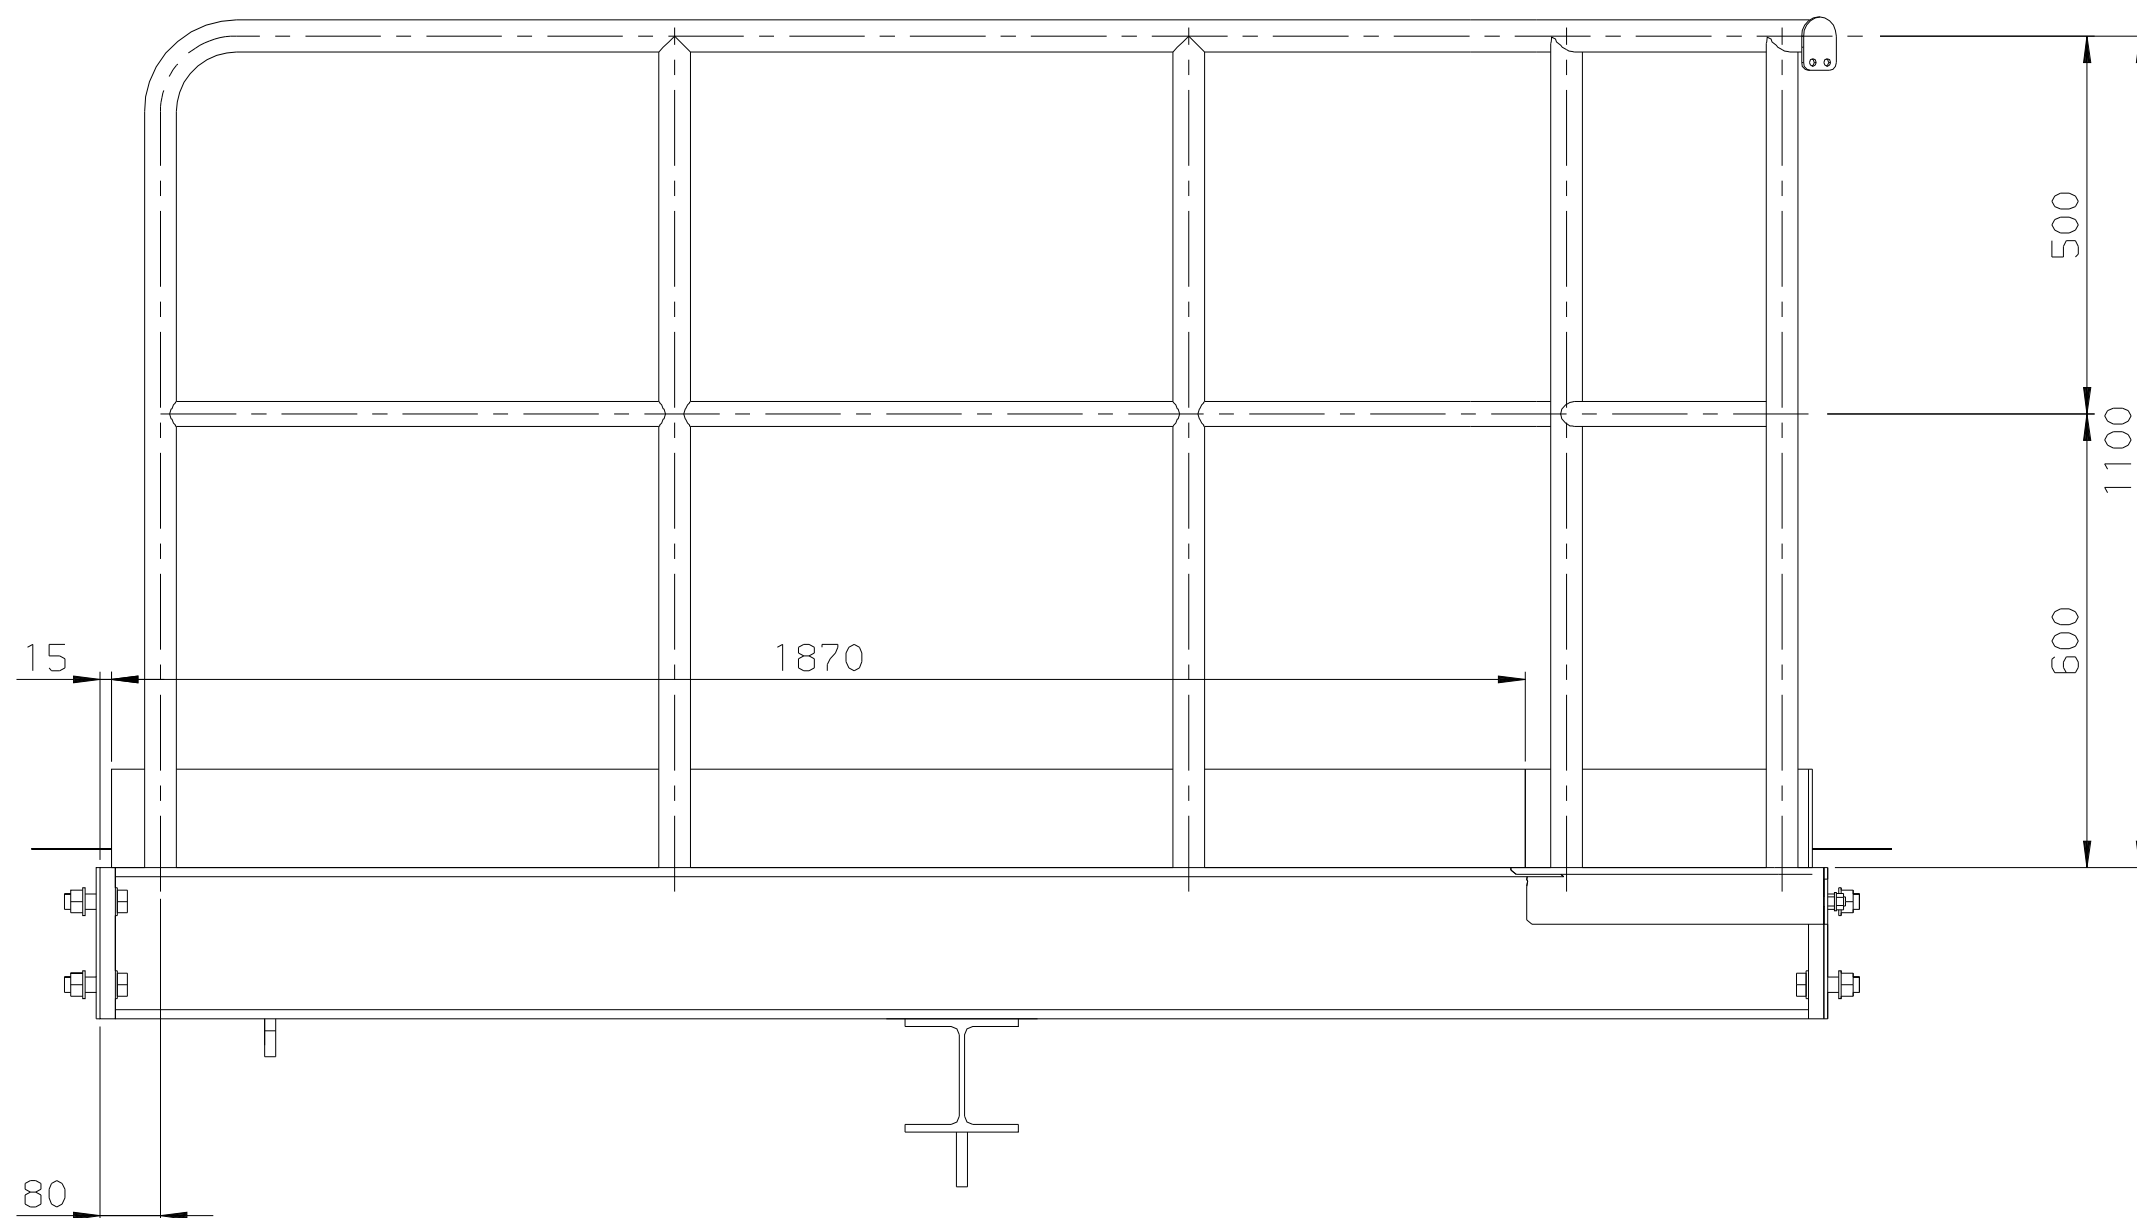

VIEW C

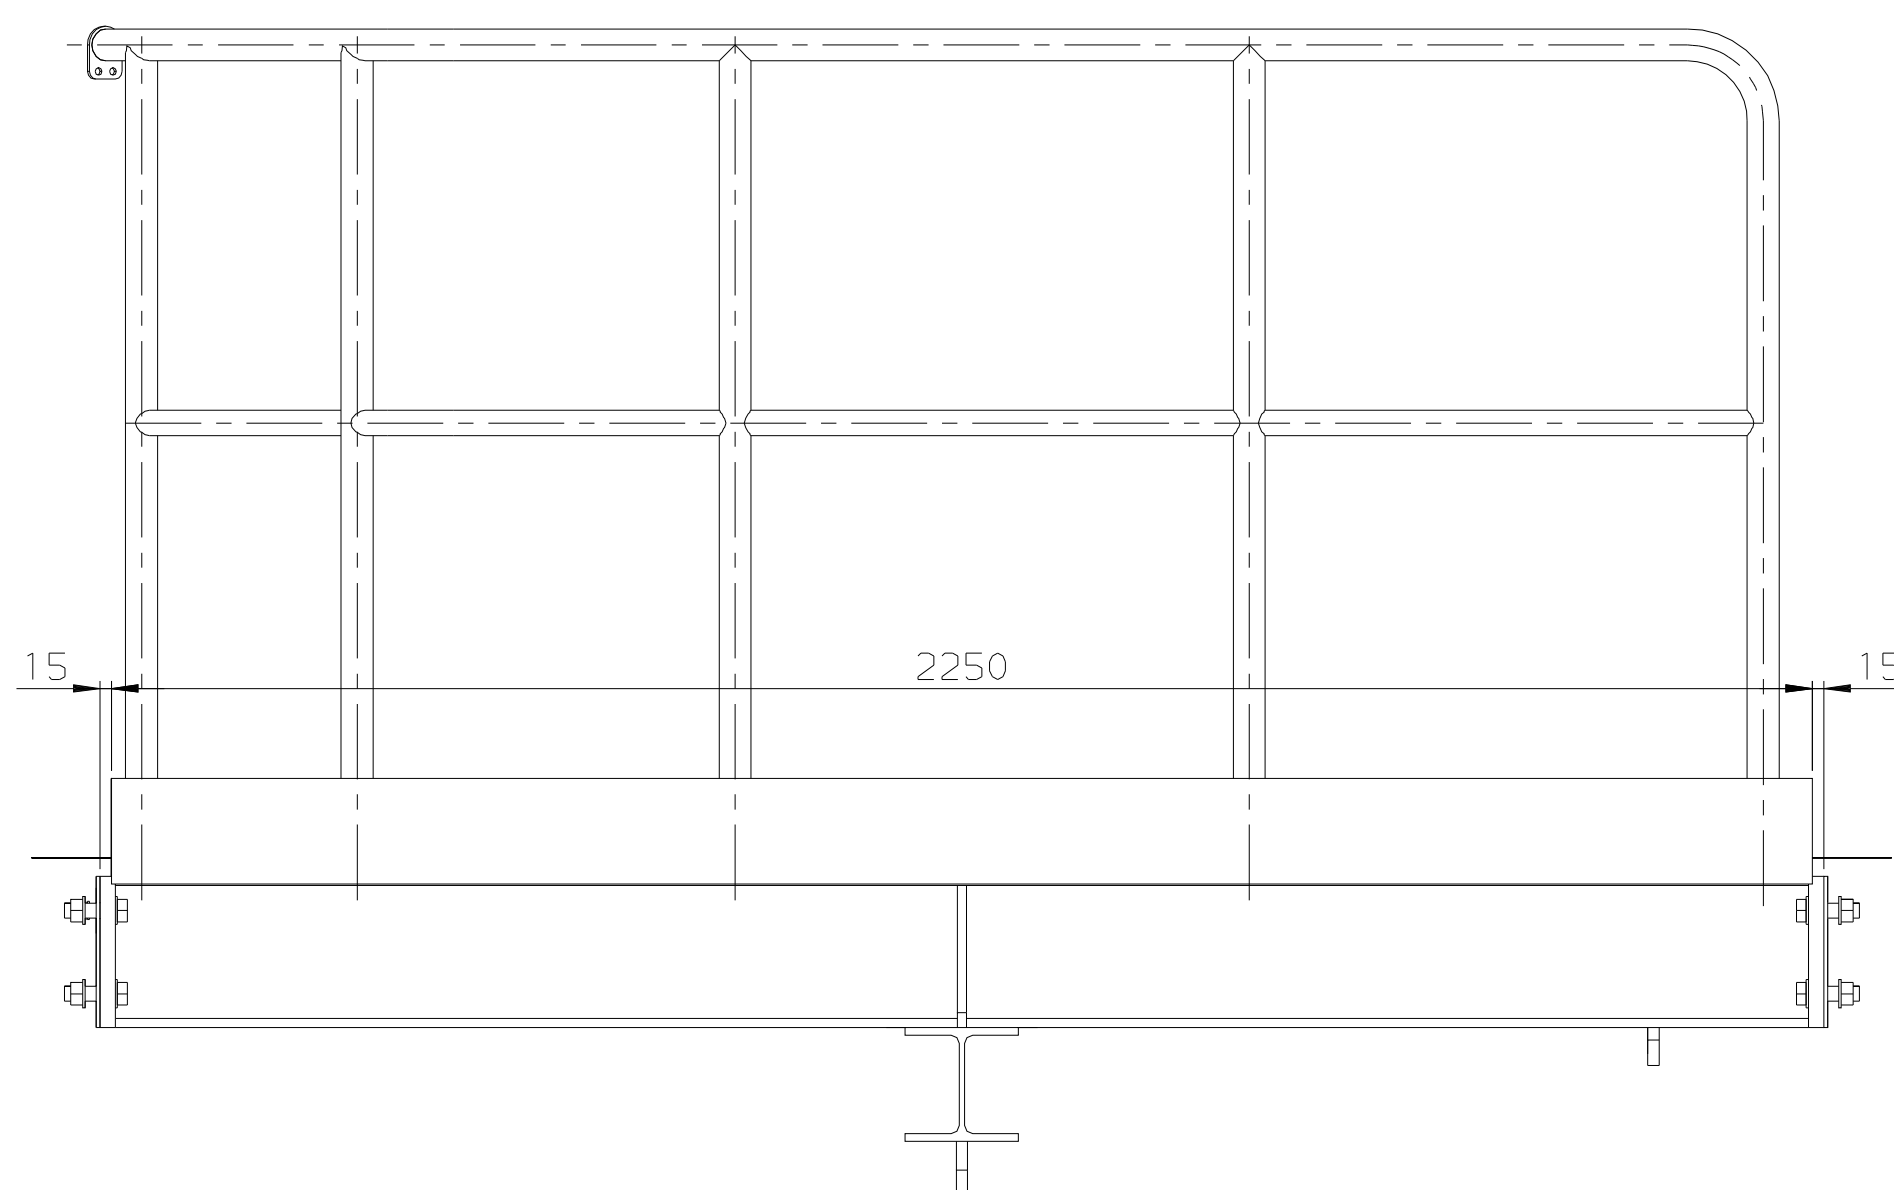


GRATING 02
GRATING 01

```




-GRATING 02
-GRATING 01

```

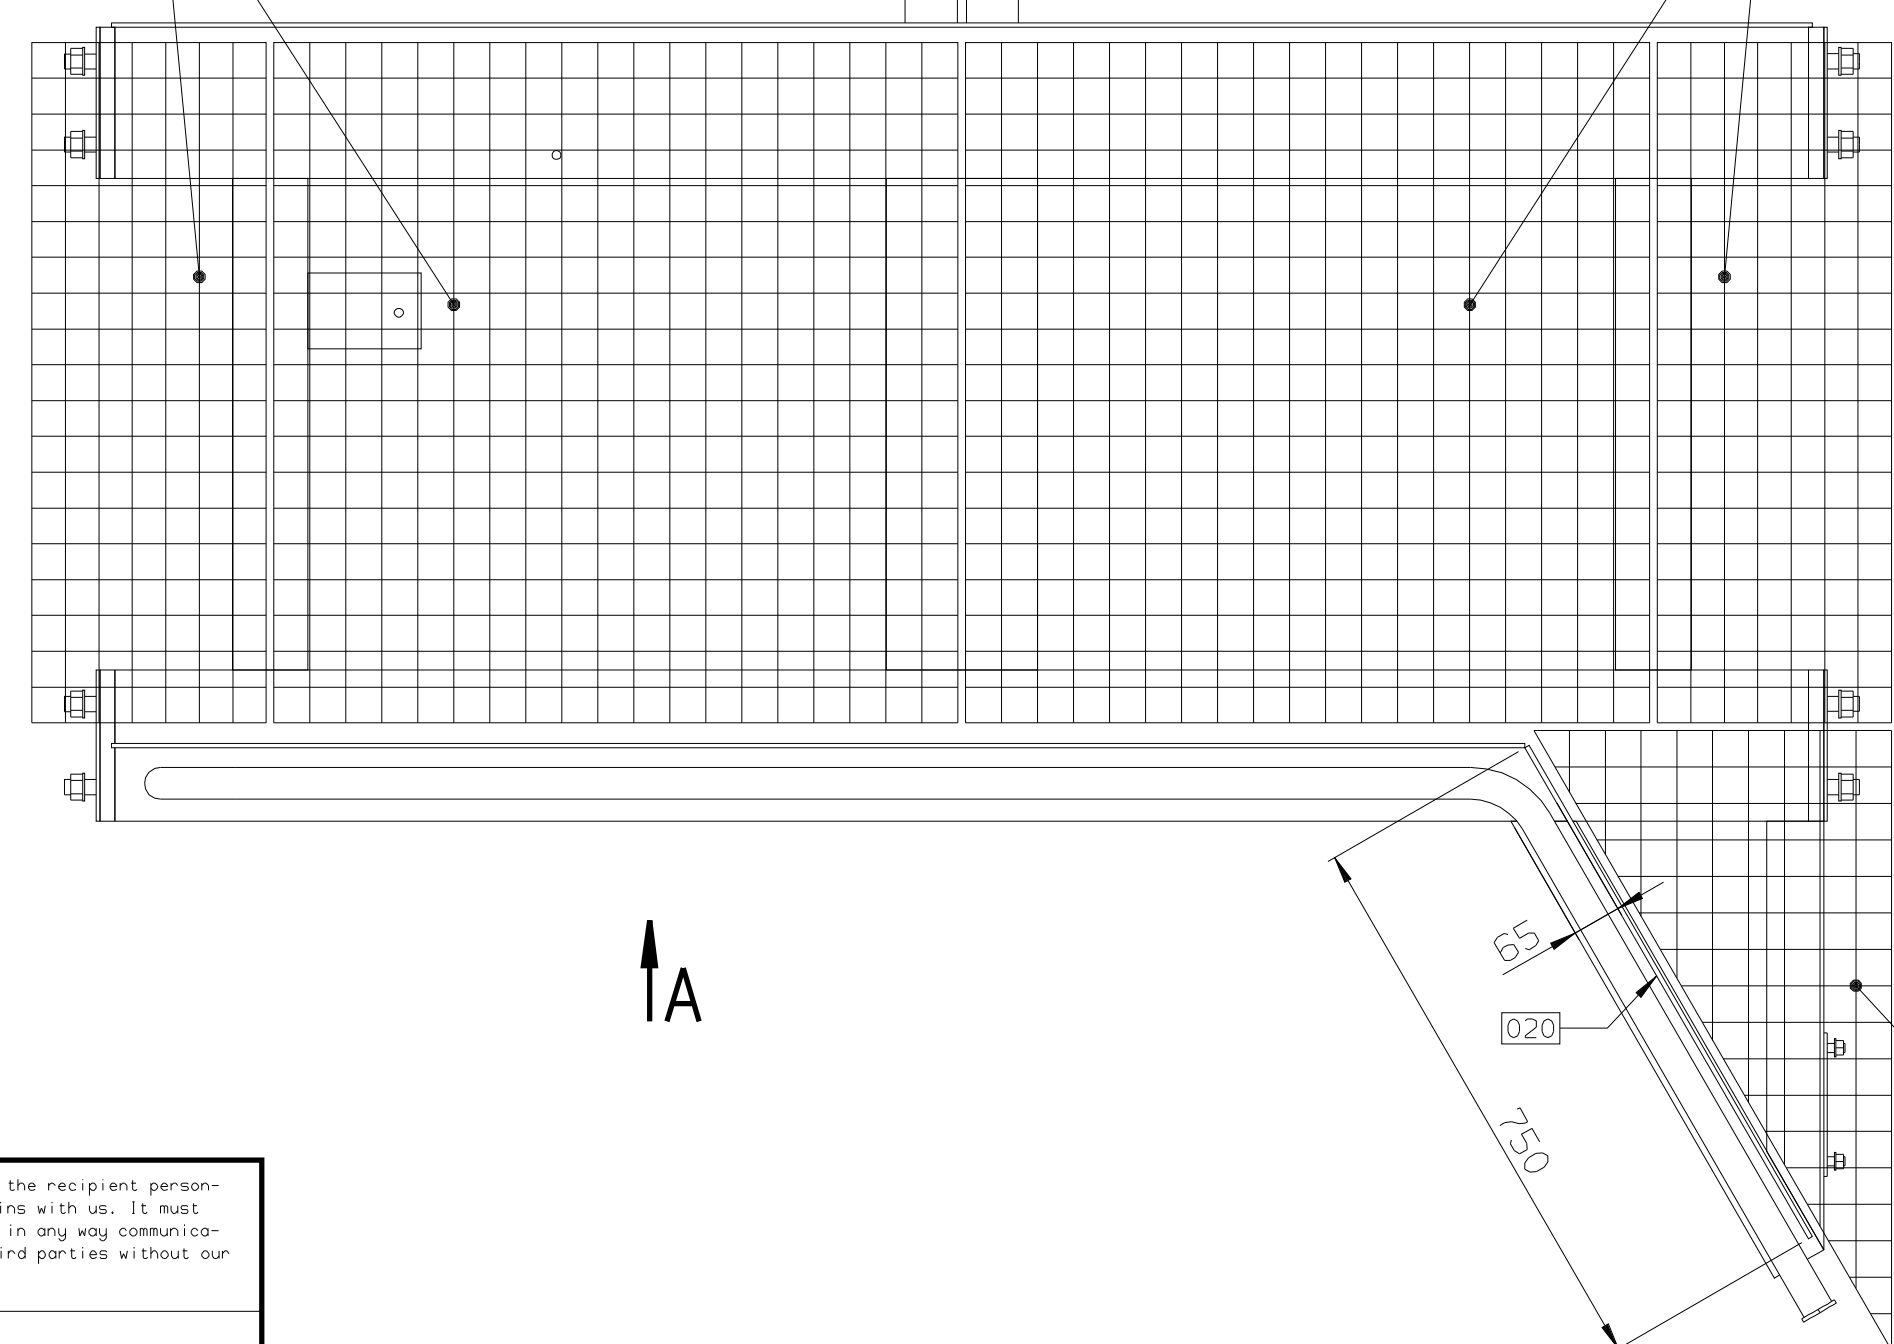

—GRATING 03

VIEW B

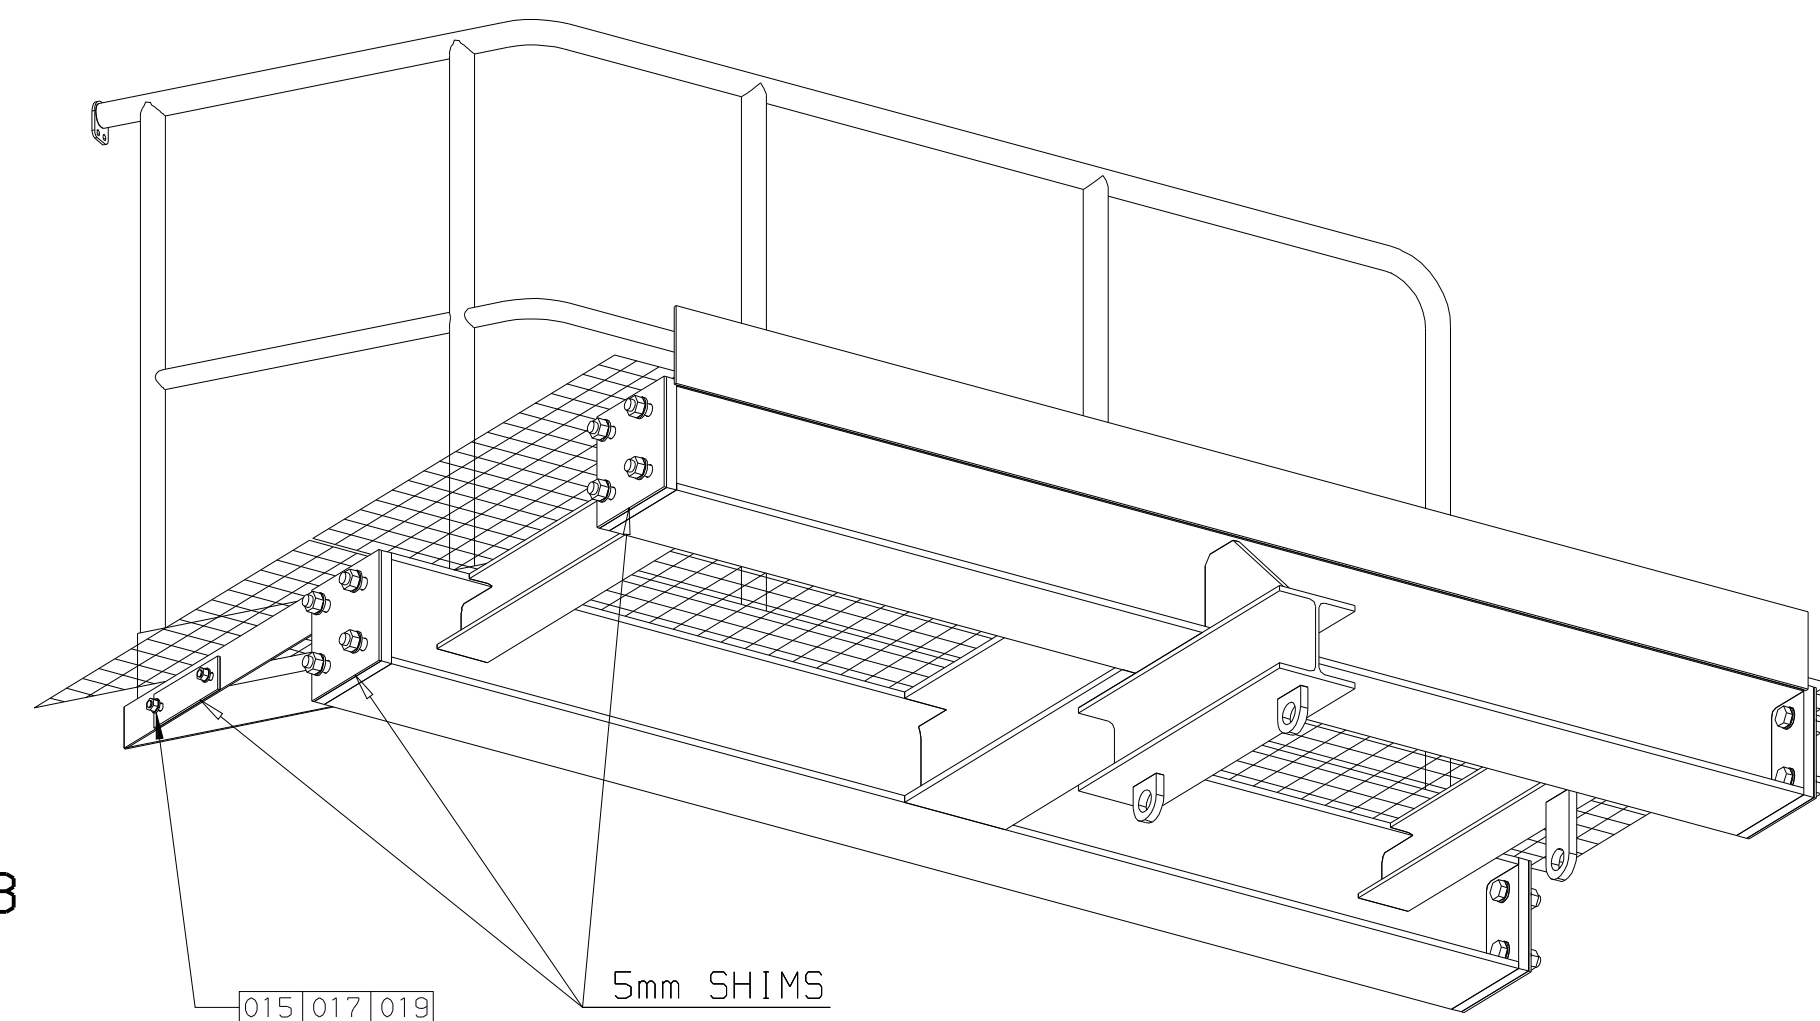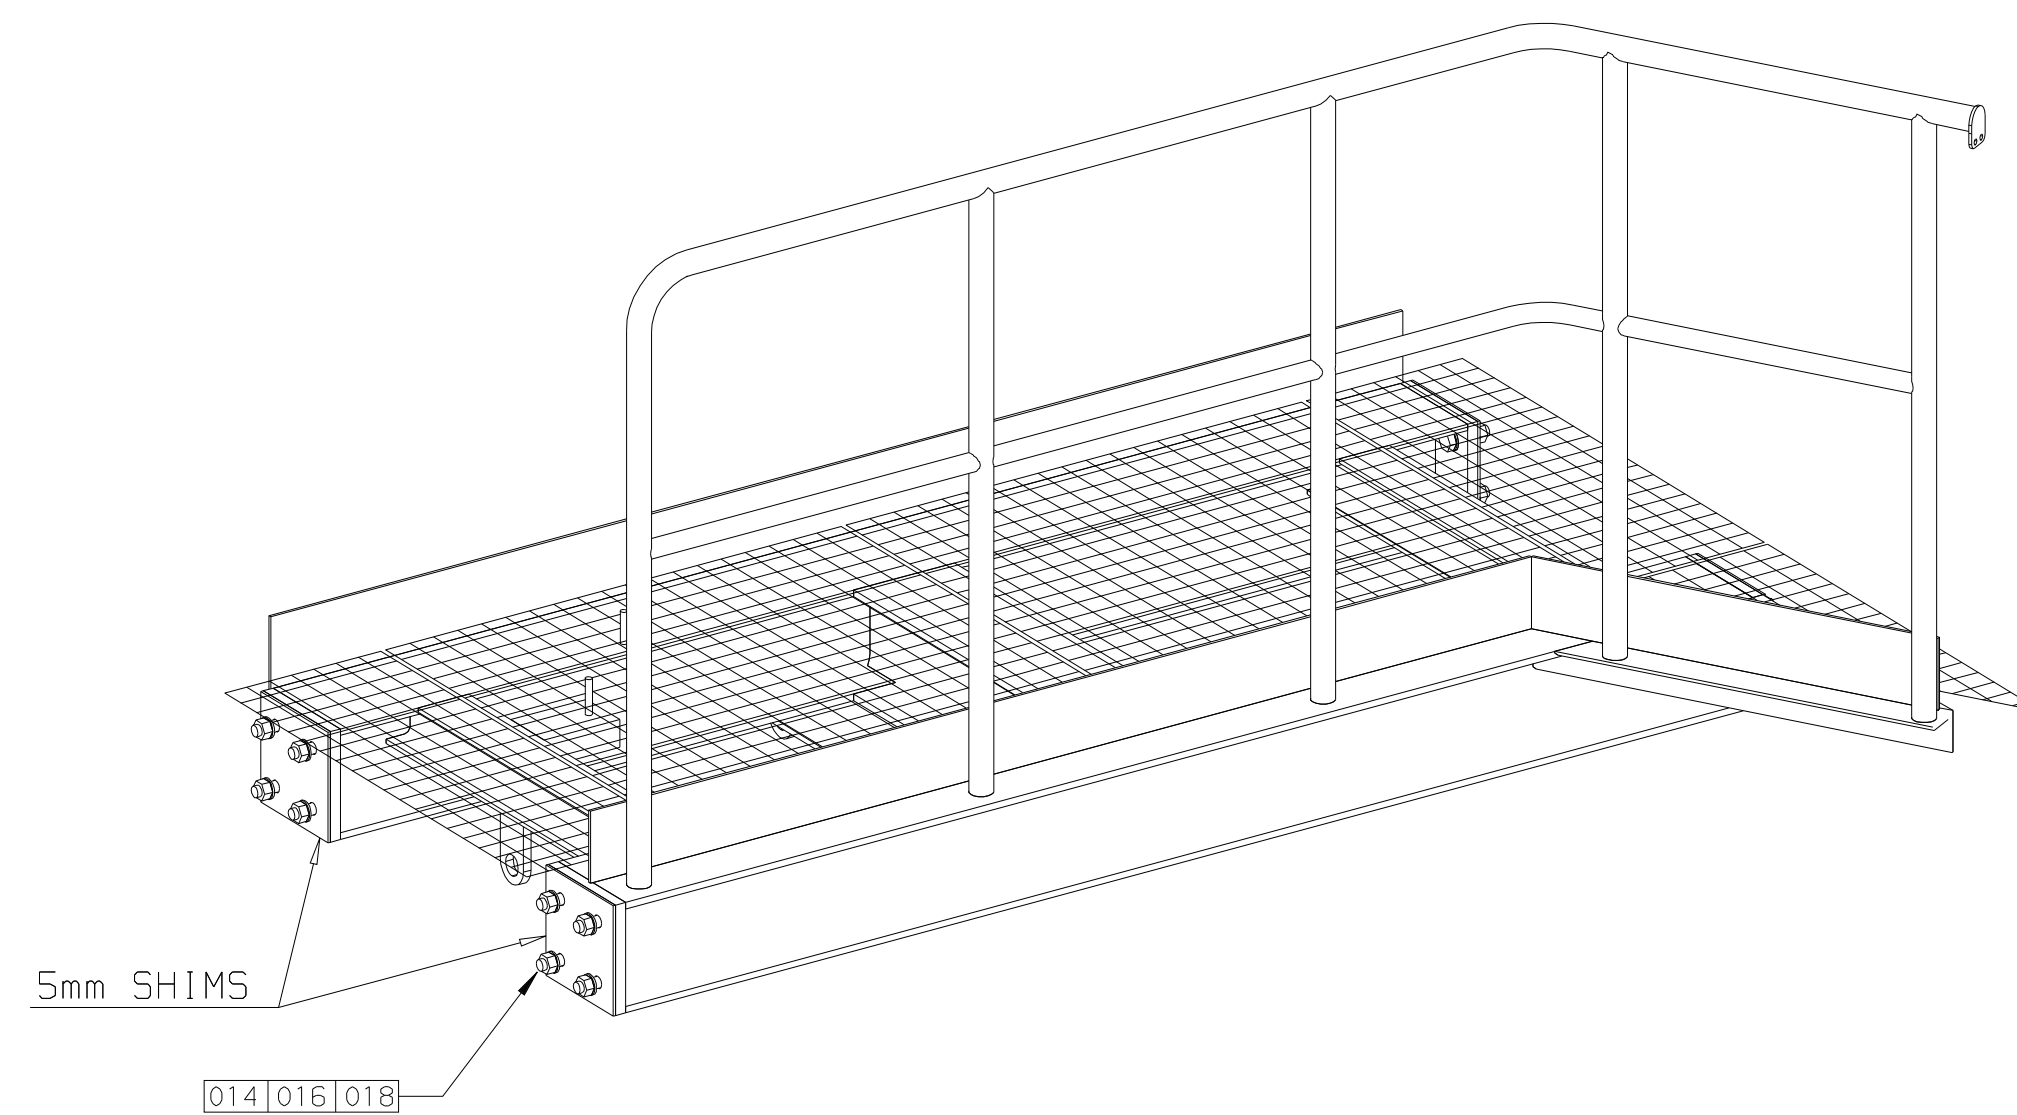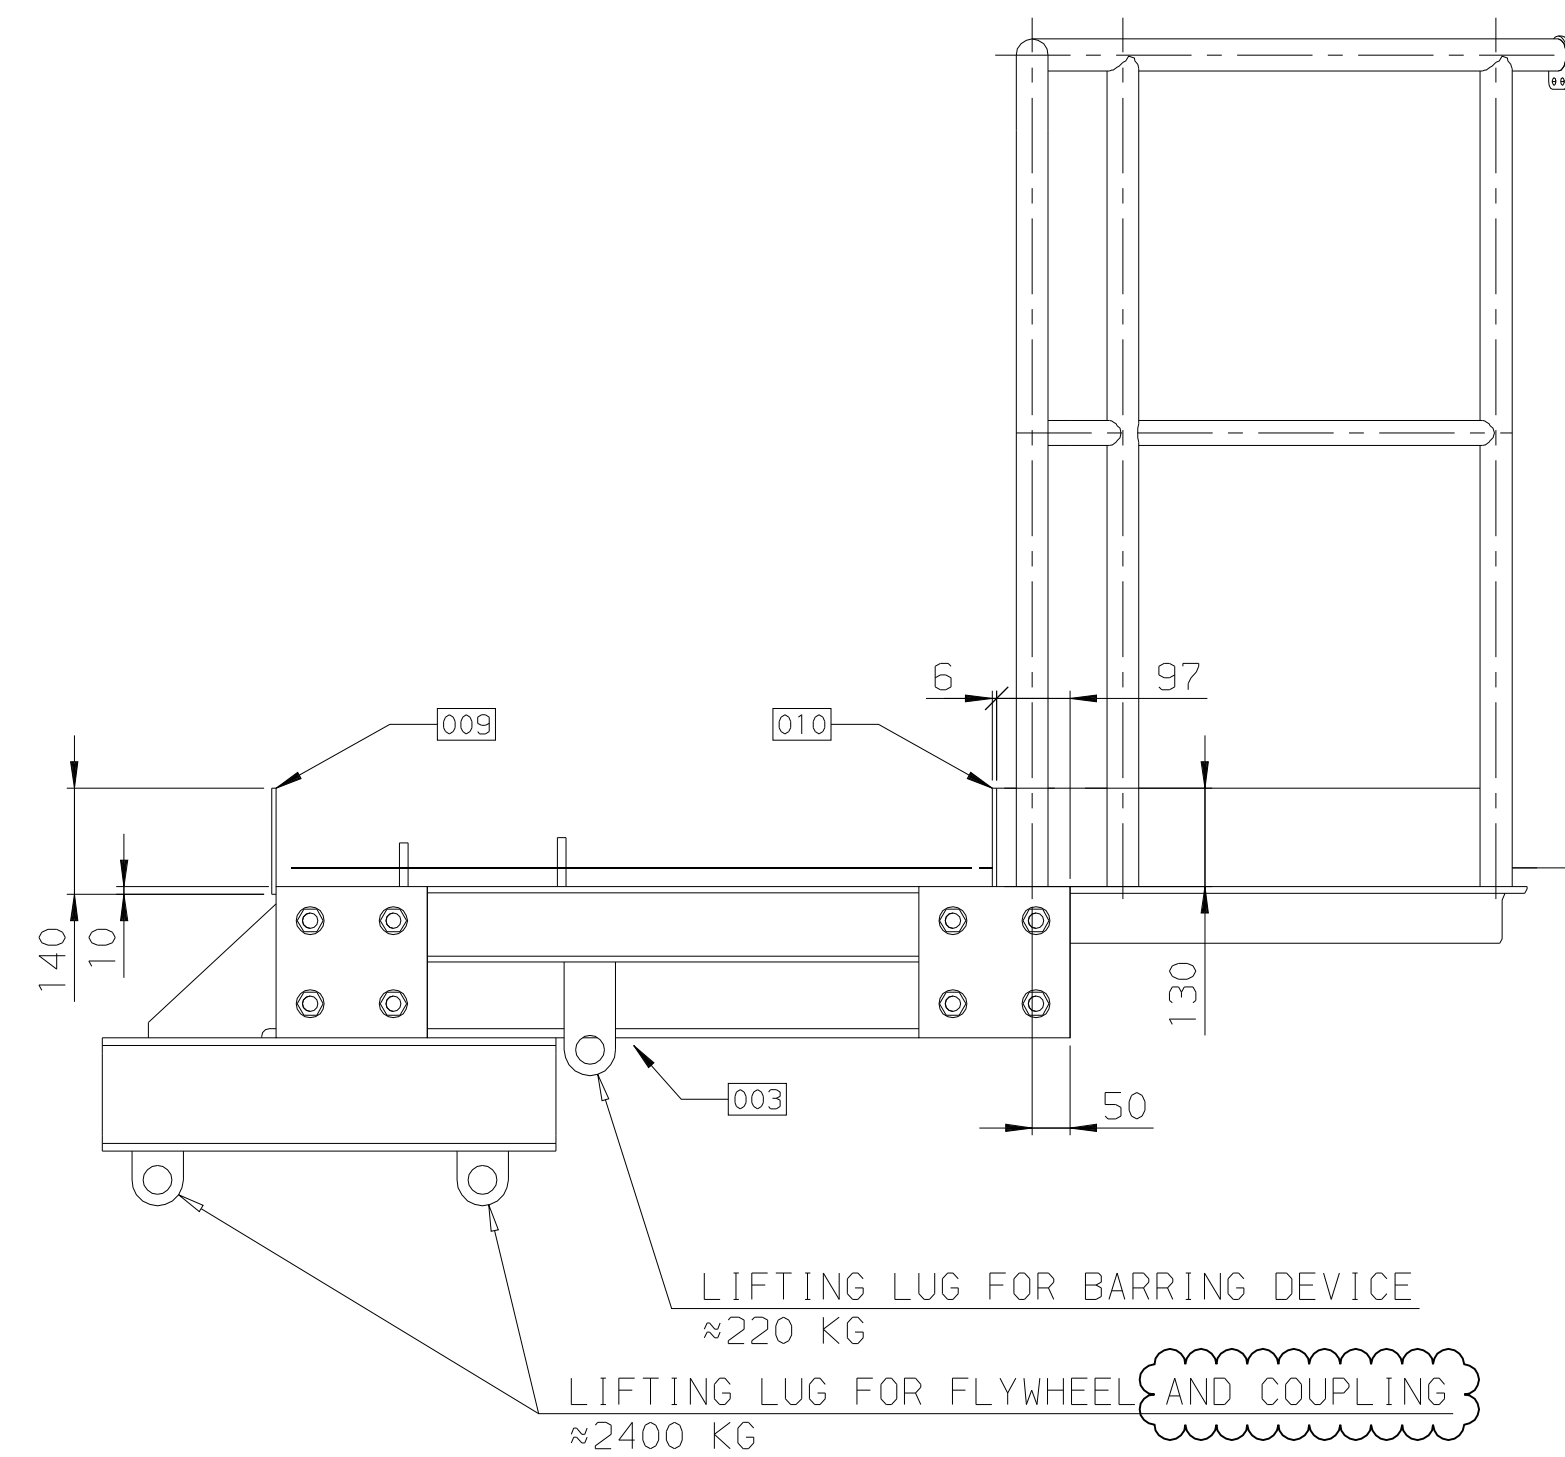


Execution Code Number			Pos.No. Code	Designation	Source of Supply	Mod. Letter

Number			Off	Material and Remarks	Approx. mass kg/pc	
5.5m		001	BEAM H-200x200	/	/	/
			SS400	K5 D3503	267	/
1.7m		002	BEAM H-100x100	/	/	/
			SS400	K5 D3503	25	/
/	003	/	/	/	/	/
		/	/	/	/	/
4	004	PLATE 200x200x20	/	/	/	
		SS400	/	6	/	/
1	005	PLATE 265x188x12	/	/	/	
		SS400	/	3	/	/
/	006	/	/	/	/	/
		/	/	/	/	/
1	007	PLATE 70x50x5	/	/	/	
		SS400	/	1	/	/
1	008	PLATE 150x68x15	/	/	/	
		SS400	/	1	/	/
1	009	FOOT PLATE 2250x140x6	/	/	/	
		SS400	/	15	/	/
1	010	FOOT PLATE 1870x130x6	/	/	/	
		SS400	/	11	/	/
8.5m	011	PIPE 1 1/4" (SCHED.10)	/	/	/	
		A106 GR B	ASME B36.10M	22	/	/
2.7m	012	PIPE 1" (SCHED.10)	/	/	/	
		A106 GR B	ASME B36.10M	7	/	/
2.4m²	013	GRATING (THK 25)	/	/	/	
		/	/	/	/	/
16	014	HEX. HEAD BOLT W/SHANK M20x70/46	/	/	/	
		B.8	DIN EN ISO 4014	/	/	/
2	015	HEX. HEAD BOLT M12x40	/	/	/	
		B.8	DIN EN ISO 4017	/	/	/
16	016	HEX. NUT M20	/	/	/	
		B	DIN EN ISO 4032	/	/	/
2	017	HEX. NUT M12	/	/	/	
		B	DIN EN ISO 4032	/	/	/
32	018	WASHER (M20)	/	/	/	
		/	ISO 7089-20-200 HV	/	/	/
4	019	WASHER (M12)	/	/	/	
		/	ISO 7089-12-200 HV	/	/	/
1	020	FOOT PLATE 750x130x6	/	/	/	
		SS400	/	5	/	/
1.5m	021	BEAM L-75x75x9	/	/	/	
		SS400	K5 D3503	13	/	/
2	022	PLATE 72x68x15	/	/	/	
		SS400	/	1	/	/
0.6m	023	BEAM H-150x150	/	/	/	
		SS400	K5 D3503	19	/	/
0.2m	024	BEAM CH-100x50	/	/	/	
		SS400	K5 D3503	2	/	/
2	025	HEX. HEAD BOLT W/SHANK M12x70/30	/	/	/	
		B.8	DIN EN ISO 4014	/	/	/
4	026	SHIMS 200x200x3	/	/	/	
		SS400	/	/	/	/
8	027	SHIMS 200x200x1	/	/	/	
		SS400	/	/	/	/
1	028	SHIMS 190x60x3	/	/	/	
		SS400	/	/	/	/
2	029	SHIMS 190x60x1	/	/	/	
		SS400	/	/	/	/
APPROX WEIGHT					≈ 399 Kg	







NOTE:

1) ALL LISTE MATERIAL ARE WITHOUT ALLOWANCE.



Modif. Freez. on:	(e)	TONELL_I_M	02-04-2024	(f)	TONELL_I_M	25-05-2023	(g)	TONELL_I_M	30-08-2023	(h)	TONELL_I_M	26-01-2024
	(a)	TONELL_I_M	09-03-2024	(b)	TONELL_I_M	25-05-2023	(c)	TONELL_I_M	30-08-2023	(d)	TONELL_I_M	26-01-2024
	Name		Date	Name		Date	Name		Date	Name		Date
	Sep. parts list			Design group								
Replaced by			Subst. for			Orig. scale			1:10			
SLP250V-5A			STEEL STRUCTURE BRIDGE MOTOR SIDE						Drawn:			14-04-2022 TONELL_I_M
									Verified:			05-04-2024 SABOGAL_A
L-0184 ASME			LABY-G10 - NON-LUBE COMP. ITEM NO. : C-001						Standards conform:			
CAD-Drawing			Part-No.		Bar - Code							
 Burckhardt Compression			E		1-125.619.980						1-2 e	





FRAME

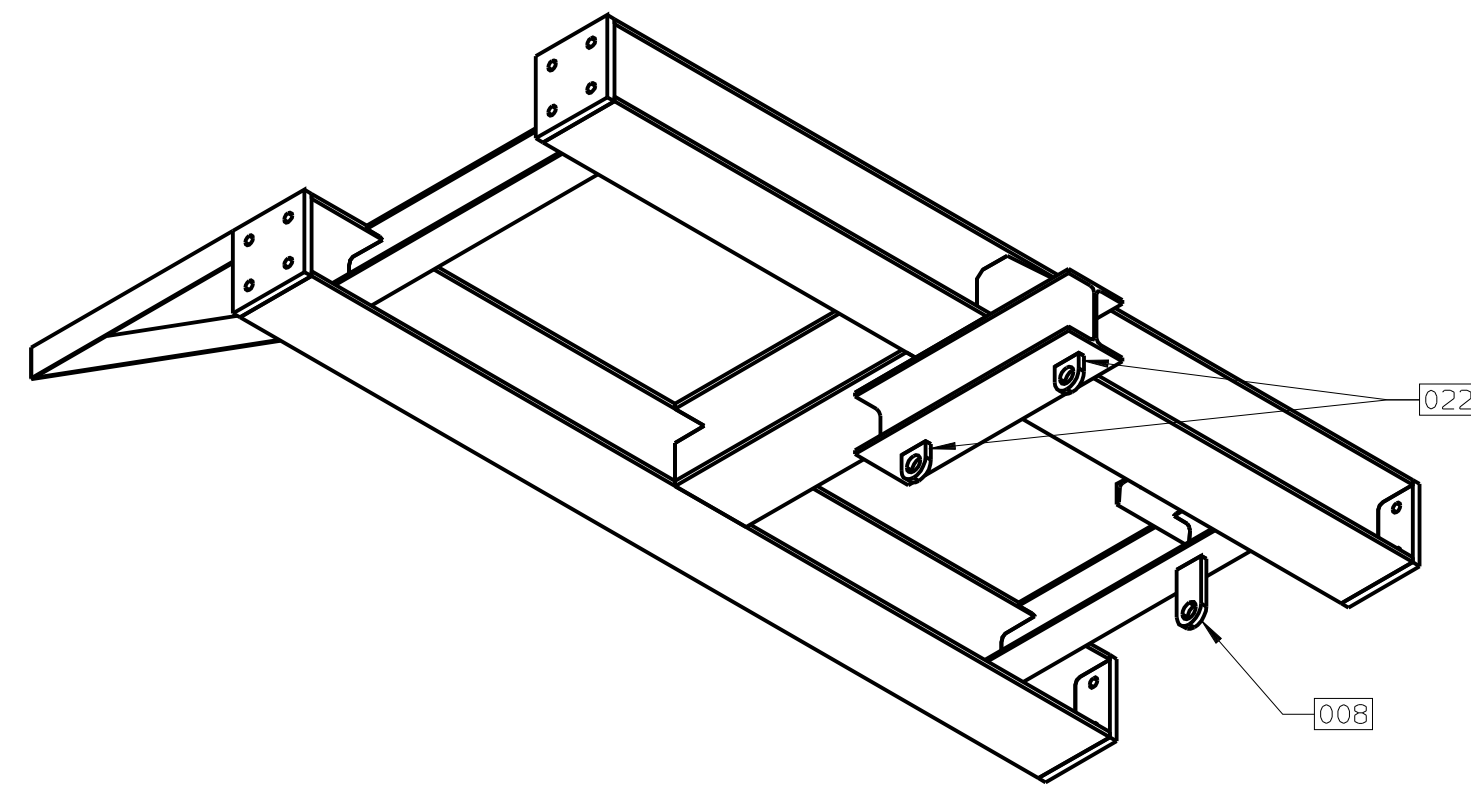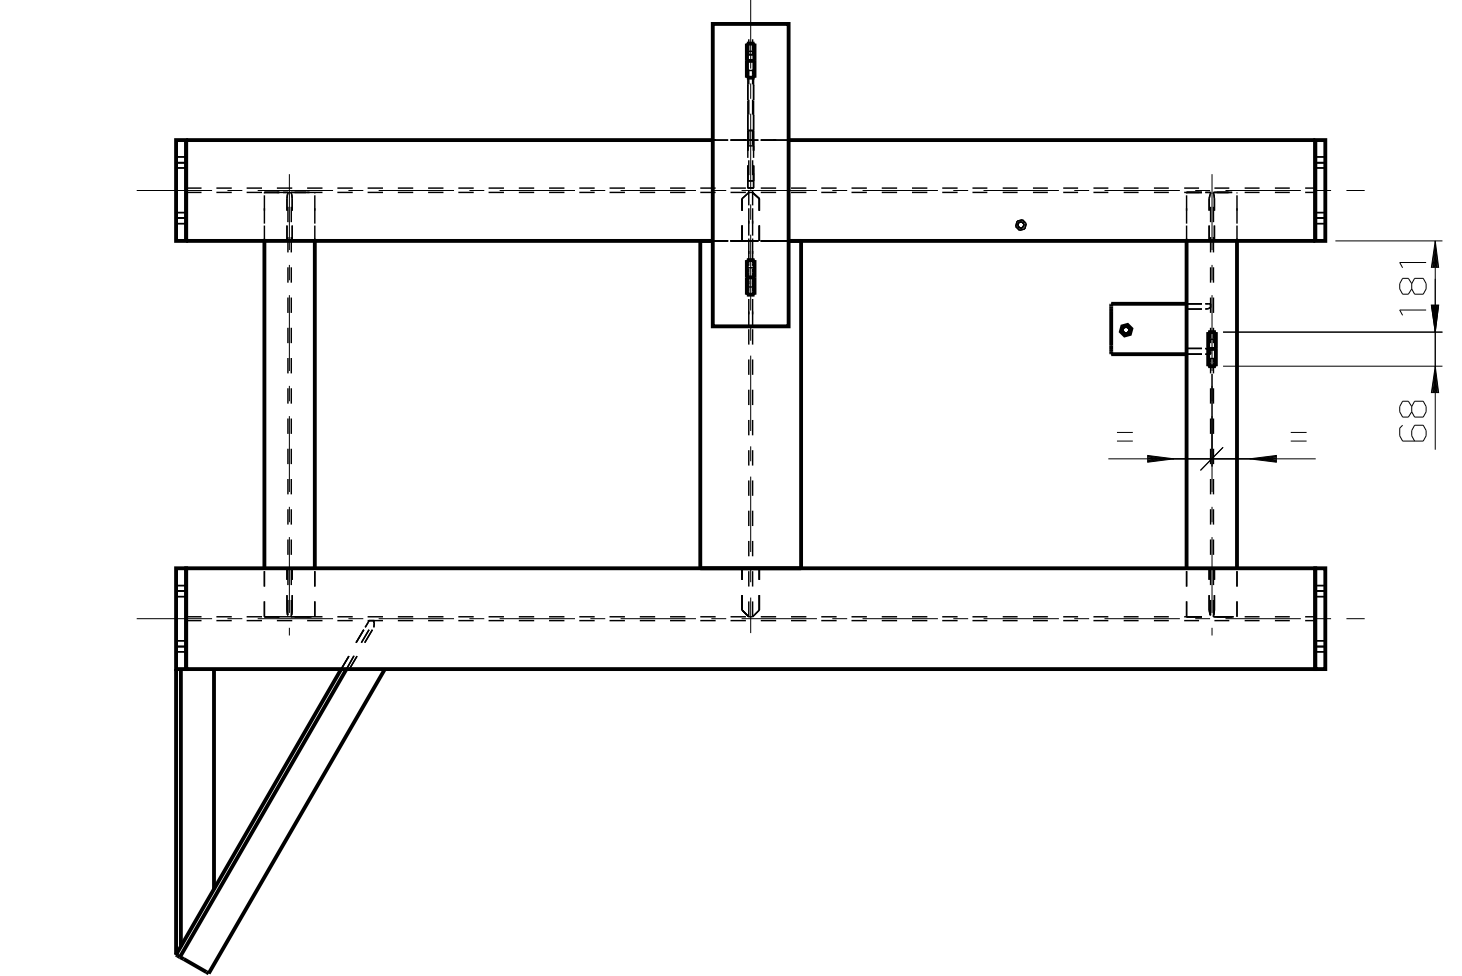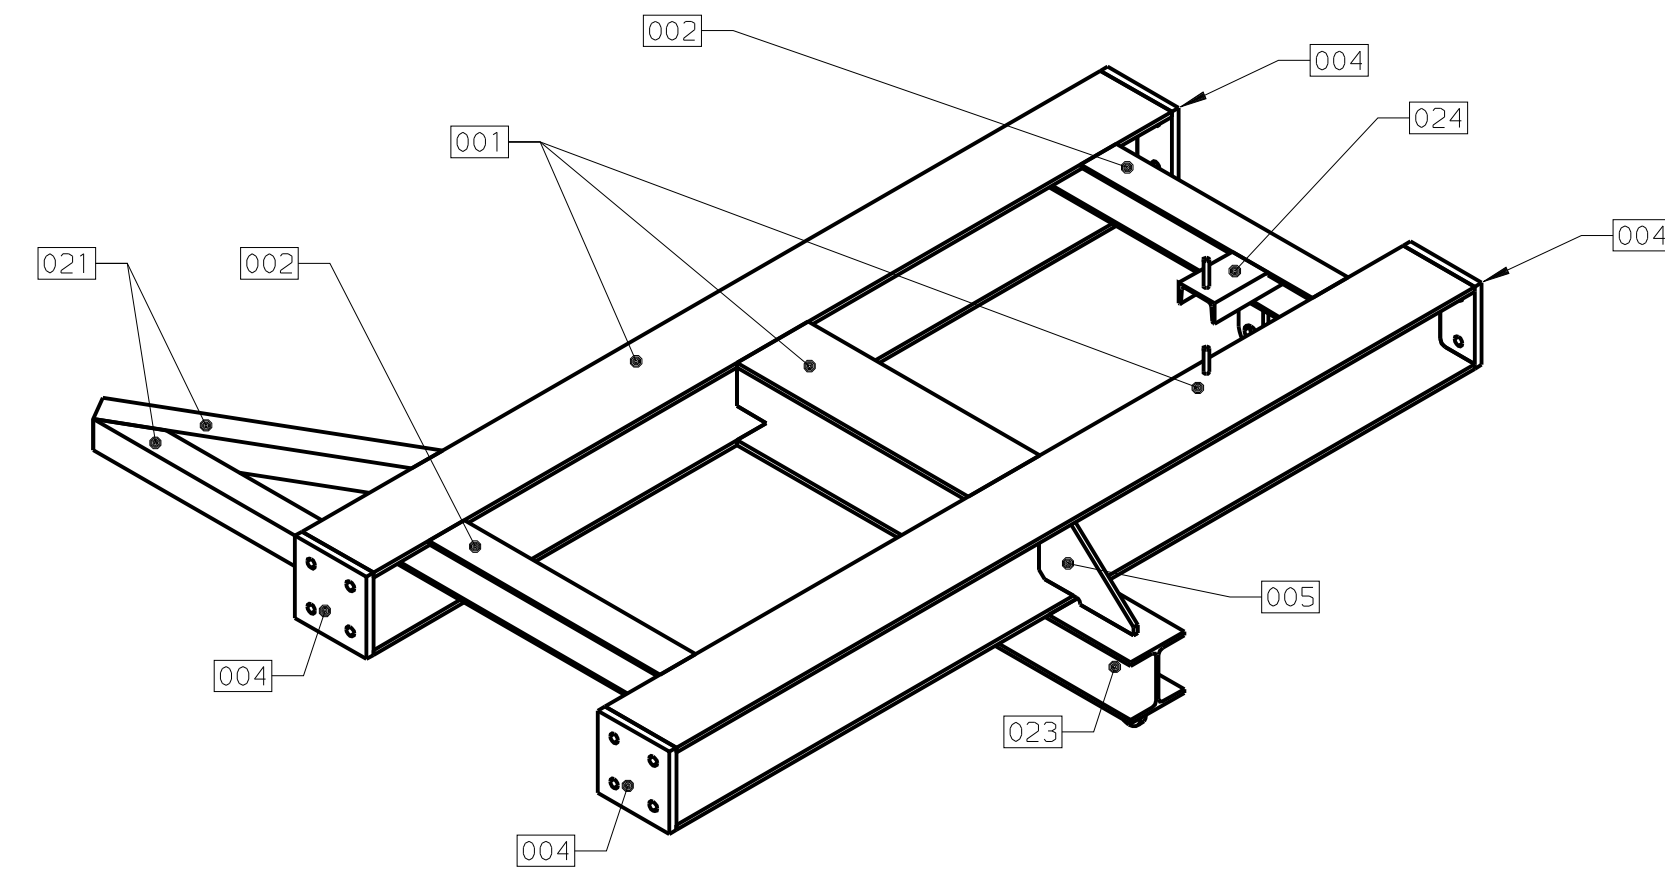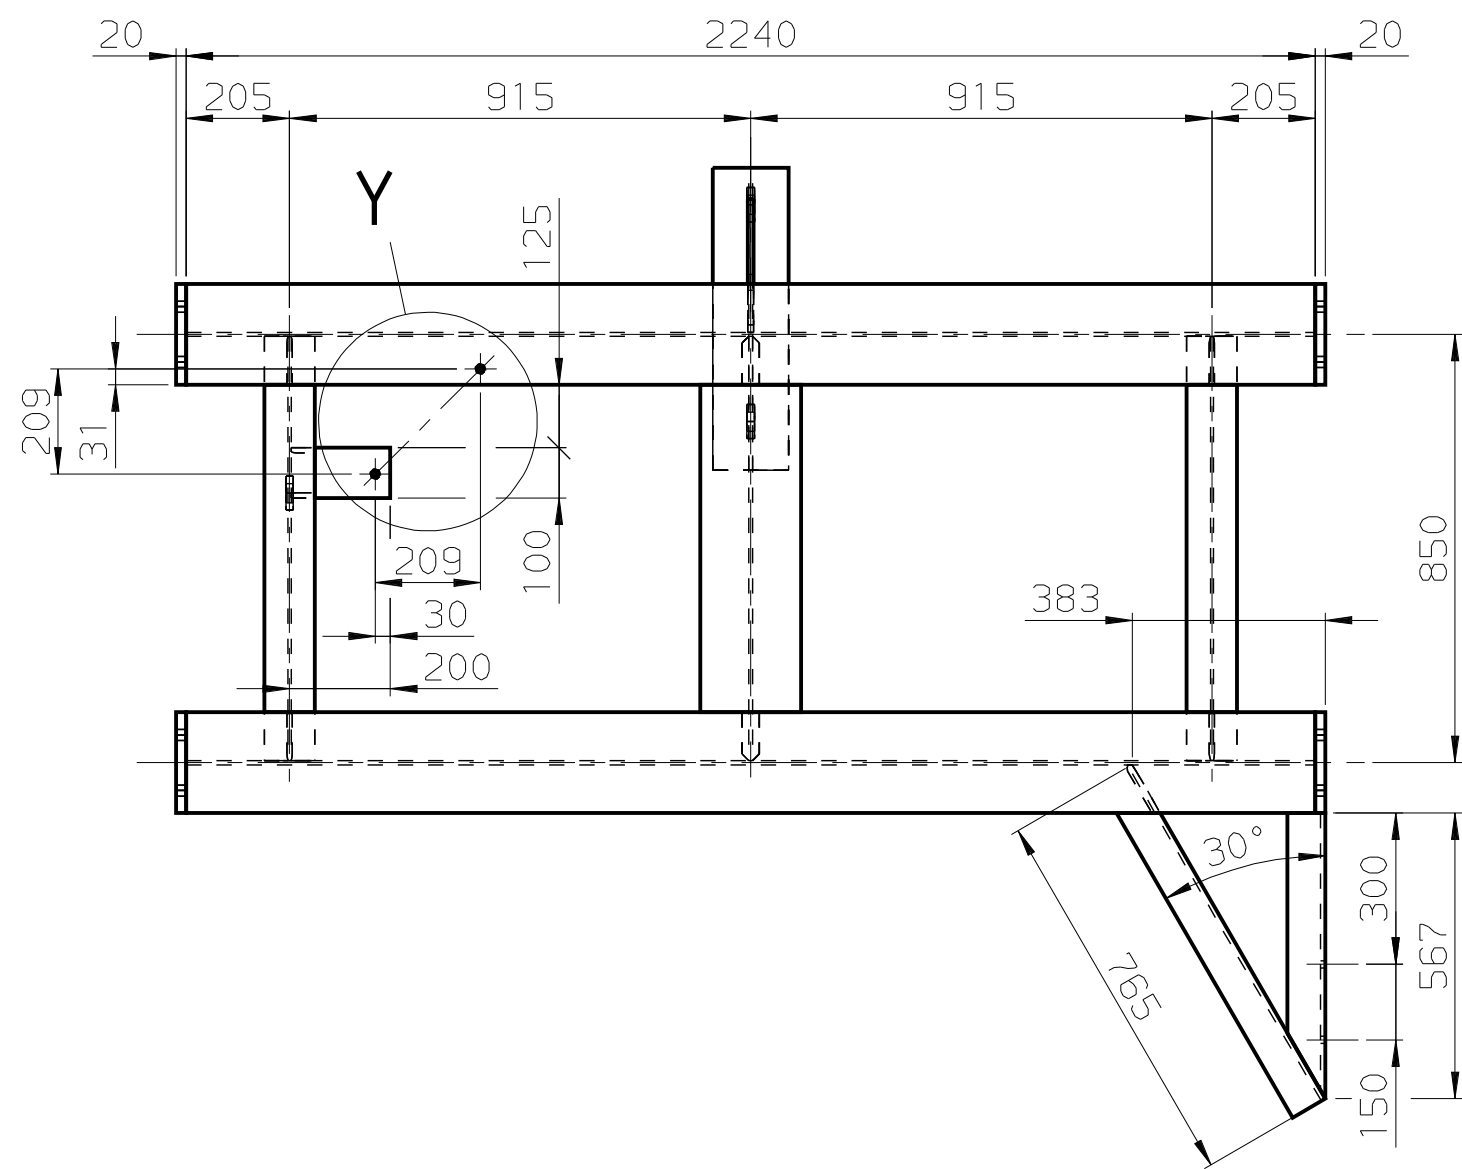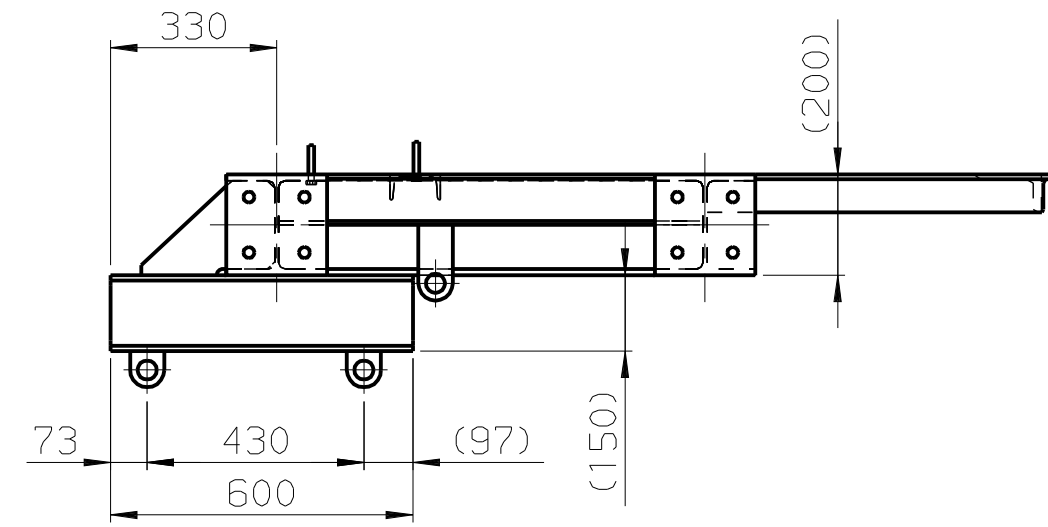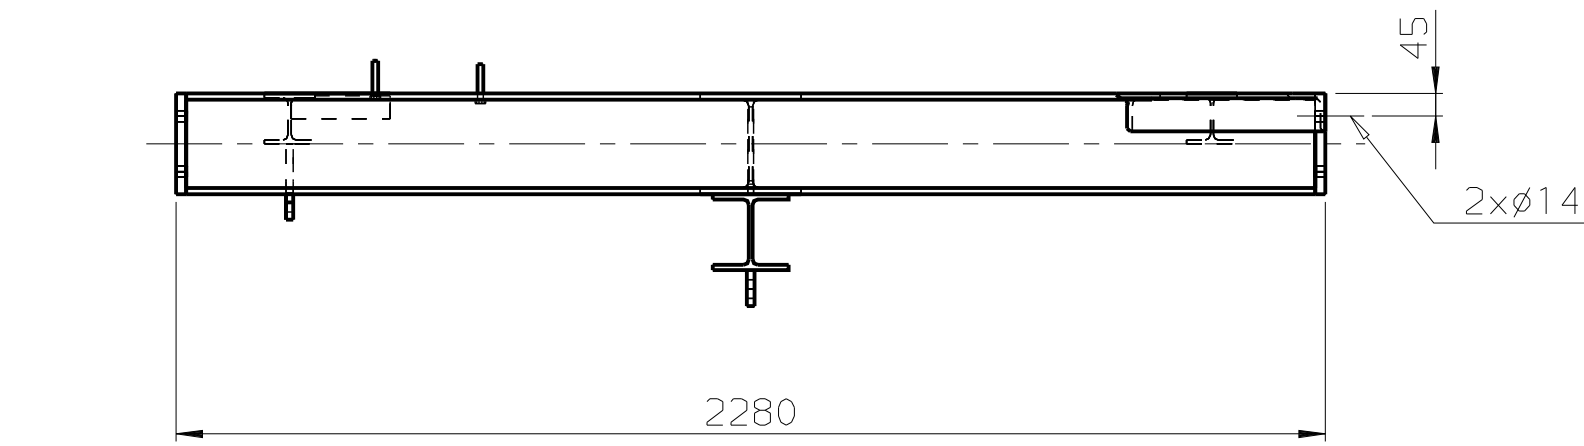

DETAIL Y


(SCALE 1:2)

SCREW MUST BE WELDED FROM BOTTOM

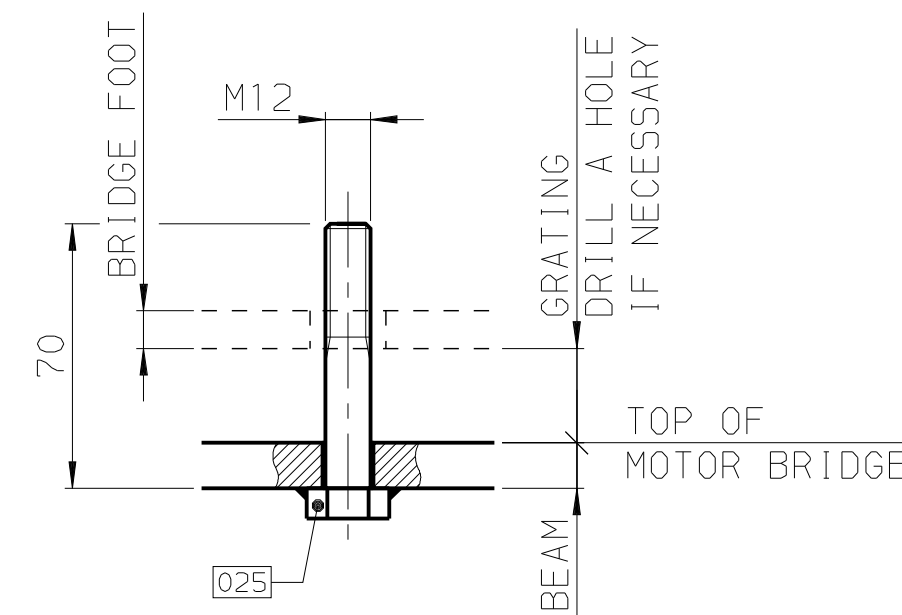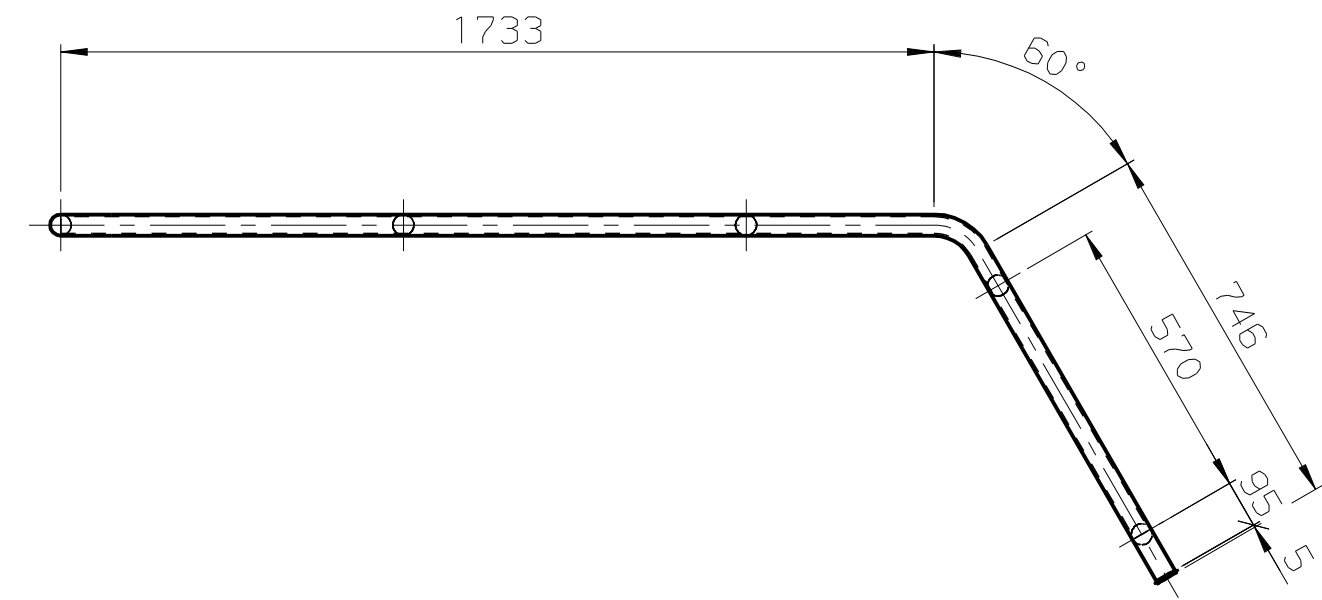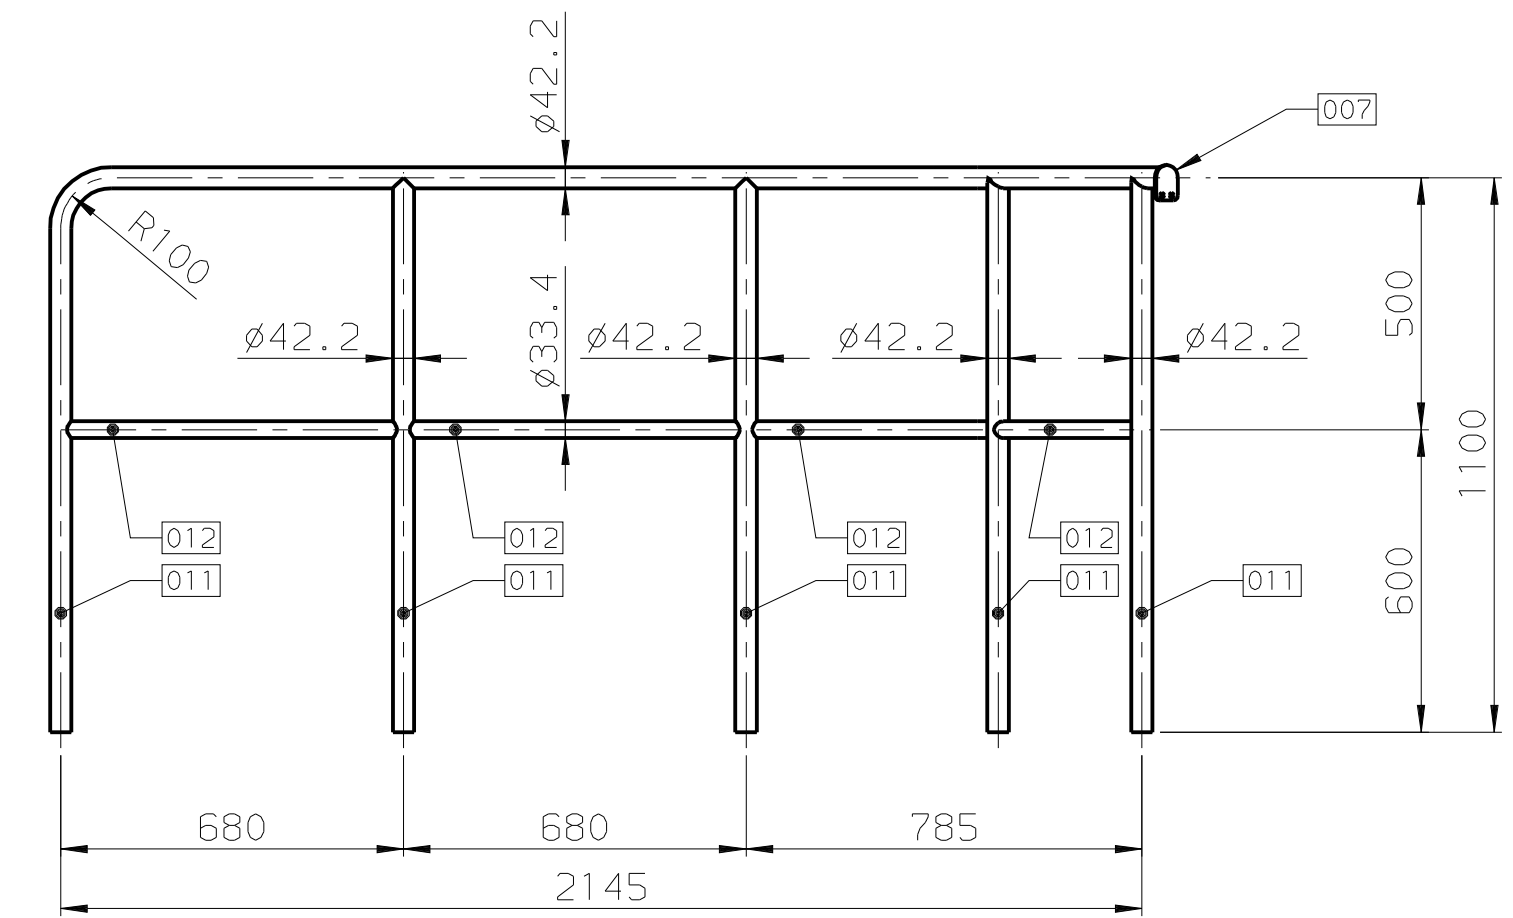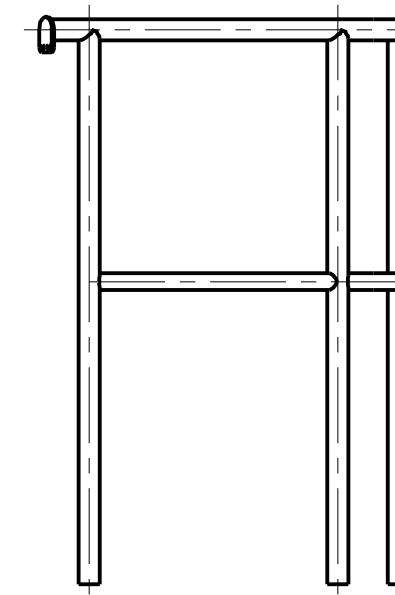RAILING


P05 004

THICKNESS 20mm
(SCALE 1:10)

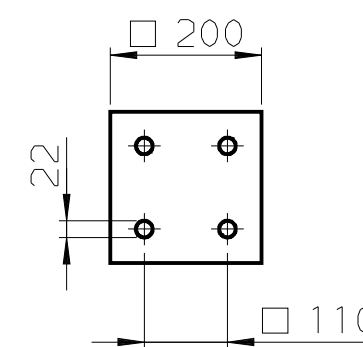


P05 005

THICKNESS 12mm
(SCALE 1:10)

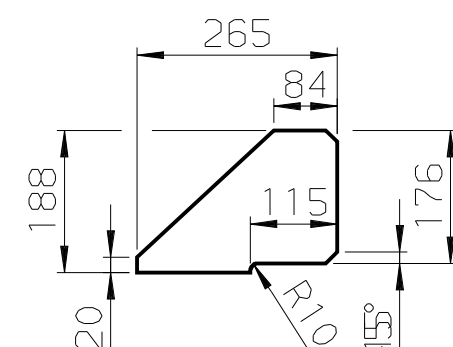


P05 007

THICKNESS 5mm
(SCALE 1:5)

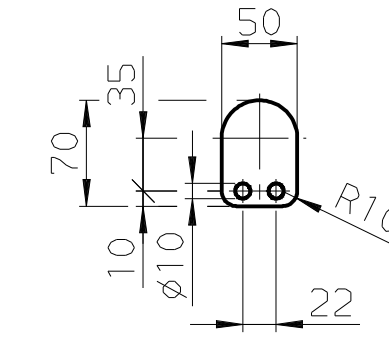


P05 008

THICKNESS 15mm
(SCALE 1:5)

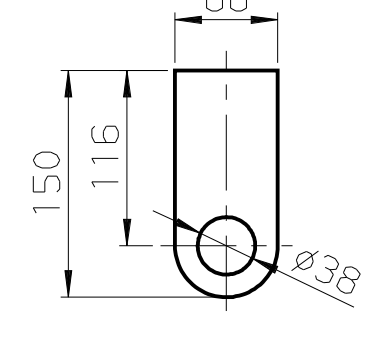


P05 022


THICKNESS 15mm
(SCALE 1:5)

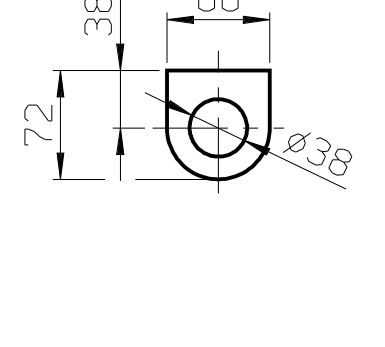


GRATING 01 (QTY 2) 013
THICKNESS 25mm

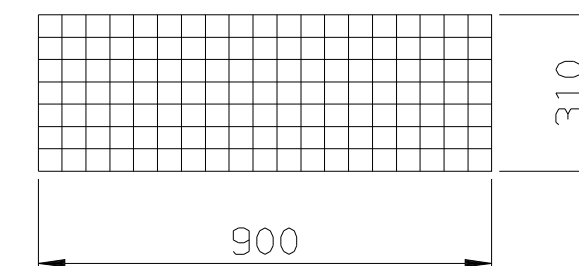

GRATING 02 (QTY 2) 013
THICKNESS 25mm

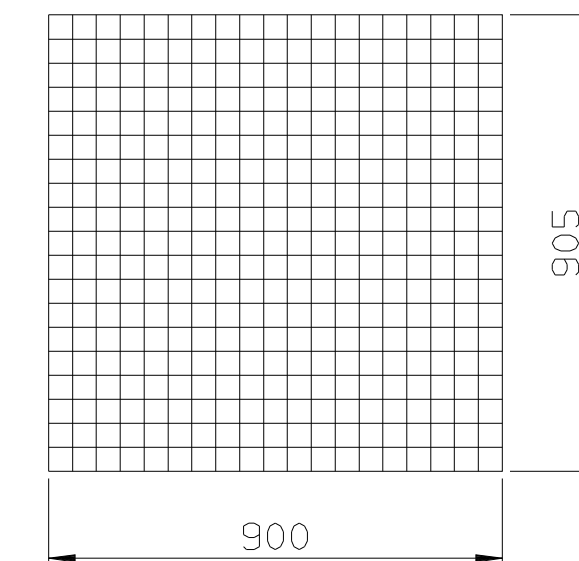


SHIMS
POS 026/027
(SCALE 1:10)

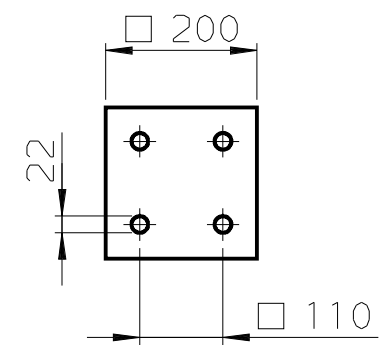

SET FOR ONE INTER-
THICKNESS

1 x 3mm


SHIMS
P05 028/029
(SCALE 1:10)

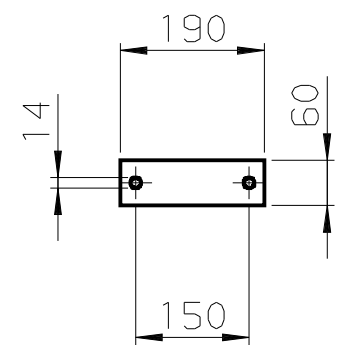

SET FOR ONE INTERFACE
THICKNESS


1 × 3mm

GRATING 03 013
THICKNESS 25mm

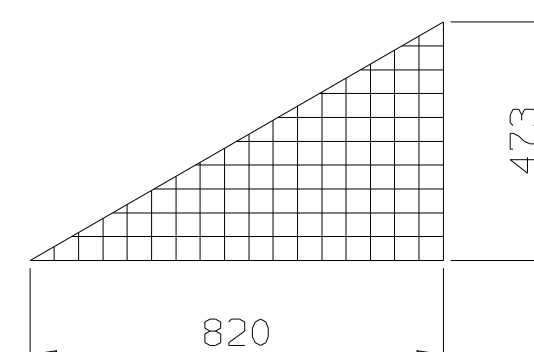


Modi. Fraz. con nome	(e)	TONELL_I_M	02-04-2024	(f)								
	(a)	TONELL_I_M	09-03-2023	(b)	TONELL_I_M	25-05-2023	(c)	TONELL_I_M	30-08-2023	(d)	TONELL_I_M	26-01-2024
	Name		Date	Name		Date	Name		Date	Name		Date
Sep. parts list			Design group									
Replaced by						Subst. for			Orig. scale 1:1 ;			
SLP250V-5A			STEEL STRUCTURE BRIDGE MOTOR SIDE LABY-G10 - NON-LUBE COMP. ITEM NO. : C-001						Drawn: 19-04-2022 TONELL_I_M			
									Verified: 05-04-2024 SABOGAL_A			
L-0184 ASME									Standards conform:			
CAD-Drawing			Part-No.		Bar - Code							
 Burckhardt Compression			E		1-125.619.980					2-2 e		





VIEW A

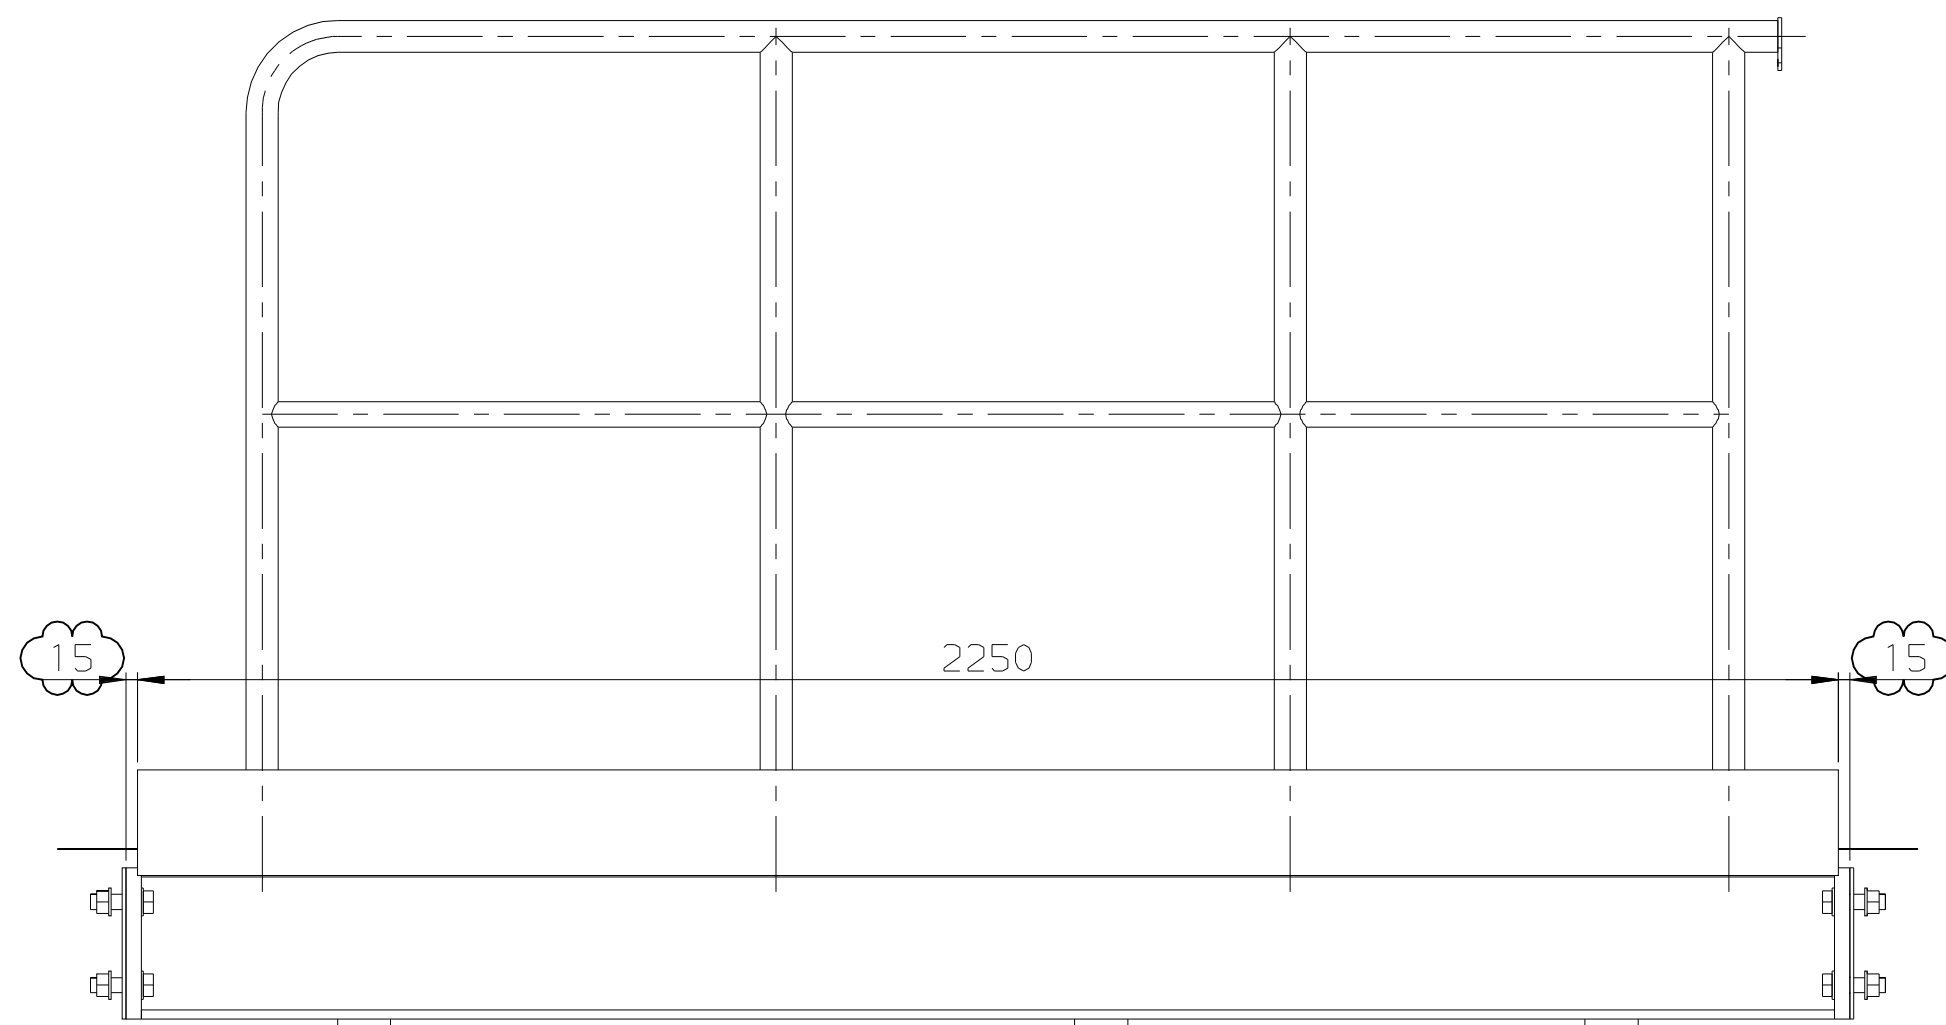

VIEW B

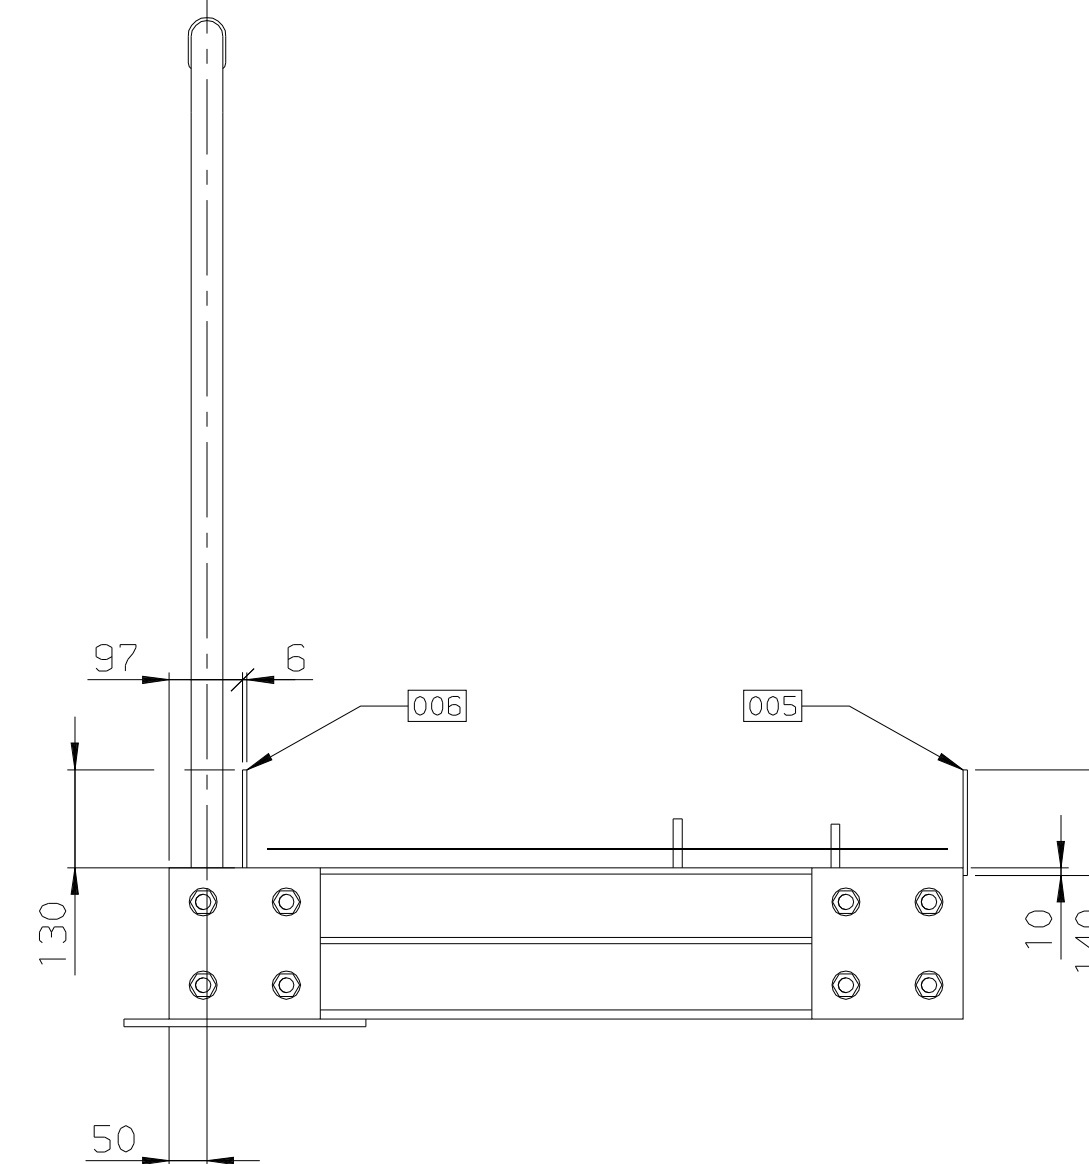

VIEW C

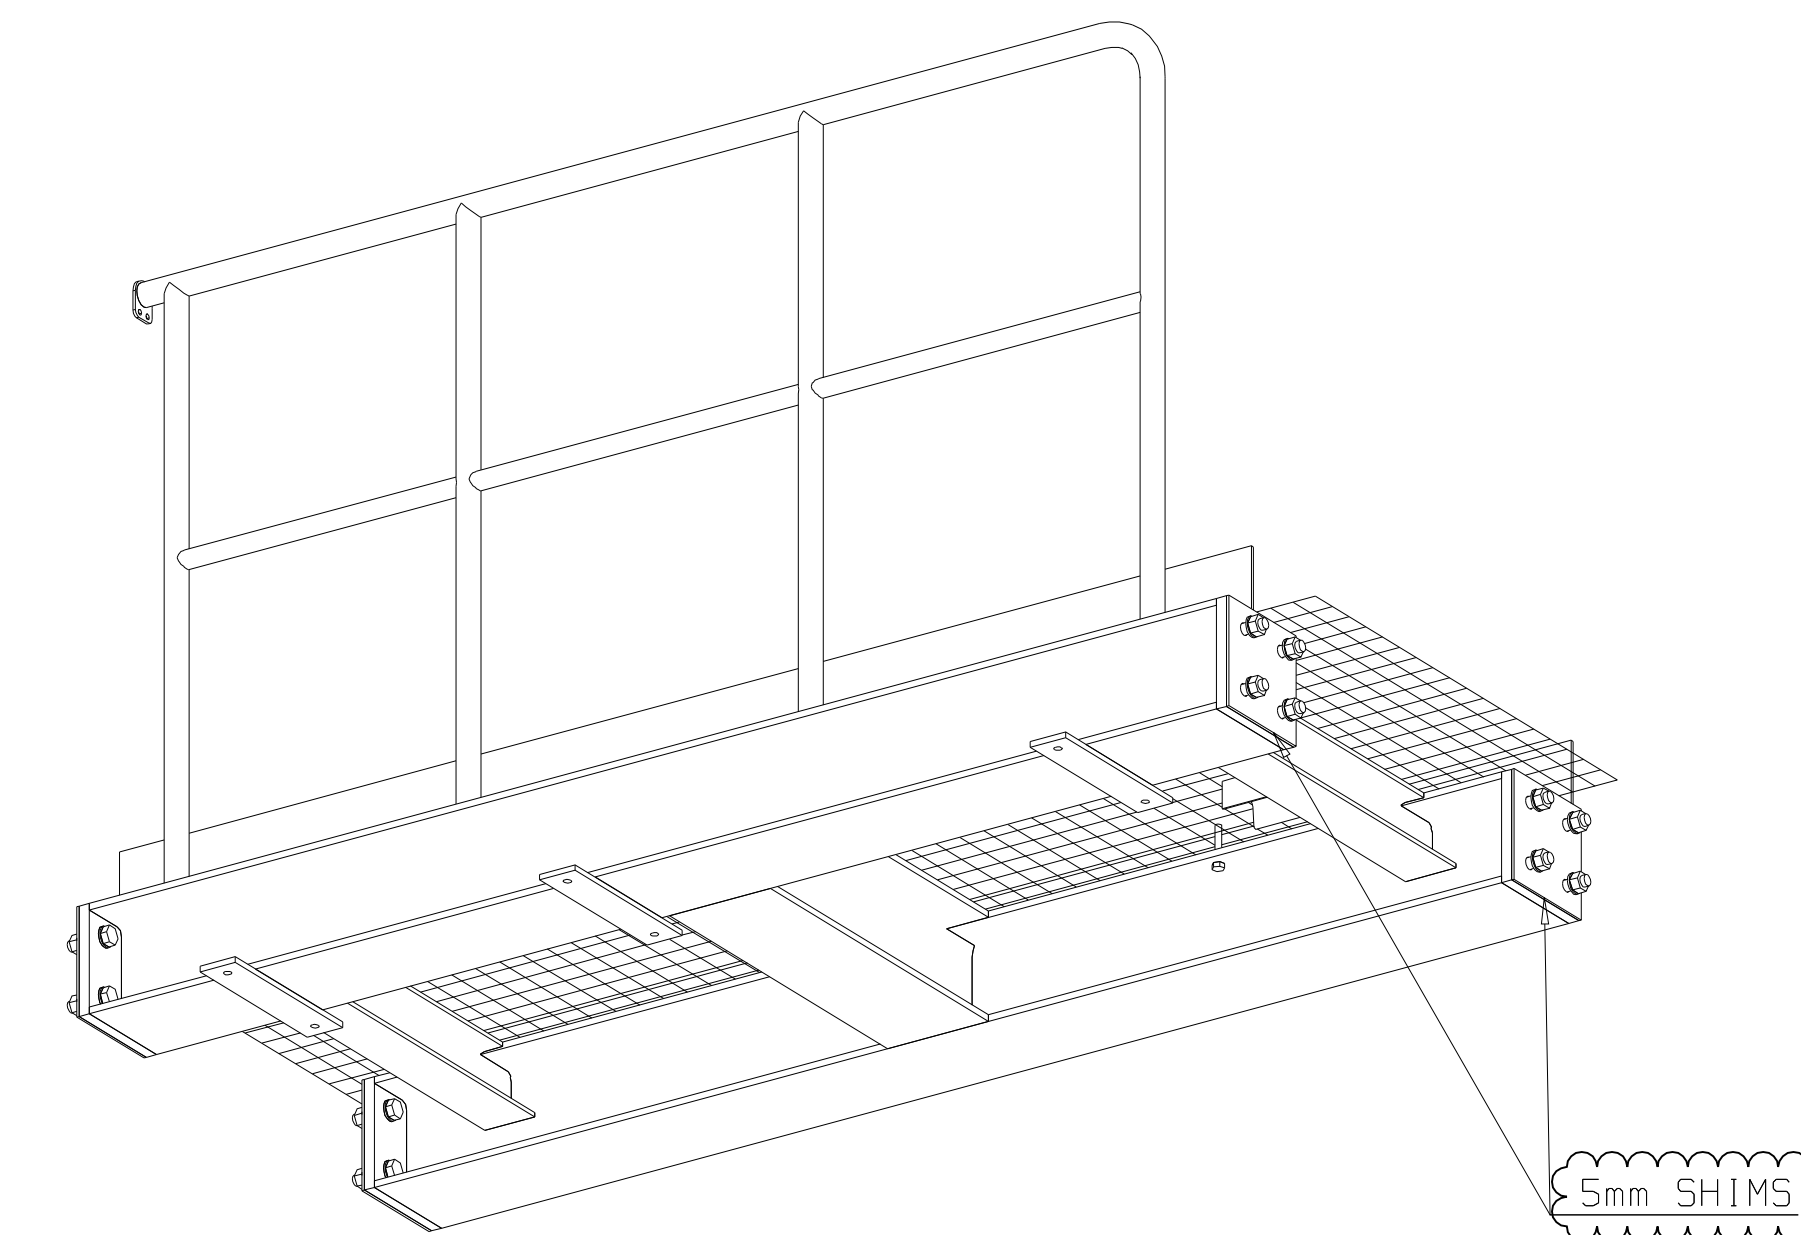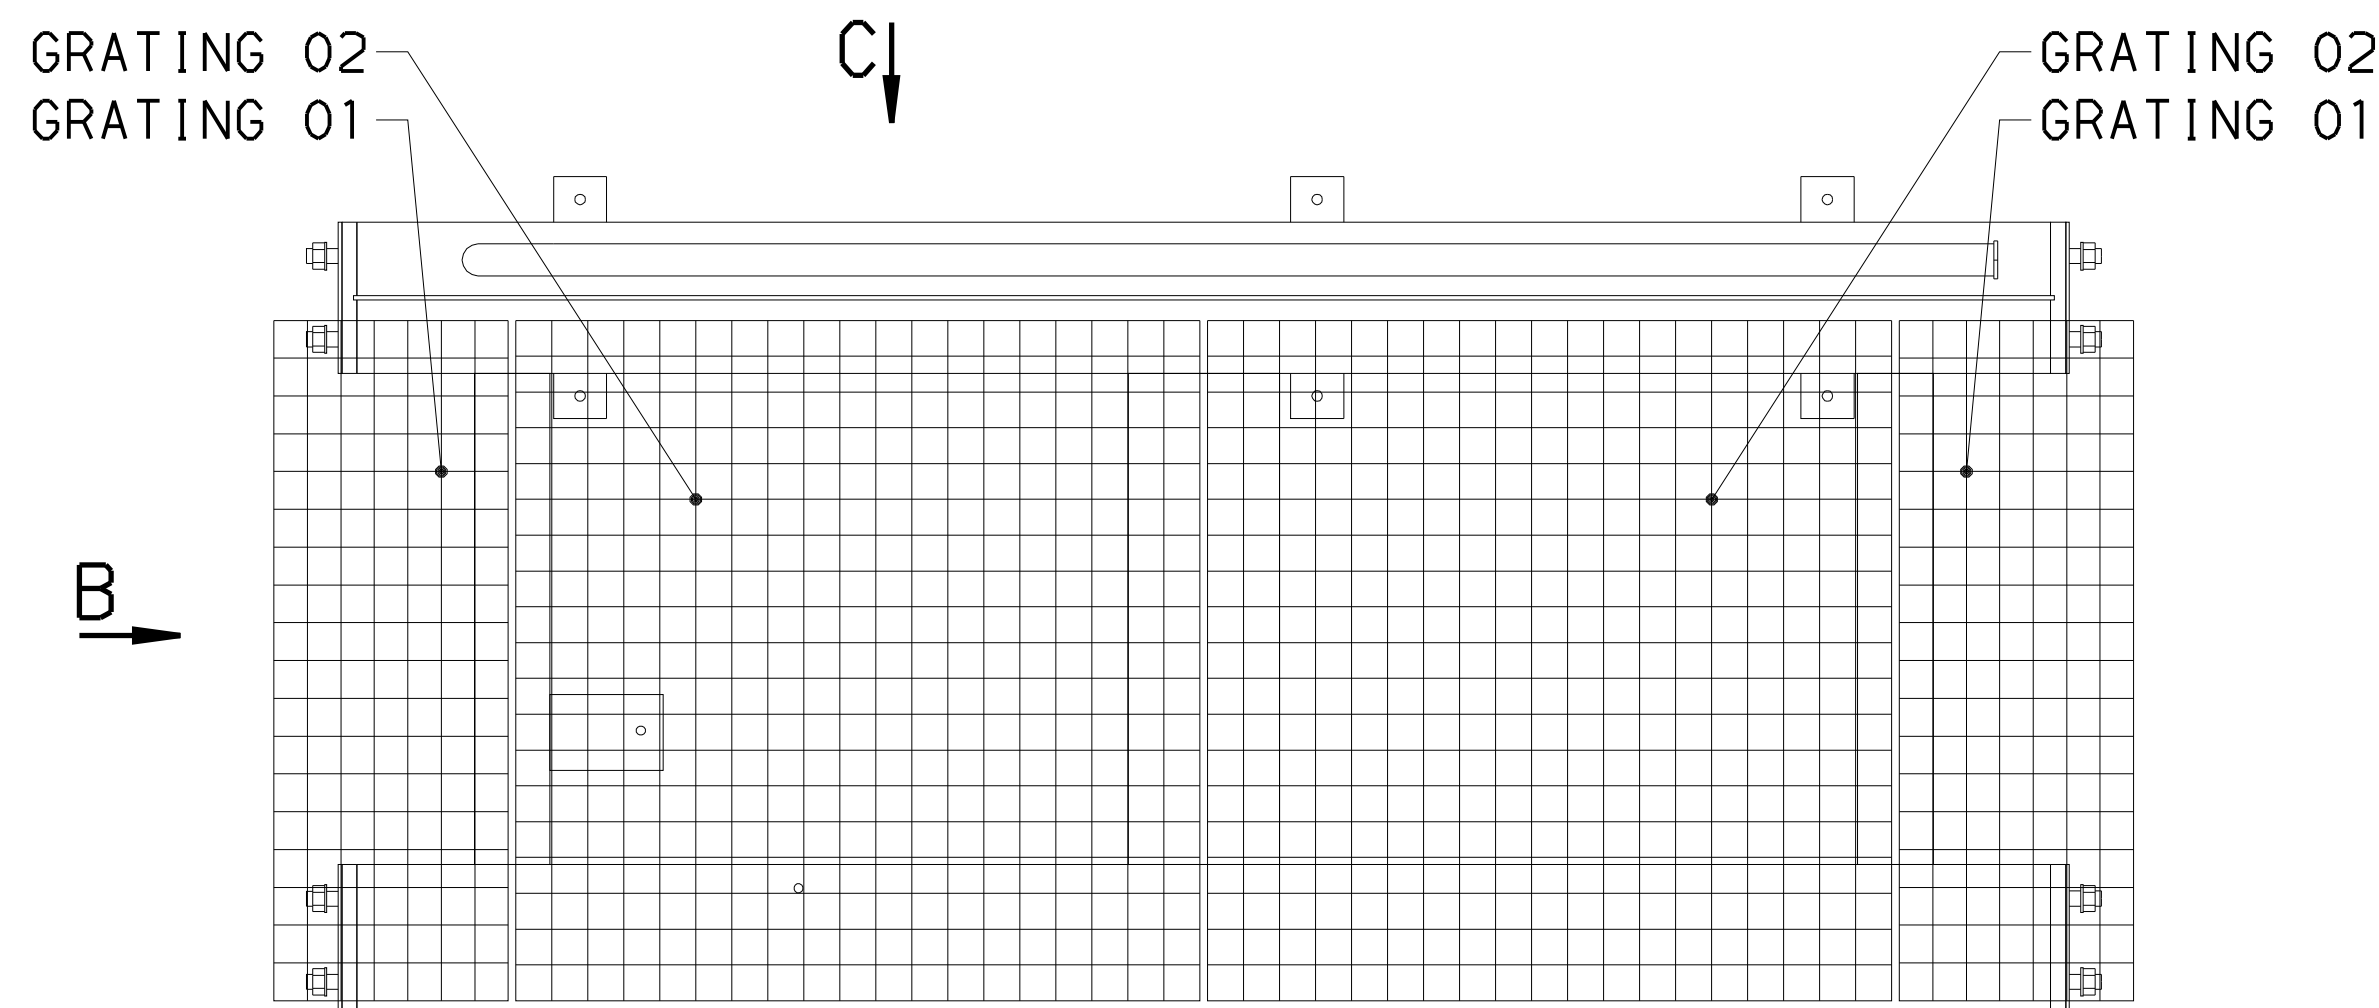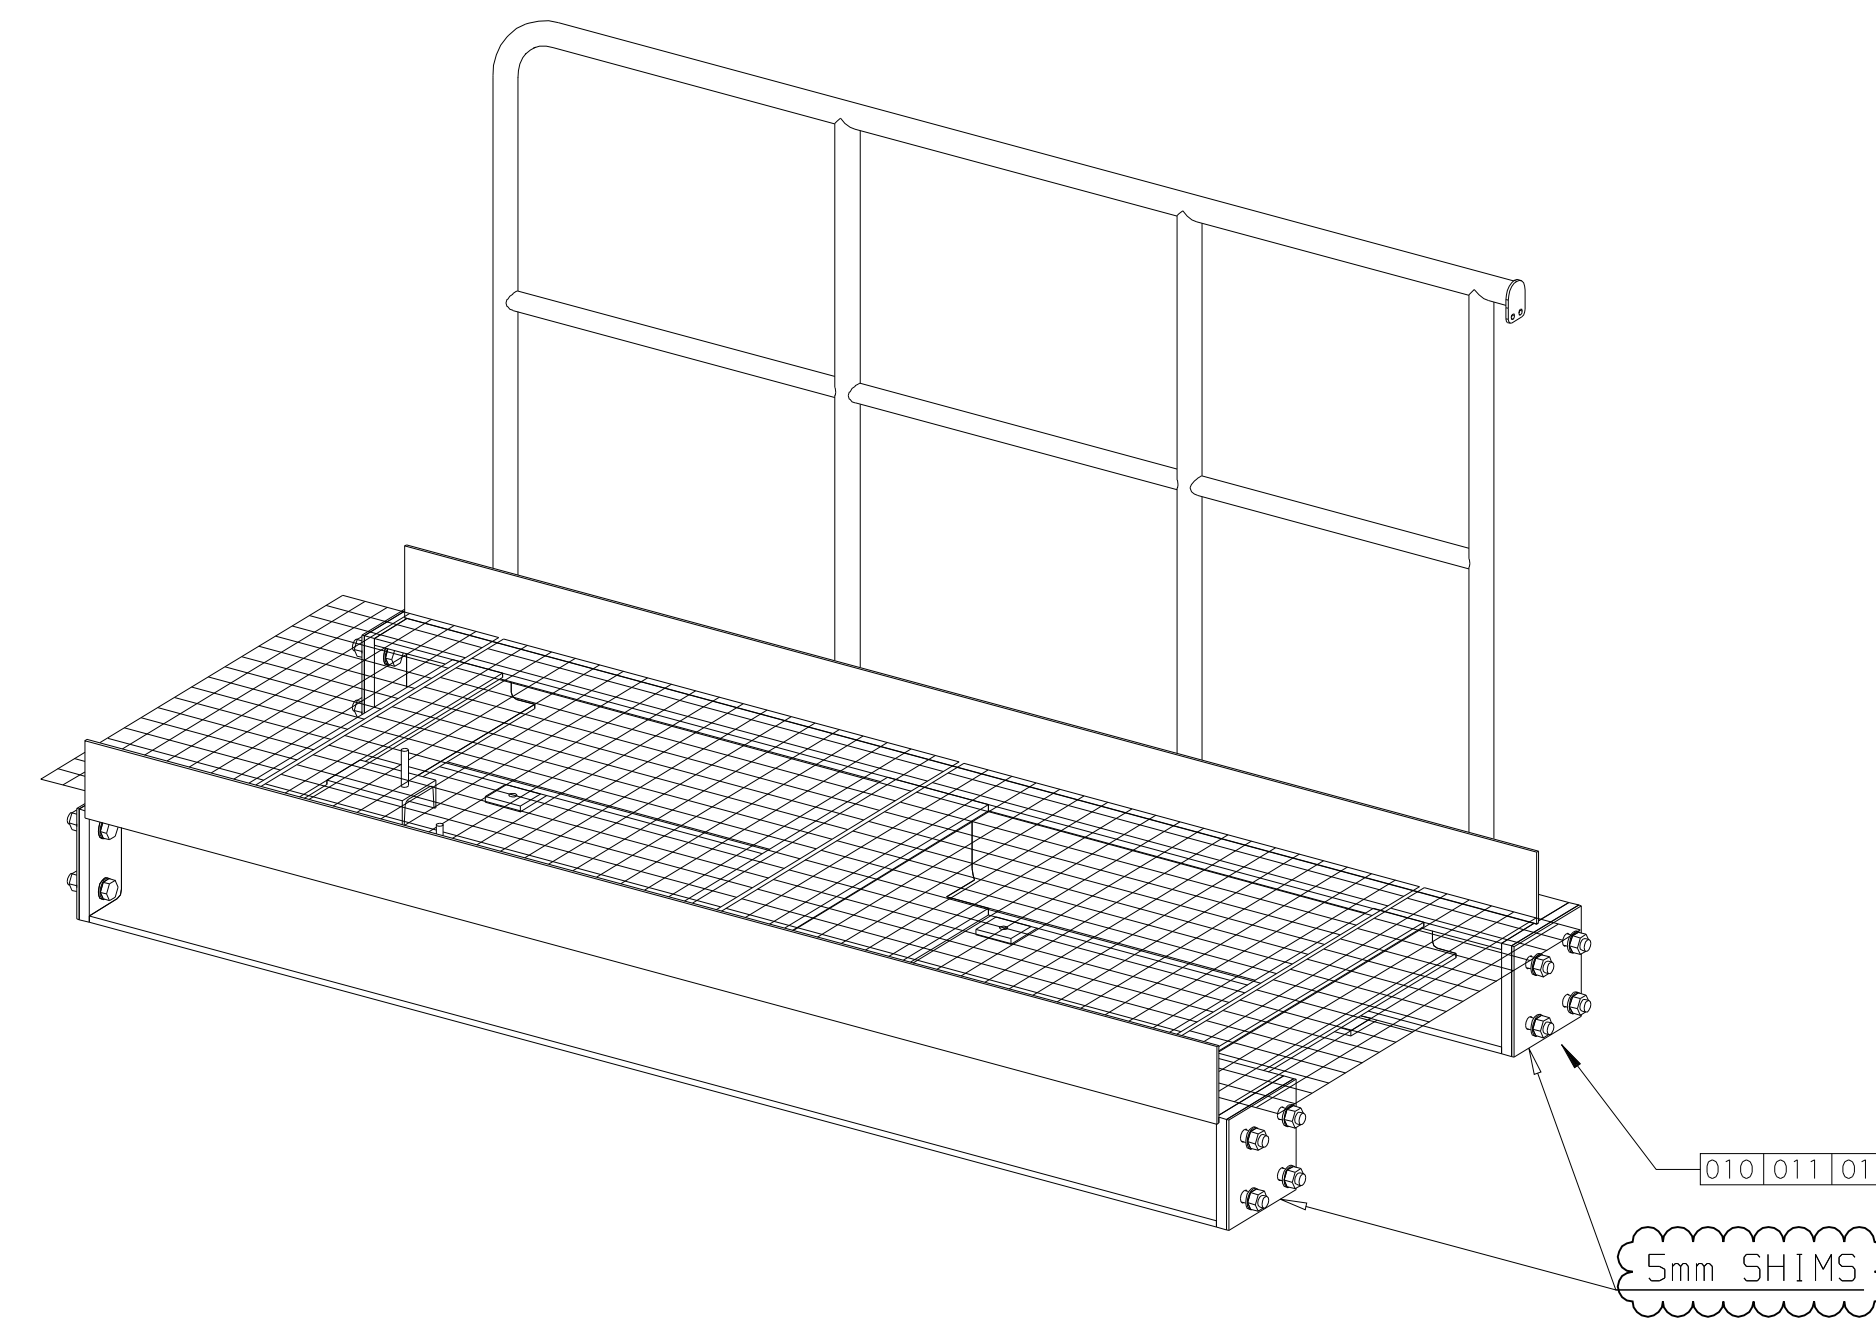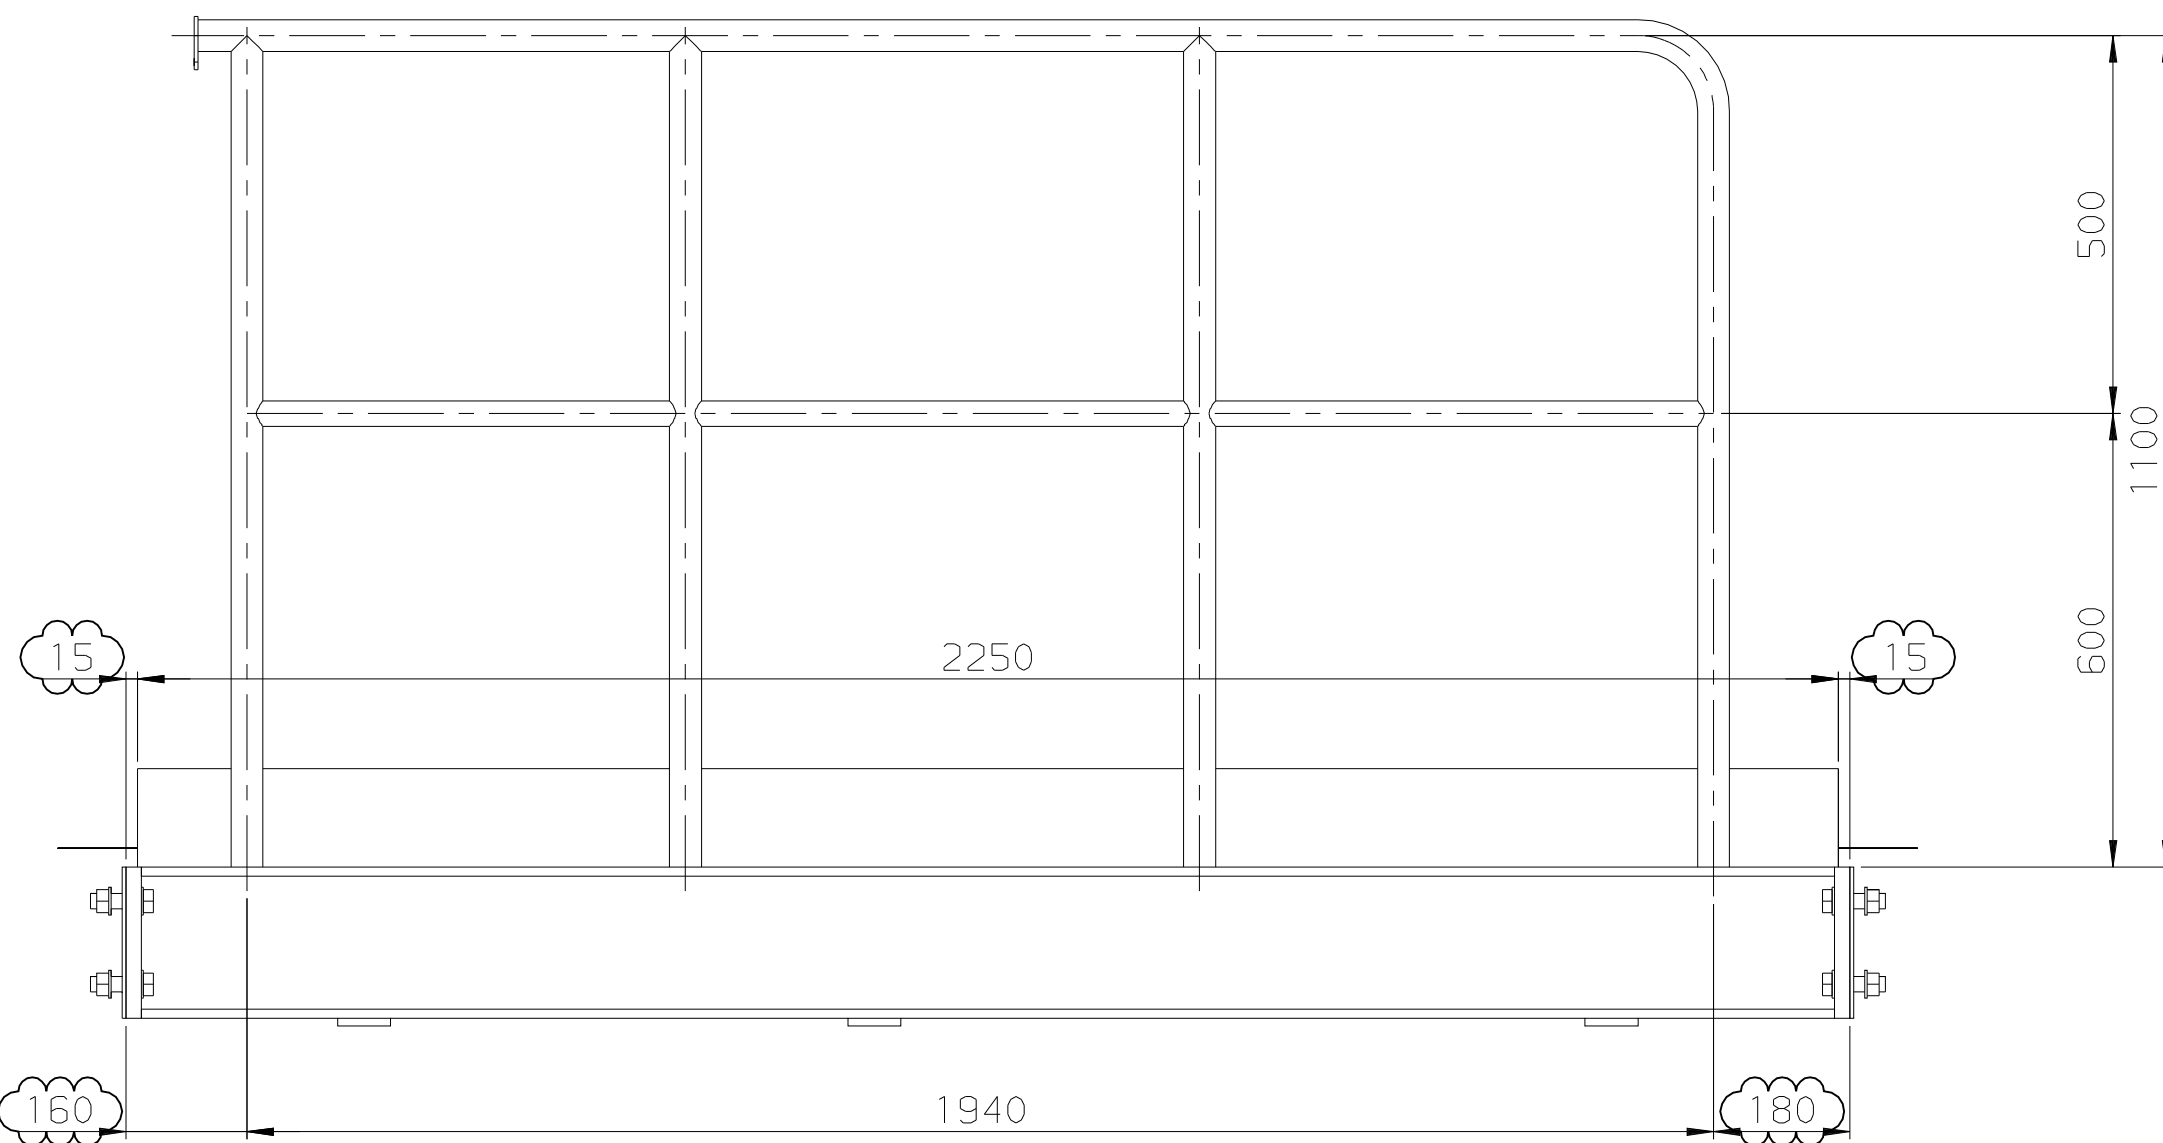

This drawing is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

Similar Dwg.

Machining regulations see Drawing Standards.

Execution Code Number		Pos.No. Code	Designation	Source of Supply	Mod. Letter
Number		Off	Material and Remarks	Approx. mass kg/pc	
5.5m	001	BEAM H-200x200	/	/	/
		S5400	K5 D3503	267	/
2m	002	BEAM H-100x100	/	/	/
		S5400	K5 D3503	29	/
4	003	PLATE 200x200x20	/	/	/
		S5400	/	6	/
3	004	PLATE 320x70x10	/	/	/
		S5400	/	1.5	/
1	005	FOOT PLATE 2250x140x6	/	/	/
		S5400	/	15	/
1	006	FOOT PLATE 2250x130x6	/	/	/
		S5400	/	14	/
6.5m	007	PIPE 1 1/4" (SCH.10)	/	/	/
		A106 GR B	ASME B36.10M	22	/
2.0m	008	PIPE 1" (SCH.10)	/	/	/
		A106 GR B	ASME B36.10M	7	/
2.2m²	009	GRATING (THK 25)	/	/	/
		/	/	/	/
16	010	HEX. HEAD BOLT W/SHANK M20x70/46	/	/	/
		8.8	DIN EN ISO 4014	/	/
16	011	HEX. NUT M20	/	/	/
		8	DIN EN ISO 4032	/	/
32	012	WASHER (M20)	/	/	/
		/	ISO 7089-20-200 HV	/	/
1	013	PLATE 70x50x5	/	/	/
		S5400	/	/	/
0.2m	014	BEAM CH-100x50	/	/	/
		S5400	K5 D3503	2	/
2	015	HEX. HEAD BOLT W/SHANK M12x70/30	/	/	/
		8.8	DIN EN ISO 4014	/	/
4	016	SHIMS 200x200x3	/	/	/
		S5400	/	/	/
8	017	SHIMS 200x200x1	/	/	/
		S5400	/	/	/

APPROX WEIGHT

≈ 385 Kg

NOTE:


1) ALL LISTE MATERIAL ARE WITHOUT ALLOWANCE.




Modif. From: none	a	TONELLI_M	18-07-2022	b	TONELLI_M	09-03-2022	c	TONELLI_M	30-08-2022	d	TONELLI_M	26-01-2023
		Name	Date		Name	Date		Name	Date		Name	Date
	Sep. parts list		Design group									
Replaced by			Subst. for			Orig. scale			1:10			 
SLP250V-5A		STEEL STRUCTURE BRIDGE PUMP SIDE							Drawn:		14-04-2022 TONELLI_M	
									Verified:		30-01-2024 SABOGAL_A	
L-0184 ASME		LABY-G10 - NON-LUBE COMP. ITEM NO. : C-001							Standards conform:			
CAD-Drawing			Part-No.		Bar - Code							
 Burckhardt Compression			E		1-125.619.981				1-2 d			

RAILING





VIEW A

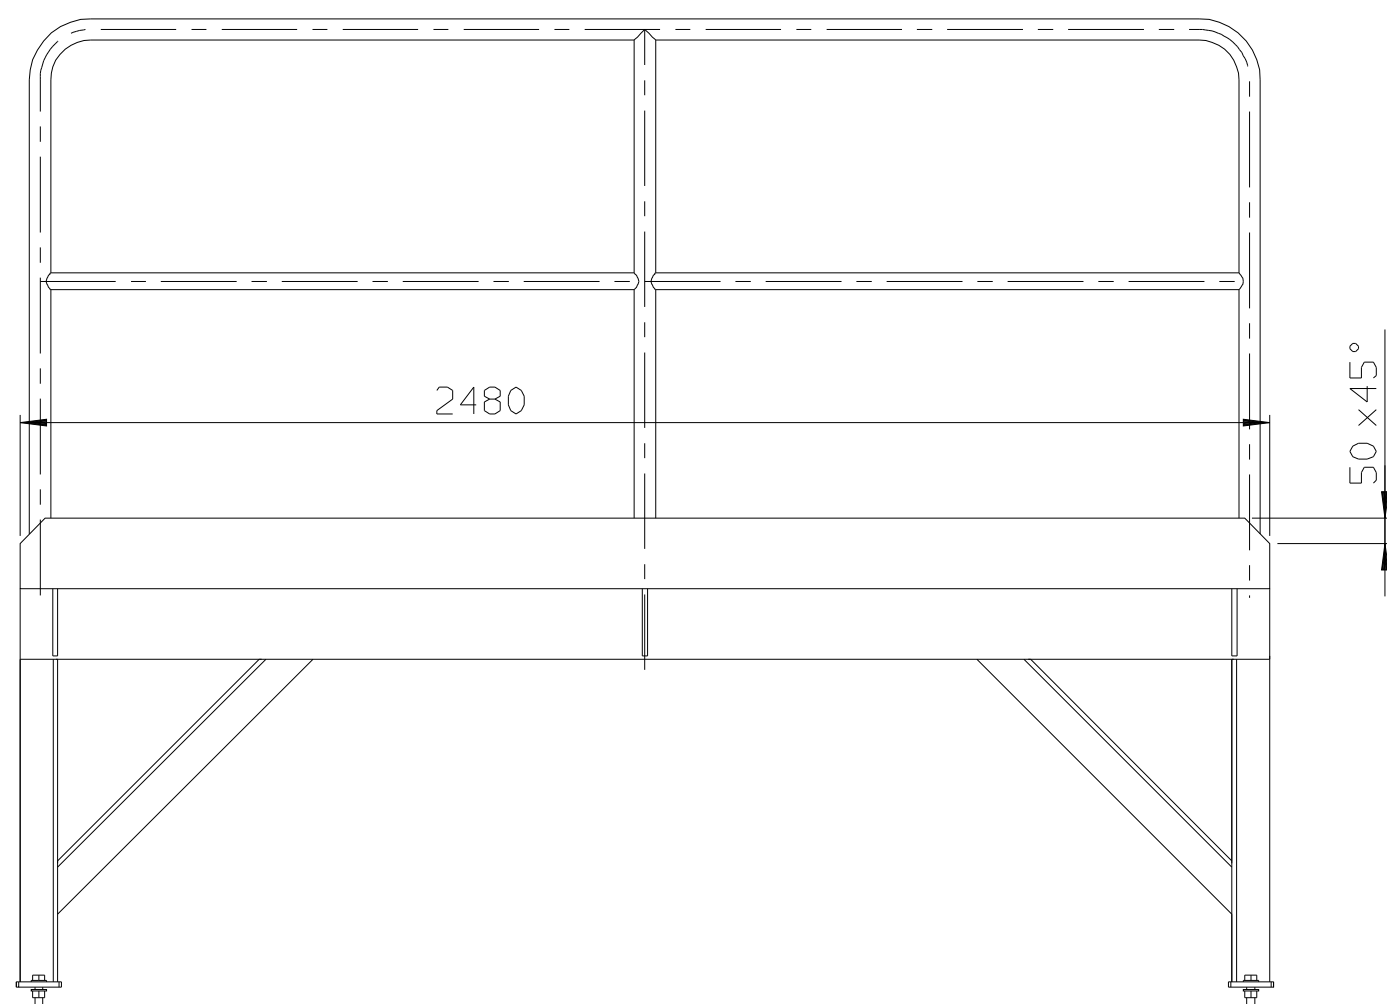

VIEW B

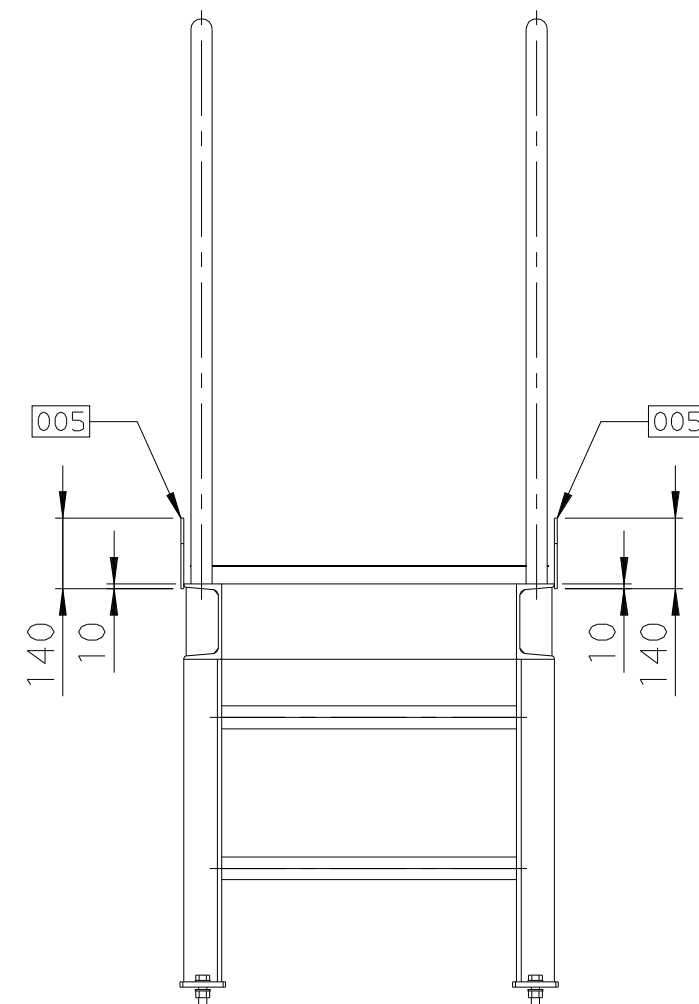

SECTION C-C

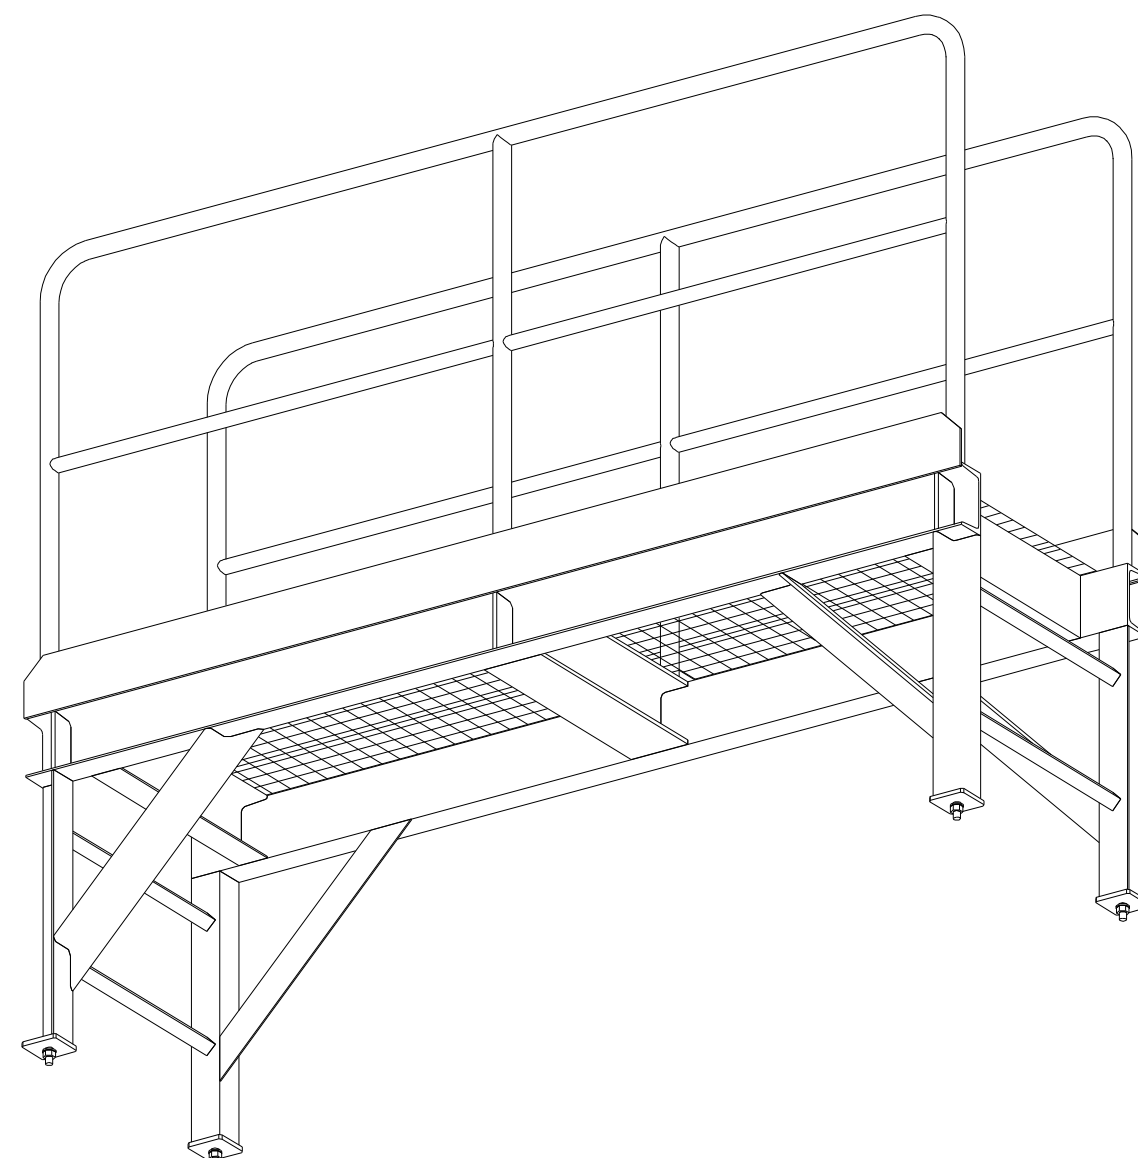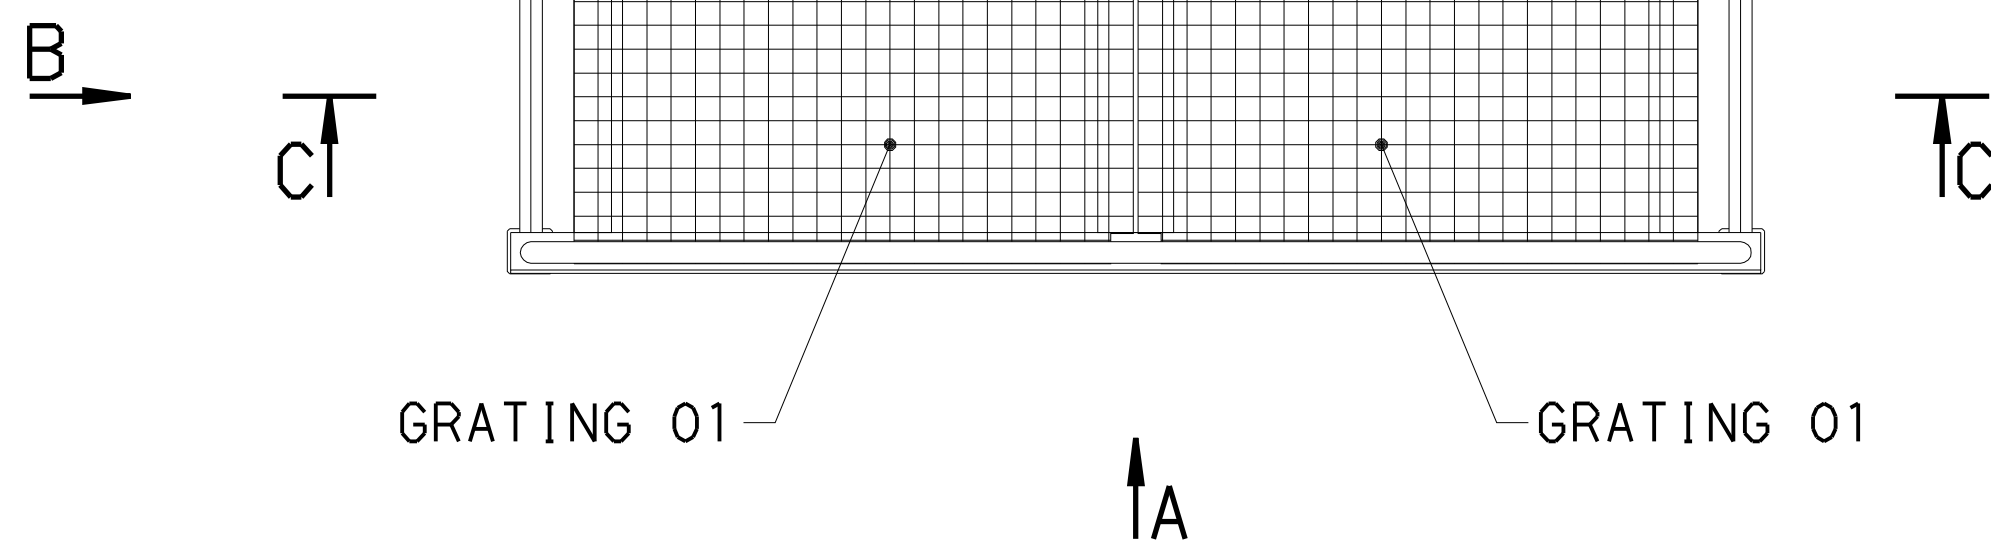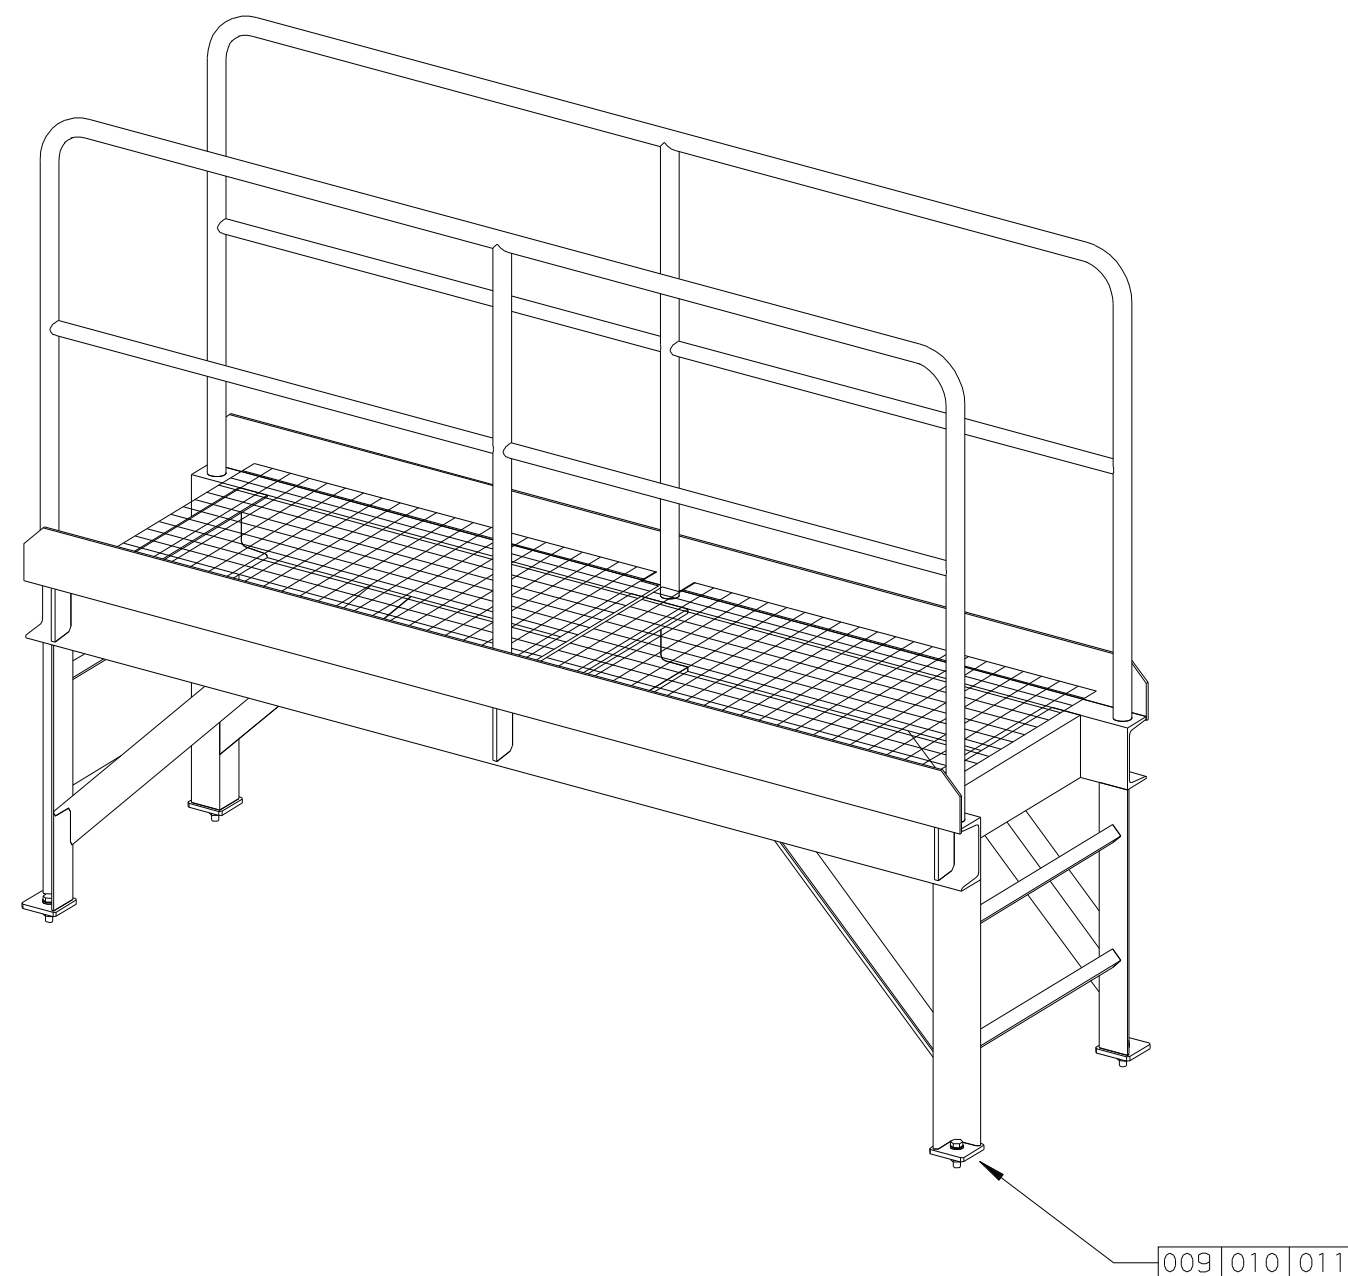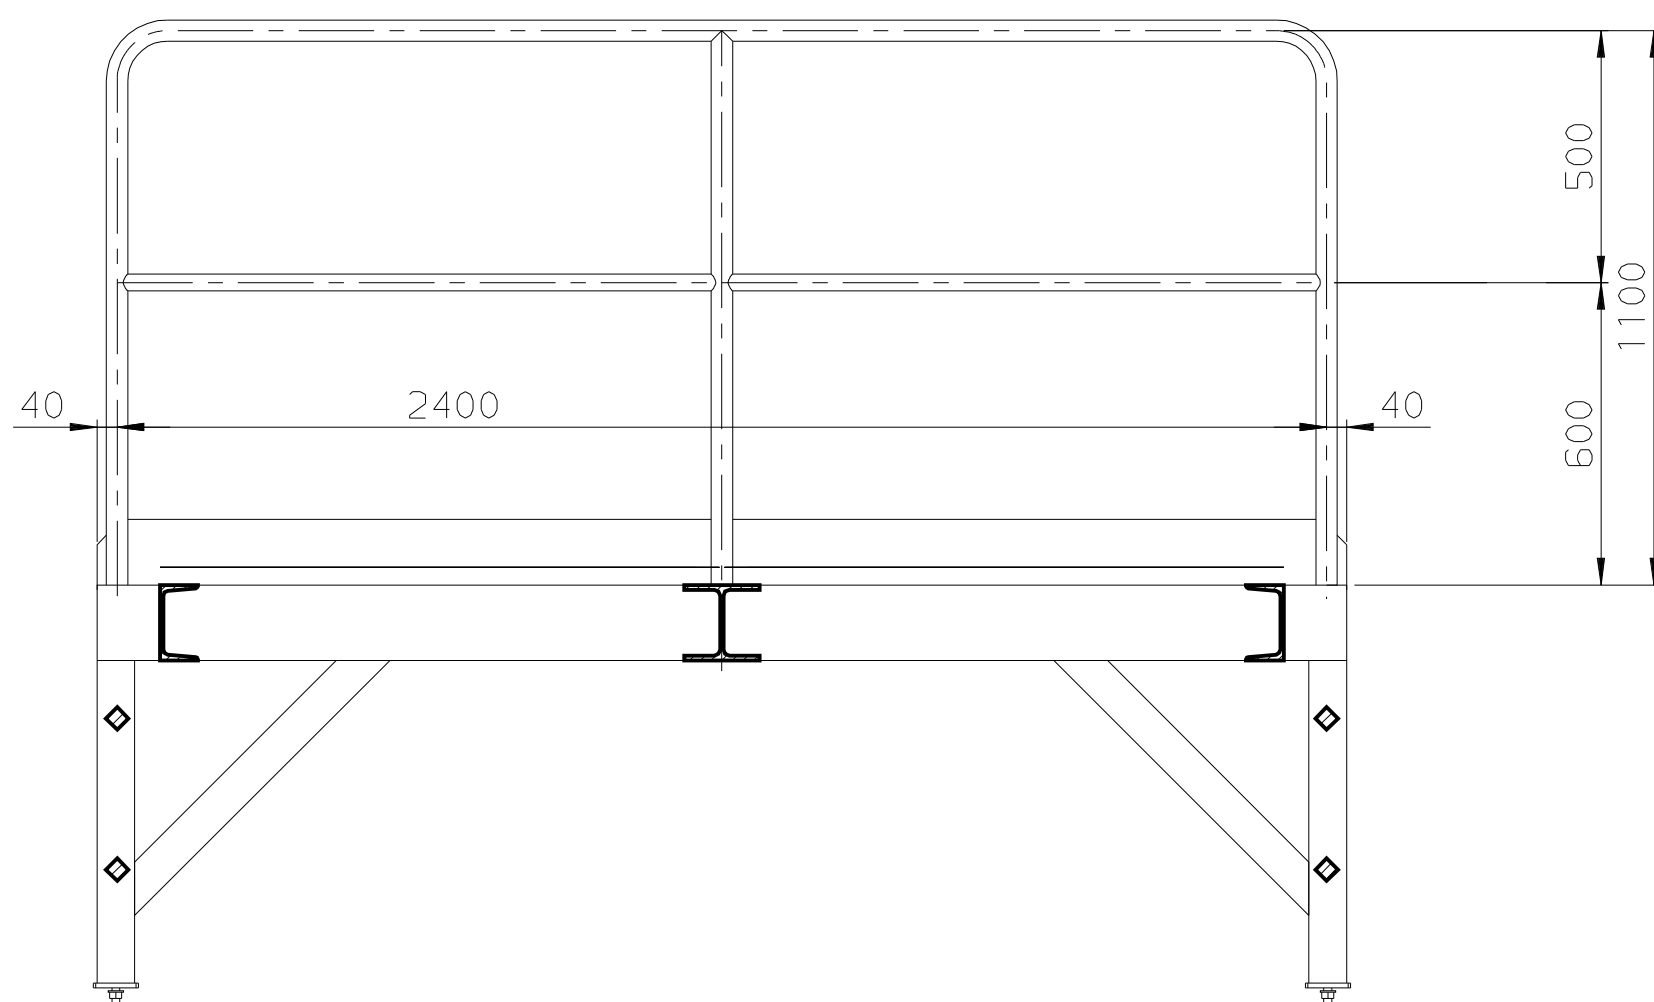


Execution Code Number		Pgs.No. Code	Designation	Source of Supply	Mod.
Number OFF			Material and Remarks	Approx. mass kg/pic	Letter
0.6m	001	BEAM H-150x150	/	/	/
		SS400	KS D3503	18	/
6.5m	002	BEAM CH-150x75	/	/	/
		SS400	KS D3503	114	/
5m	003	BEAM L-75x75x9	/	/	/
		SS400	KS D3503	48	/
4	004	PLATE 90x90x10	/	/	/
		SS400	/	0.5	/
2	005	FOOT PLATE 2480x140x6	/	/	/
		SS400	/	16	/
11.5m	006	PIPE 1 1/4" (SCH20)	/	/	/
		A106 GR B	ASME B36.10M	46	/
5m	007	PIPE 1" (SCH20)	/	/	/
		A106 GR B	ASME B36.10M	16	/
1.6m	008	GRATING (THK 25)	/	/	/
		/	/	/	/
4	009	HEX. HEAD BOLT W/SHANK M16x50/3B	/	/	/
		B.8	DIN EN 150 4014	/	/
4	010	HEX. NUT M16	/	/	/
		B.8	DIN EN 150 4032	/	/
8	011	WASHER (M16)	/	/	/
		/	ISO 7089-16-200 HV	/	/
6	012	STIFFENER 136x64x10	/	/	/
		SS400	/	1	/
4	013	LADDER RUNG □ 22x585 (OR EQUIVALENT)	/	/	/
		SS400	/	1	/
APPROX WEIGHT				≈	282 Kg

NOTE:
1) ALL LISTE MATERIAL ARE WITHOUT ALLOWANCE.







QTY: 2




Documentation shall be deemed to be approved unless commented and/or rejected within 14 days

																							
		TONELLI_M		24-08-2023				TONELLI_M		13-03-2021				TONELLI_M		08-03-2021							
Name		Date		Name		Date		Name		Date		Name		Date		Name		Date					
Sep. parts list				Design group																			
Replaced by				Subst. for				Orig. scale				1:15											
SLP250V-SA				STEEL STRUCTURE BRIDGE COMP. / MOTOR LABY-G10 - NON-LUBE COMP. ITEM NO.: C-001								Drawn:				14-04-2022 TONELLI_M							
L-0184 ASME												Verified:				10-03-2023 SABOGAL_A				Standards conform:			
CAD-Drawing				Part-No.				Bar - Code															
 Burckhardt Compression				E				1-125.619.982				1-2 c											

FRAME

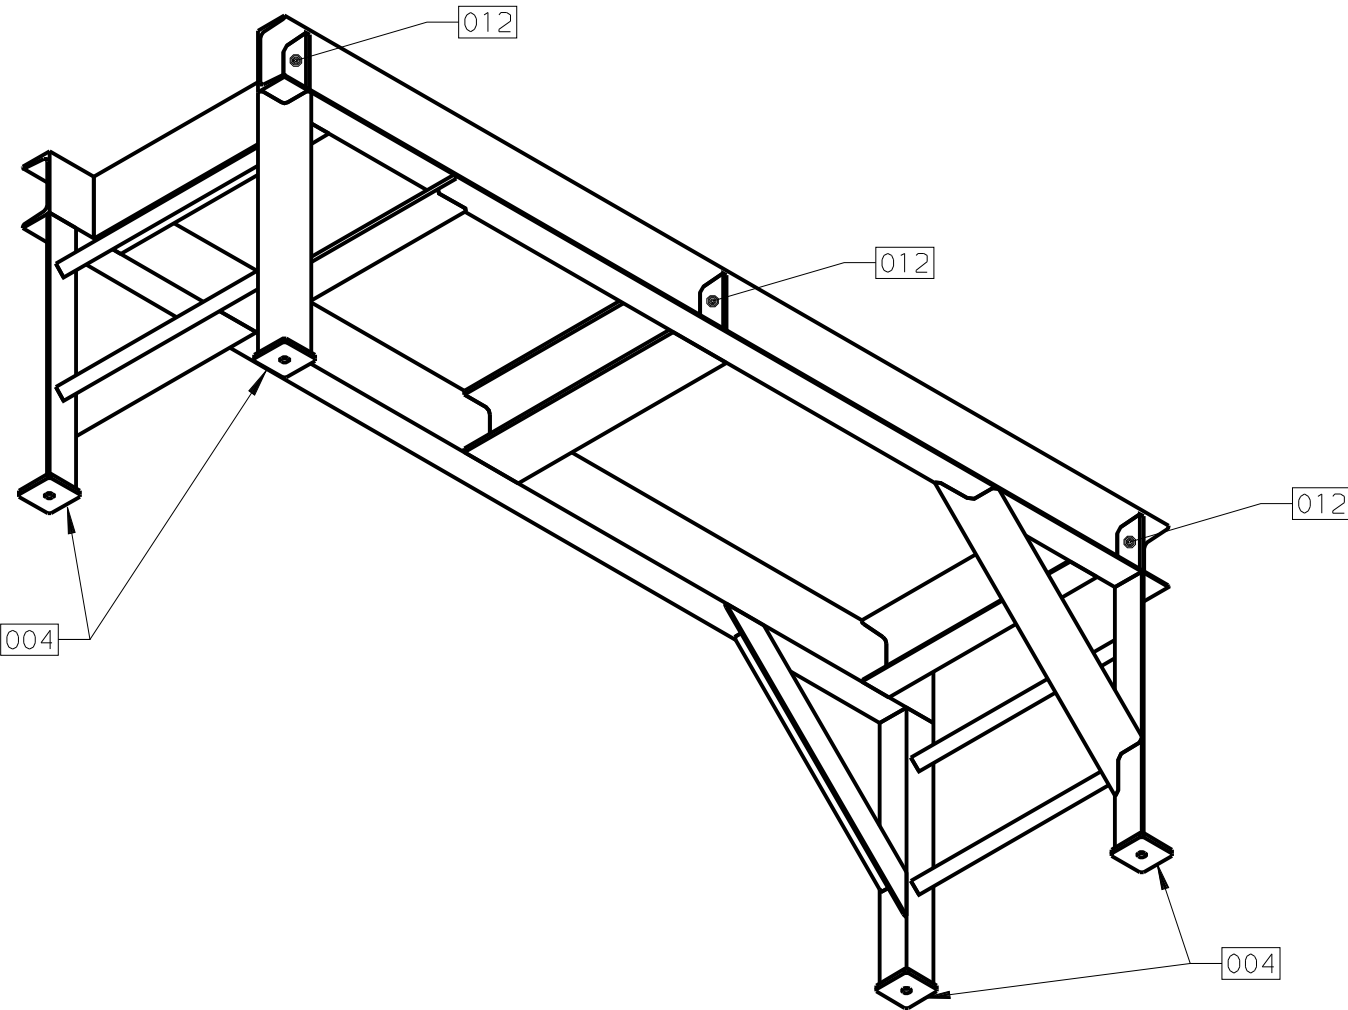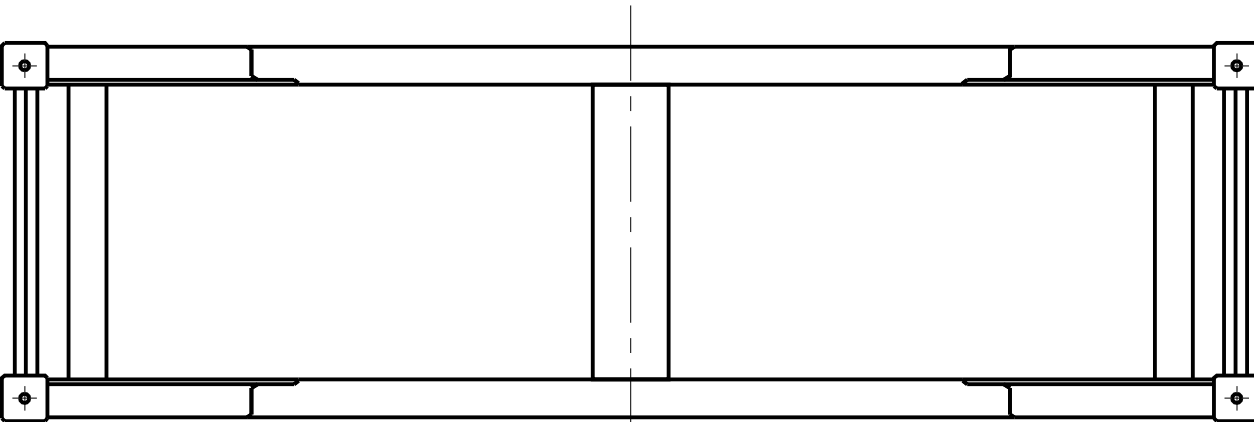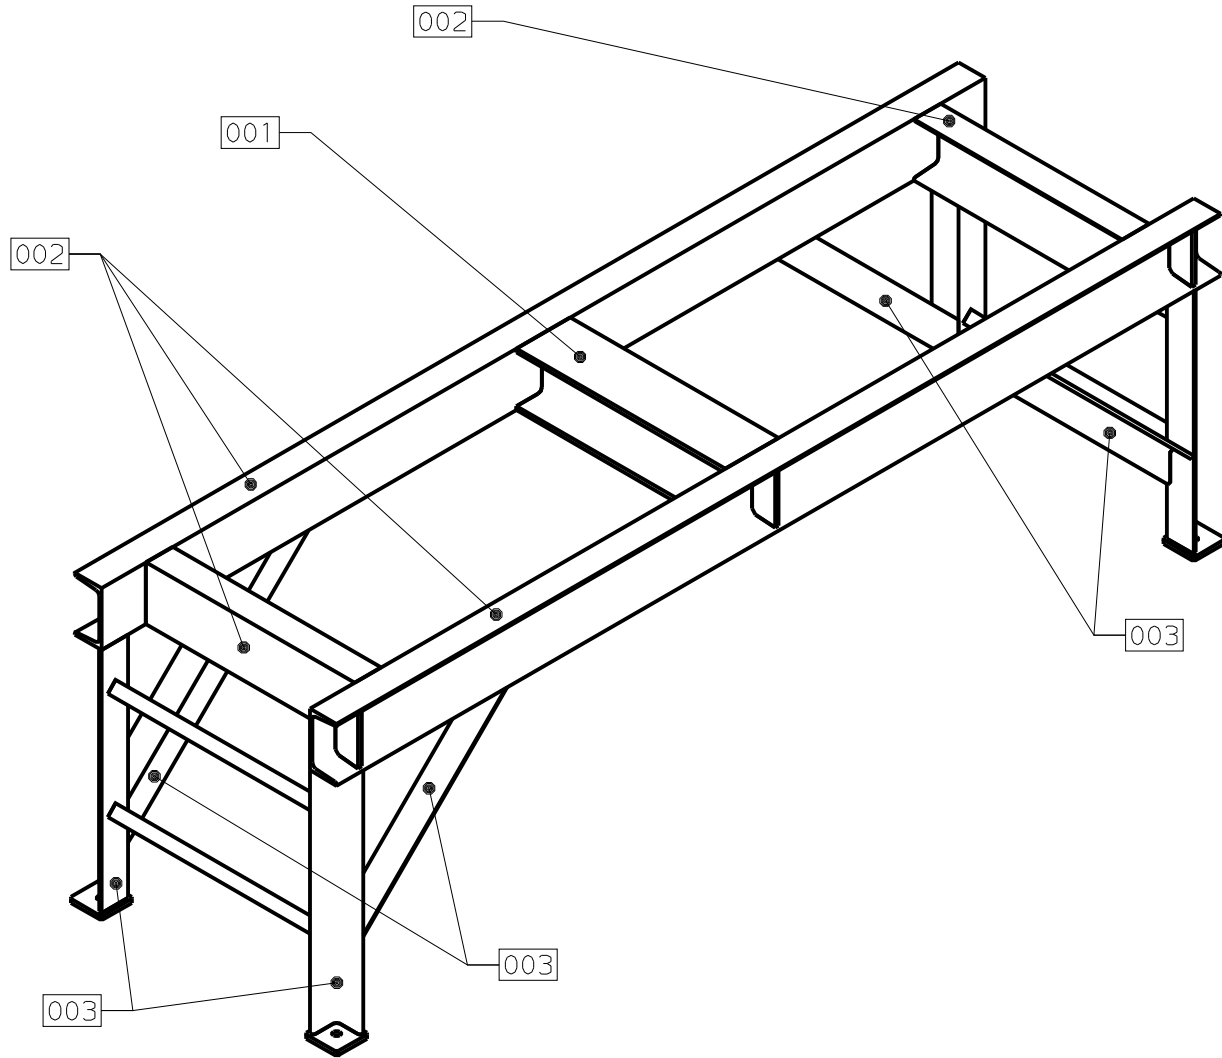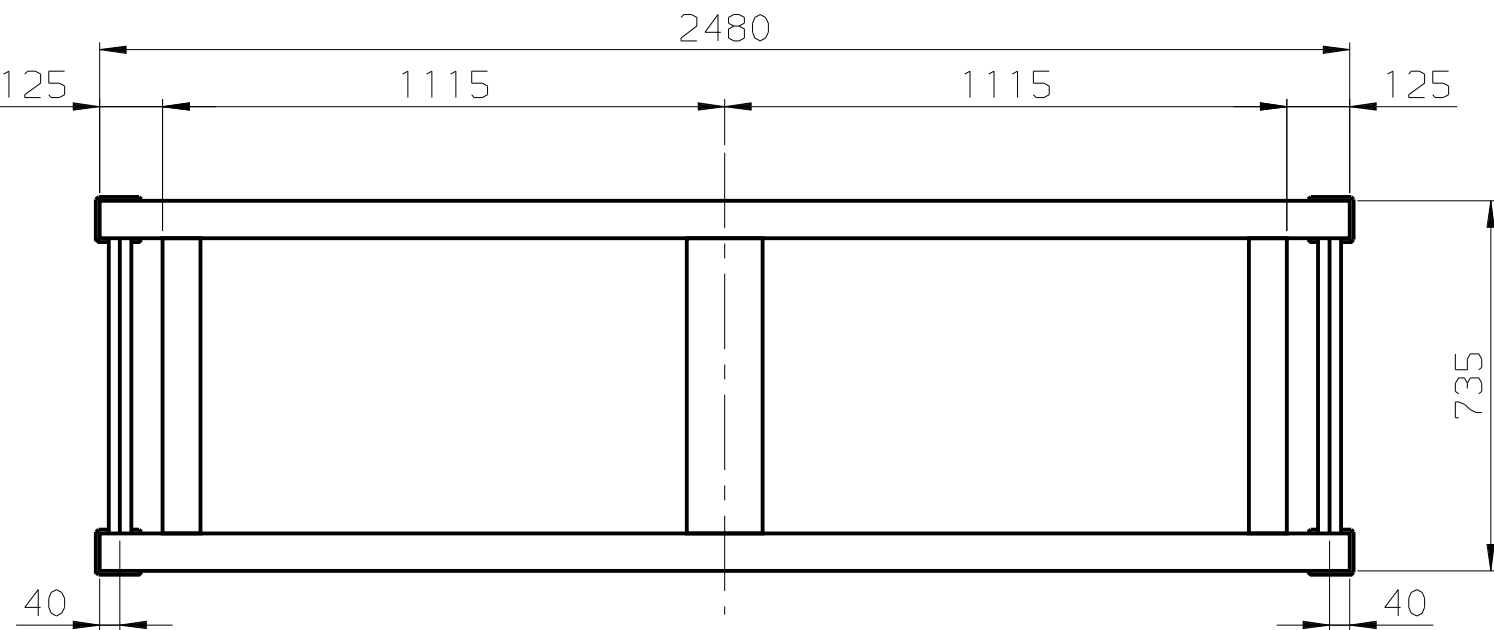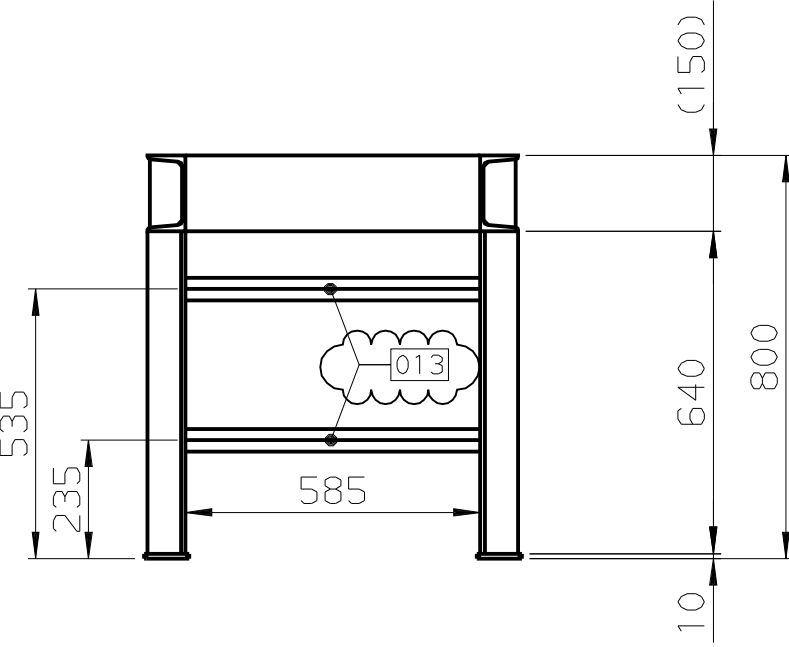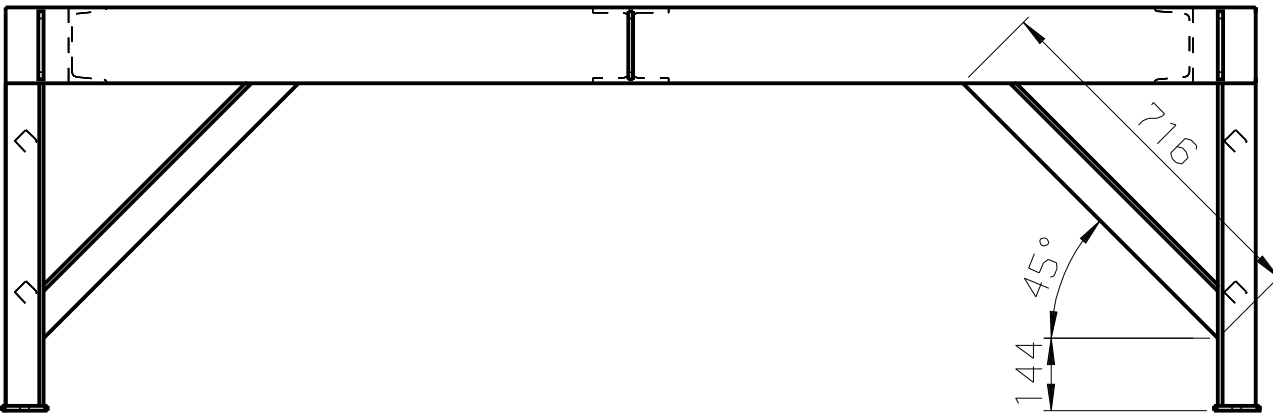


RAILING (QTY 2)

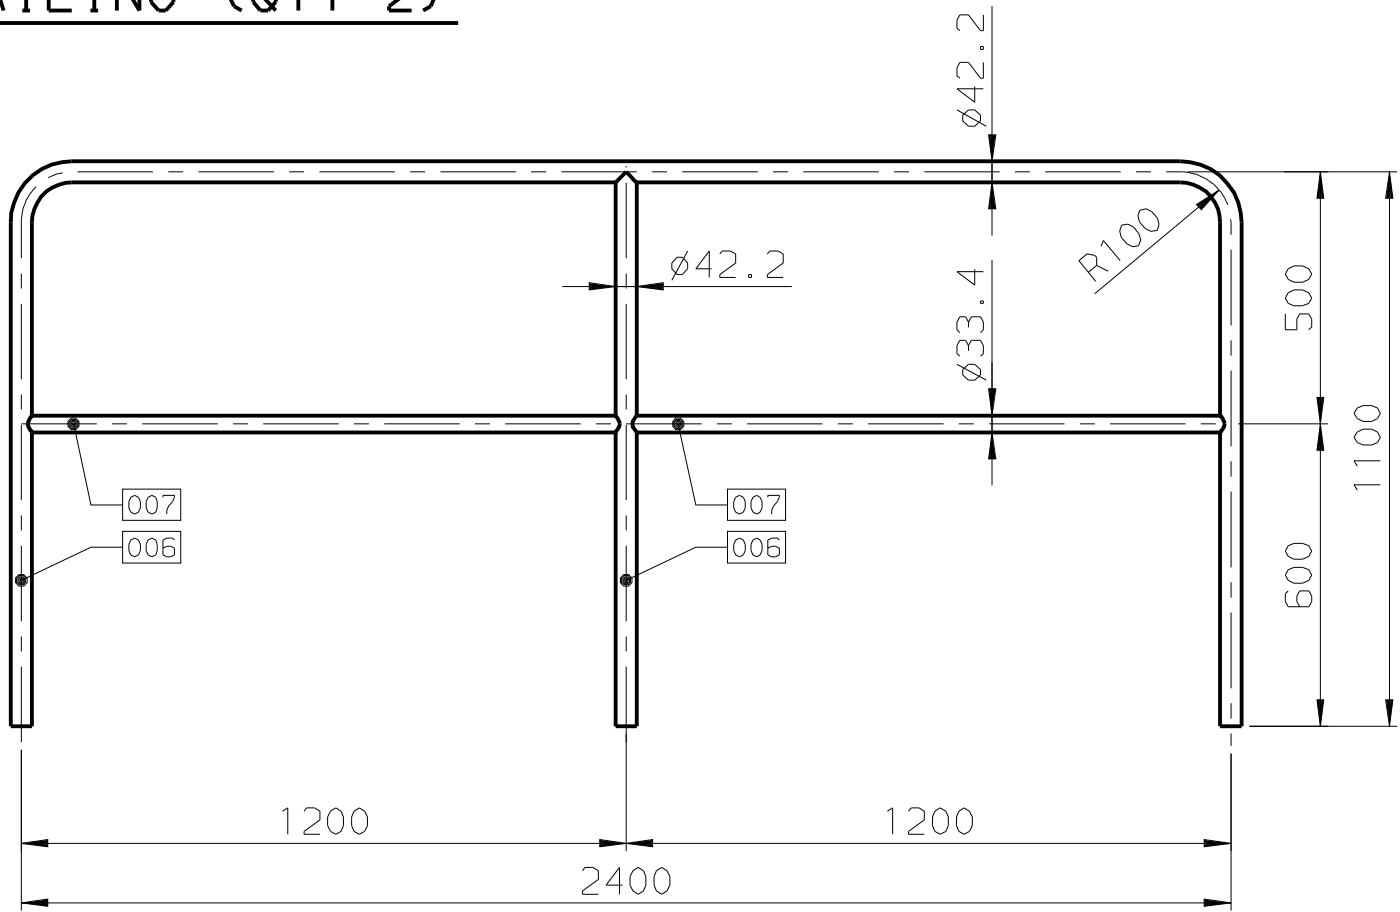


P05 004

THICKNESS 10mm
(SCALE 1:5)

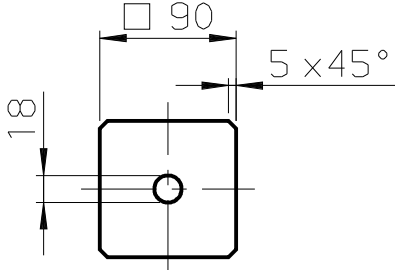


P05 012

THICKNESS 10mm
(SCALE 1:5)



GRATING 01 (QTY 2)

THICKNESS 25mm

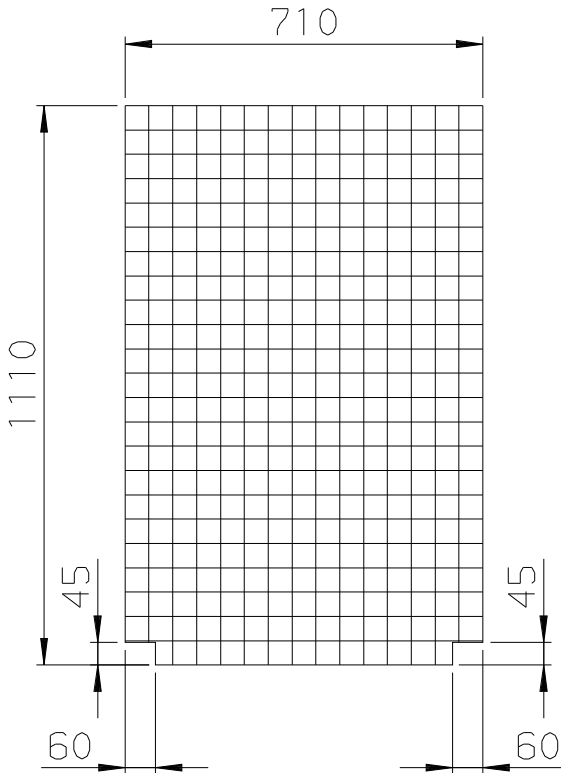



This drawing is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

Similar Dwg.


Machining regulations see Drawing Standards.

Modifications a TONELLI_M 24-08-2022 b TONELLI_M 13-01-2023 c TONELLI_M 08-03-2023											
Name		Date		Name		Date		Name		Date	
Sep. parts List				Design group							
Replaced by				Subst. for				Orig. scale 1:15			
SLP250V-5A		STEEL STRUCTURE BRIDGE COMP. / MOTOR						Drawn: 19-04-2022 TONELLI_M			
L-0184 ASME		LABY-GI - NON-LUBE COMP. ITEM NO.: C-001						Verified: 10-03-2023 SABOGAL_A			
								Standards conform:			
CAD-Drawing		Part-No.		Bar - Code							
Burckhardt Compression		E		1-125.619.982		2-2 c					

Technical drawing of a three-dimensional object, likely a mechanical part, showing dimensions in millimeters (mm). The object is a rectangular block with a central rectangular cutout. The overall dimensions are 2135 mm in length and 700 mm in height. The cutout is 515 mm wide and 300 mm high. The object has a base thickness of 150 mm and a top thickness of 350 mm. The cutout is positioned 810 mm from the left edge and 275 mm from the right edge. The object is shown in a perspective view with dashed lines indicating hidden edges.

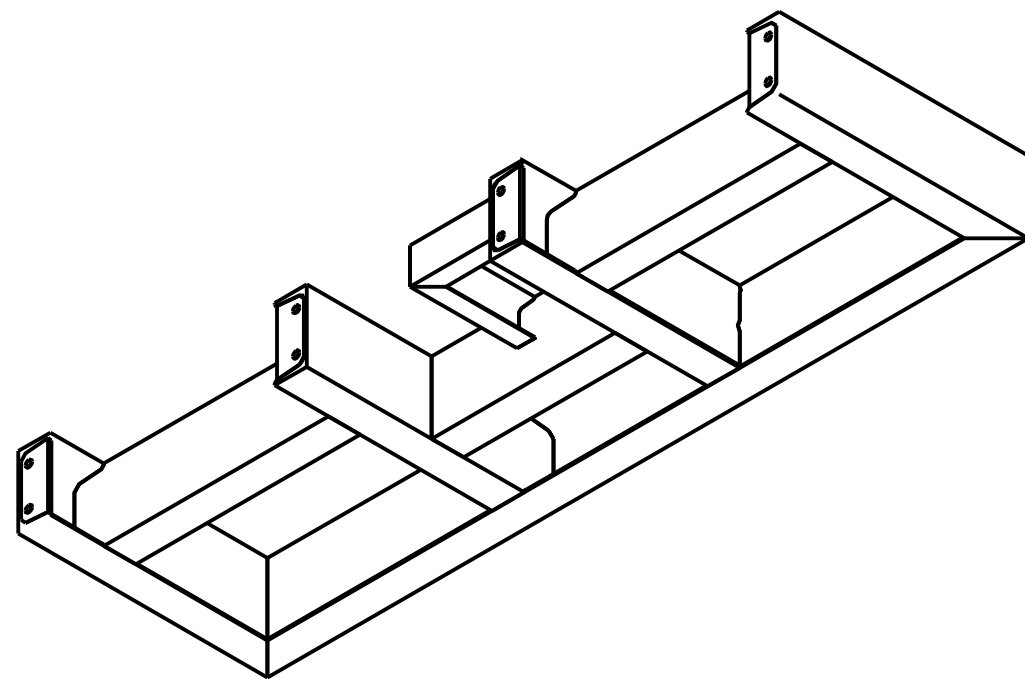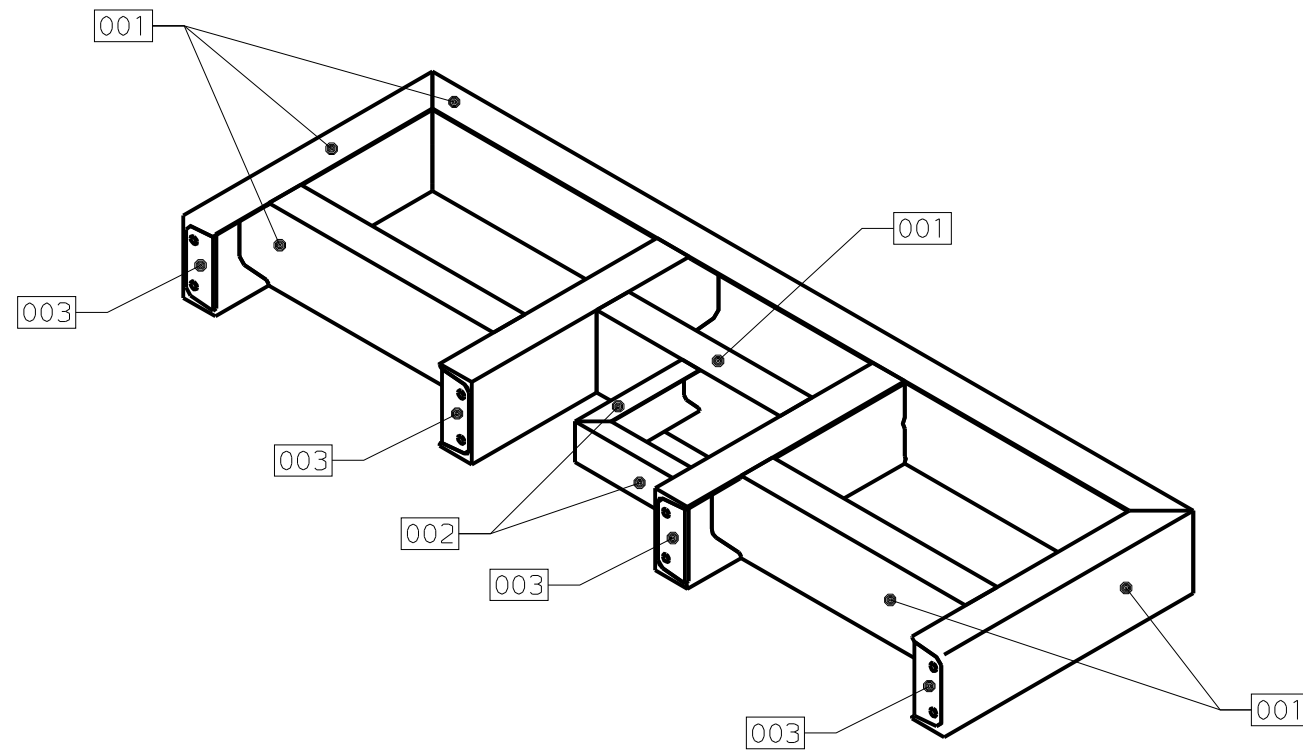



Technical drawing of a U-shaped component. The overall width is 2177. The inner radius of the U-shape is R100. The drawing includes labels 005 pointing to the vertical side walls and 004 pointing to the bottom horizontal wall.

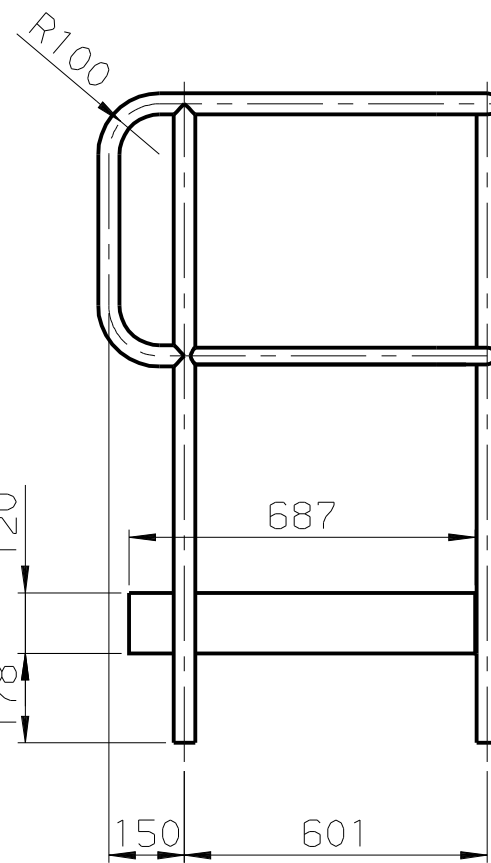

Technical drawing of a mechanical part with dimensions: 76, 167, 180, and 13x45°.

A diagram of a rectangular grid. The grid is composed of 20 columns and 15 rows of small squares. Above the grid, a horizontal dimension line with arrows at both ends is labeled '760'. To the right of the grid, a vertical dimension line with arrows at both ends is labeled '675'.

Modificatore															
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Nome		Date		Nome		Date		Nome		Date		Nome		Date	
Sep. parts List		Design group													
Replaced by				Subst. for				Orig. scale				1:15			
SLP250V-SA		STEEL STRUCTURE BALCONY M2										Drawn:		26-04-2023 TONELLI_M	
L-0184 ASME		LABY-G10 - NON-LUBE COMP. ITEM NO.: C-001										Verified:		31-05-2023 SABOGAL_A	
												Standards conform:			
CAD-Drawing		Part-No.		Bar - Code											
 Burckhardt Compression		E		1-125.622.368										2-2	

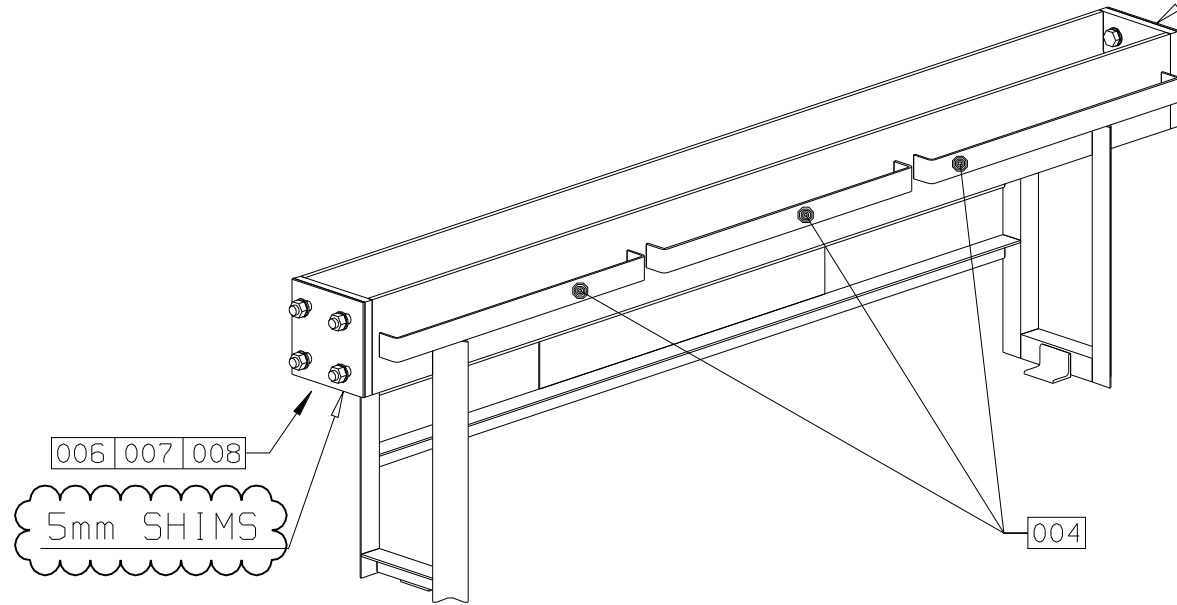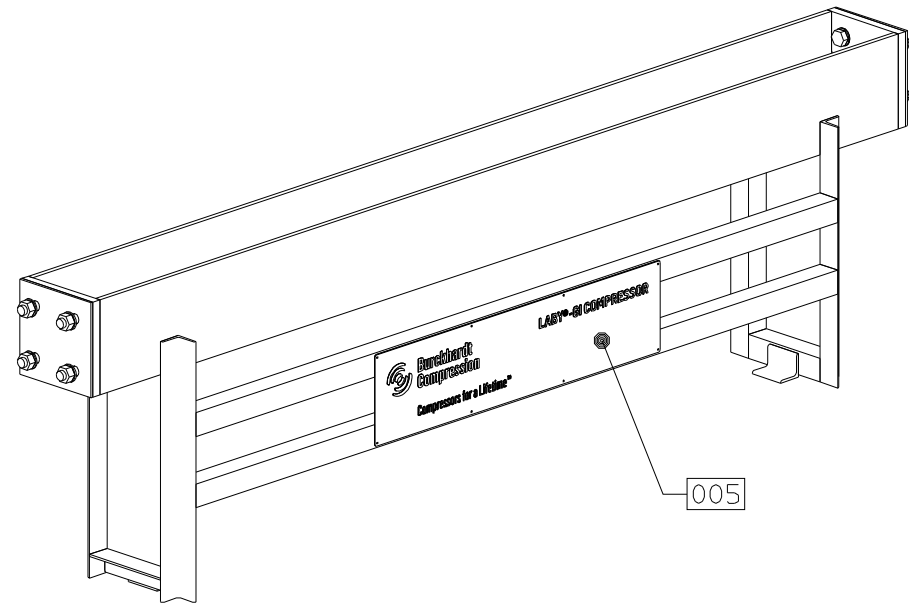

5mm SHIMS


006 007 008

5mm SHIMS

004


POS 003

THICKNESS 20mm
(SCALE 1:10)

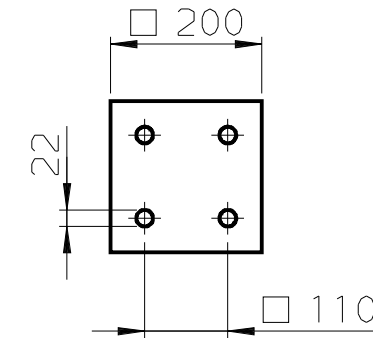

SHIMS
POS 009/010



(SCALE 1:10)

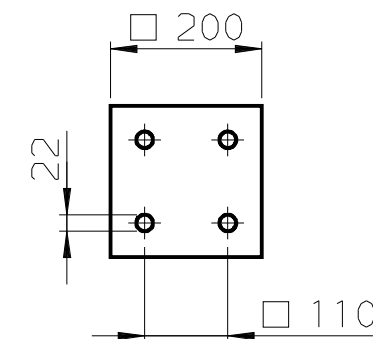

SET FOR ONE INTERFACE
THICKNESS


1 x 3mm
2 x 1mm

FRAME

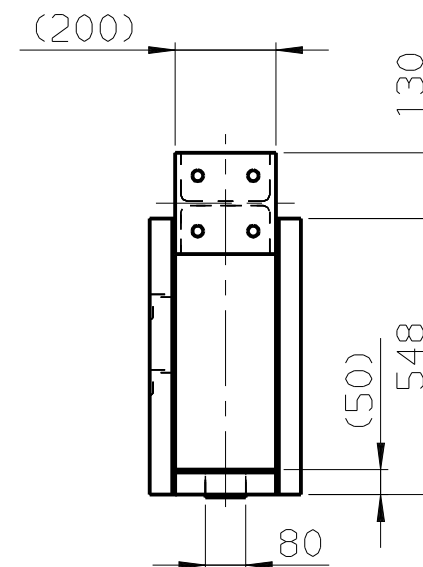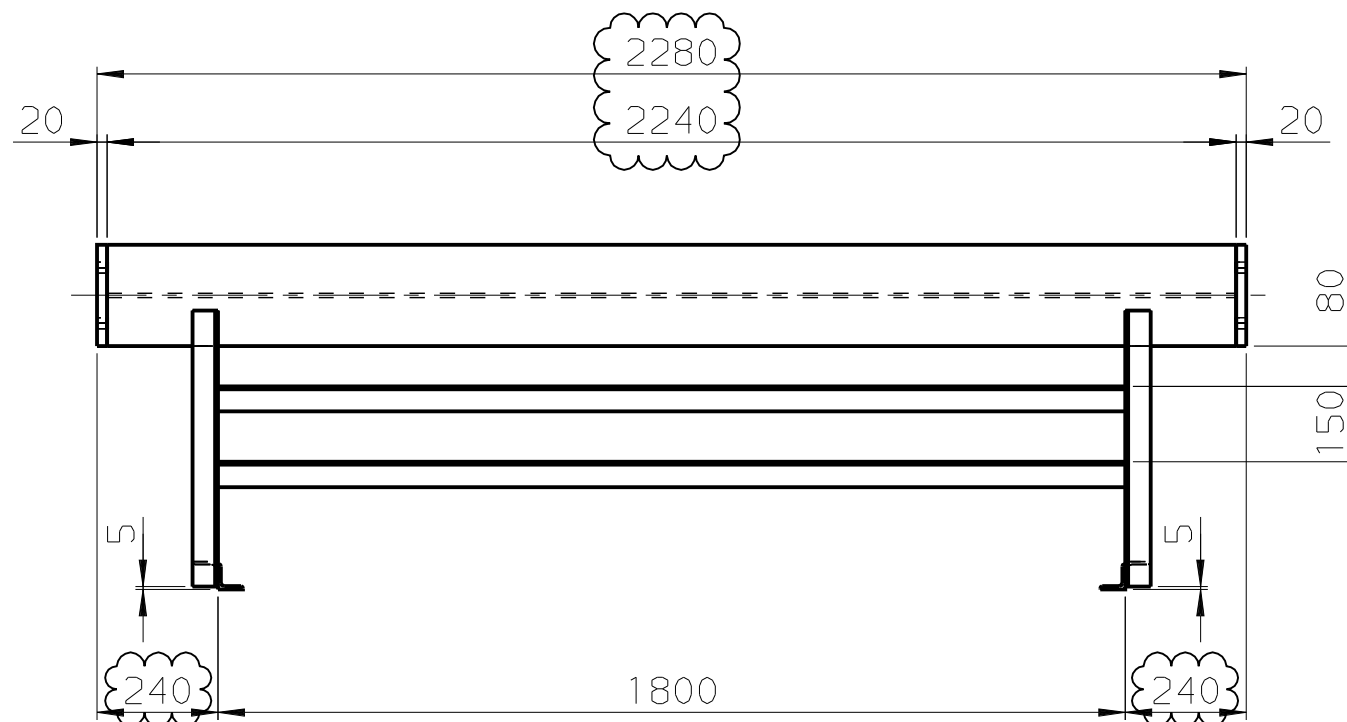

POS 004



WIDTH 50mm
(SCALE 1:10)

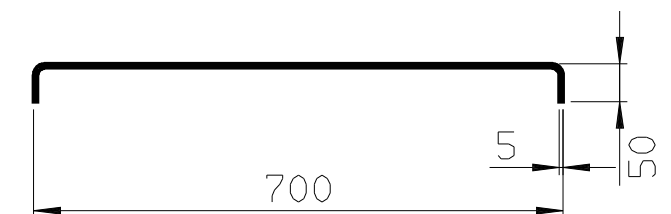

**Burckhardt
Compression**
FOR APPROVAL

Documentation shall be deemed to be approved unless
commented and/or rejected within 14 days

POS 002

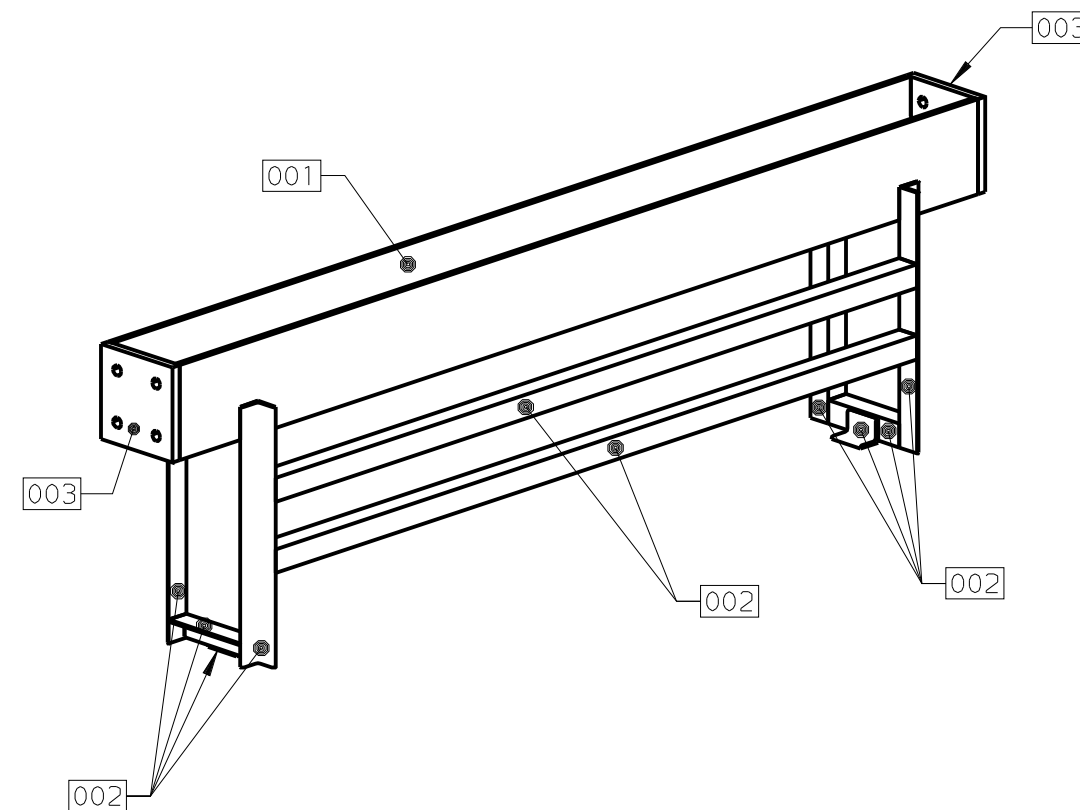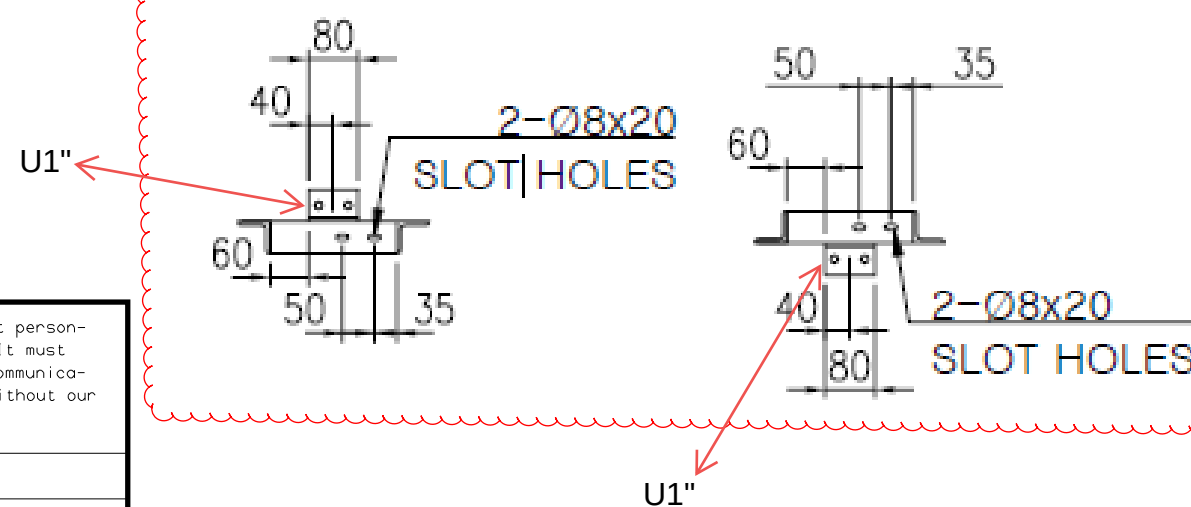



Modifications												
		TONELLI_M	26-01-2024									
	Name	Date	Name	Date	Name	Date	Name	Date				
Sep.parts List			Design group									
Replaced by			Subst. for					Orig. scale 1:15 ,				
SLP250V-5A		STEEL STRUCTURE STIFFNER							Drawn: 14-04-2022 TONELLI_M			
L-0184 ASME									Verified: 30-01-2024 SABOGAL_A			
		LABY-GI● - NON-LUBE COMP. ITEM NO.: C-001							Standards conform:			
CAD-Drawing		Part-No.	Bar - Code									
		E	2-125.619.983							1 - 1 a		

This drawing is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

Similar Drwg.


Machining regulations see Drawing Standards.

FRAME

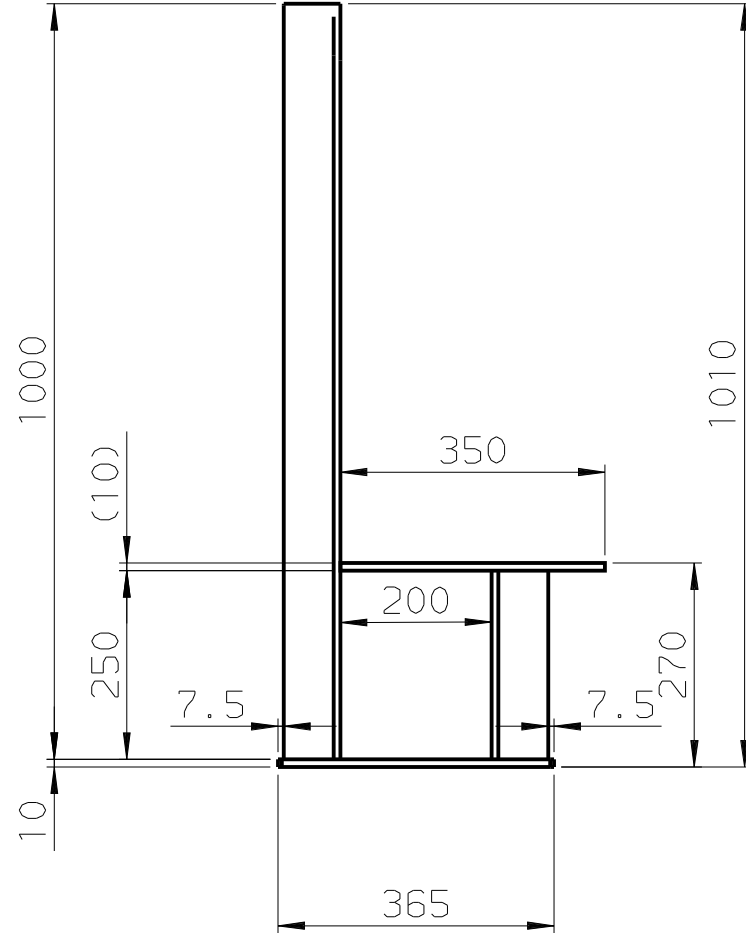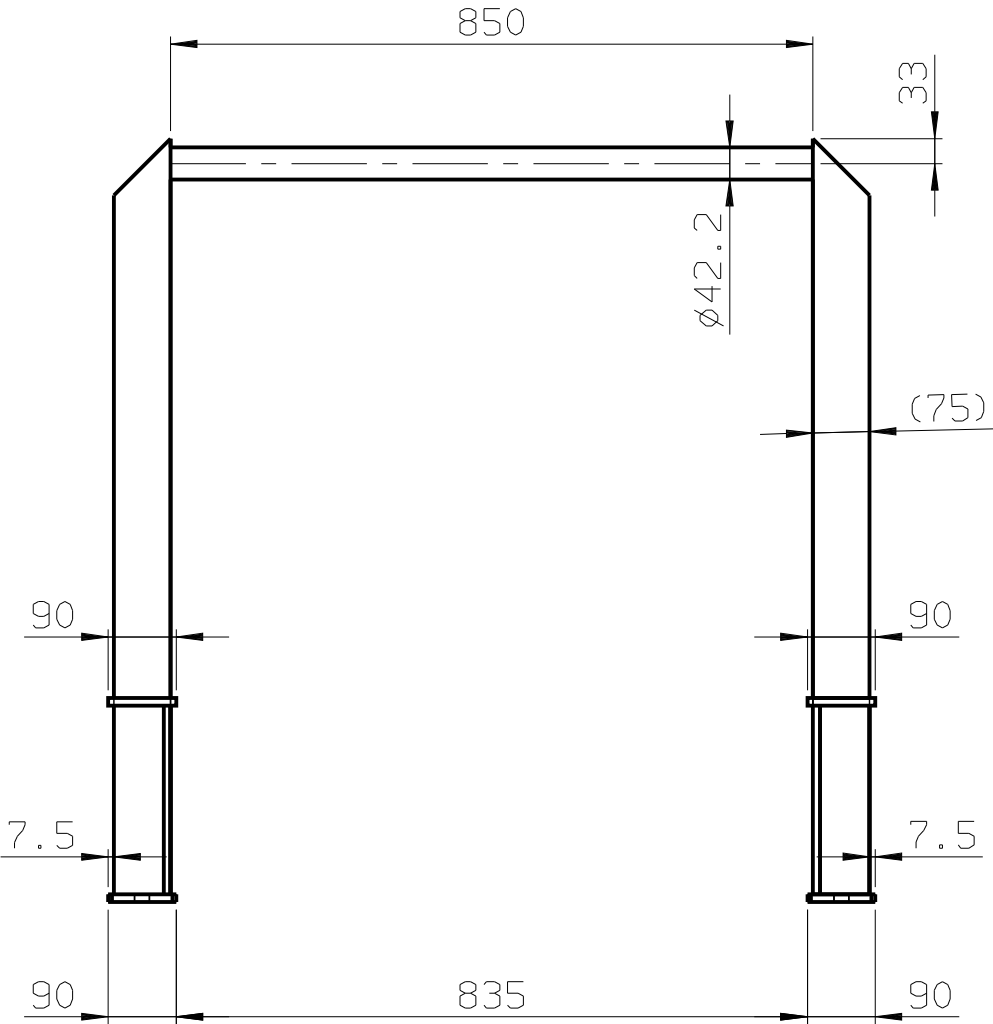






P05 004 (QTY 2)

THICKNESS 10mm
(SCALE 1:5)

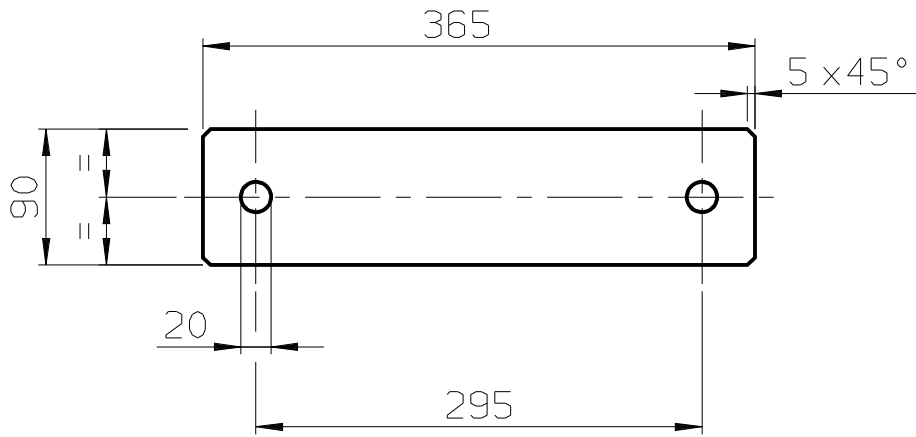

GRATING 01

THICKNESS 25mm

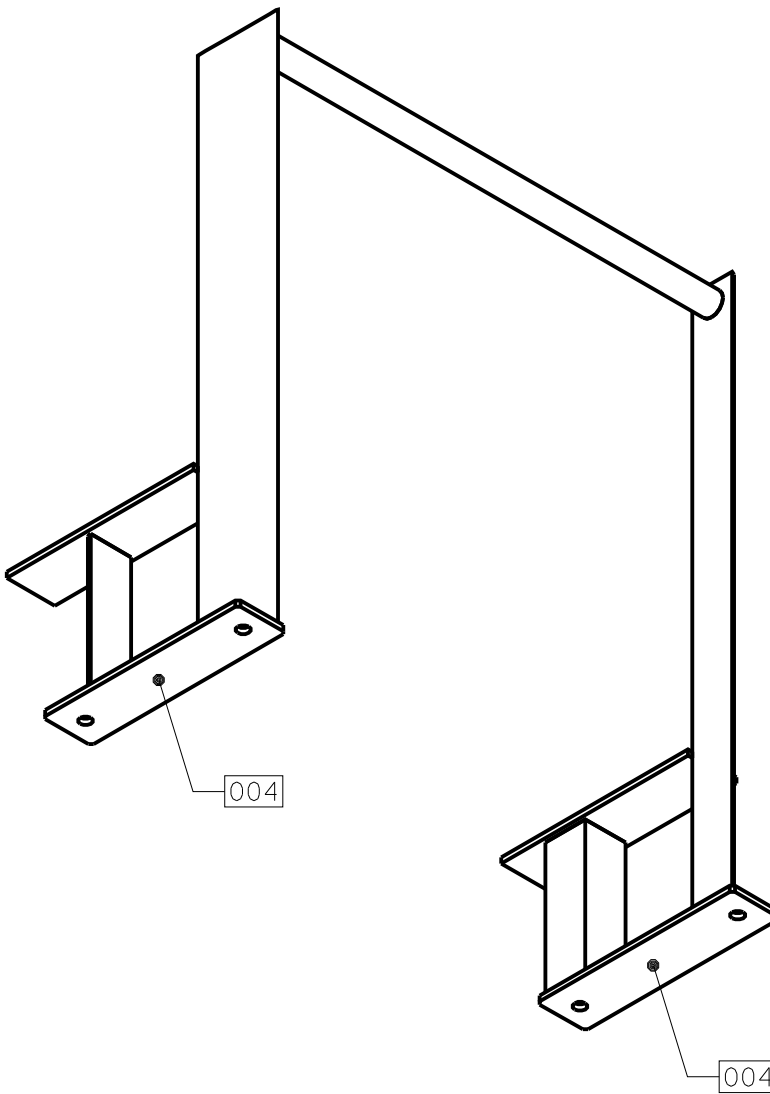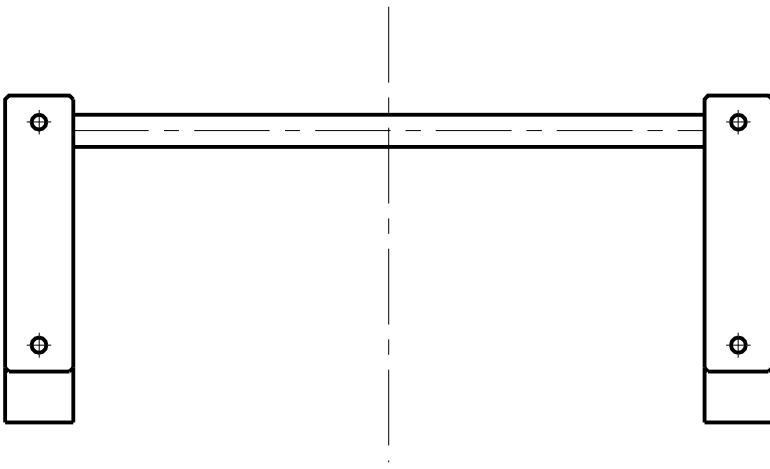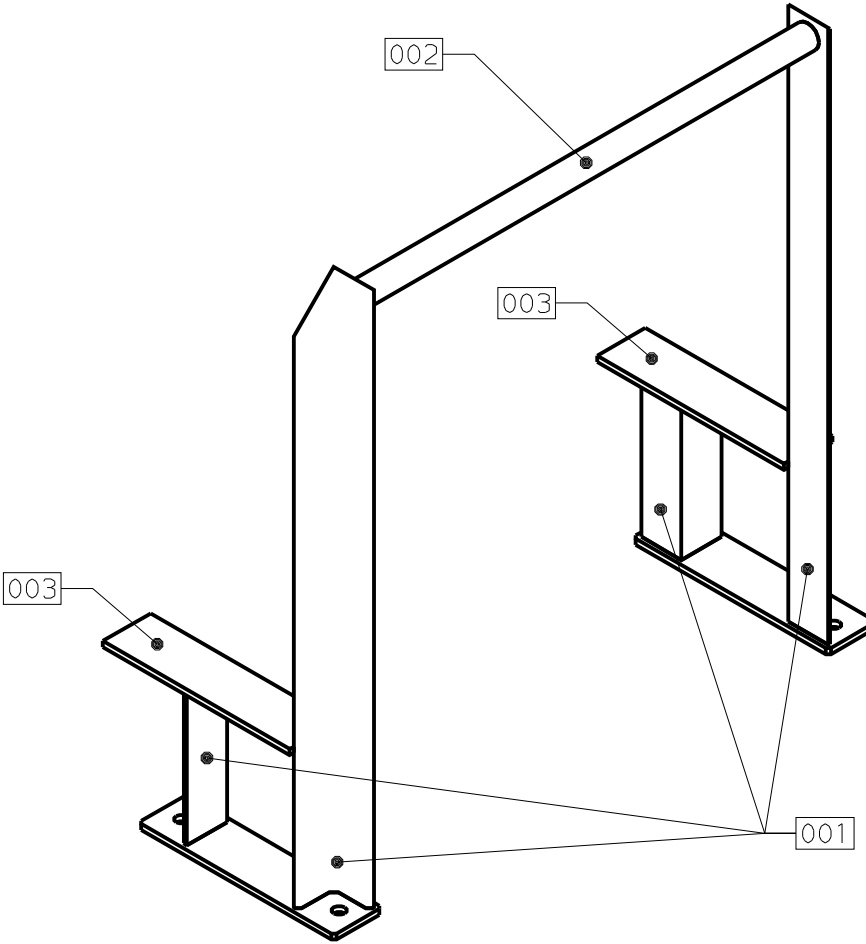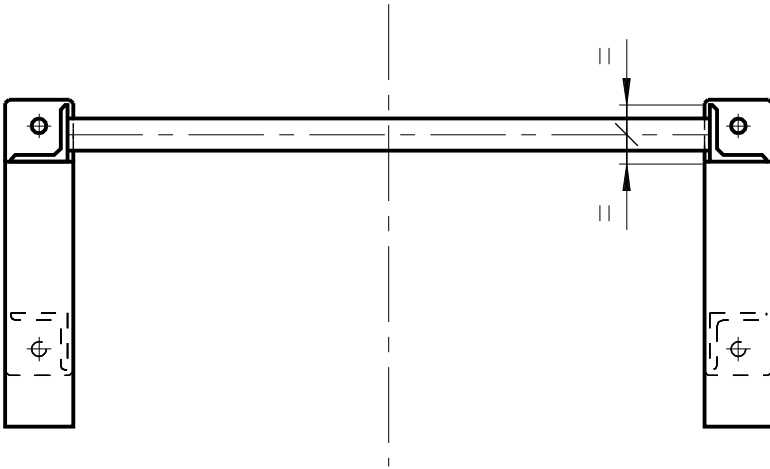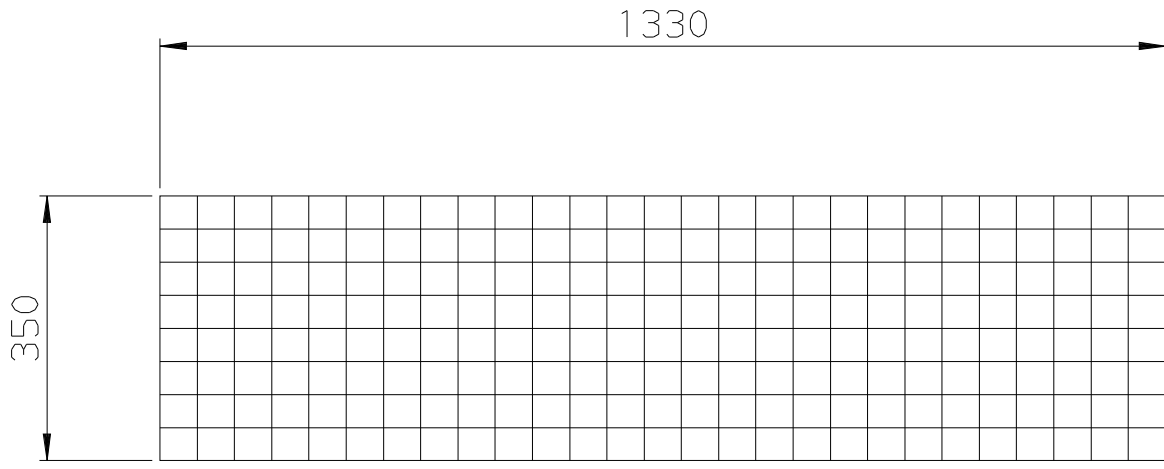



This drawing is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

Similar Dwg.

Machining regulations see Drawing Standards.

Modifications									
	Name	Date	Name	Date	Name	Date	Name	Date	
Seps.parts List		Design group							
Replaced by		Subst. for		Orig. scale		1:10			
SLP250V-5A		STEEL STRUCTURE		Drawn: 31-08-2023		TONELLI_M			
L-0184		BRIDGE (STEP) OVER PIPE		Verified: 15-09-2023		SABOGAL_A			
ASME		LABY-GI - NON-LUBE COMP.		Standards conform:					
CAD-Drawing		Part-No.		Bar - Code					
Burckhardt Compression		E		1-125.623.891		2-2			

1) FULL PENETRATION WELDED

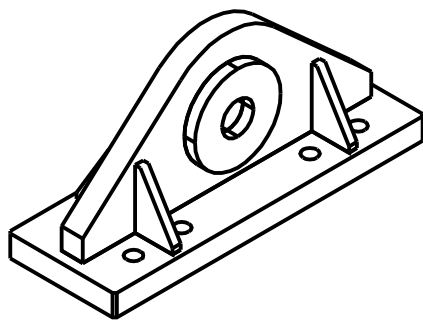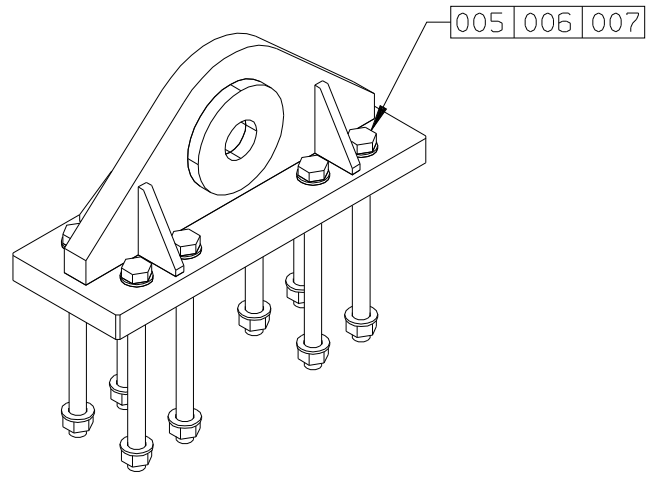


A SET만 제작


Execution Code Number				Pos.No. Code	Designation	Source of Supply	Mod.	
Number OFF					Material and Remarks	Approx. mass kg/pc	Letter	
1	001	PLATE 580x200x40			/	/	/	/
		S355 SS400			/	35	/	/
1	002	PLATE 540x240x40			/	/	/	/
		S355 SS400			/	27	/	/
4	003	PLATE 110x70x15			/	/	/	/
		S355 SS400			/	5	/	/
2	004	PLATE Ø160x20			/	/	/	/
		S355 SS400			/	3	/	/
8	005	HEX. HEAD BOLT W/SHANK M24x310/73			/	/	/	/
		8.8 DIN EN ISO 4014			/	/	/	/
8	006	HEX. NUT M24			/	/	/	/
		8 DIN EN ISO 4032			/	/	/	/
16	007	WASHER (M24)			/	/	/	/
		/ ISO 7089-24-200 HV			/	/	/	/
APPROX WEIGHT						≈	88 Kg	

NOTE:
1) ALL LISTE MATERIAL ARE WITHOUT ALLOWANCE.


VIEW A

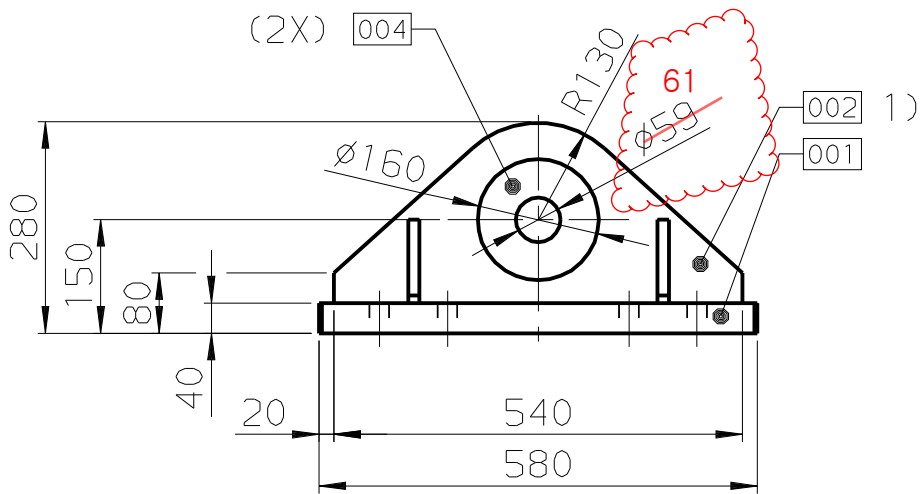

VIEW B

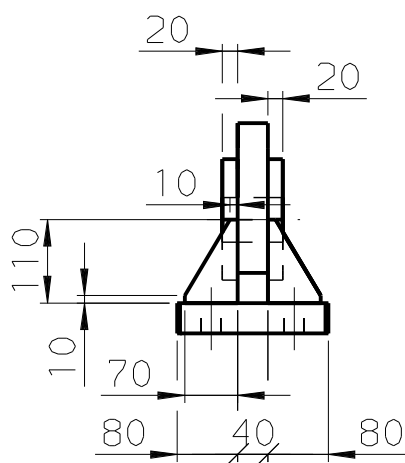


POS 001
THICKNESS 40mm

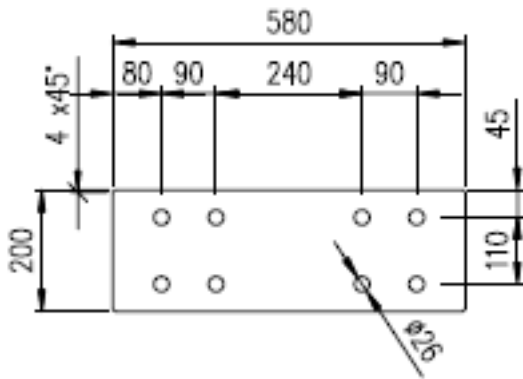


1EA 35kg

POS 002
THICKNESS 45mm

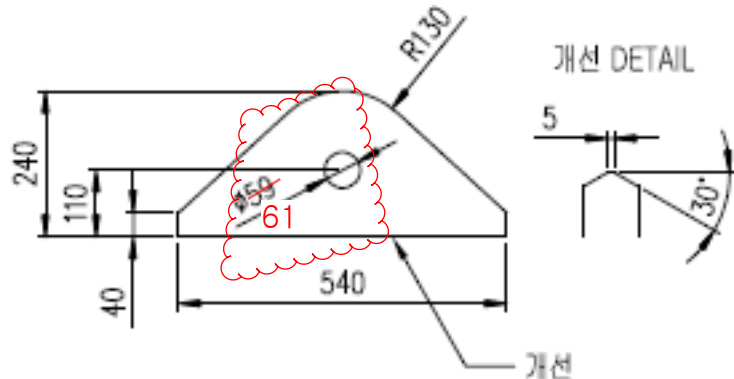


1EA 27kg

POS 003
THICKNESS 15mm

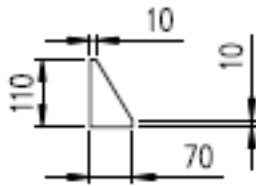

4EA 3kg

POS 004
THICKNESS 20mm

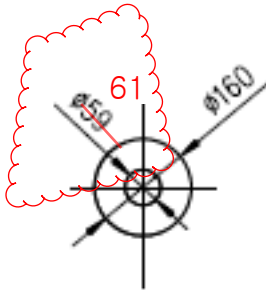

2EA 6kg

**Burckhardt
Compression**
FOR APPROVAL
Documentation shall be deemed to be approved unless
commented and/or rejected within 14 days

Modifications	○			○			○			○		
	○	TONELLI_M	16-10-2023	○			○			○		
		Name	Date		Name	Date		Name	Date		Name	Date
Sep.parts List			Design group									
Replaced by				Subst. for				Orig. scale 1:10 ,				
SLP250V-5A		STEEL STURCTURE LIFTING DEVICE M3 LABY-GI● - NON-LUBE COMP. ITEM NO.: C-001							Drawn: 14-04-2022 TONELLI_M			
L-0184 ASME									Verified: 16-10-2023 SABOGAL_A			
		Standards conform:										
CAD-Drawing		Part-No.		Bar - Code								
		E		2-125.619.994							1 - 1 a	

This drawing is entrusted to the recipient personally, but the copyright remains with us. It must not be copied, reproduced or in any way communicated or made accessible to third parties without our written consent.

Similar Drwg.

Machining regulations see Drawing Standards.