<2026-02-05 tor> BurgerOrderer

Mikael Svahnberg

February 5, 2026

Contents

1 Use Case: Order Food **1**

2 System Sequence Diagram **3**

3 Sequence Diagram: startNewOrder() **4**

4 Sequence Diagram: selectMealType() **4**

5 Sequence Diagram: selectOrder() **5**

6 Sequence Diagram: selectConfiguration() **5**

7 Sequence Diagram: confirmOrder() **5**

8 Class Diagram **6**


1 Use Case: Order Food

Use Case Order Food
Actors Customer
Description Customer orders a meal and configures it. The system registers the order and confirms.


Main Course of Events

Actor	System
1. Customer arrives and starts a new order	
	2. System presents options [single burger, meal, dessert, ...]
3. Customer selects "full meal"	
	4. System presents available meals
5. Customer selects "Dripping with McLard"	
	6. System adds meal to the order and presents configuration options.
7. Customer selects "no onions"	
	8. System adds "No Onions" to order
9. Customer selects "more bacon!"	
	10. System adds "extra bacon" to order
11. Customer confirms order	
	12. System initiates the use case pay for order
	13. System places order to Kitchen
	14. System prints receipt.


2 System Sequence Diagram

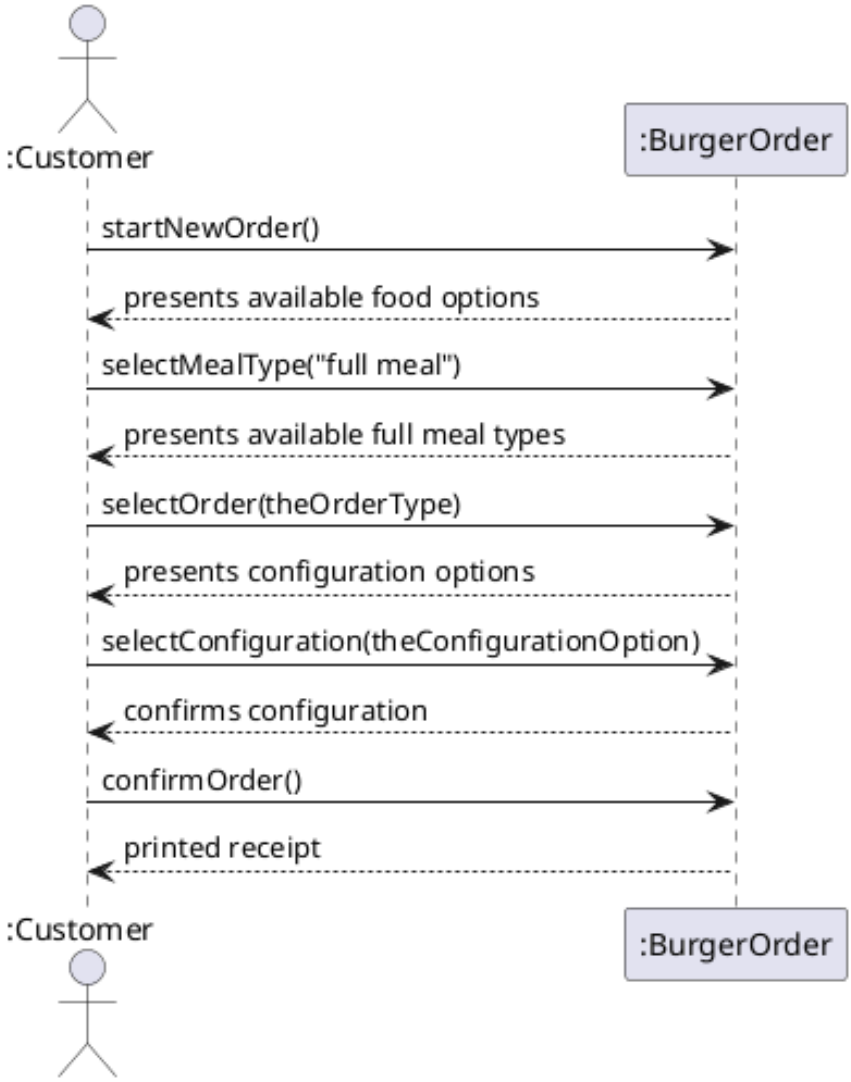


3 Sequence Diagram: startNewOrder()

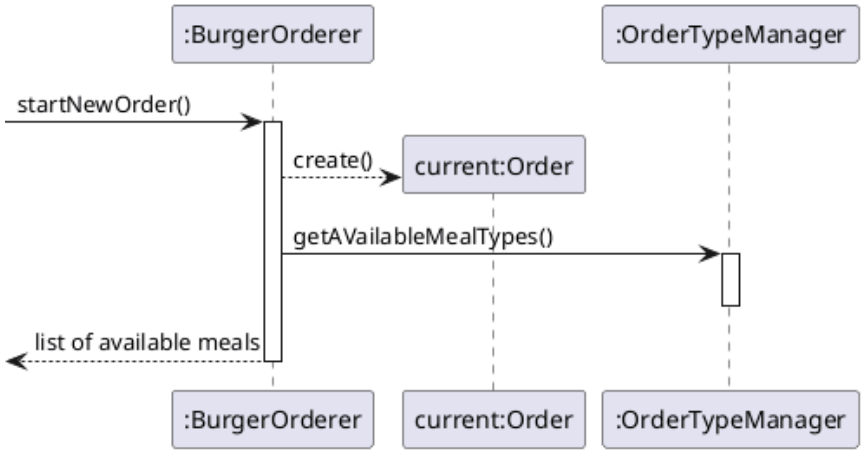


4 Sequence Diagram: selectMealType()

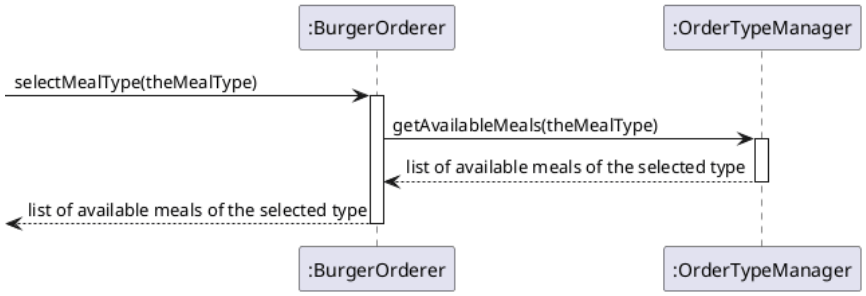

5 Sequence Diagram: selectOrder()

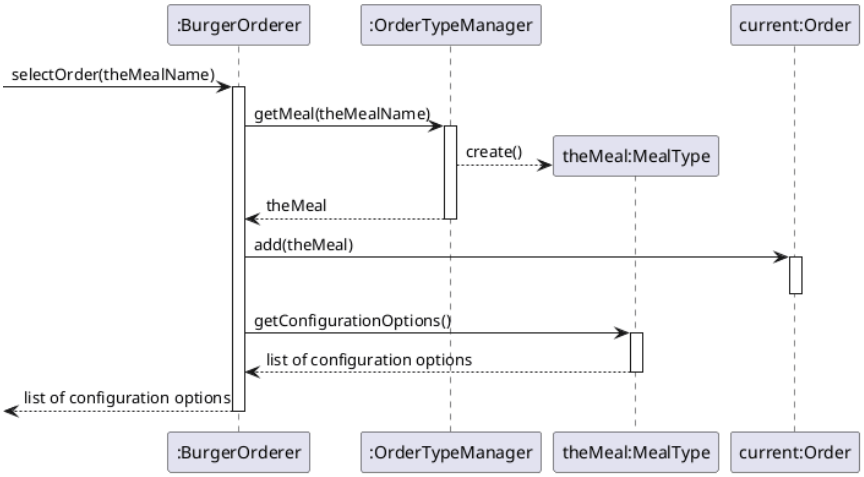


6 Sequence Diagram: selectConfiguration()

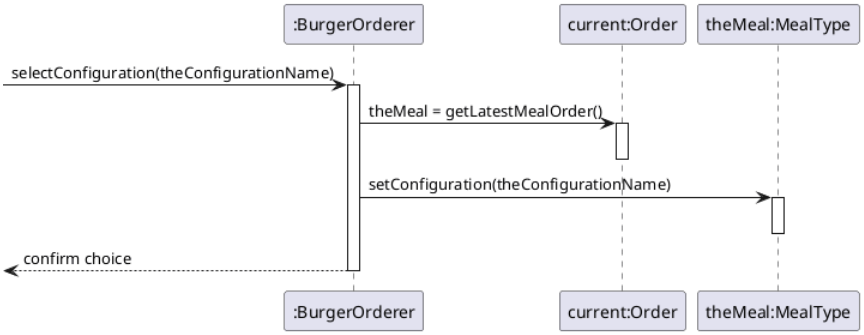

7 Sequence Diagram: confirmOrder()

1. System initiates the use case pay for order
2. System places order to Kitchen
3. System prints receipt.

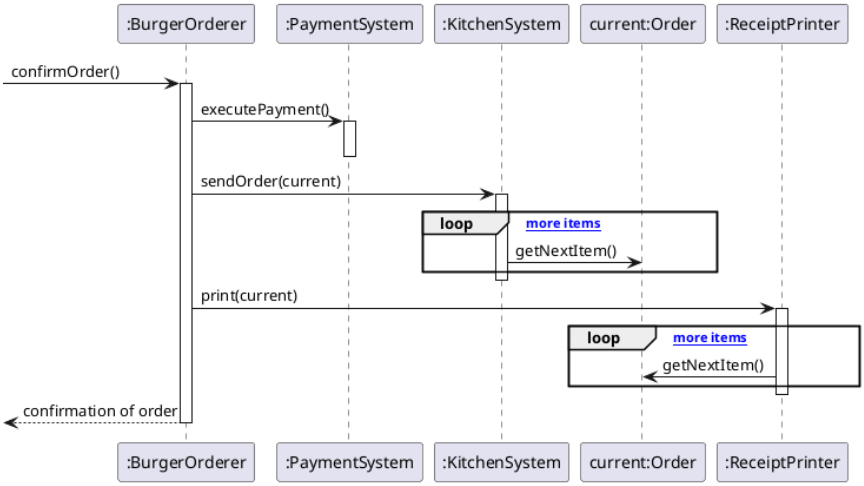

8 Class Diagram

