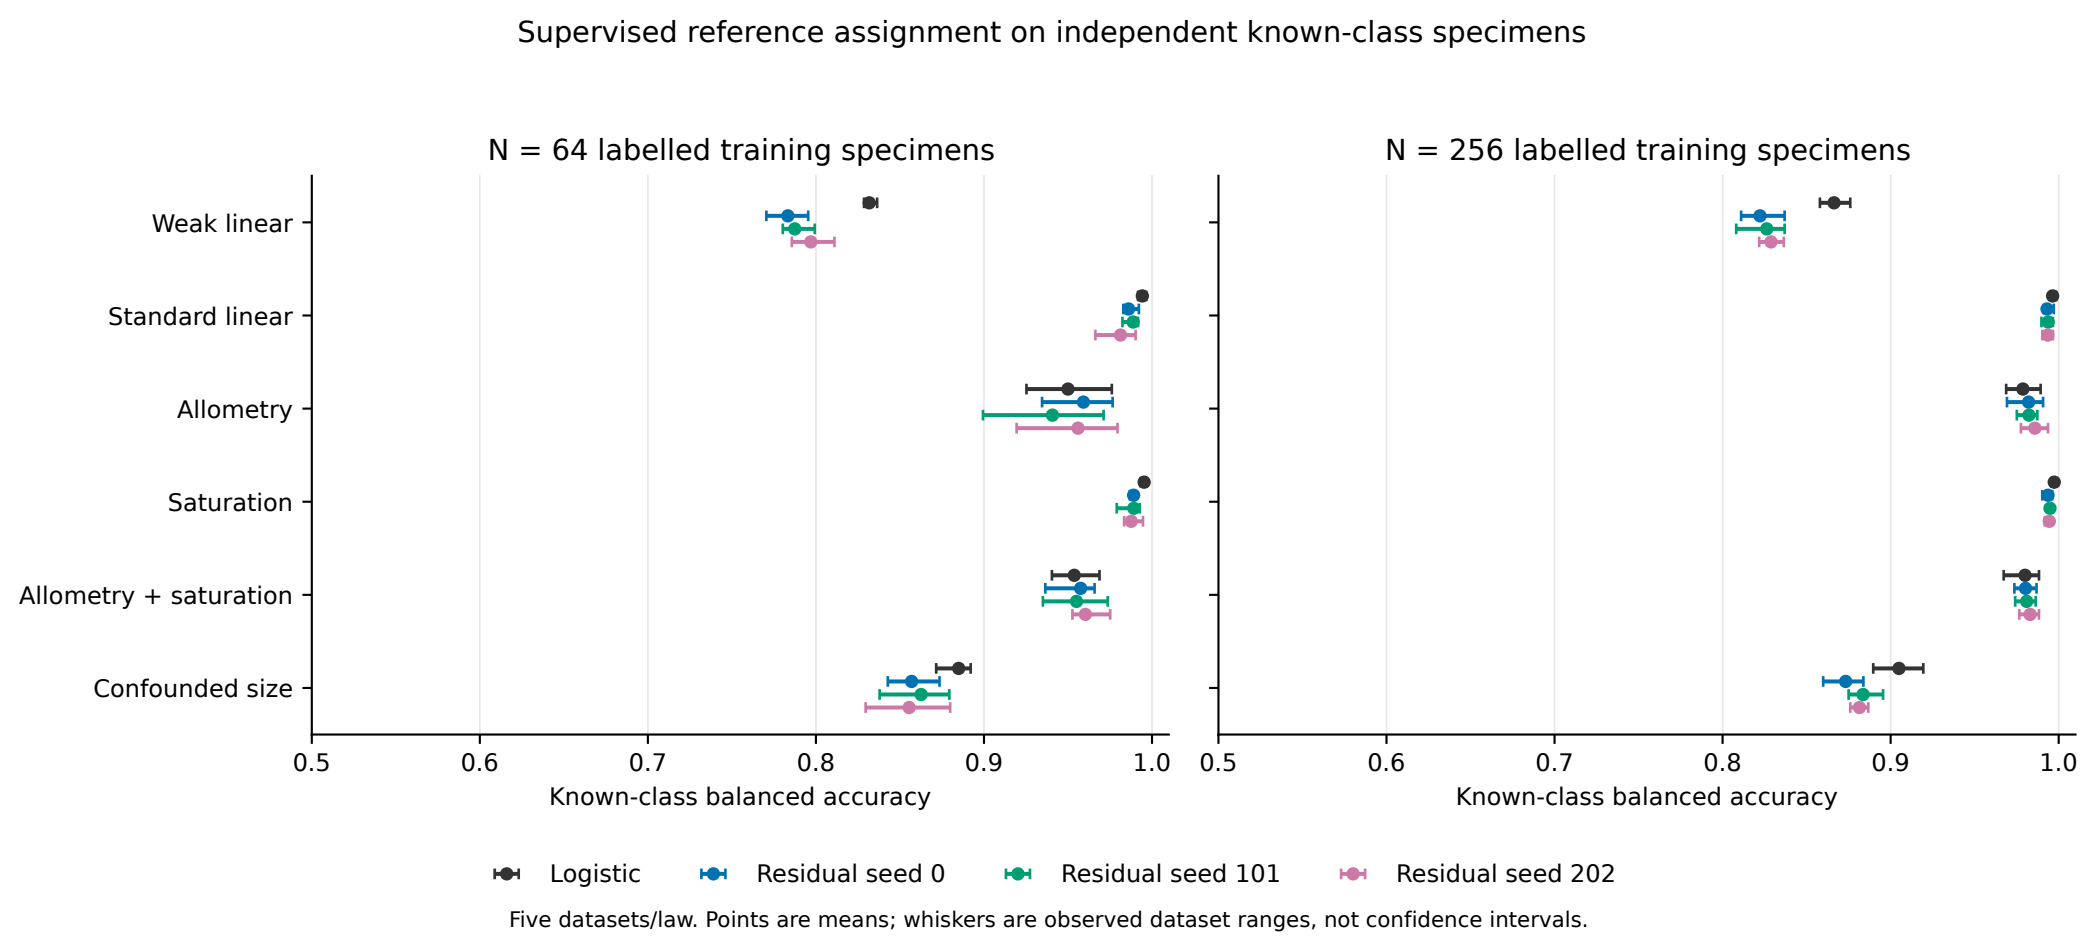
Supervised reference assignment on independent known-class specimens
N = 64 labelled training specimens
N = 256 labelled training specimens
Weak linear
Standard linear
Allometry
Saturation
Allometry + saturation
Confounded size
0.5
0.6
0.7
0.8
0.9
1.0
Known-class balanced accuracy
Logistic
Residual seed 0
Residual seed 101
Residual seed 202
Five datasets/law. Points are means; whiskers are observed dataset ranges, not confidence intervals.