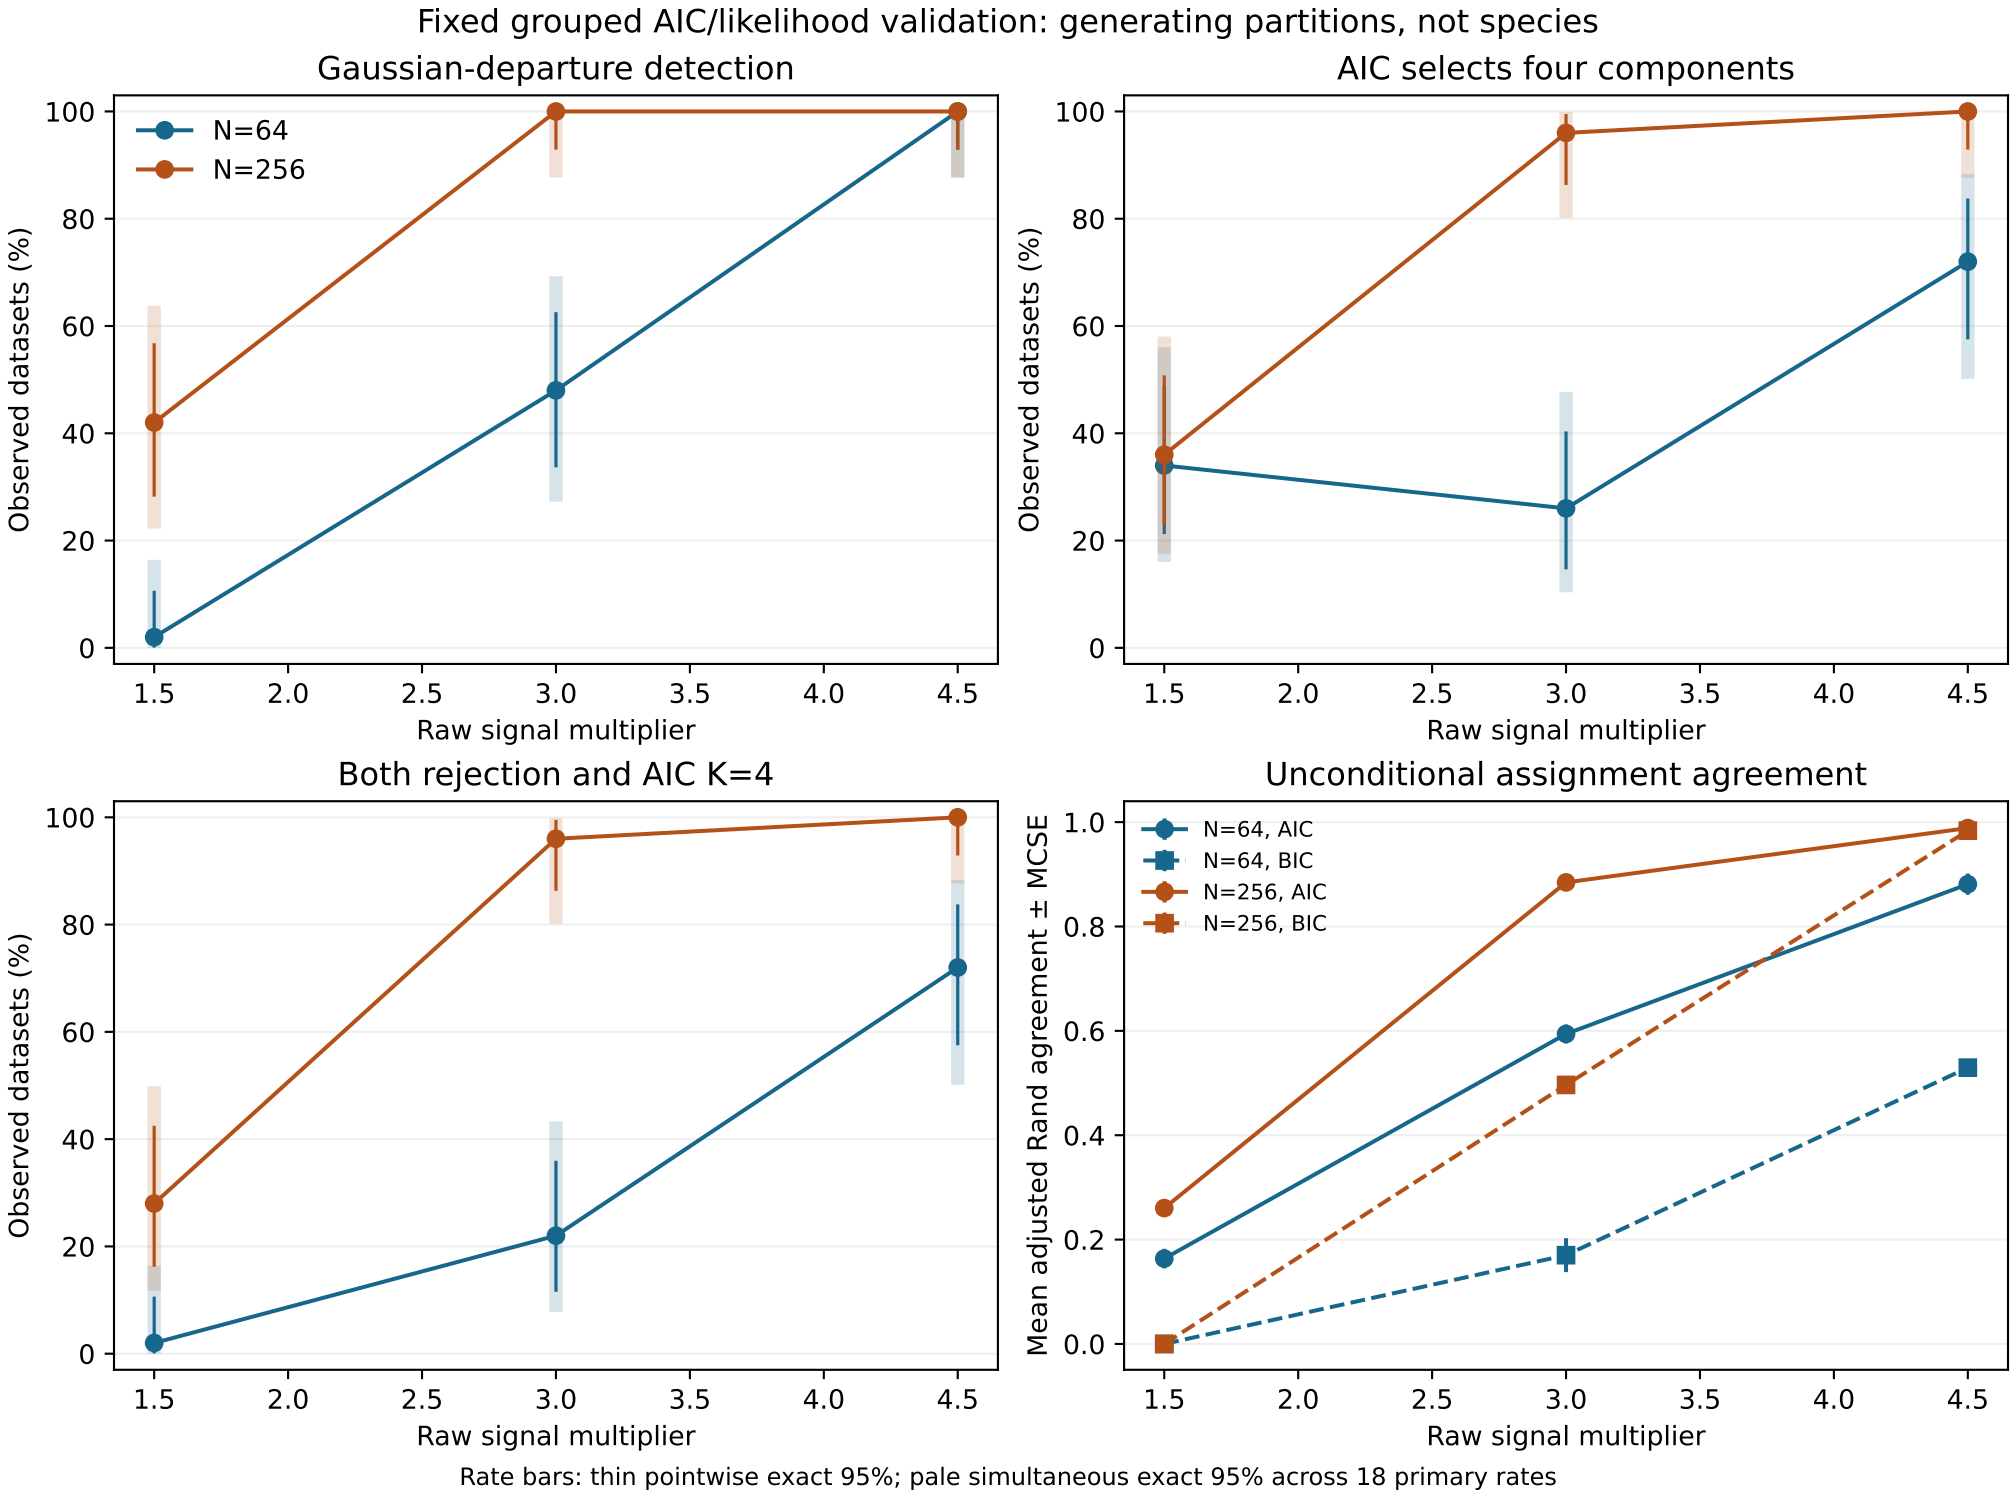
Fixed grouped AIC/likelihood validation: generating partitions, not species
Gaussian-departure detection
AIC selects four components
Both rejection and AIC K=4
Unconditional assignment agreement
N=64
N=256
N=64, AIC
N=64, BIC
N=256, AIC
N=256, BIC
Observed datasets (%)
Mean adjusted Rand agreement ± MCSE
Raw signal multiplier
Rate bars: thin pointwise exact 95%; pale simultaneous exact 95% across 18 primary rates