Integrative clustering: recovery and conditional bootstrap behavior

A Partition recovery

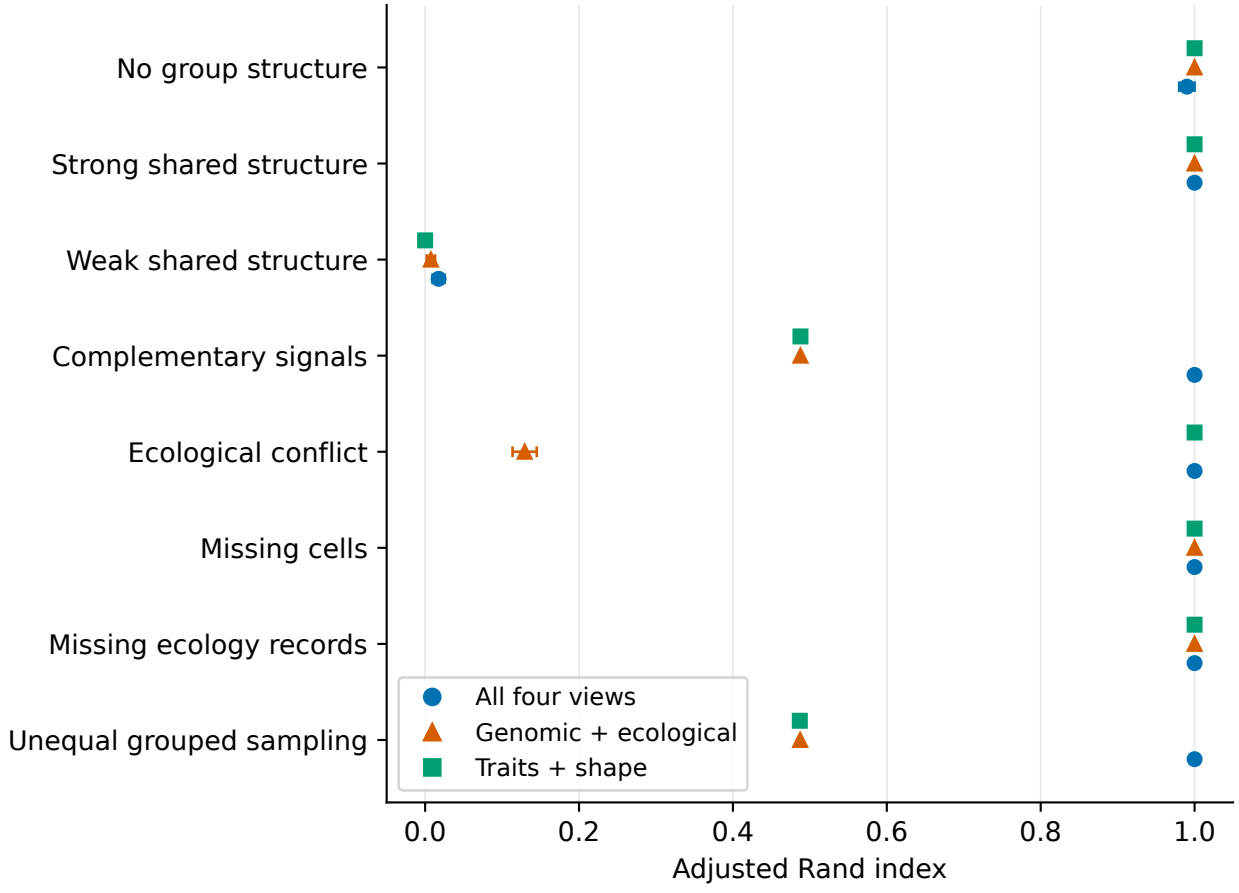

B K recovery among completed fits

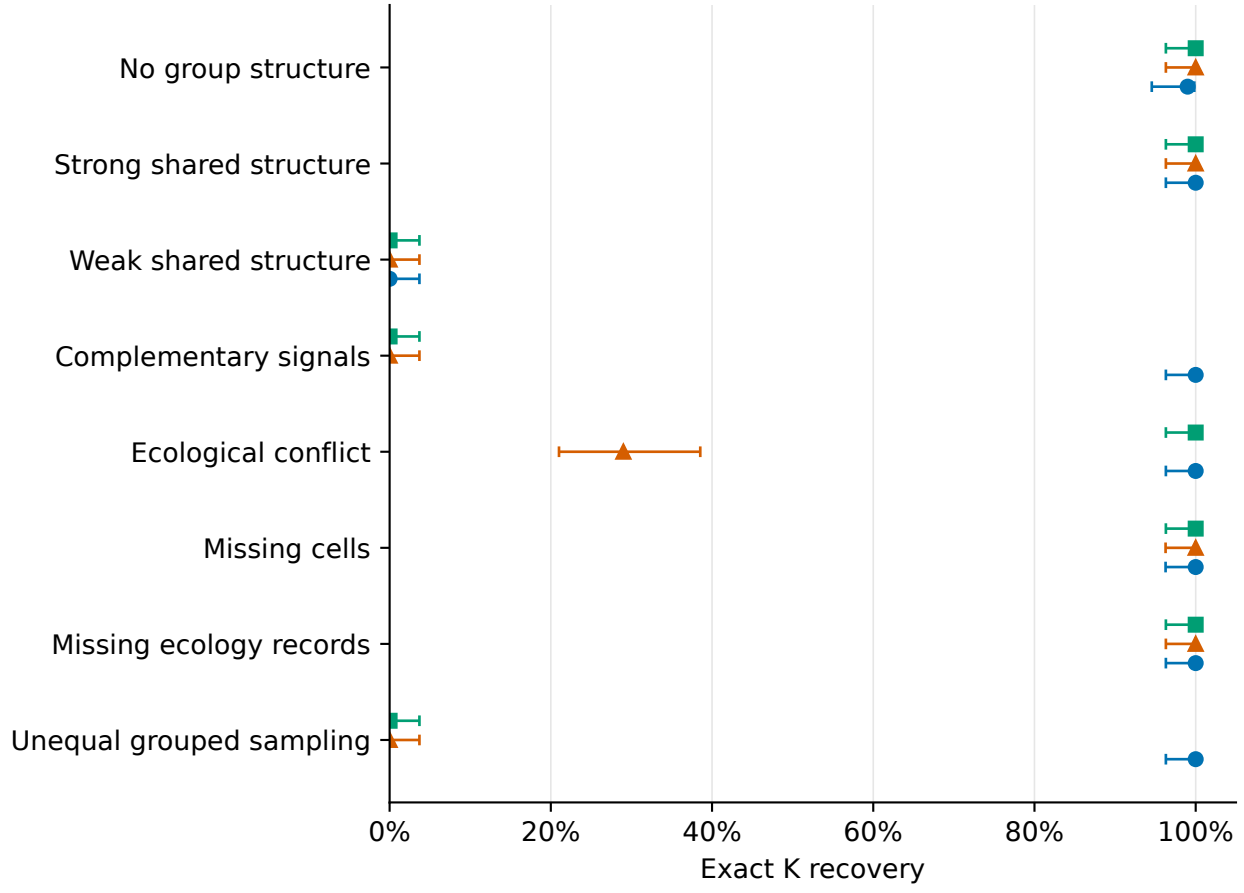

C Bootstrap recovery error

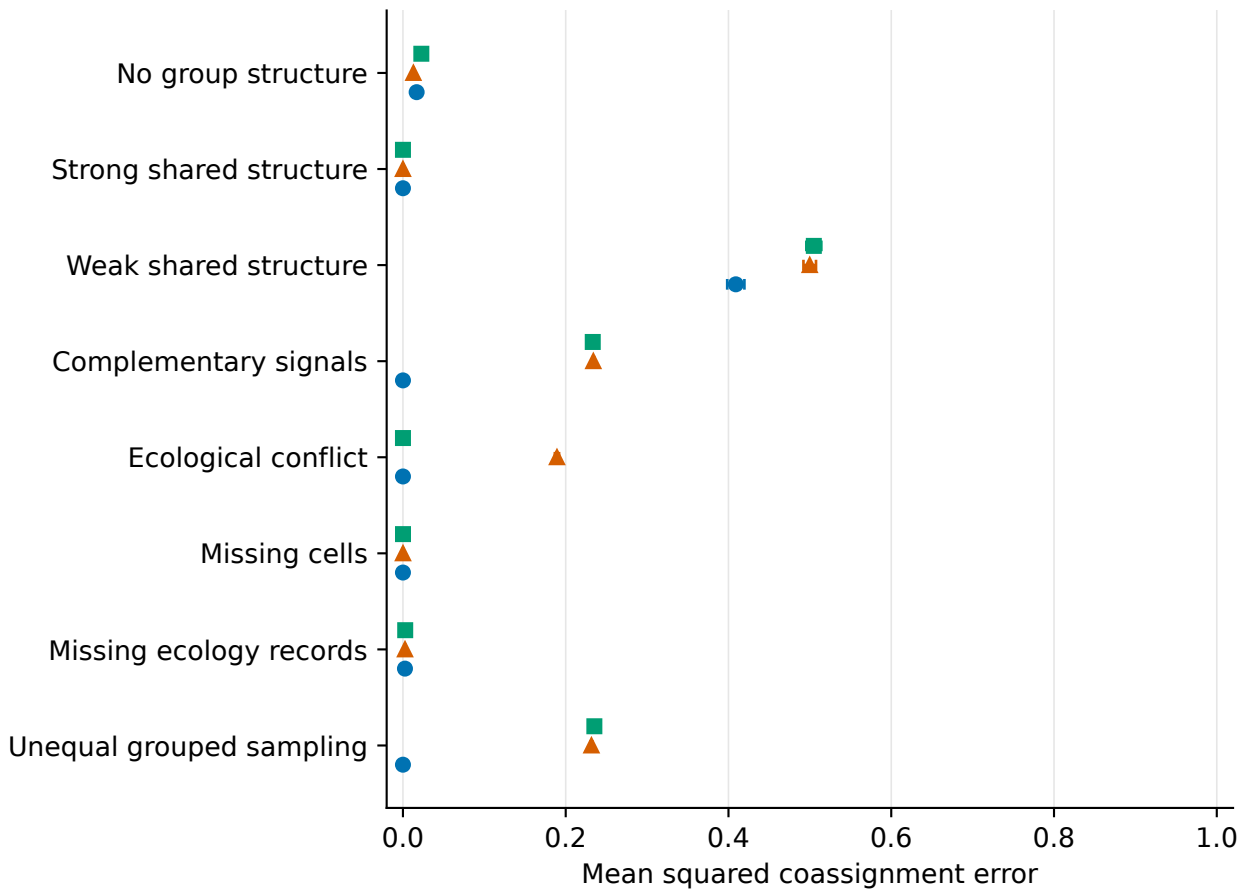

D OOB pair coverage

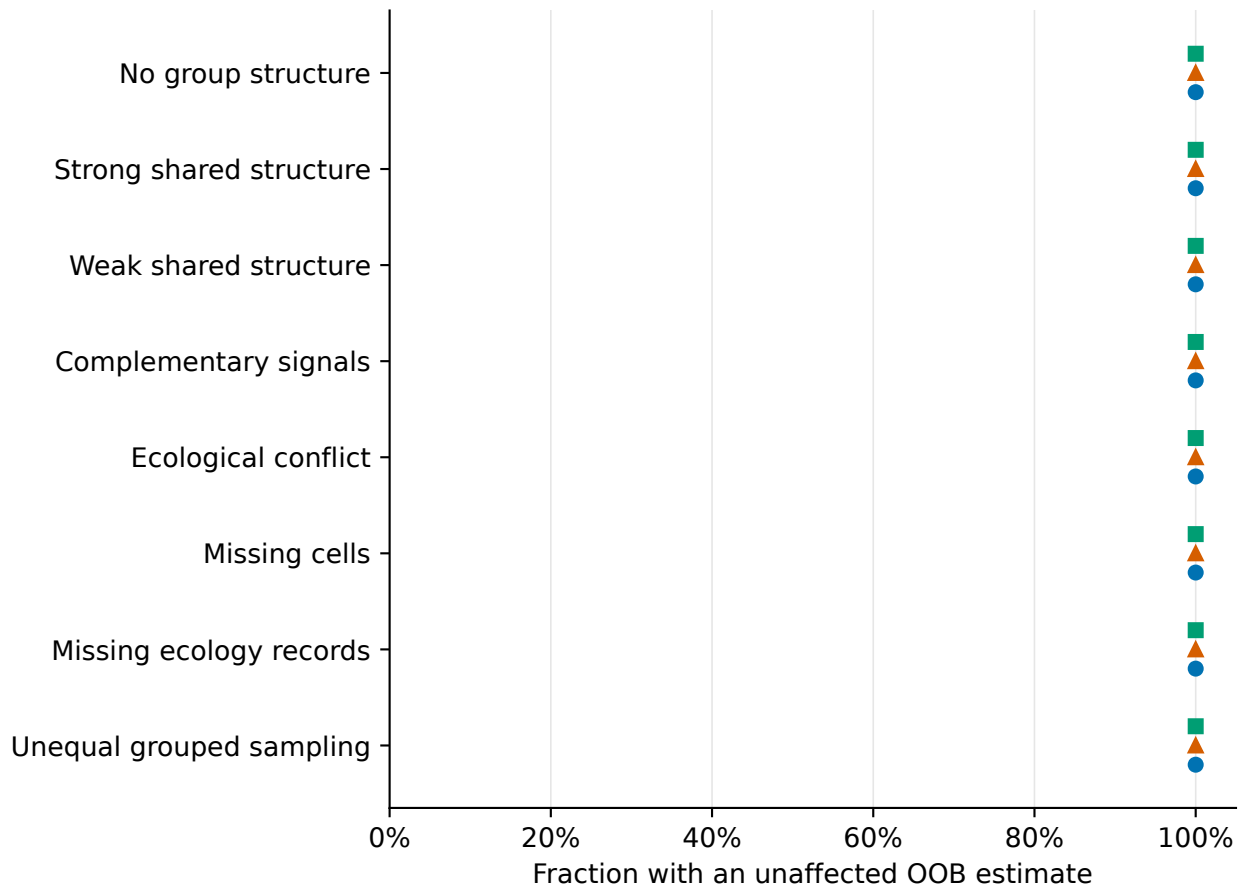

Points: dataset means. Bars: ±MCSE; K recovery uses pointwise 95% Wilson Monte Carlo intervals.
Availability and failure denominators are reported in the tables; these are not species-support intervals.